

Project for Community Development Block Grant

Applicant: City of Erie, Kansas
CDBG Environment assessment of improvements to water storage and
distribution system
CDBG Project No. 03-PF-302

Contact Person: Robert E. Hosack

Address: Hosack Community Planning and Development Services
209 East Tenth St.
Chanute, KS 66720

Phone: 316-431-9547

Sent to the Kansas Geological Survey for environmental review.

Agency Review Comments:

Any short-term adverse impacts during construction should be offset by the long-term benefits of the improvements to the water storage and distribution system, including a potential decrease in a loss of supply water and better water quality after the old cast iron water mains are replaced with PVC pipe.

Recommended Action:


- ☒ Clearance of project should be granted
- ☐ Clearance of project should not be granted
- ☐ Clearance of project should be delayed until the issues or questions have been clarified
- ☐ Clearance of project should not be delayed, but the applicant (in the application) should address or clarify the questions or concerns indicated above

Donald O. Whittemore
Reviewer's Name

Geohydrology Section, Kansas Geological Survey
Division/Agency

1/27/03
Date

Donald O. Whittemore
Reviewer's Signature

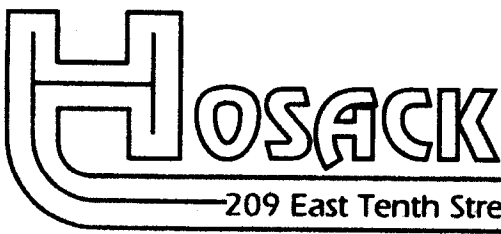

Community Planning and Development Services

209 East Tenth Street — Chanute, Kansas 66720 — (316) 431-9547

January 17, 2003

Mr. Donald Whittemore, Senior Scientist
Kansas Geological Survey
The University of Kansas
1930 Constant Avenue, Campus West
Lawrence, Kansas 66047-2906

**Re: City of Erie, Kansas
CDBG Environmental Assessment
CDBG Project Number 03-PF-306**

Dear Mr. Whittemore:

The City of Erie, Kansas, located in Neosho County, was recently awarded Community Development Block Grant (CDBG) funds for the construction of improvements to the City's water storage and distribution system. As a part of the CDBG environmental review process, comments on this proposed project by your agency are hereby requested. In order for your agency's comments to be considered, they must be received in writing at the **letterhead address** above on or before **Friday, February 21, 2003**. If your agency does not respond by the specified date, it will be considered as a "no comment" on the project.


The proposed water storage and distribution system improvements will consist of constructing a 300,000-gallon multi-leg elevated water storage tank; the abandonment and demolition of the existing 65,000-gallon elevated water storage tank; and the replacement of 7,125 linear feet of deteriorated 4-inch and 6-inch cast iron water mains with 8-inch PVC pipe. A project location map is enclosed for your review.

Technical information about this project may be obtained by contacting Anthony Philipscheck, P. E., Olsson Associates, Kansas City, Missouri, at (816) 361-1177. If you should have any other questions, please do not hesitate to contact me at (620) 431-9547.

Sincerely,

Robert E. Hosack
CDBG Administrator

Enclosure

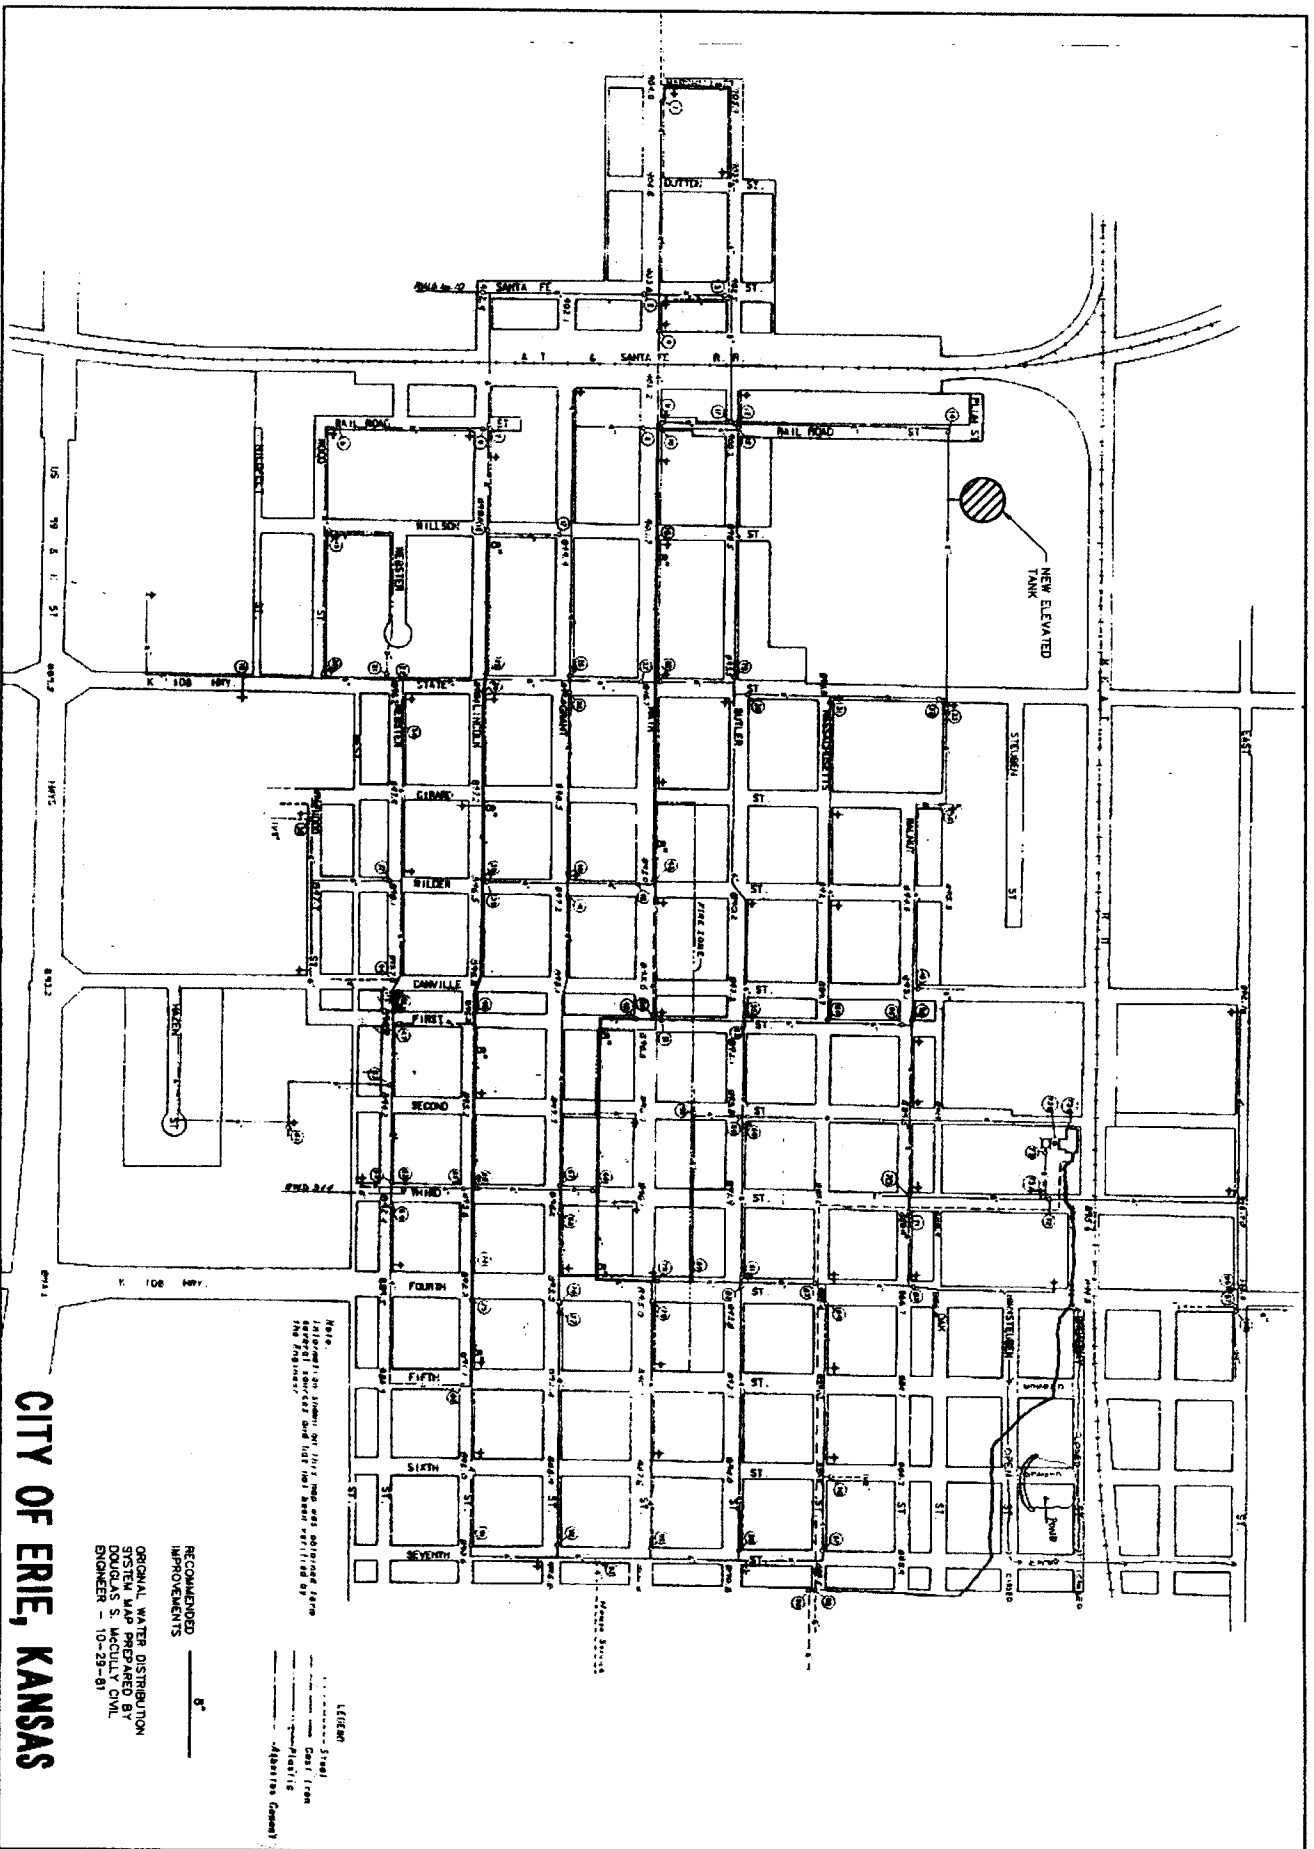

CITY OF ERIE, KANSAS

FIGURE 4.1

WATER DISTRIBUTION SYSTEM IMPROVEMENTS

ERIE, KANSAS

2002



OLSSON ASSOCIATES
ENGINEERS - PLANNERS - SCIENTISTS - SURVEYORS
400 EAST 10TH STREET - SUITE 201 - ERIE, KANSAS 66521
913-733-1177 - FAX 913-733-1188
WWW.OLSSONASSOCIATES.COM

NO.	DATE	DESCRIPTION	BY
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			

Project No. 2002-0481
Drawing No. 2002-0481-01
Date: SEP 13, 2002