




Weatherford

**CML MESSENGER SHUTTLE
COMPACT PHOTO DENSITY
COMPENSATED DUAL NEUTRON LOG**

COMPANY **VESS OIL CORP.**
WELL **MCCORD 'A' 20H**
FIELD **BEMIS SHUTTS**
PROVINCE/COUNTY **ELLIS**
COUNTRY/STATE **USA / KANSAS**
LOCATION **1680' FNL & 788' FEL**



SEC **26** TWP **11S** RGE **17W** Other Services **CMI**
API Number **15-051-26218.010** CXD
Permit Number

Permanent Datum G.L., Elevation 2091 feet
Log Measured From K.B. @ 9.6 FEET above Permanent Datum
Drilling Measured From K.B.

Elevations: feet
KB 2100.60
DF 2099.00
GL 2091.00

Date	23-NOV-2011
Run Number	ONE
Depth Driller	5805.00 feet
Depth Logger	5805.00 feet
First Reading	5717.00 feet
Last Reading	3740.00 feet
Casing Driller	3740.00 feet
Casing Logger	3740.00 feet
Bit Size	6.125 inches
Hole Fluid Type	CHEM
Density / Viscosity	9.20 lb/USg 63.00 CP
PH / Fluid Loss	10.50 6.80 ml/30Min
Sample Source	FLOWLINE
Rm @ Measured Temp	0.80 @ 55.0 ohm-m
Rmf @ Measured Temp	0.64 @ 55.0 ohm-m
Rmc @ Measured Temp	0.96 @ 55.0 ohm-m
Source Rmf / Rmc	CALC CALC
Rm @ BHT	0.41 @ 105.0 ohm-m
Time Since Circulation	6 HOURS
Max Recorded Temp	105.00 deg F
Equipment Name	COMPACT
Equipment / Base	18006 OKC
Recorded By	D. ROWELL
Witnessed By	R. MARTIN
S.O.# / AFE	3534253

BOREHOLE RECORD			Last Edited: 23-NOV-2011 10:42	
Bit Size inches	Depth From feet	Depth To feet		
6.125	3740.00	5805.00		
CASING RECORD				
Type	Size inches	Depth From feet	Shoe Depth feet	Weight pounds/ft
INTERMED	7.000	0.00	3740.00	26.00

REMARKS

WLS LOGGING SOFTWARE VERSION 11.02.3186 WAS USED

ALL LOGS WERE SET TO DEPTH WITH MWD GAMMA RAY

LAT: 39.06994 N
LONG: 99.16968 W

DRILL PIPE DEPTH DURING DEPLOYMENT: 5680
LOGGING TOOL DEPTH AFTER DEPLOYMENT: 5780


4.5 INCH PRODUCTION CASING USED TO CALCULATE AHV


OPERATORS: M FISHER, J. TURNER
S.O: 3534253
RIG: MAVERICK 106


All interpretations are opinions based on electrical or other measurements and we cannot, and do not, guarantee the accuracy or correctness of any interpretations, and we shall not, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions in our price schedule.


5 INCH MAIN LOG DSC

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 02-DEC-2011 16:22
 Filename: G:\Data\Vess McCord A 20H\McCord A 20H plotted\GOOD RTAP.dta Recorded on 22-NOV-2011 23:03
 System Versions: Processed with 11.03.4044 Plotted with 12.03.5032

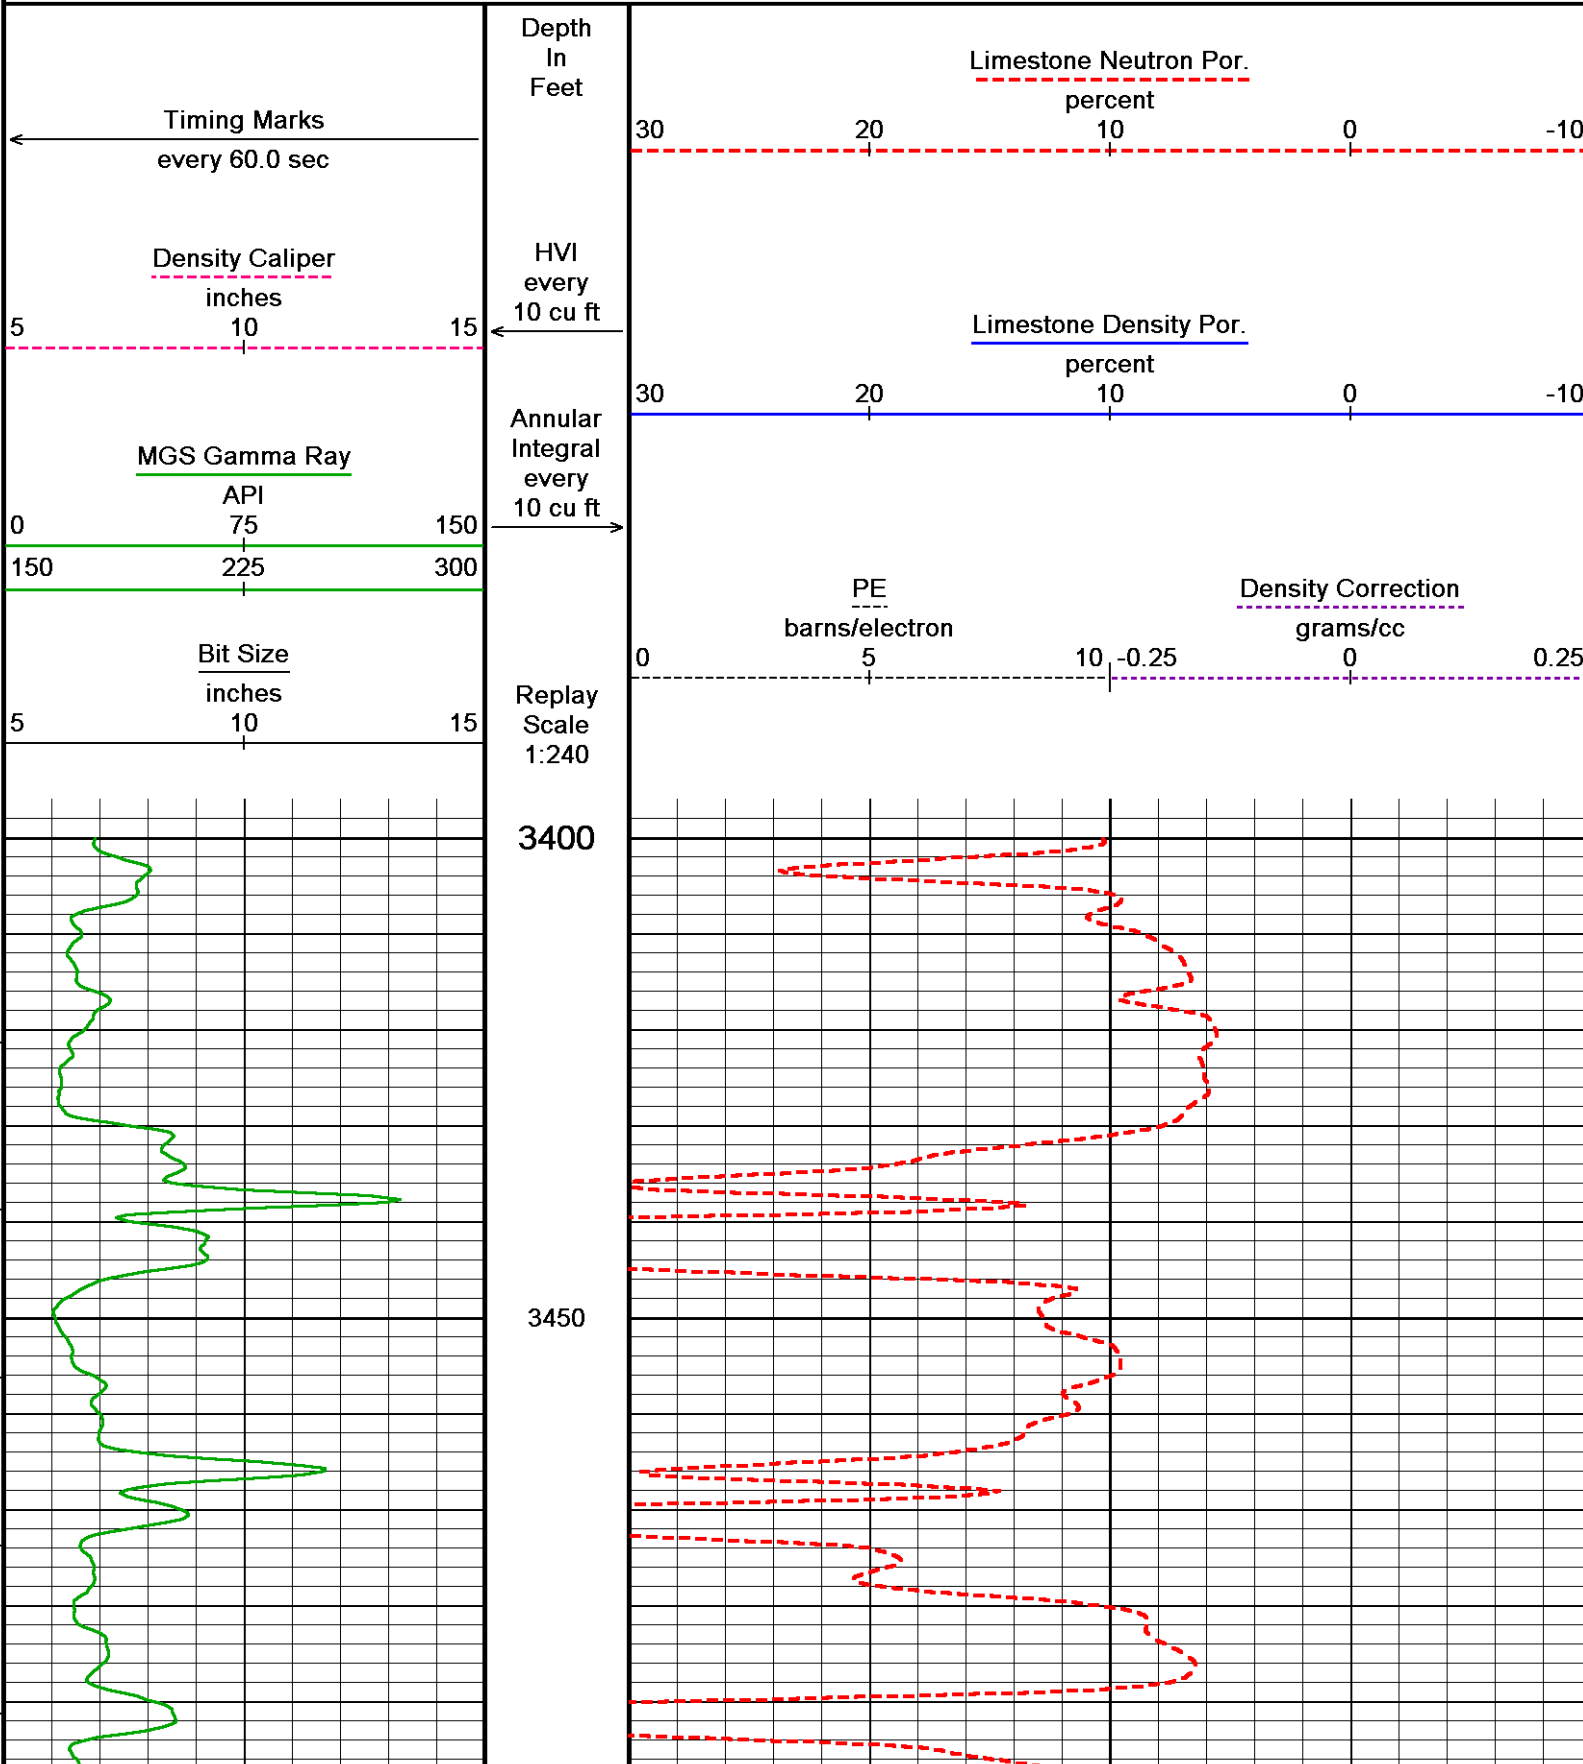


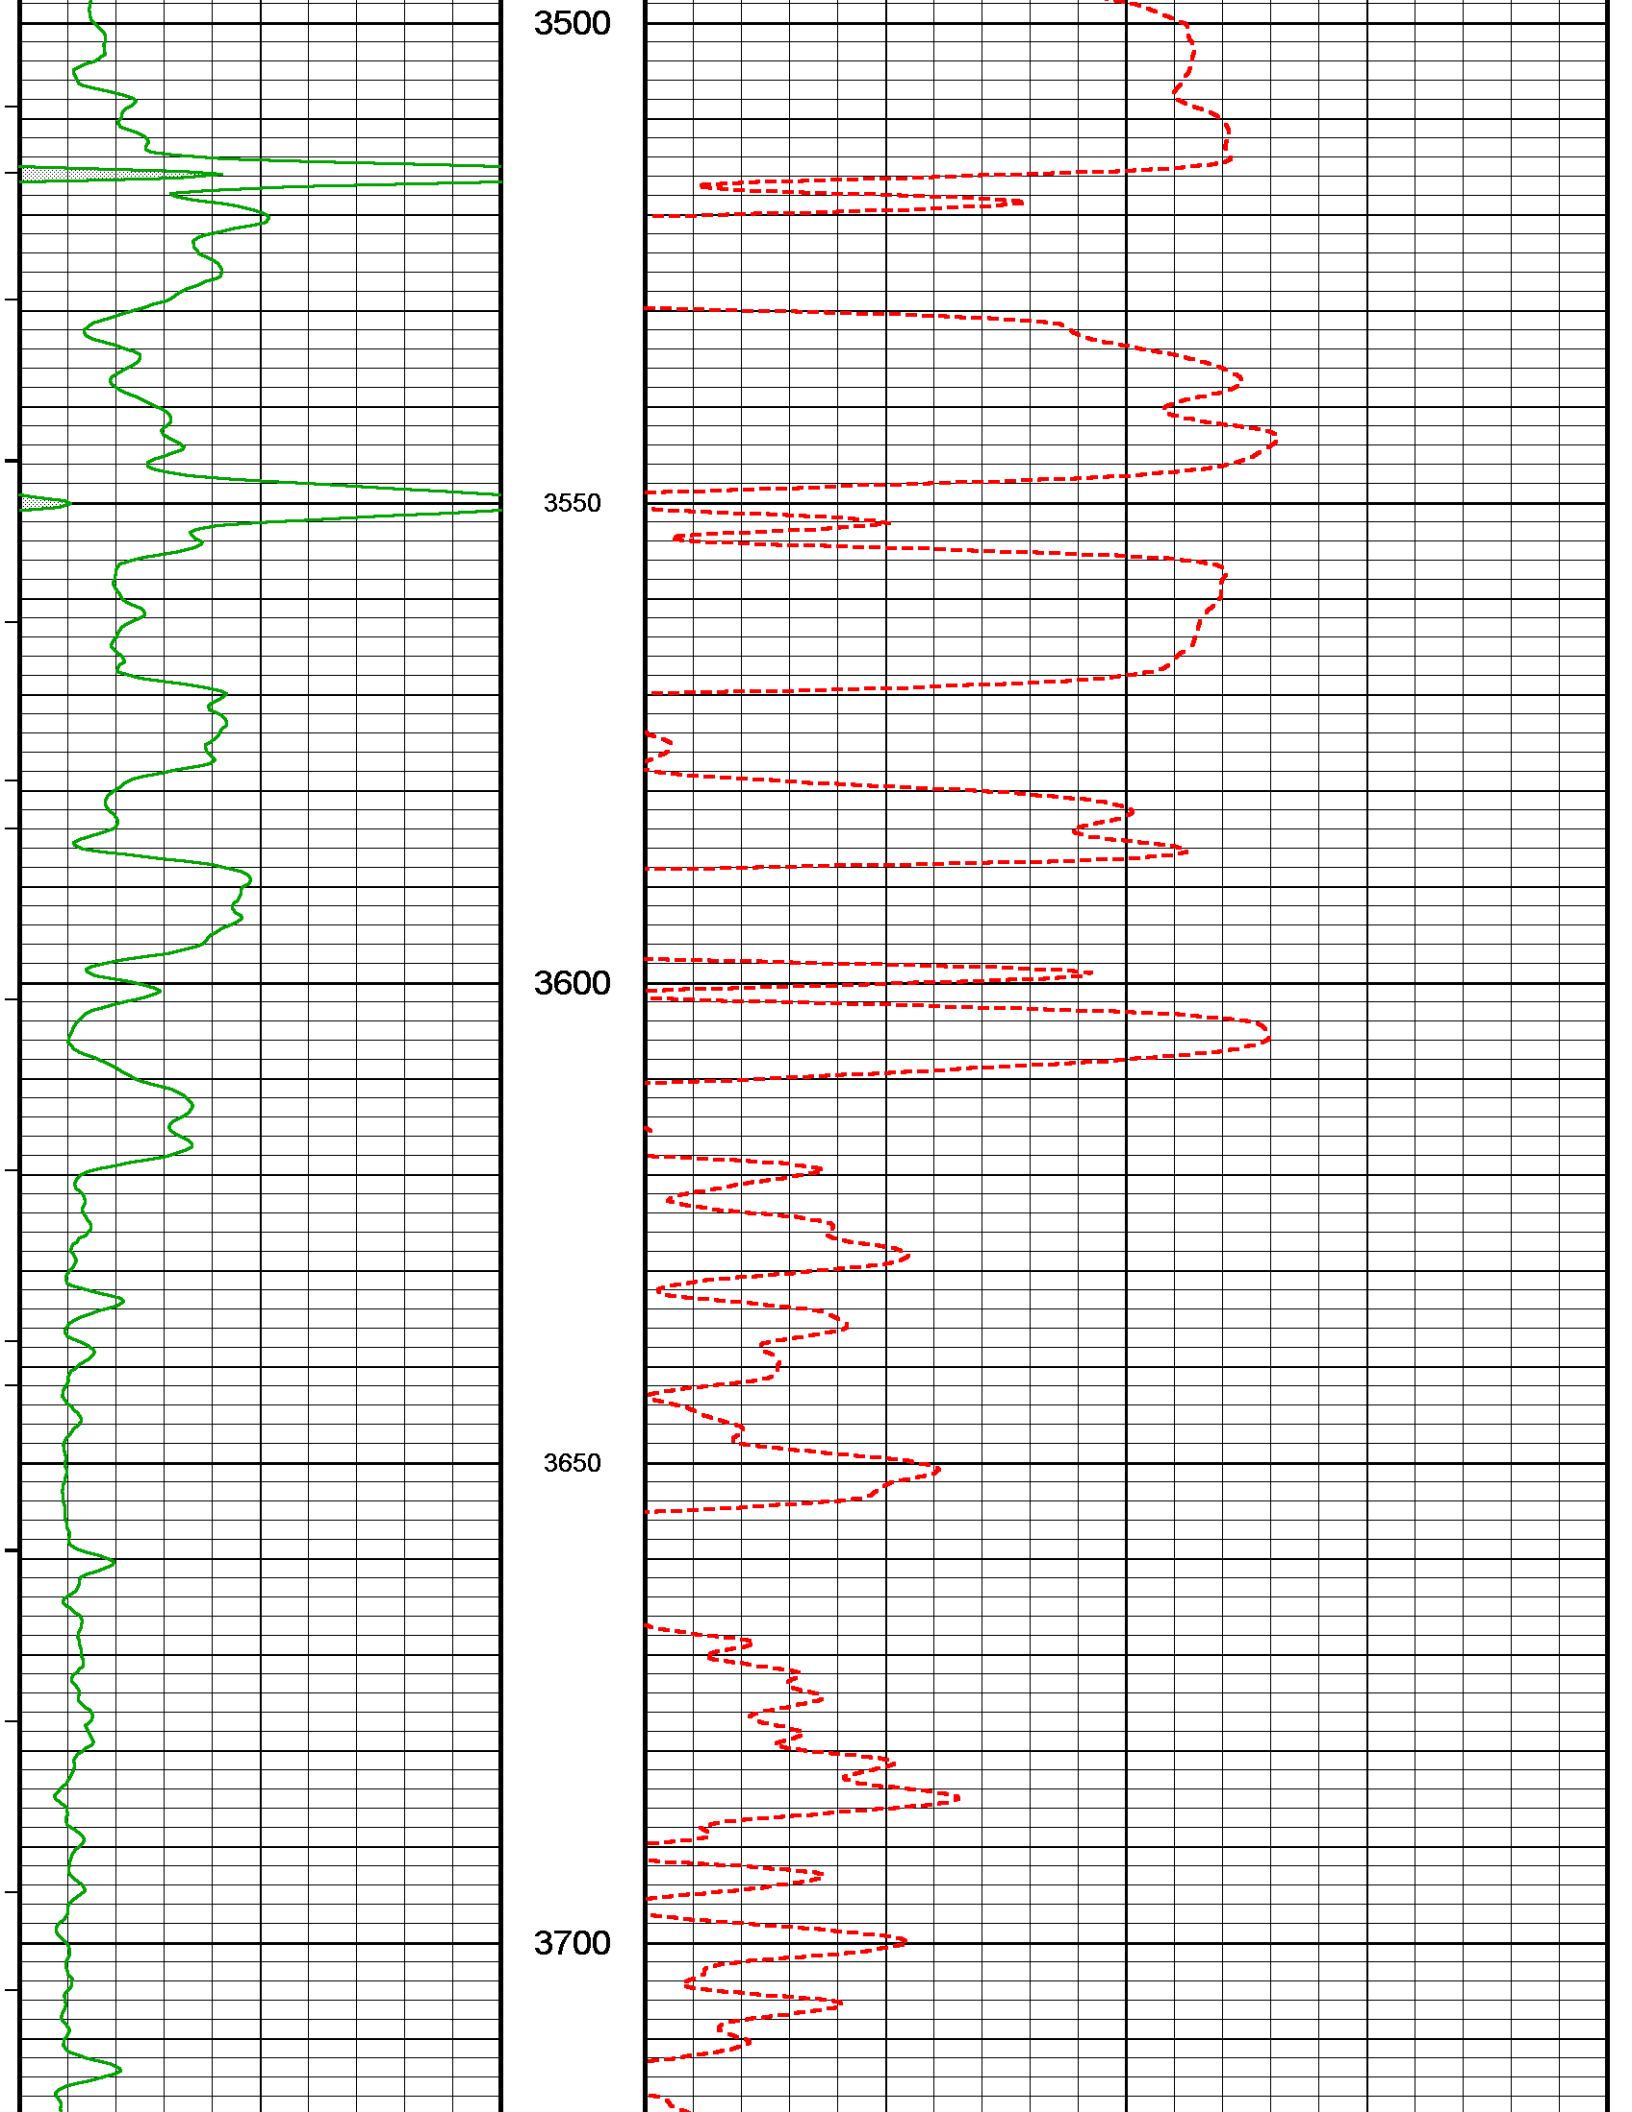


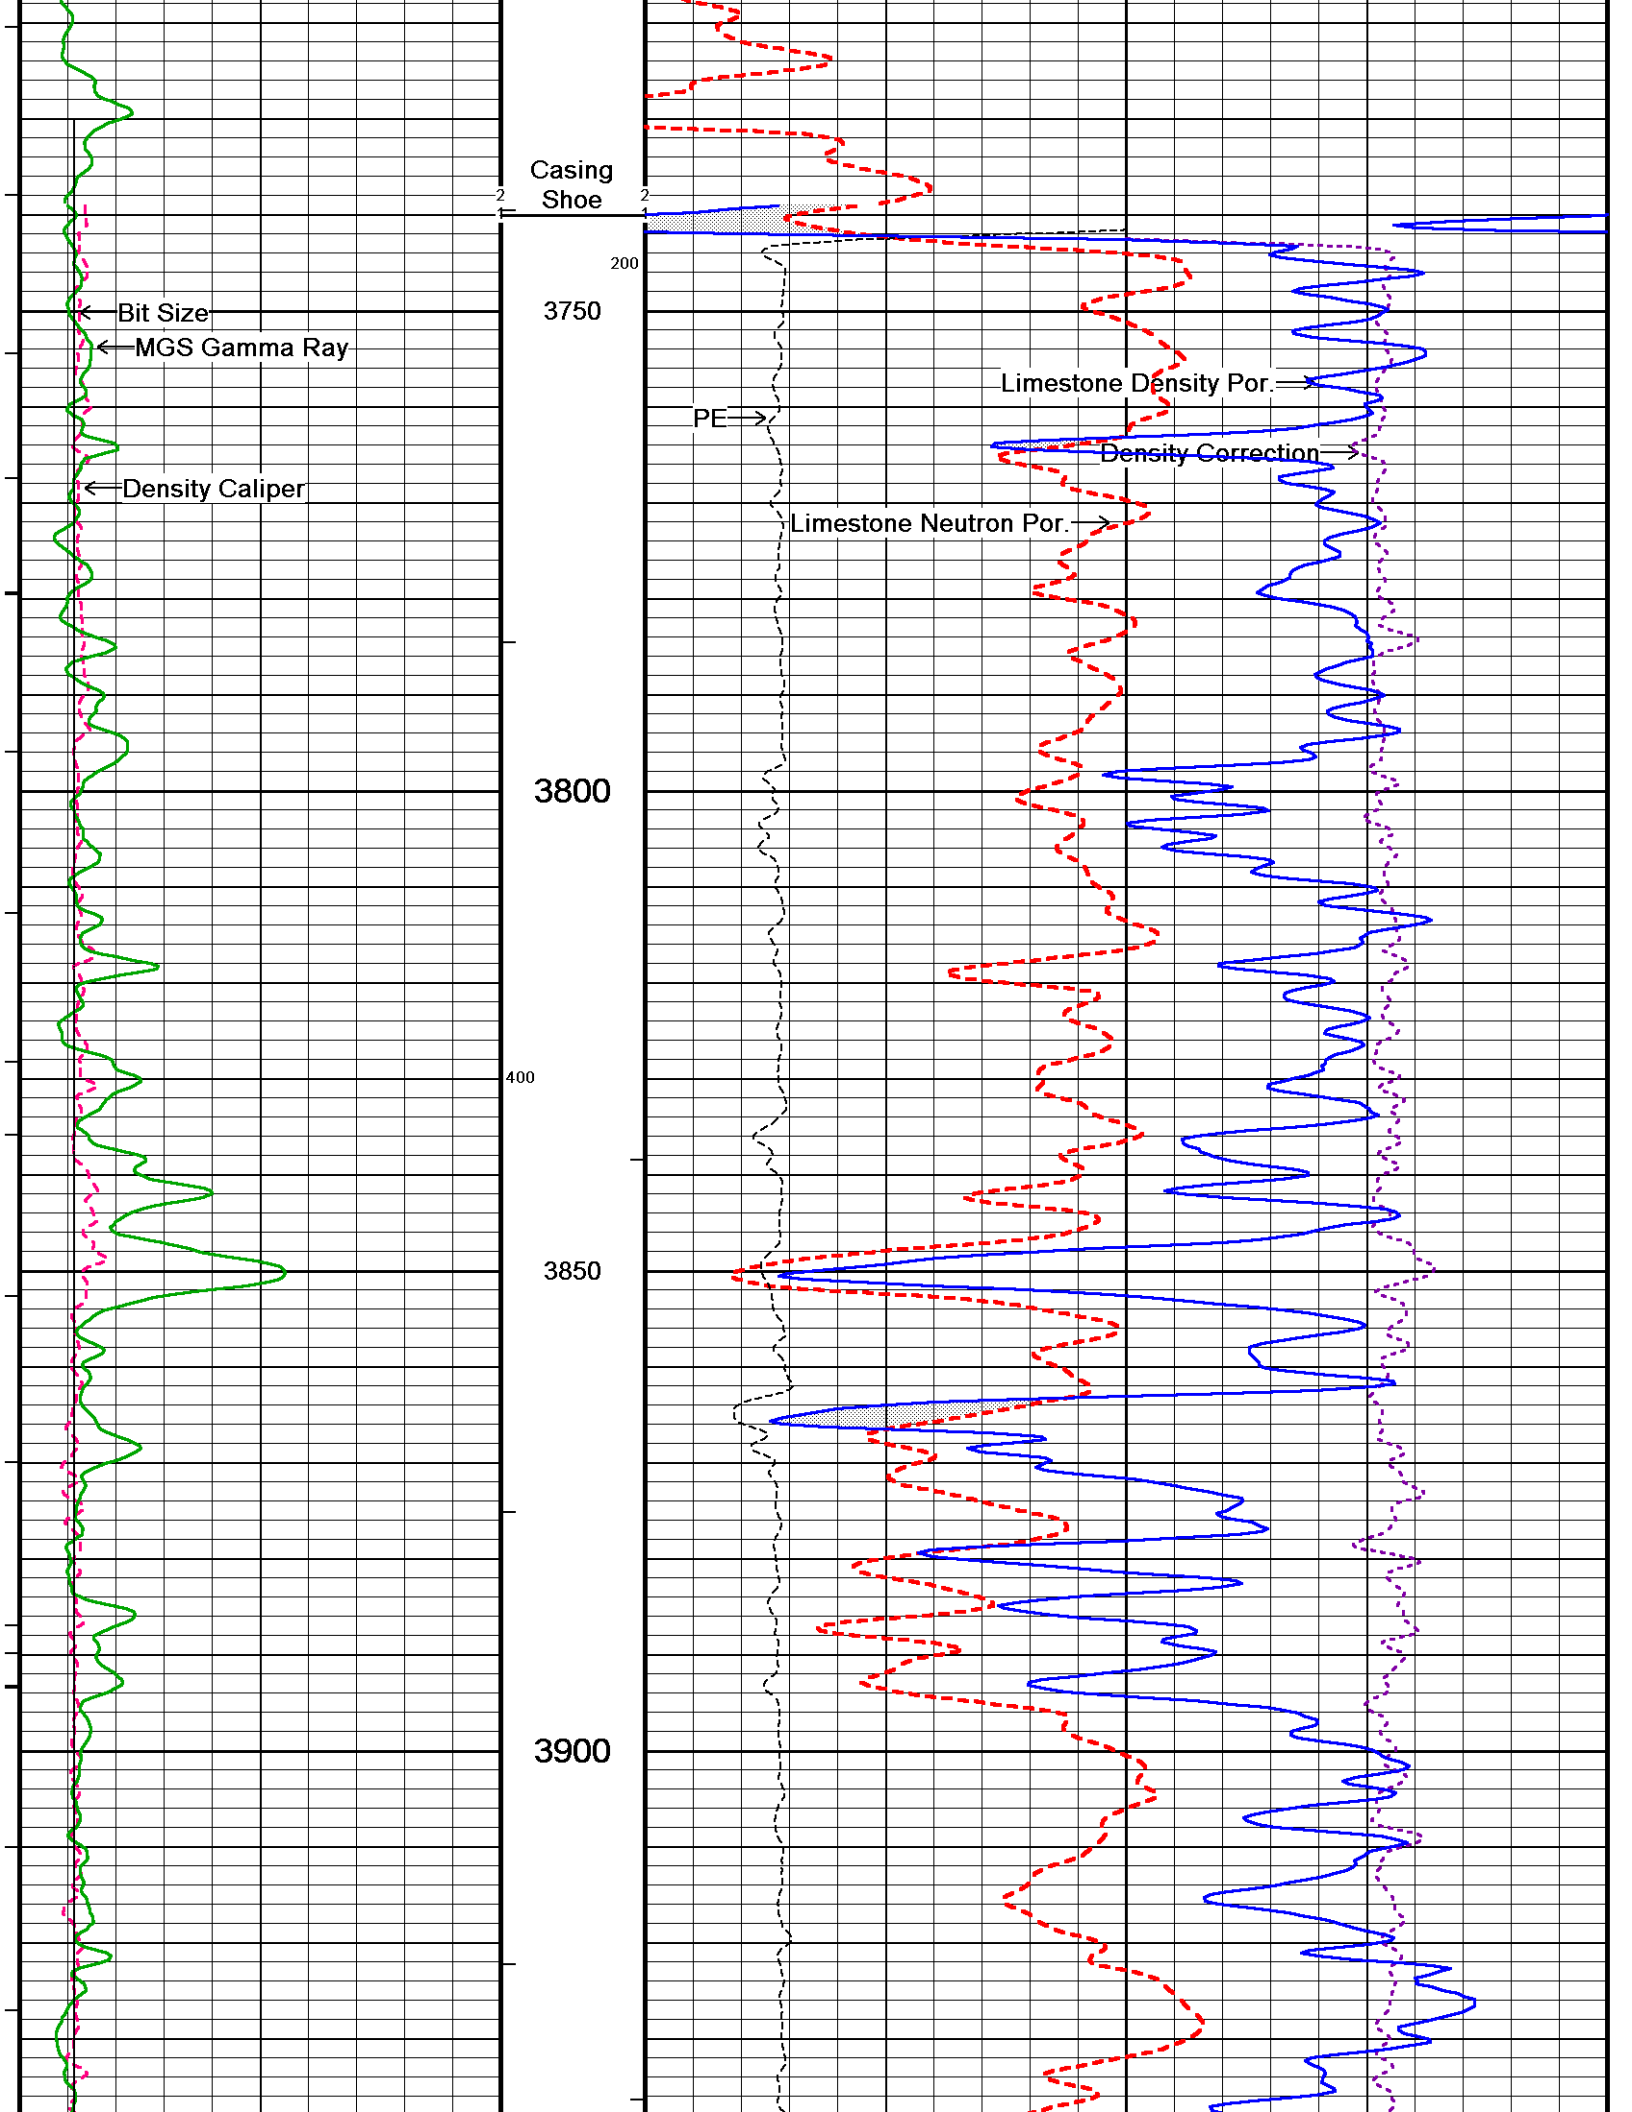


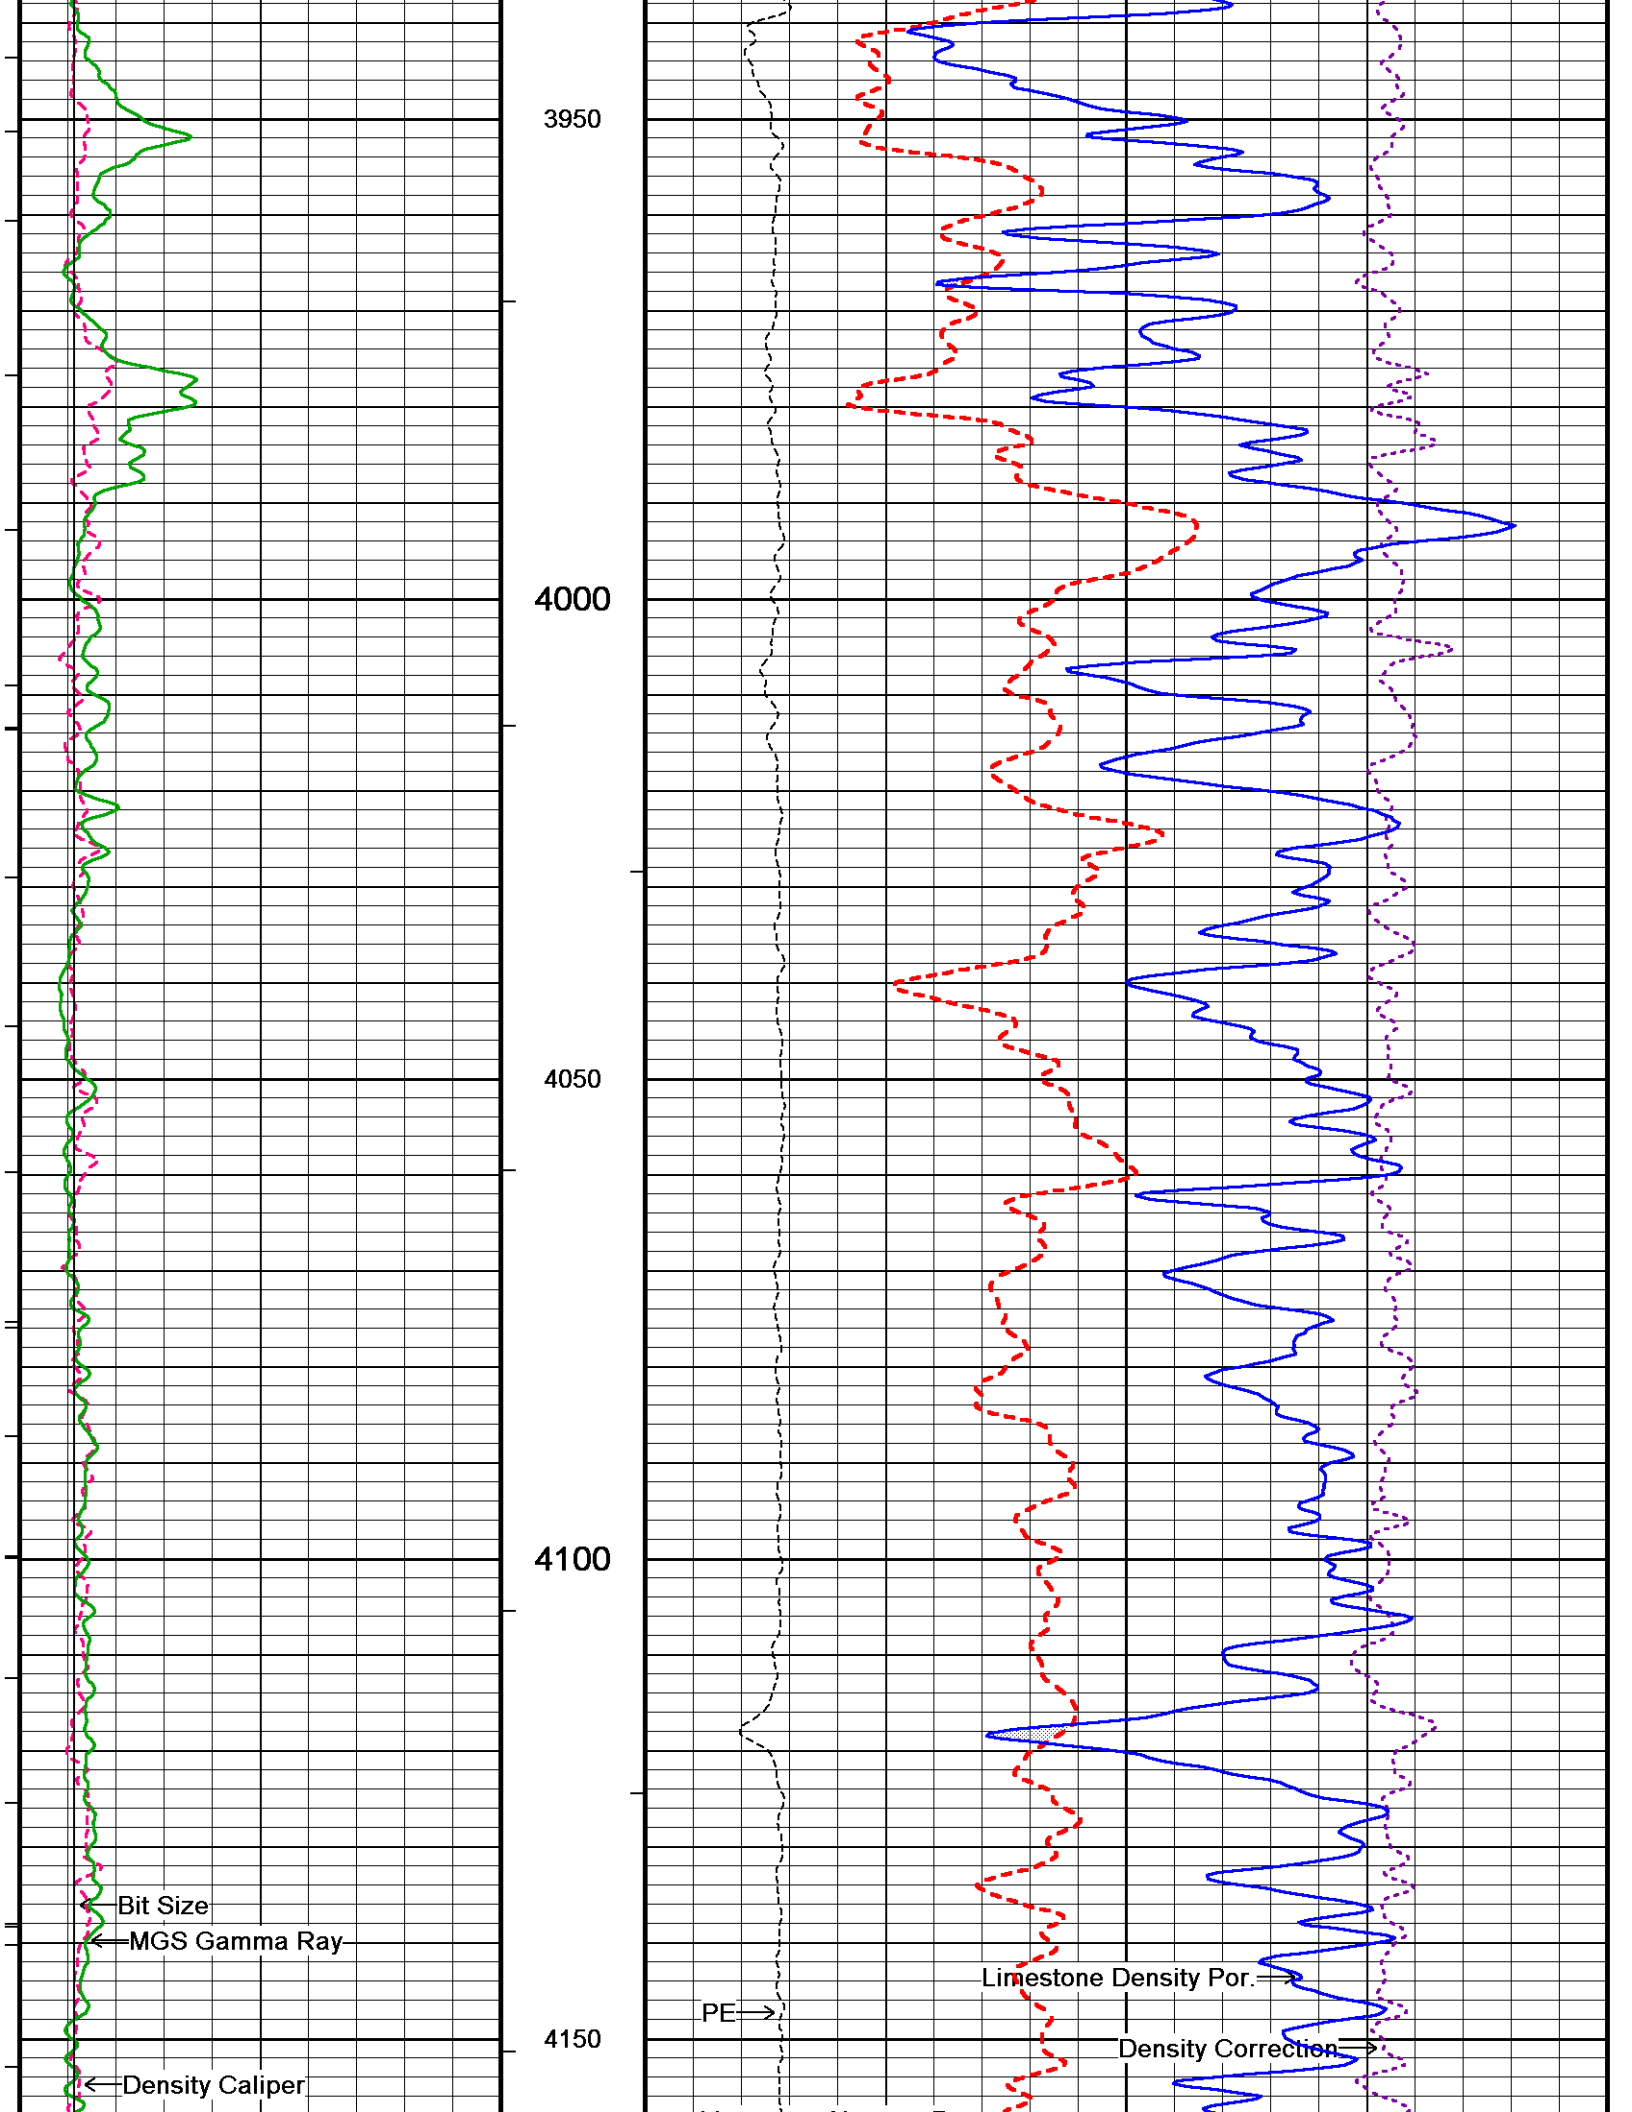



Limestone Neutron Por.

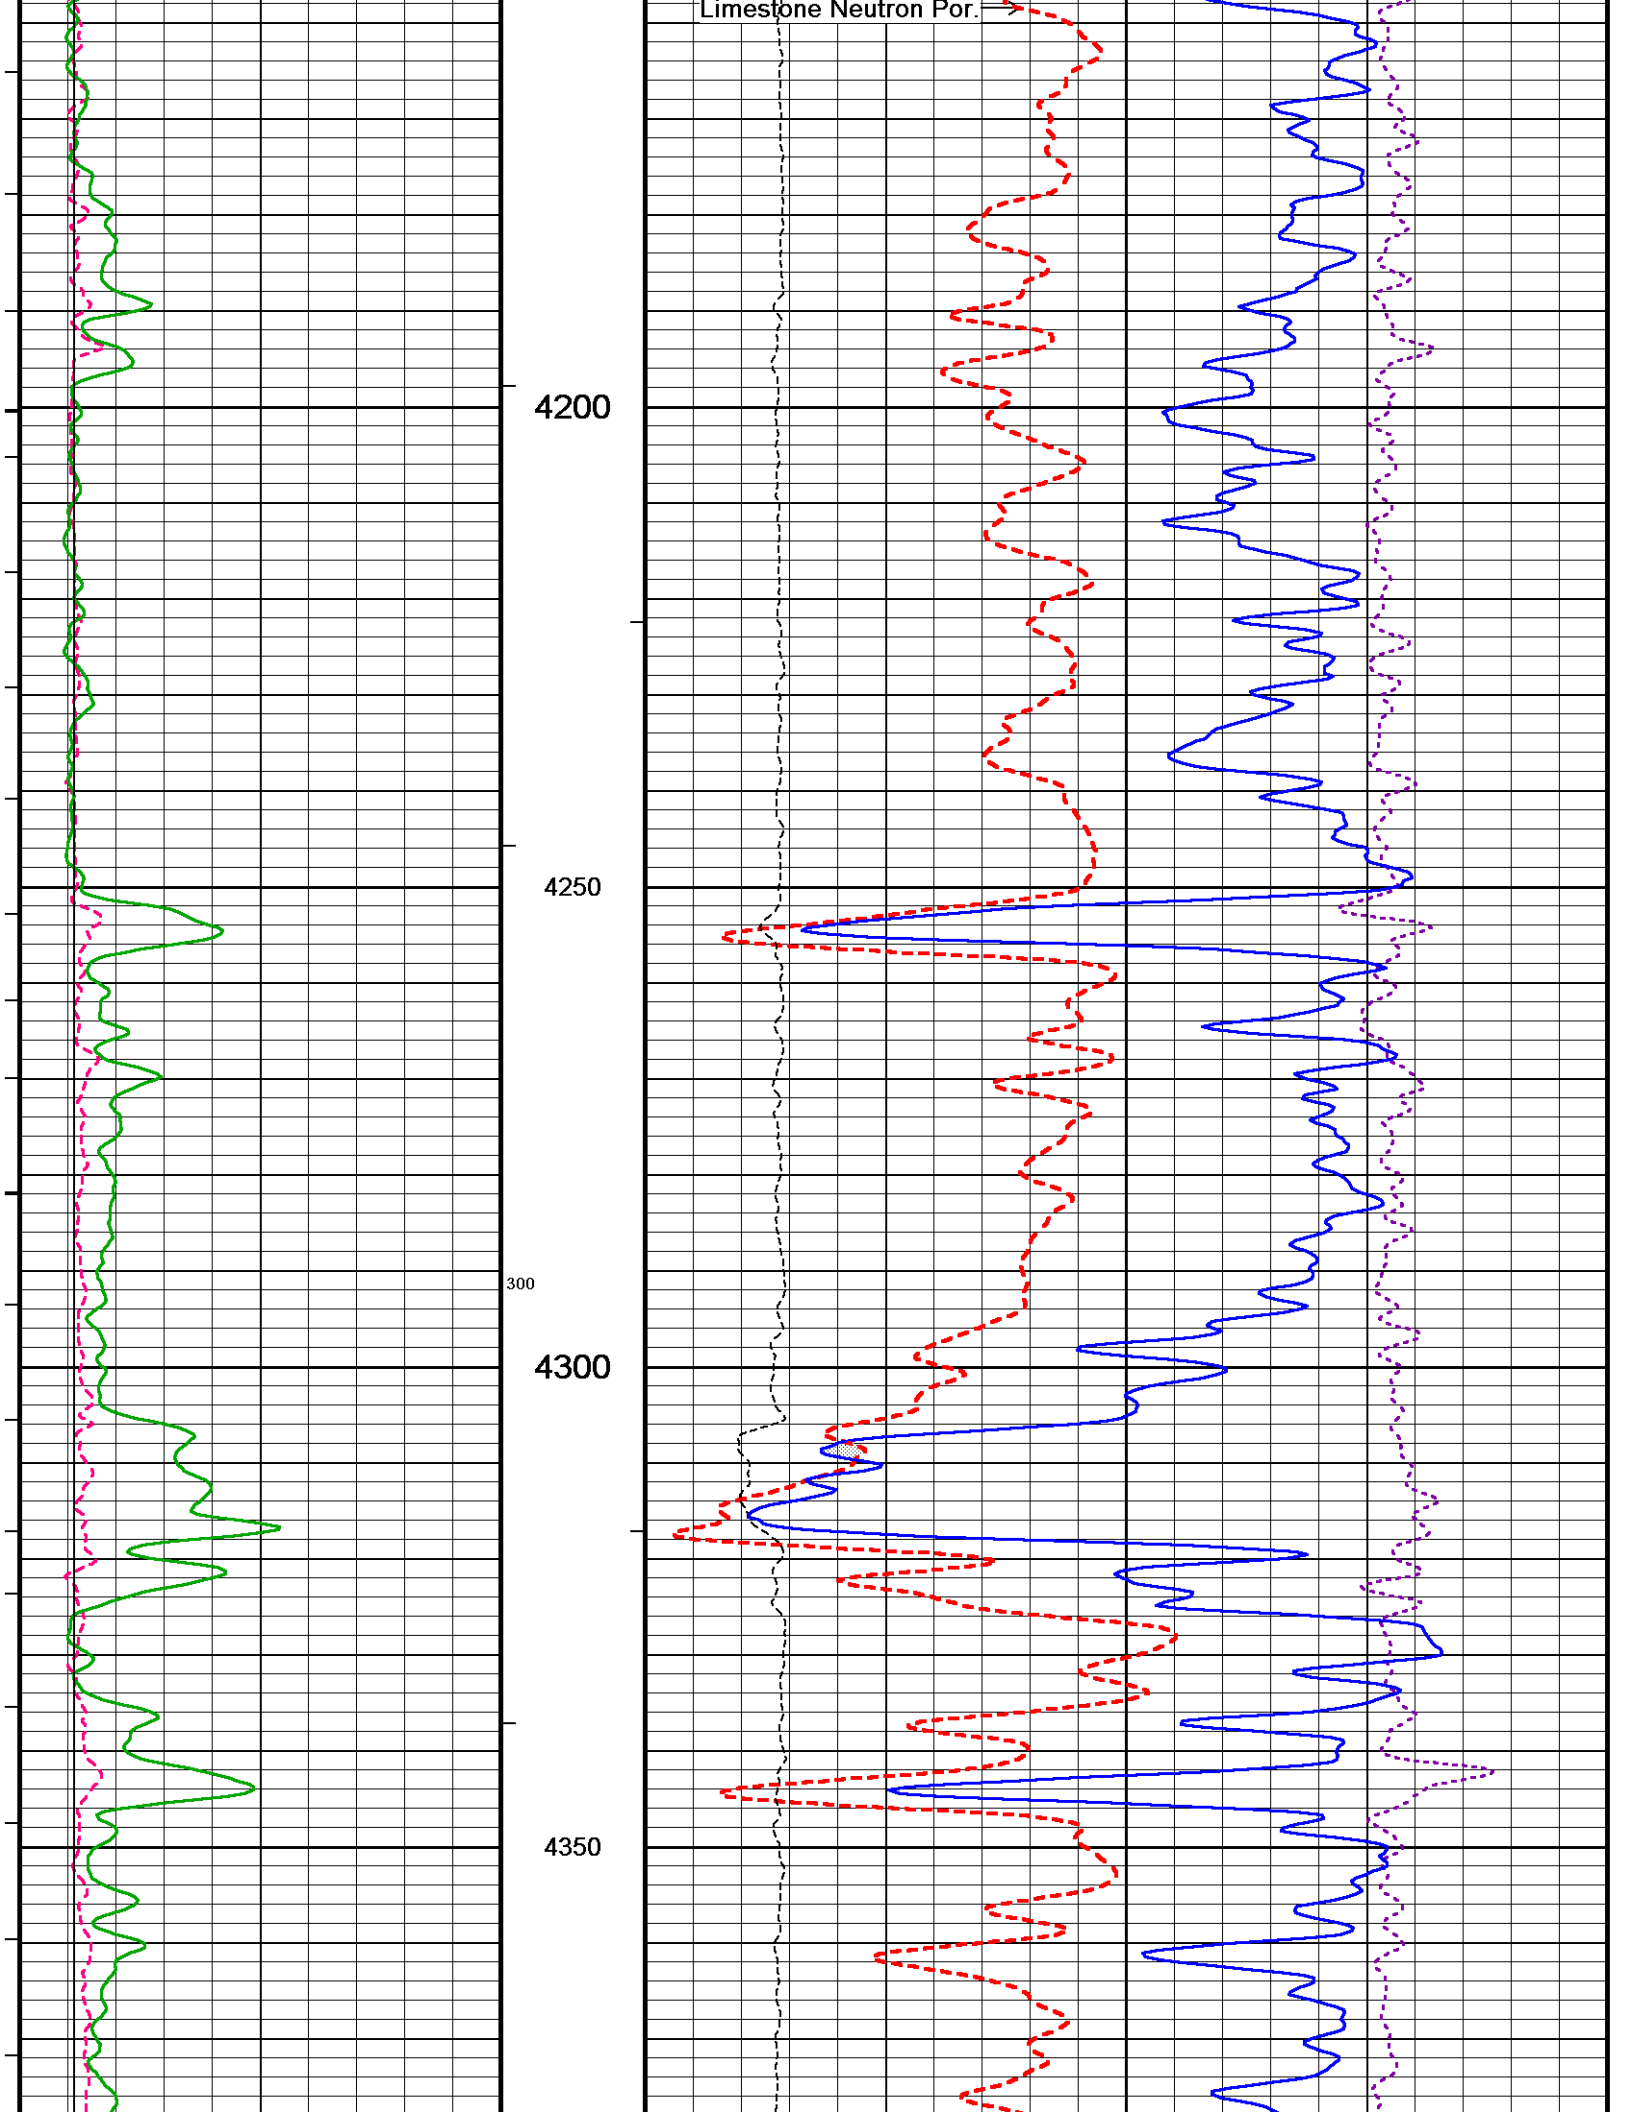


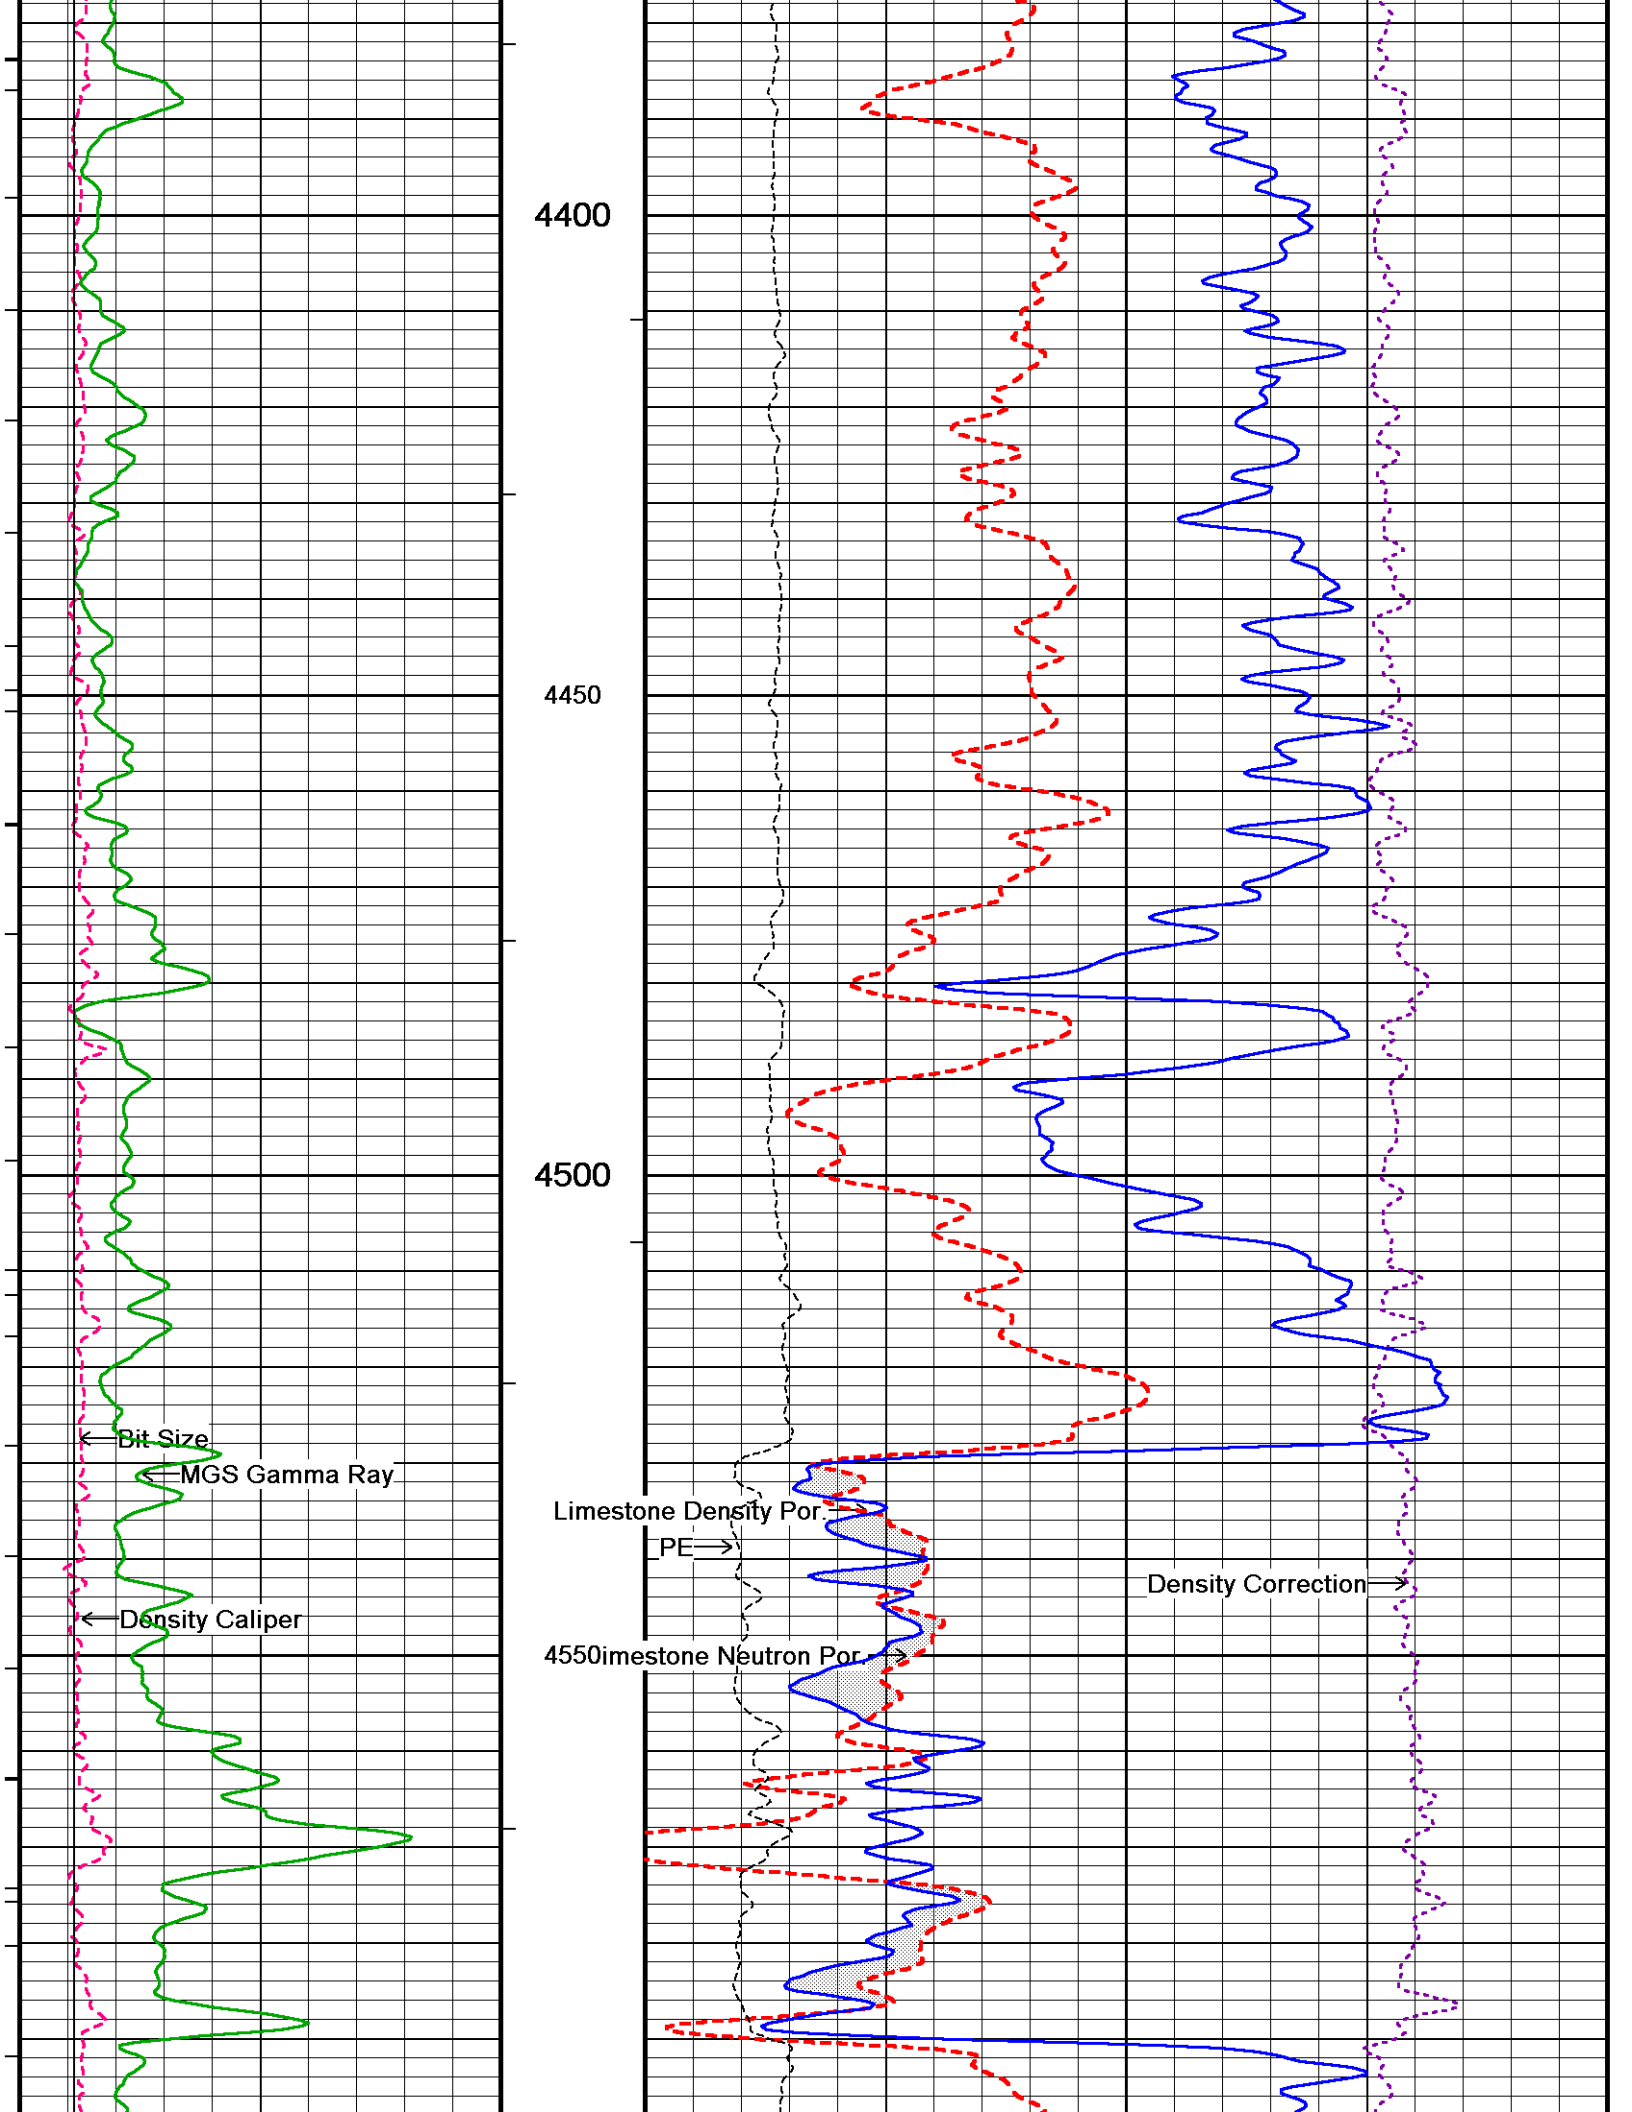


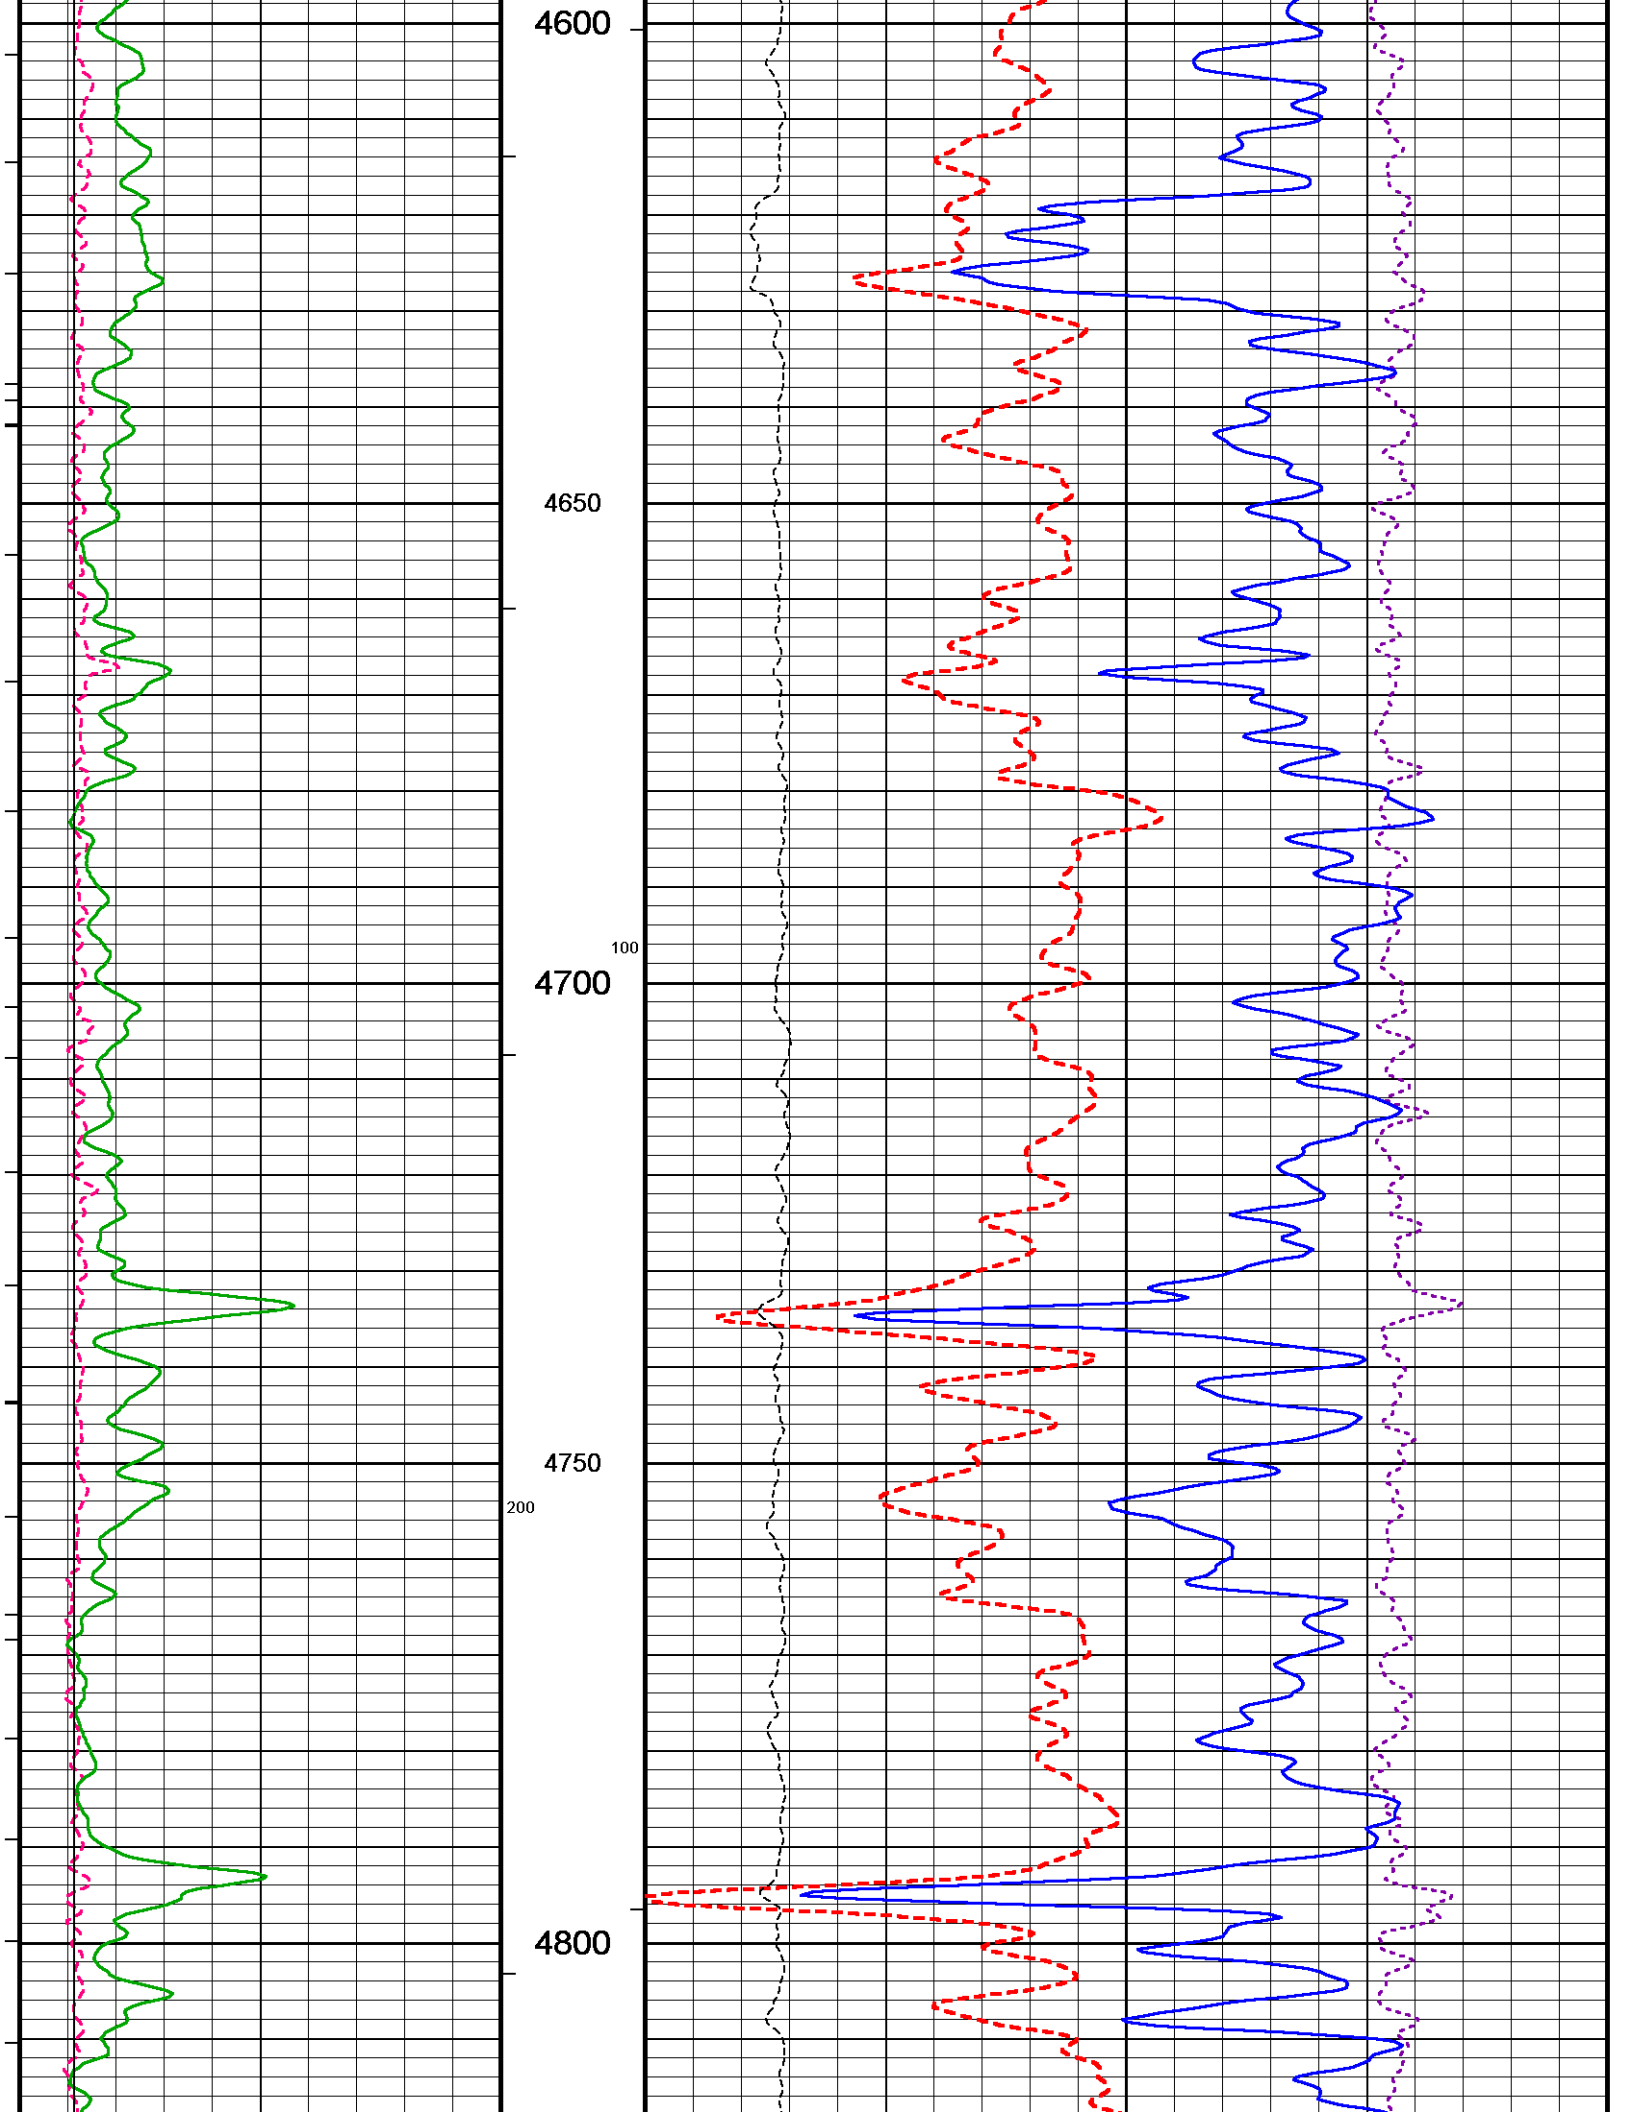


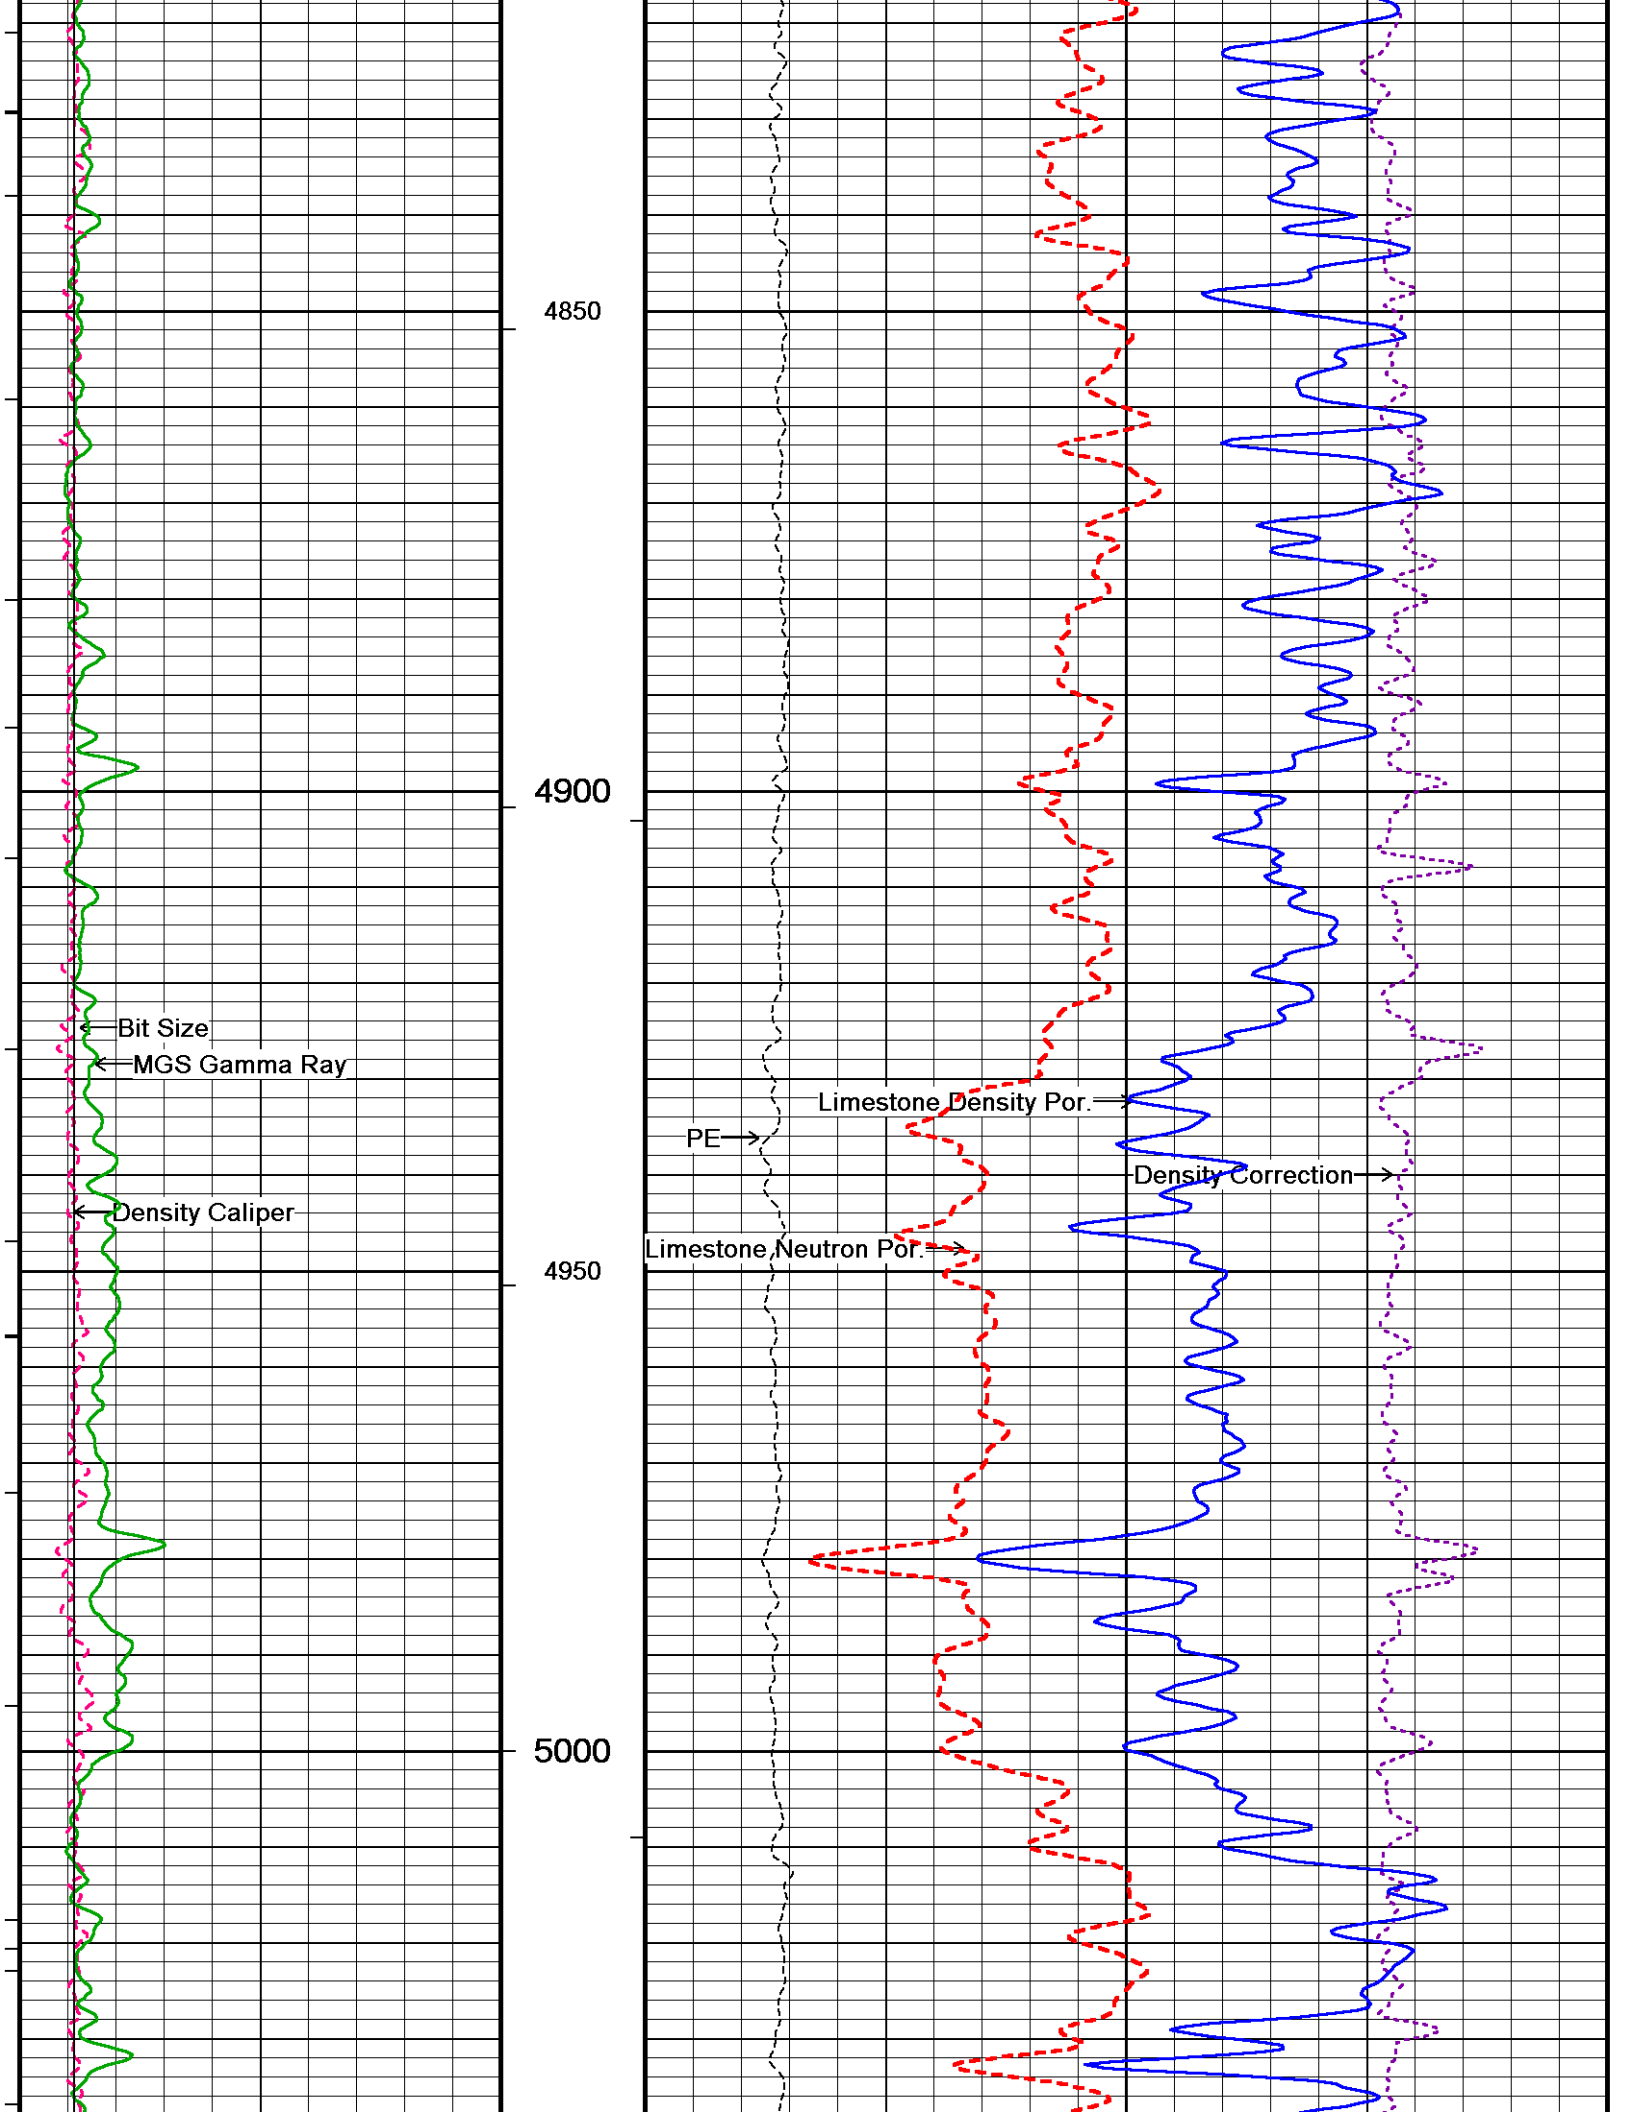

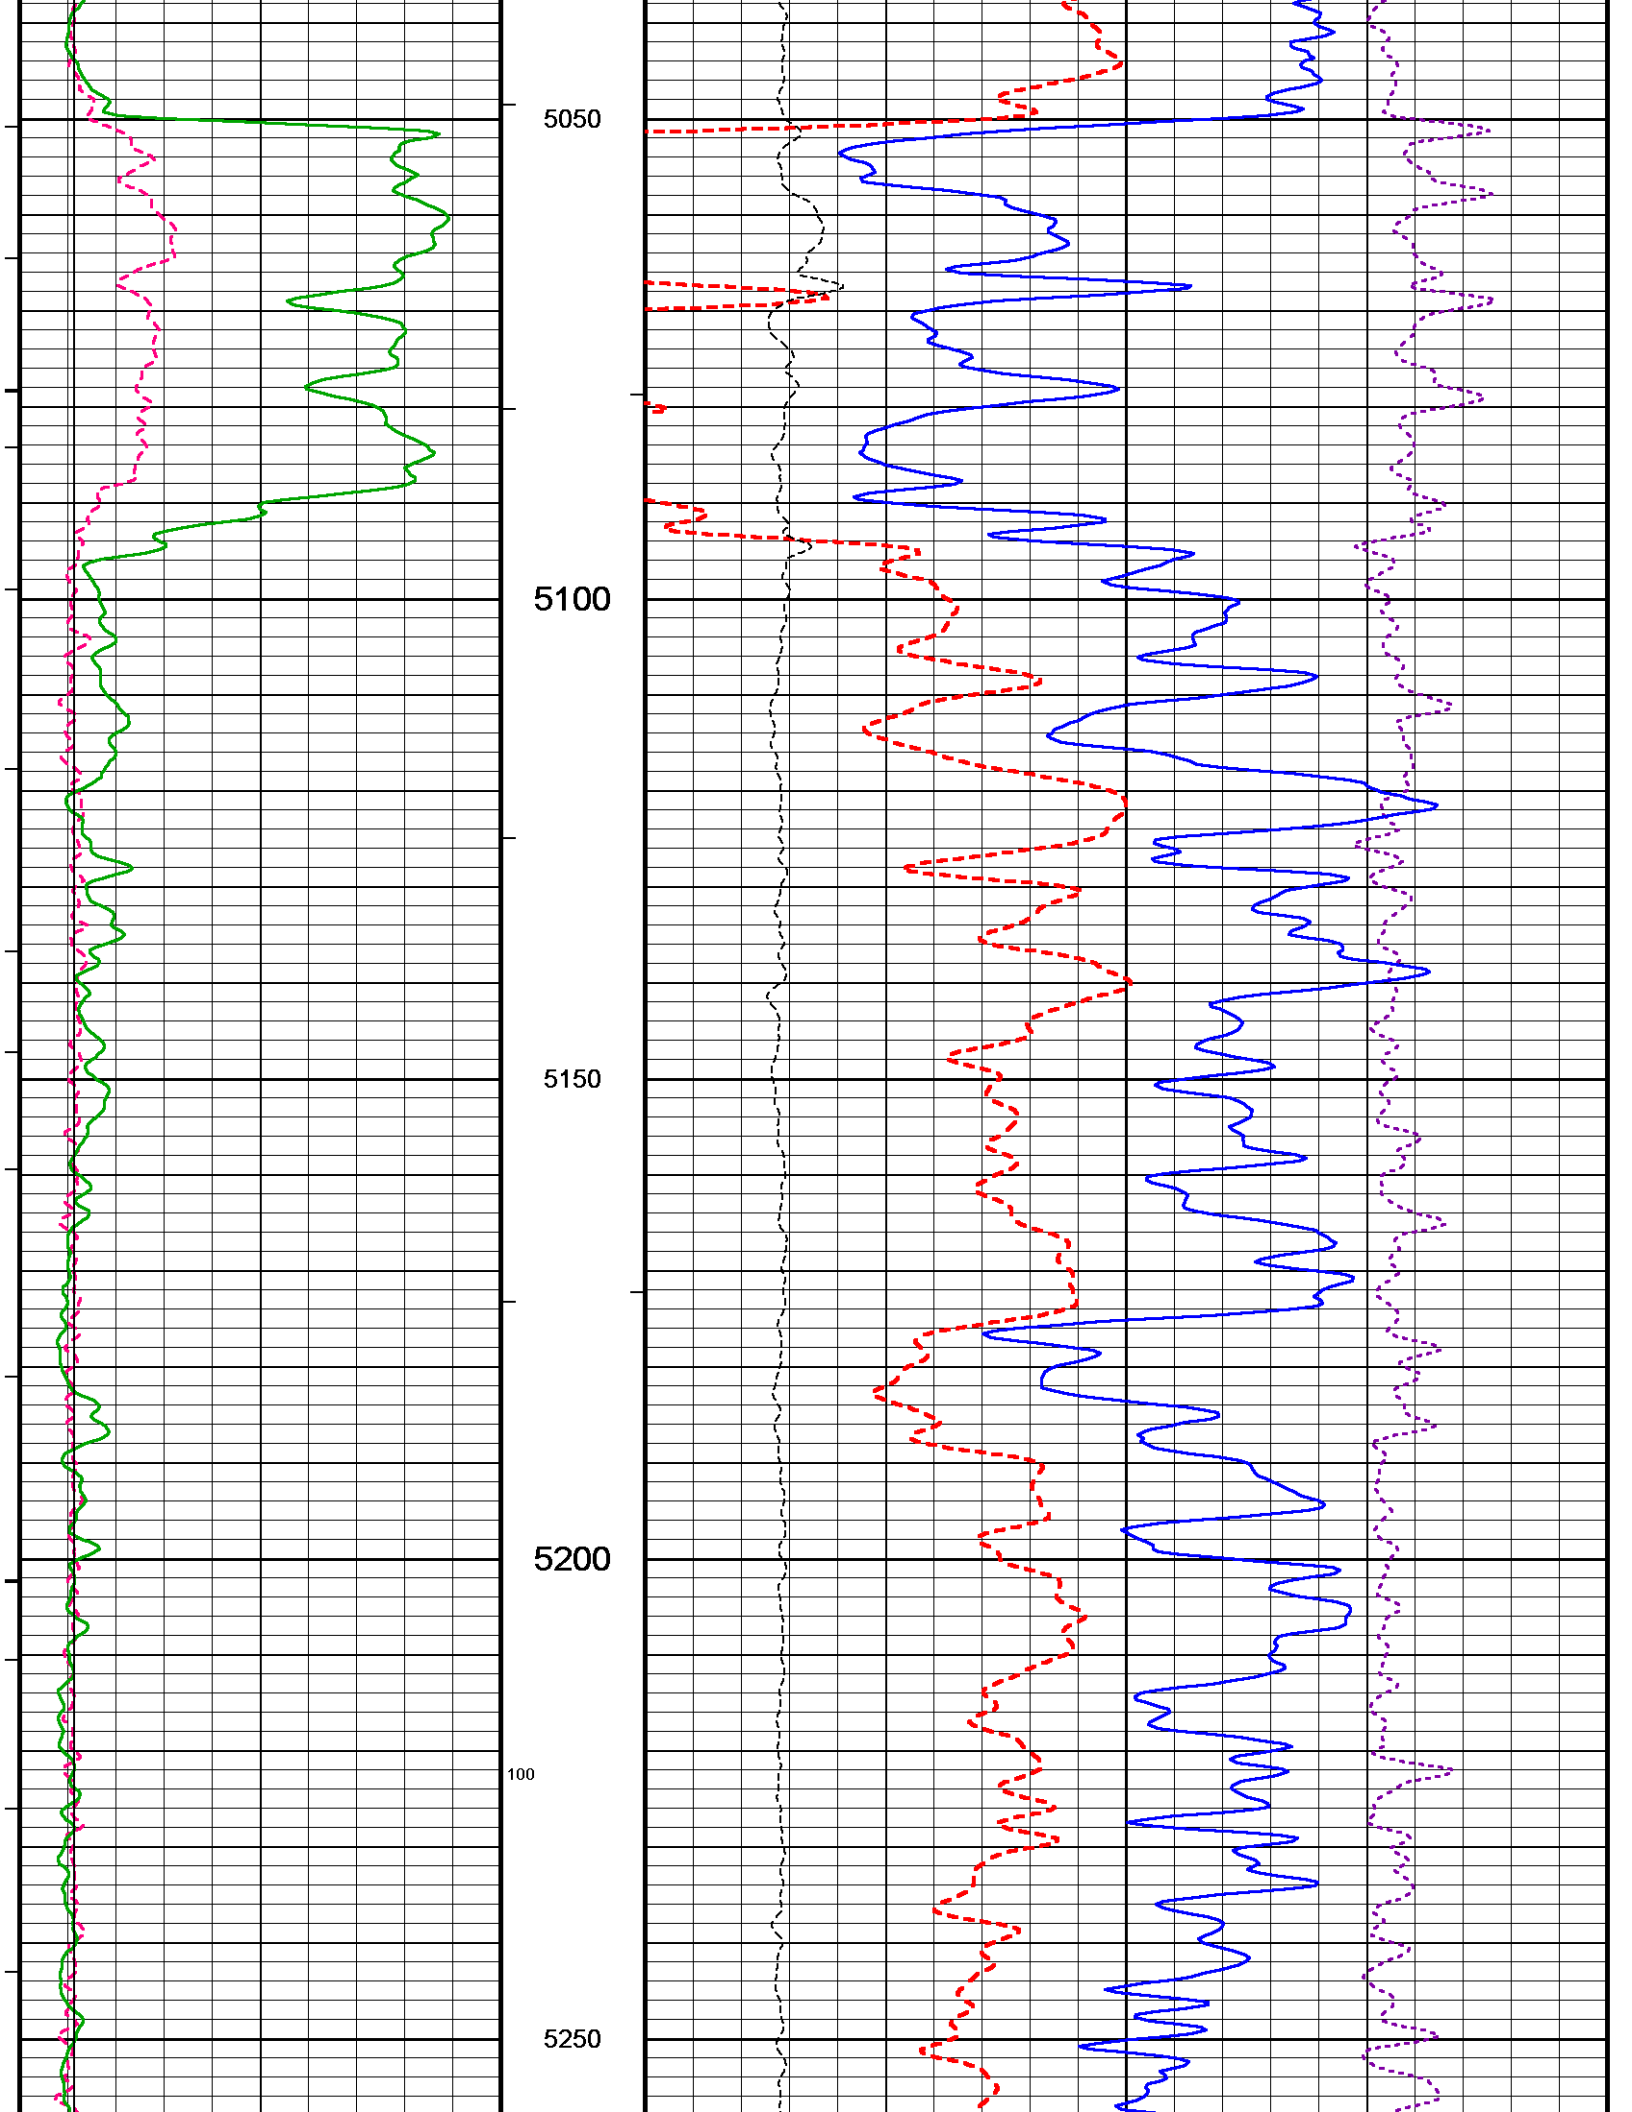

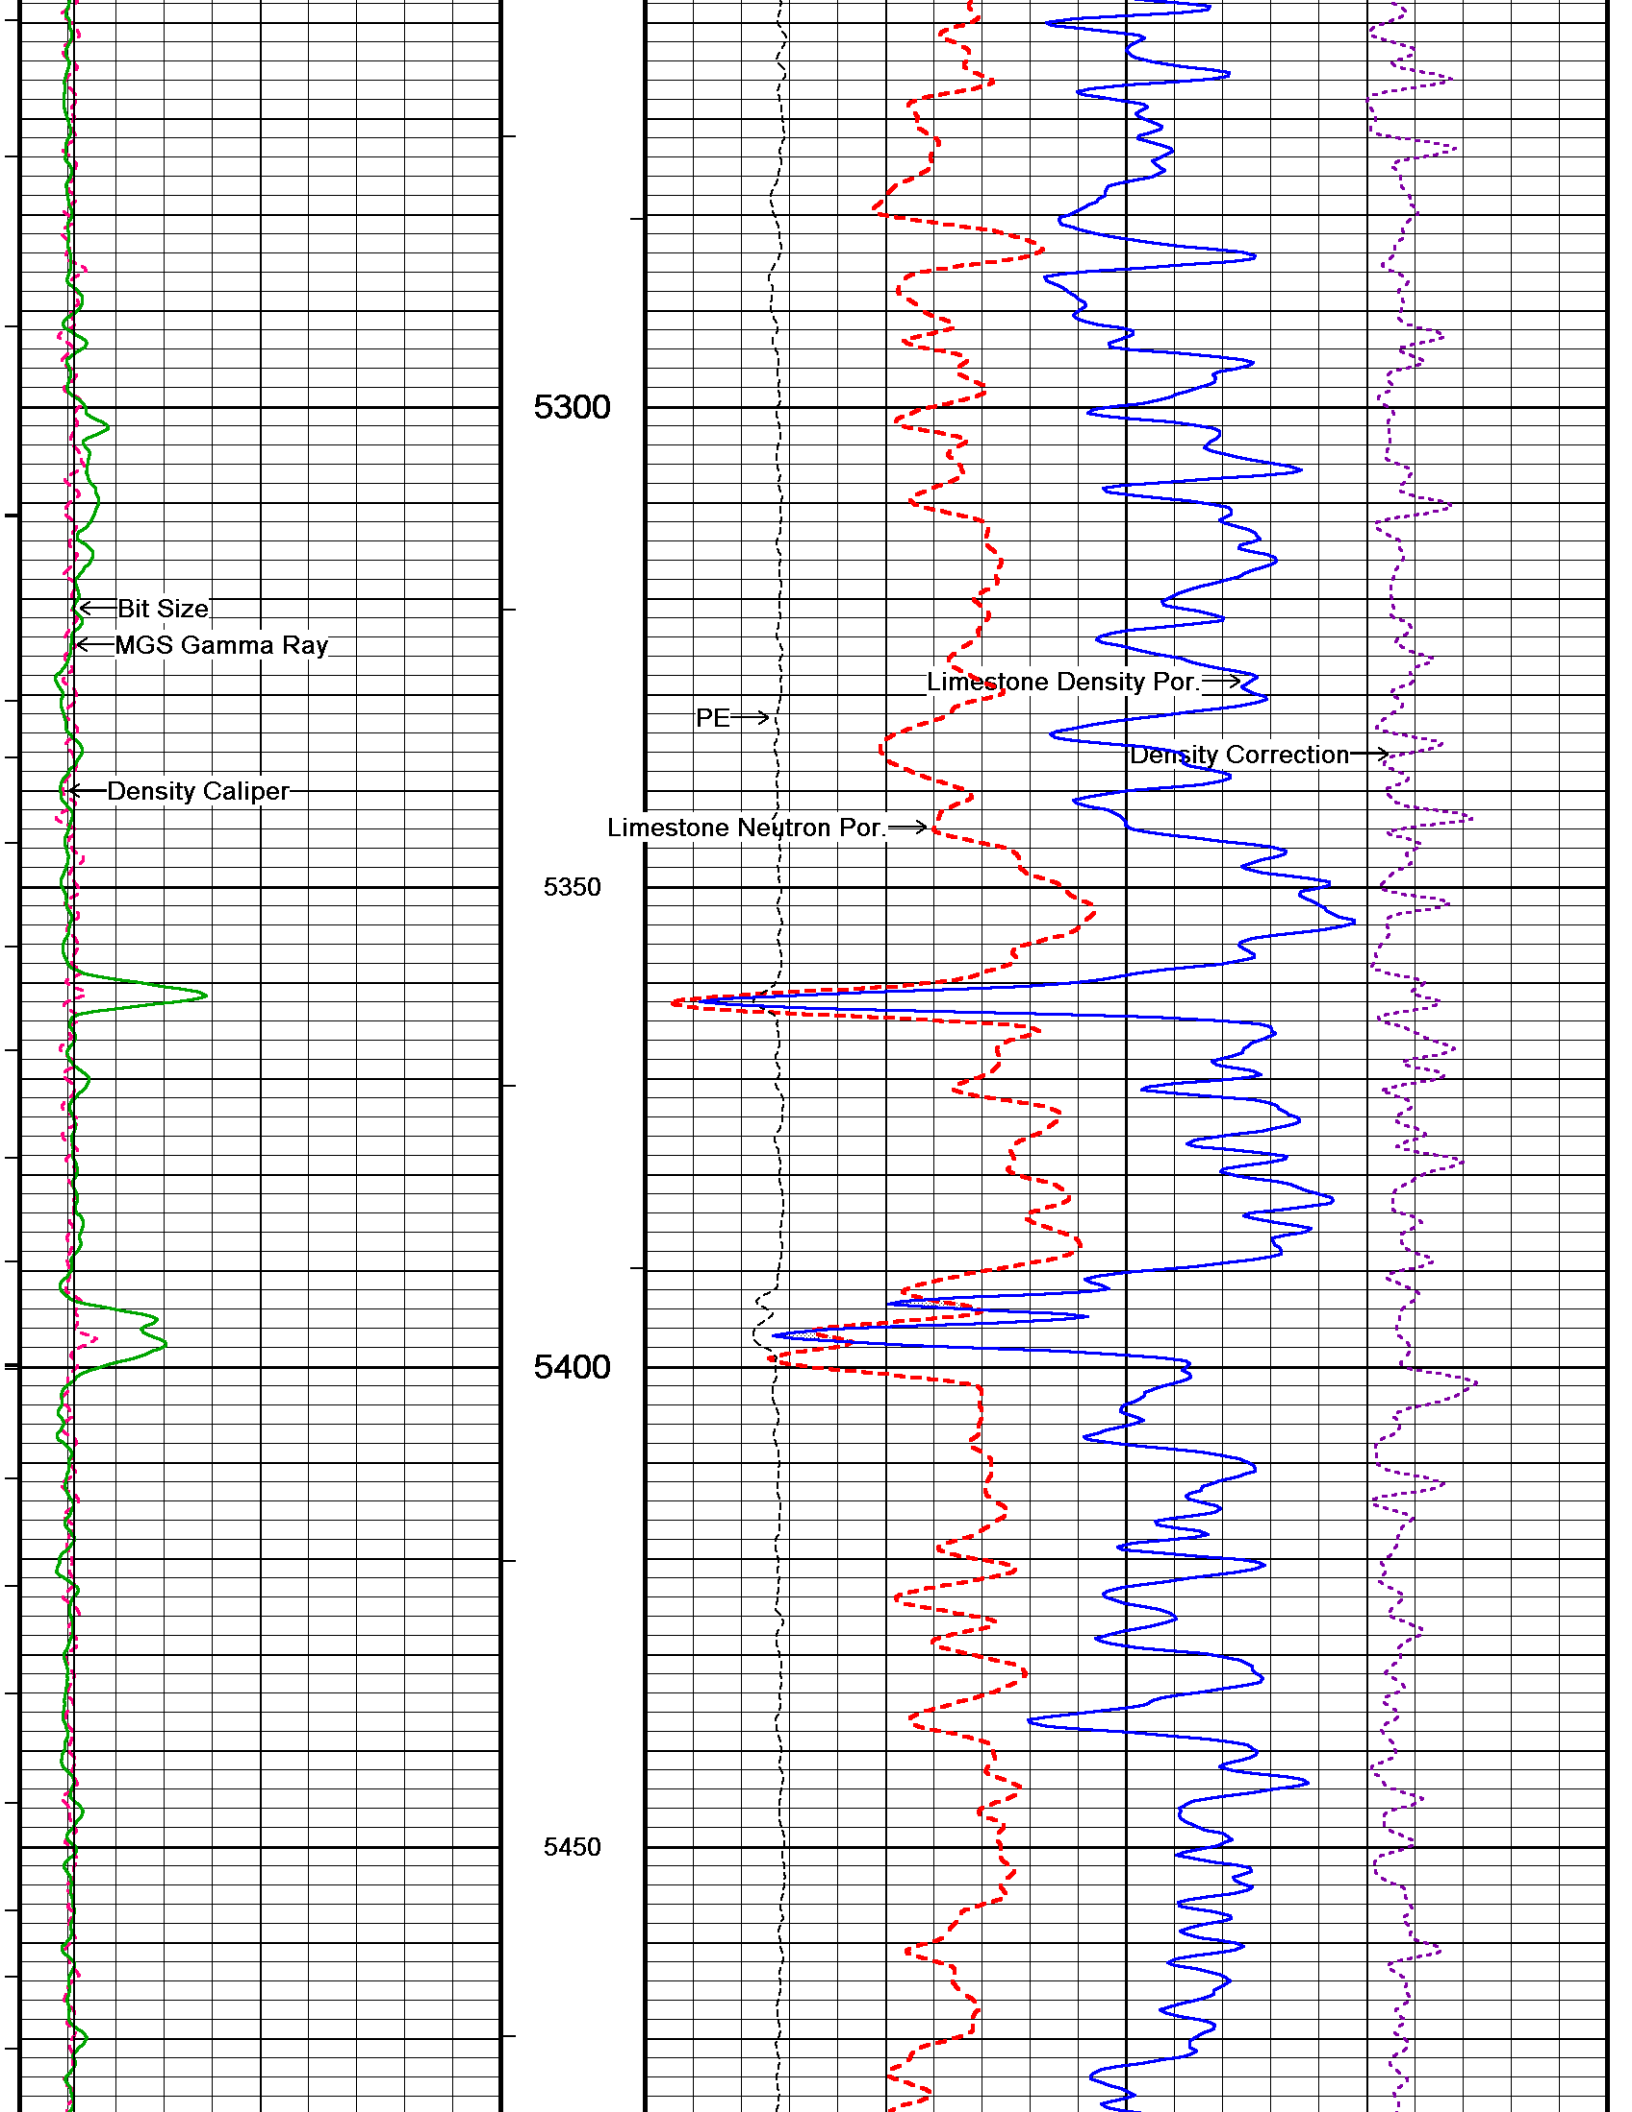

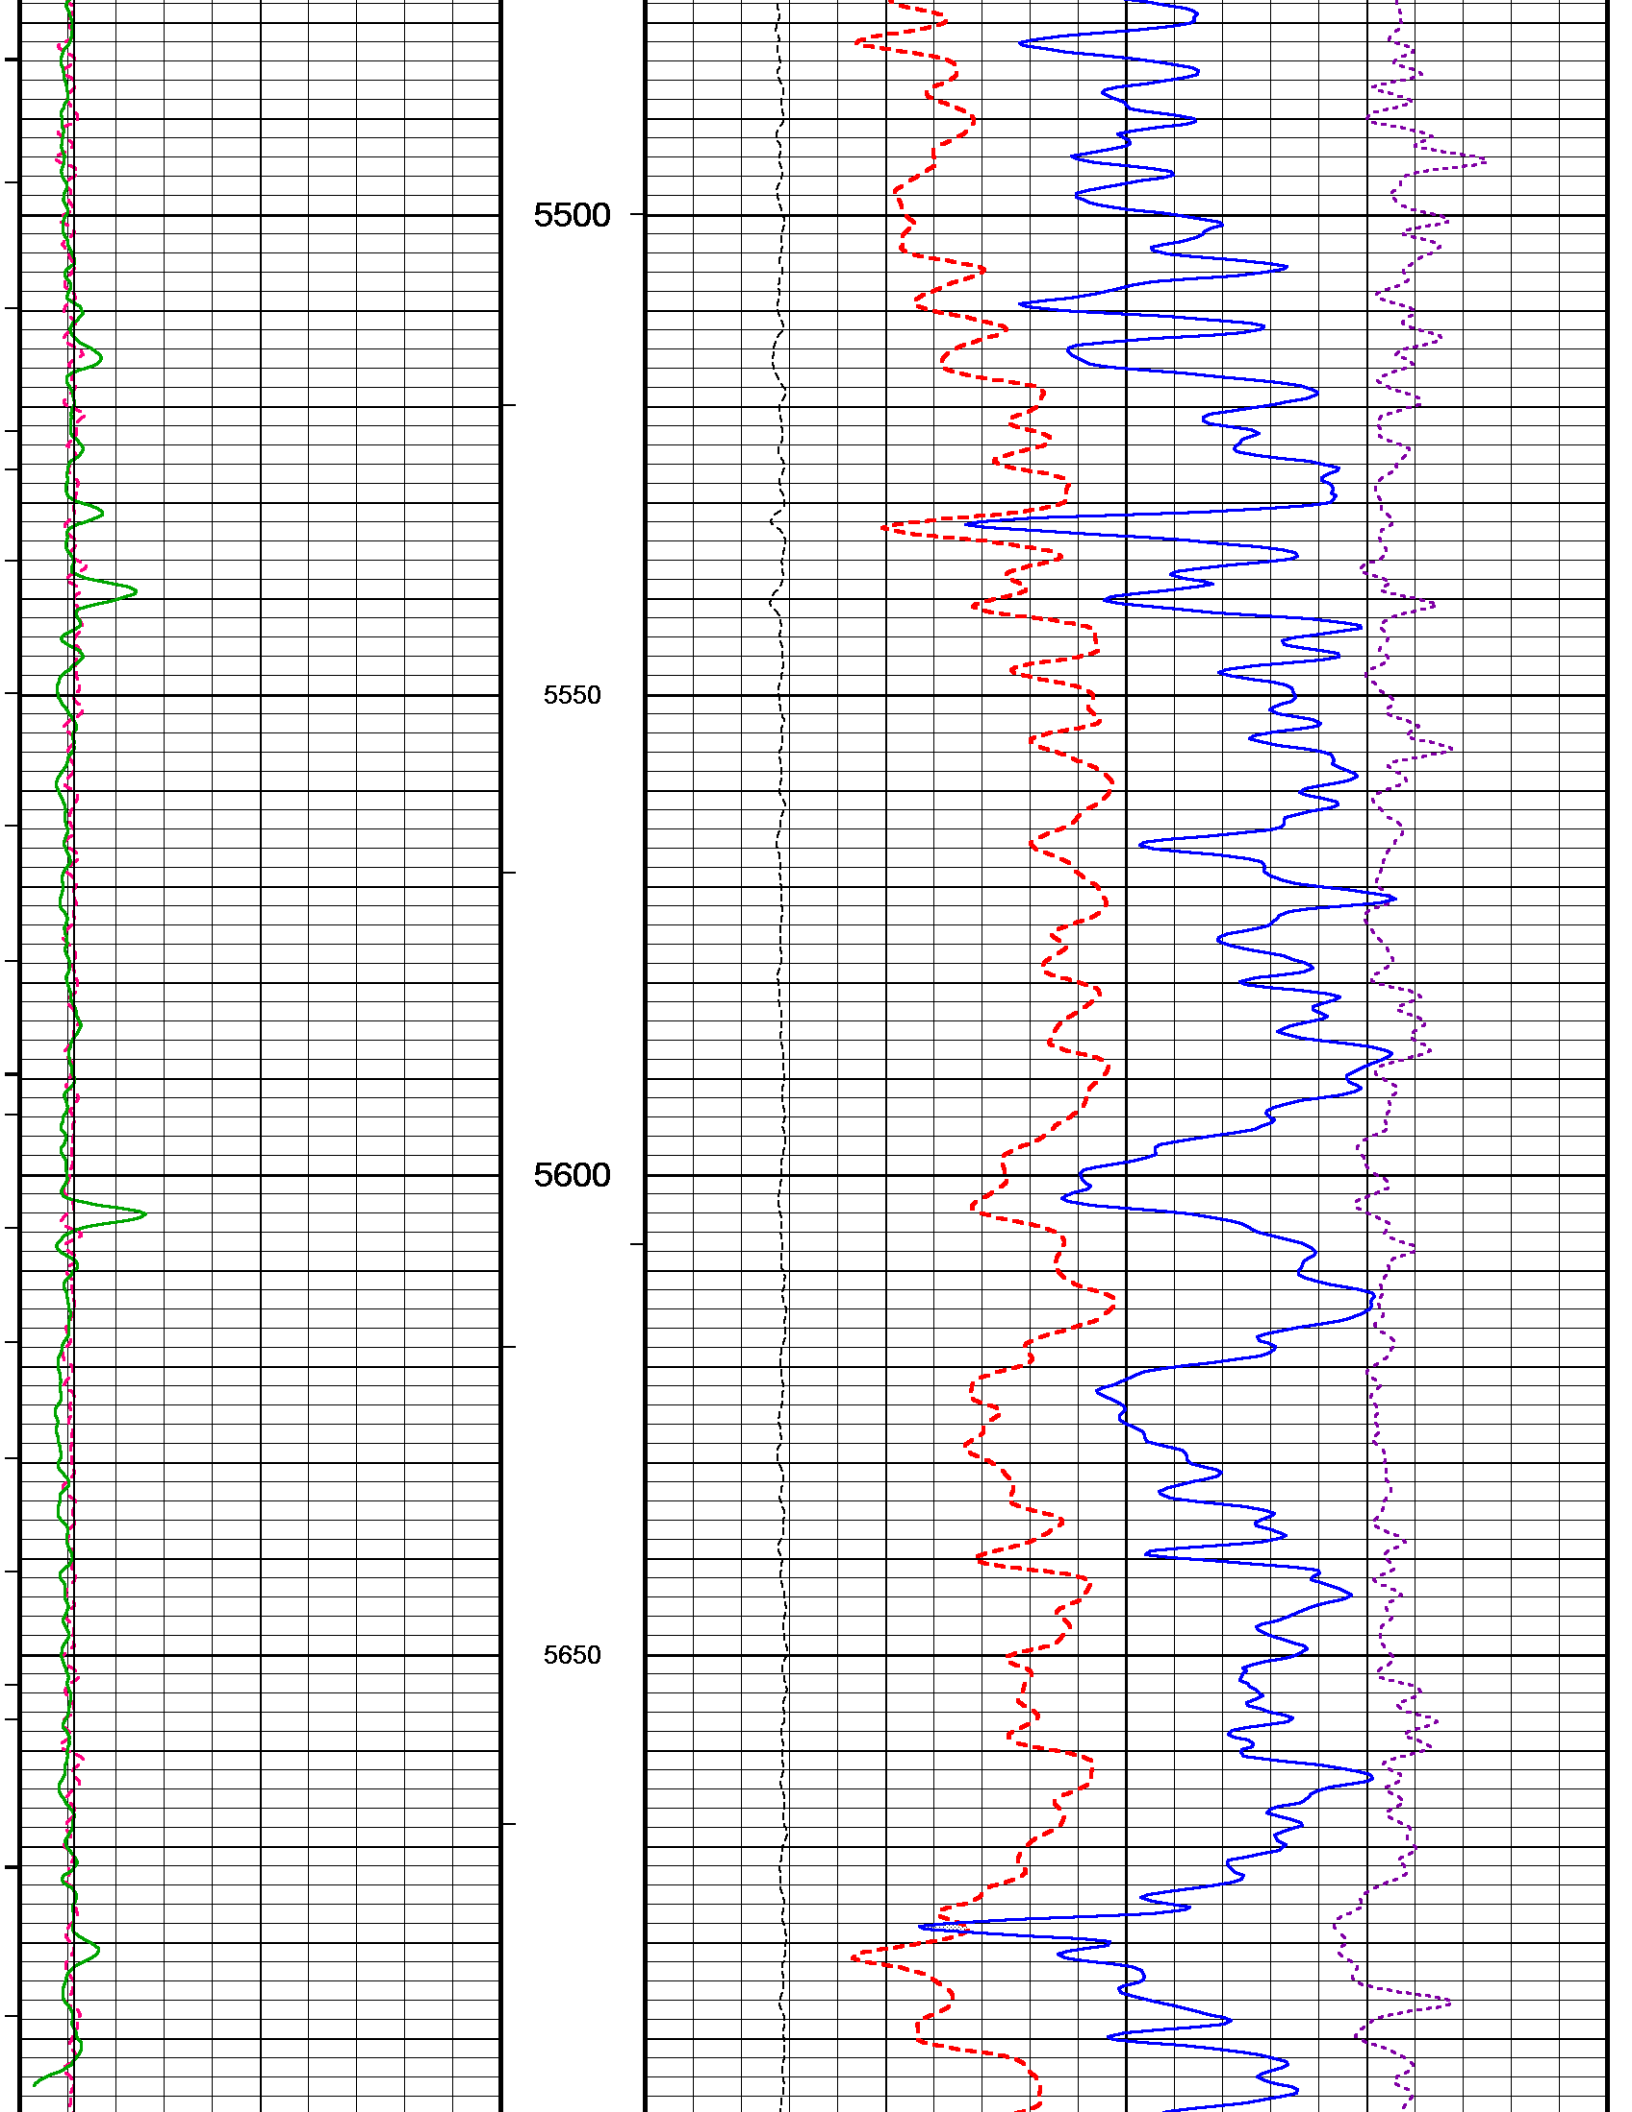

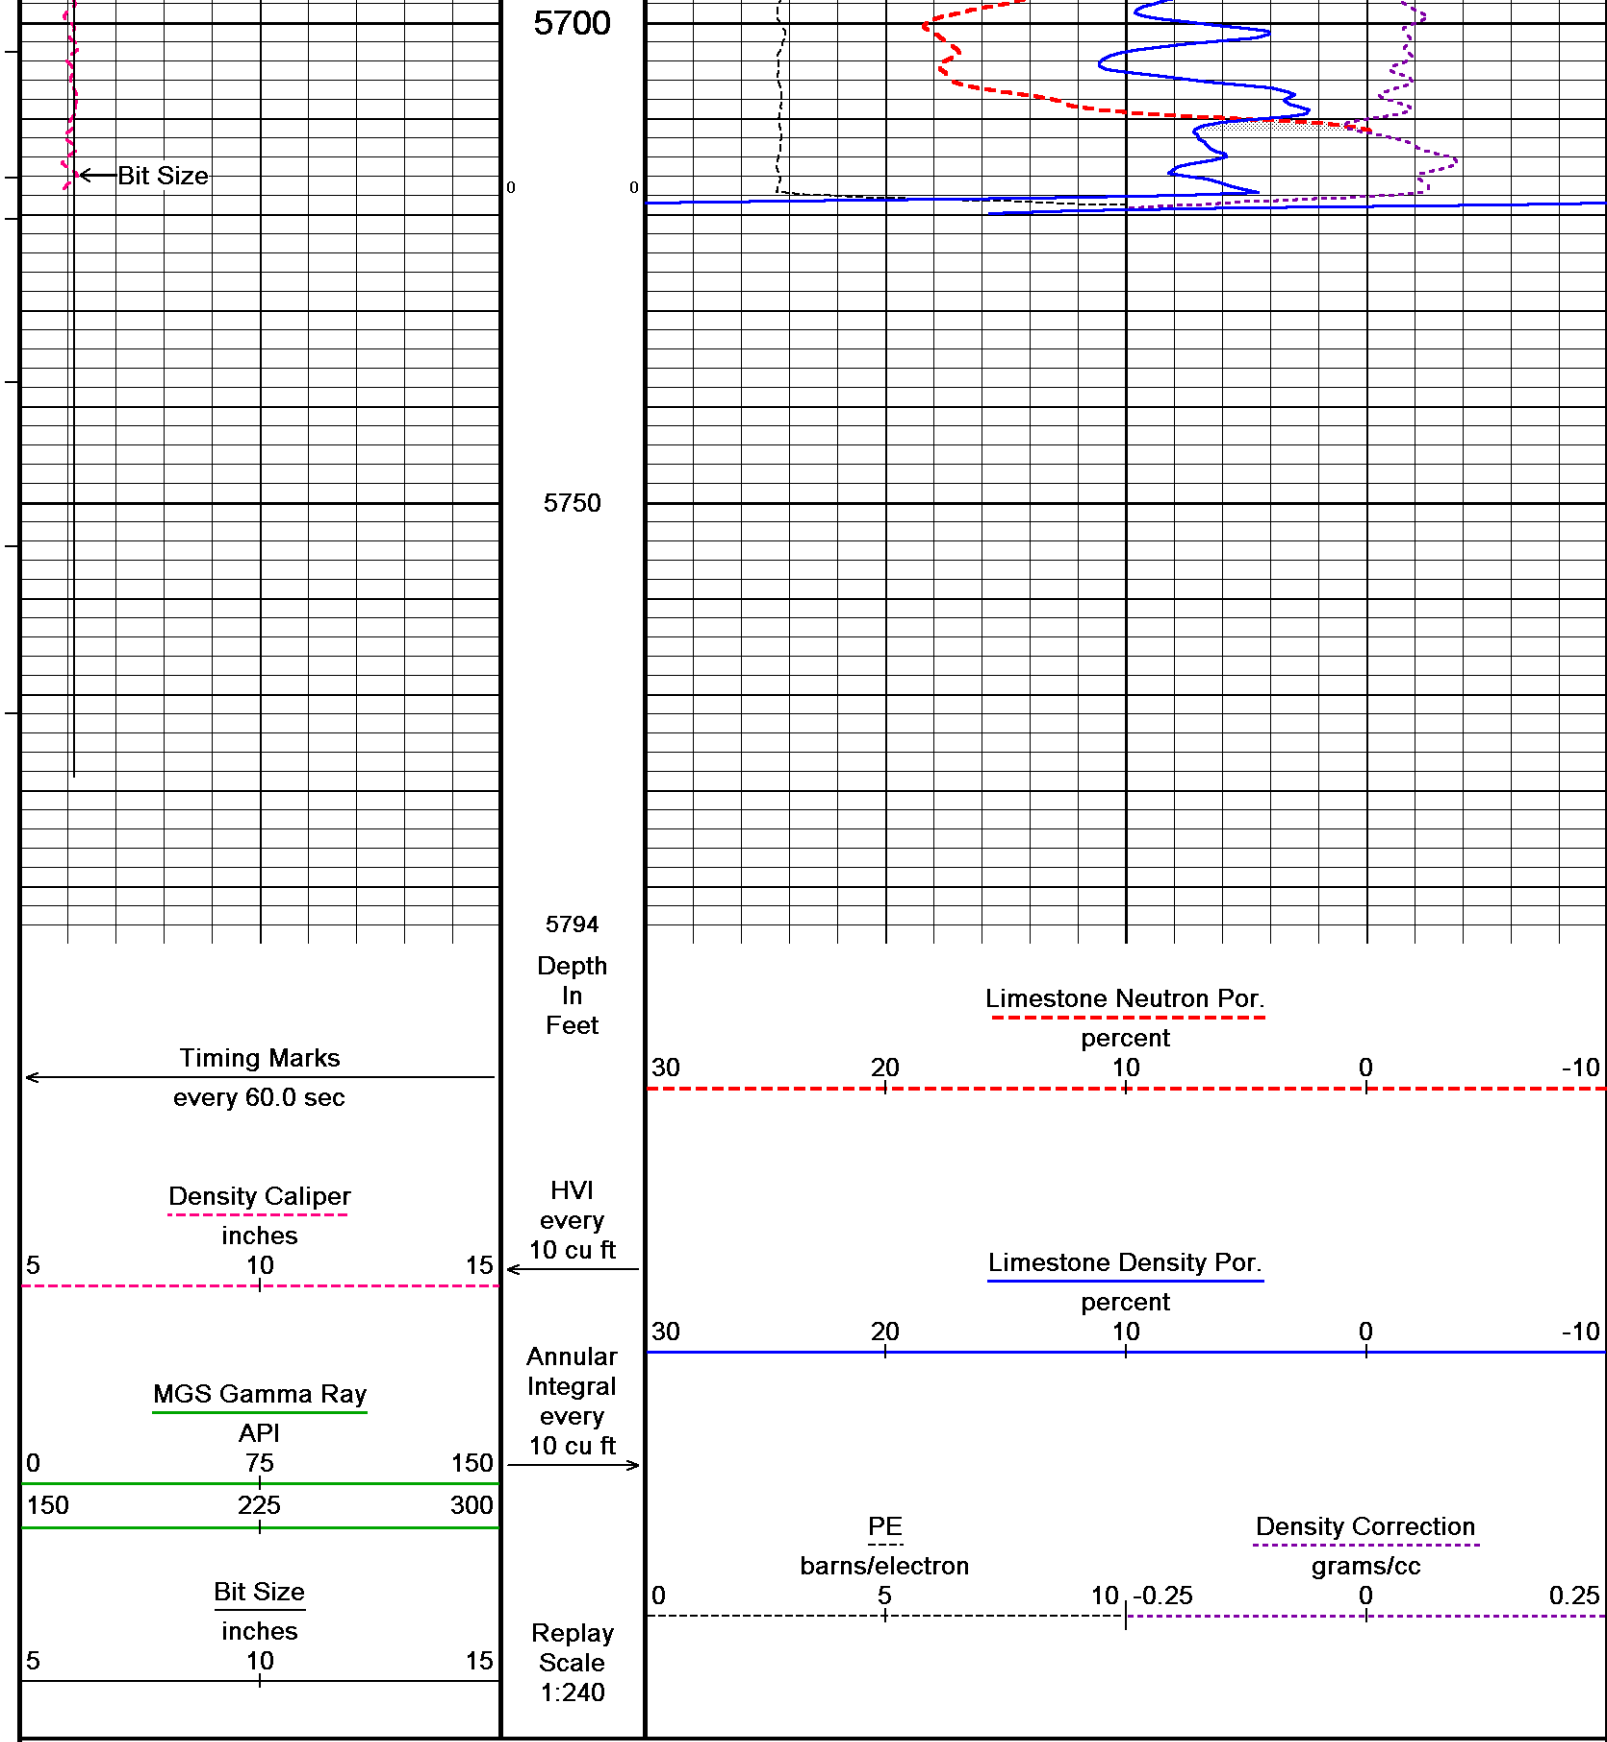

Depth Based Data - Maximum Sampling Increment 10.0cm
 Filename: G:\Data\Vess McCord A 20H\Mccord A 20H plotted\GOOD RTAP.dta
 System Versions: Processed with 11.03.4044 Plotted with 12.03.5032


Plotted on 02-DEC-2011 16:22
 Recorded on 22-NOV-2011 23:03


↑ 5 INCH MAIN LOG DSC ↑


↓ 5 INCH BULK DENSITY LOG DSC ↓


Depth Based Data - Maximum Sampling Increment 10.0cm
 Filename: G:\Data\Vess McCord A 20H\Mccord A 20H plotted\GOOD RTAP.dta
 System Versions: Processed with 11.03.4044 Plotted with 12.03.5032


Plotted on 02-DEC-2011 16:22
 Recorded on 22-NOV-2011 23:03

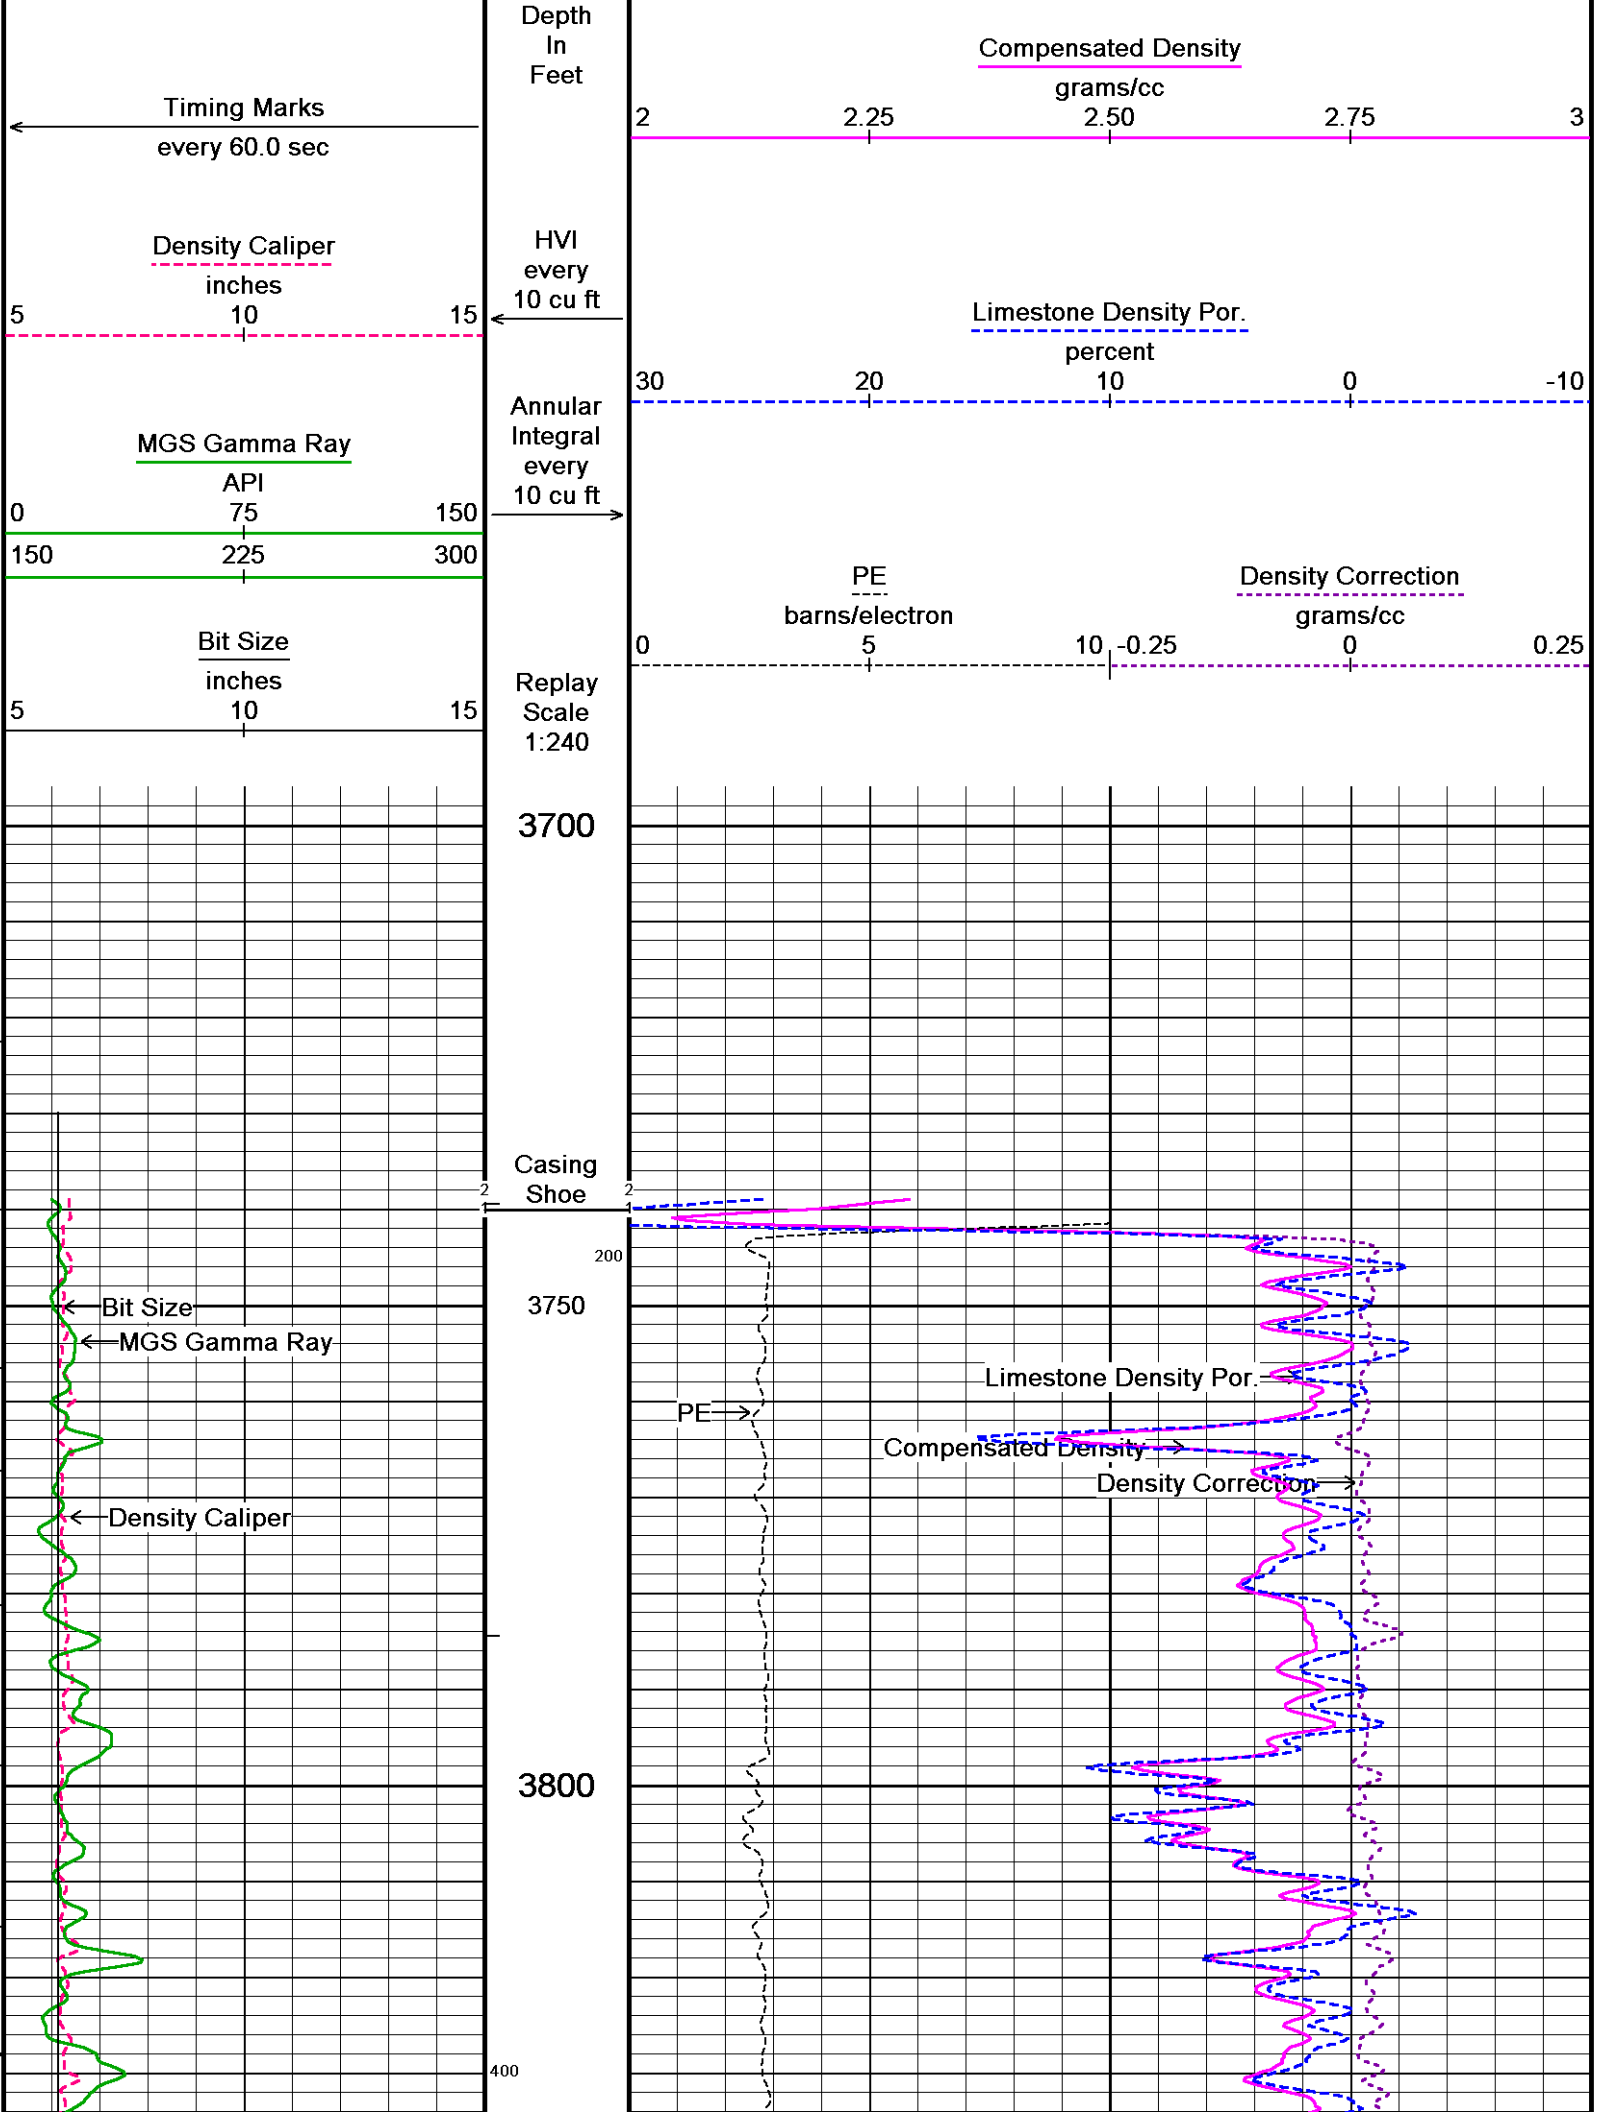


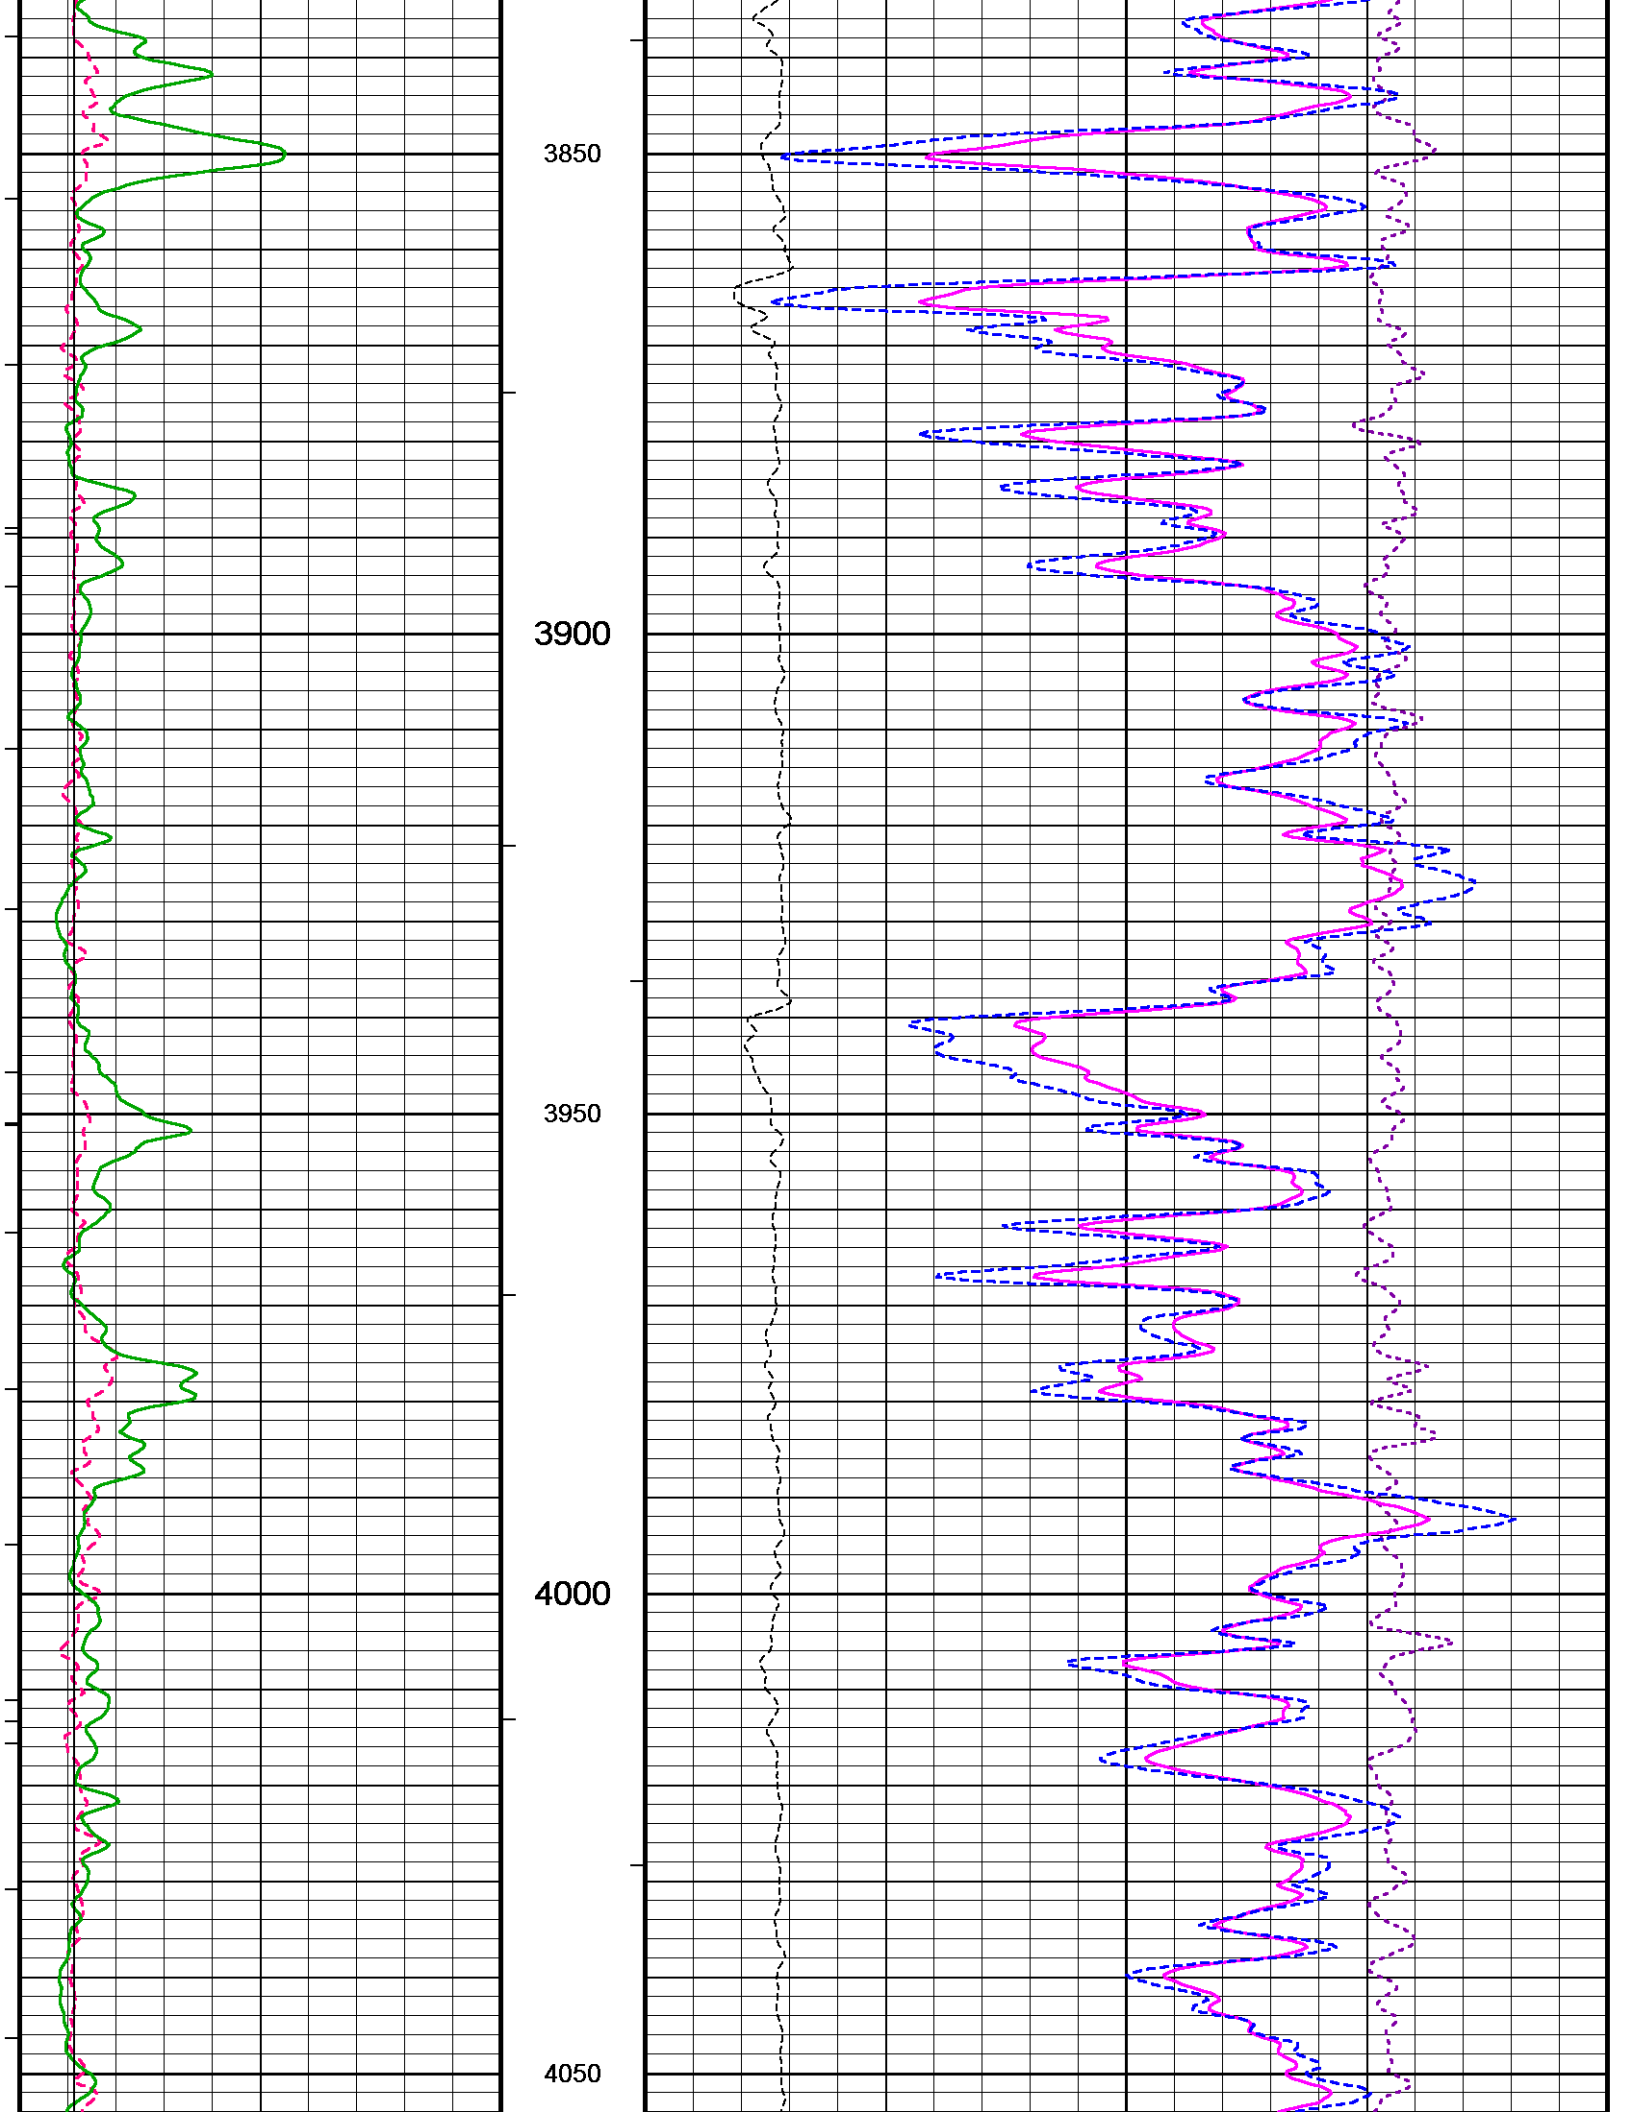


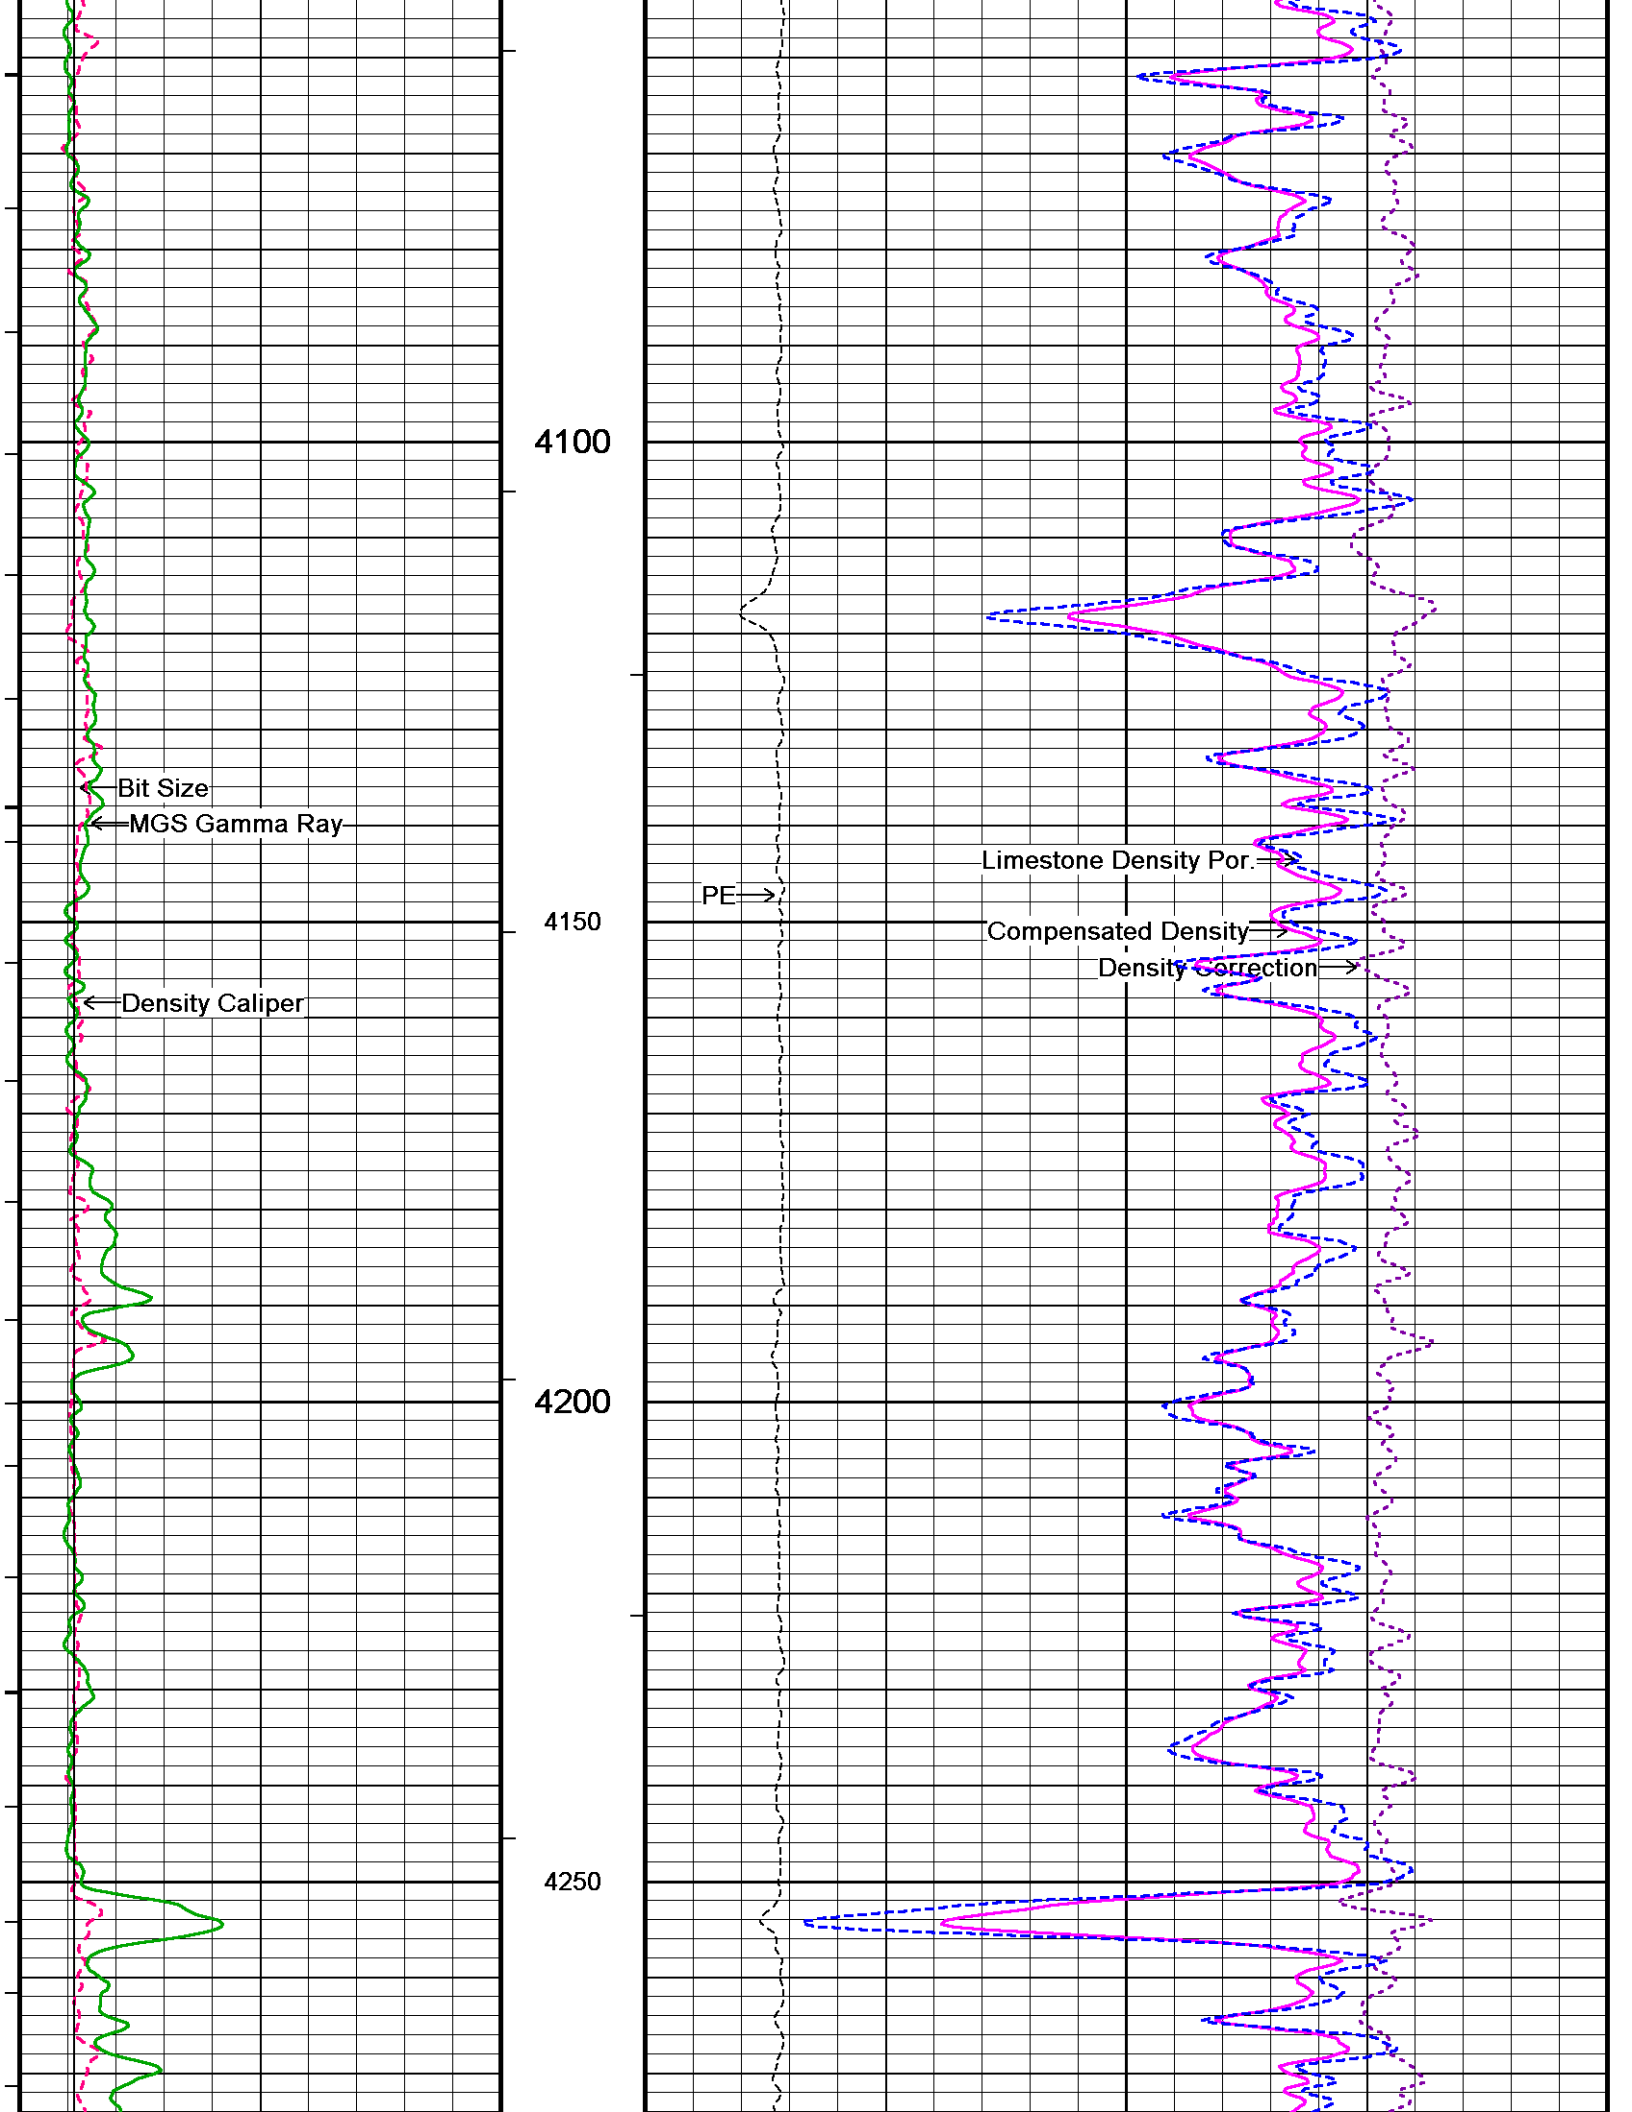


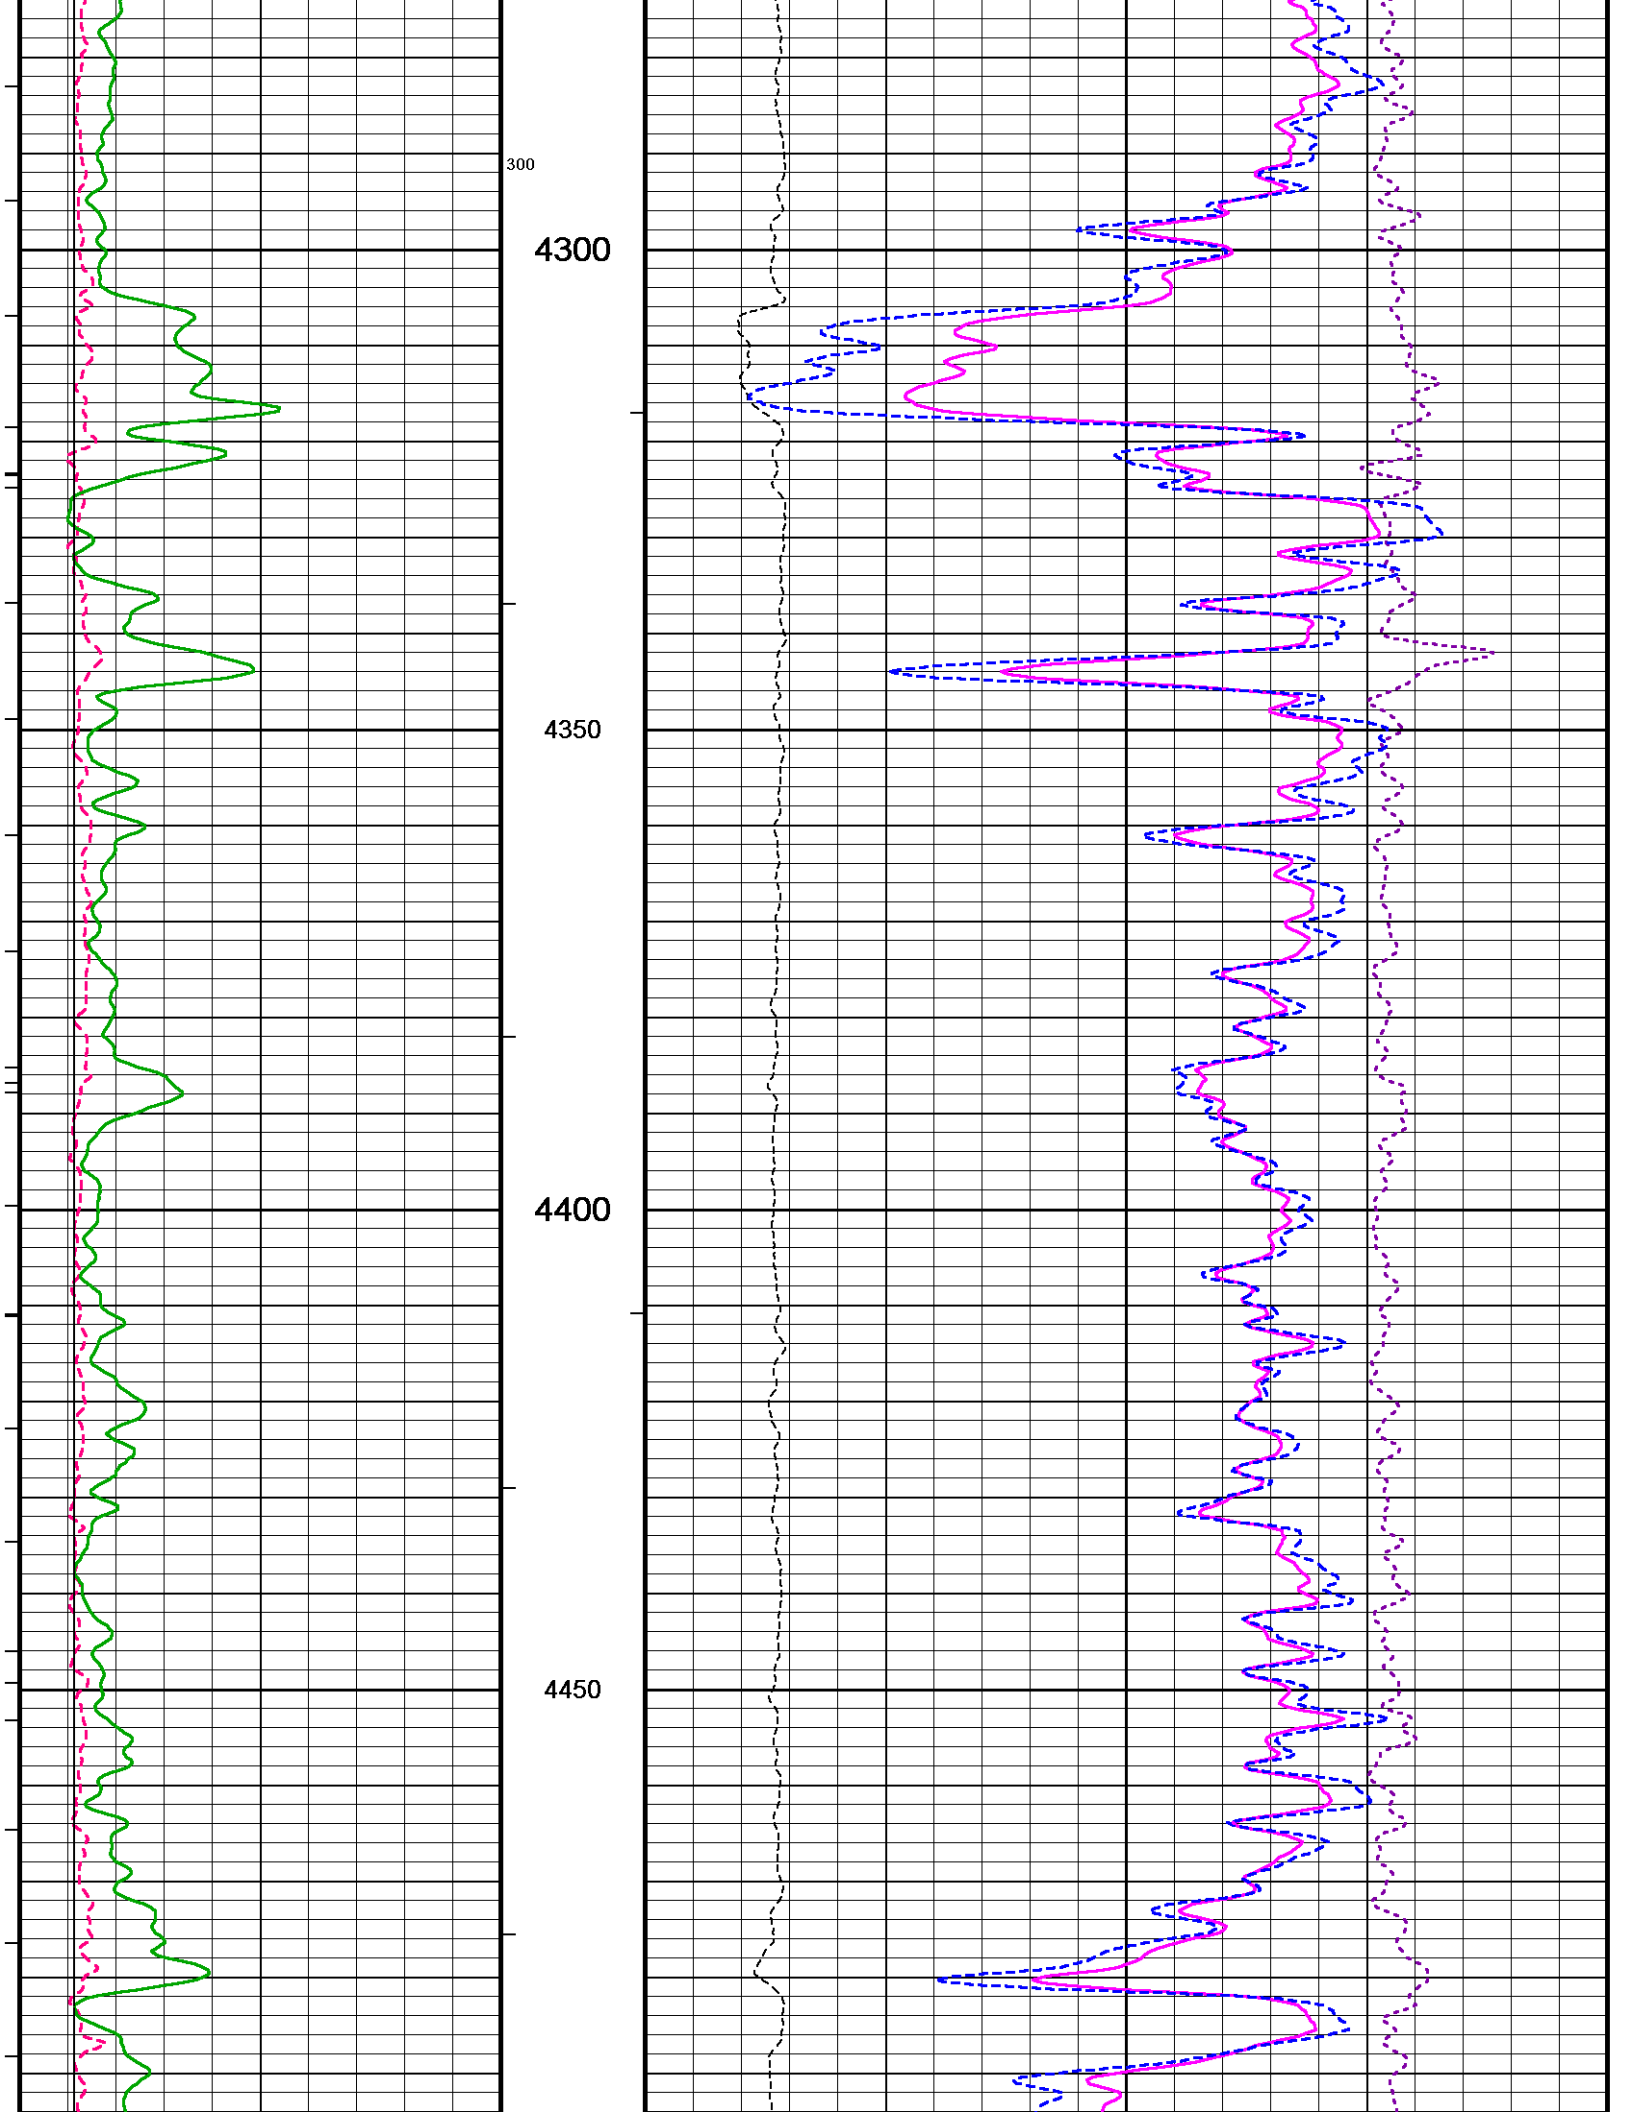


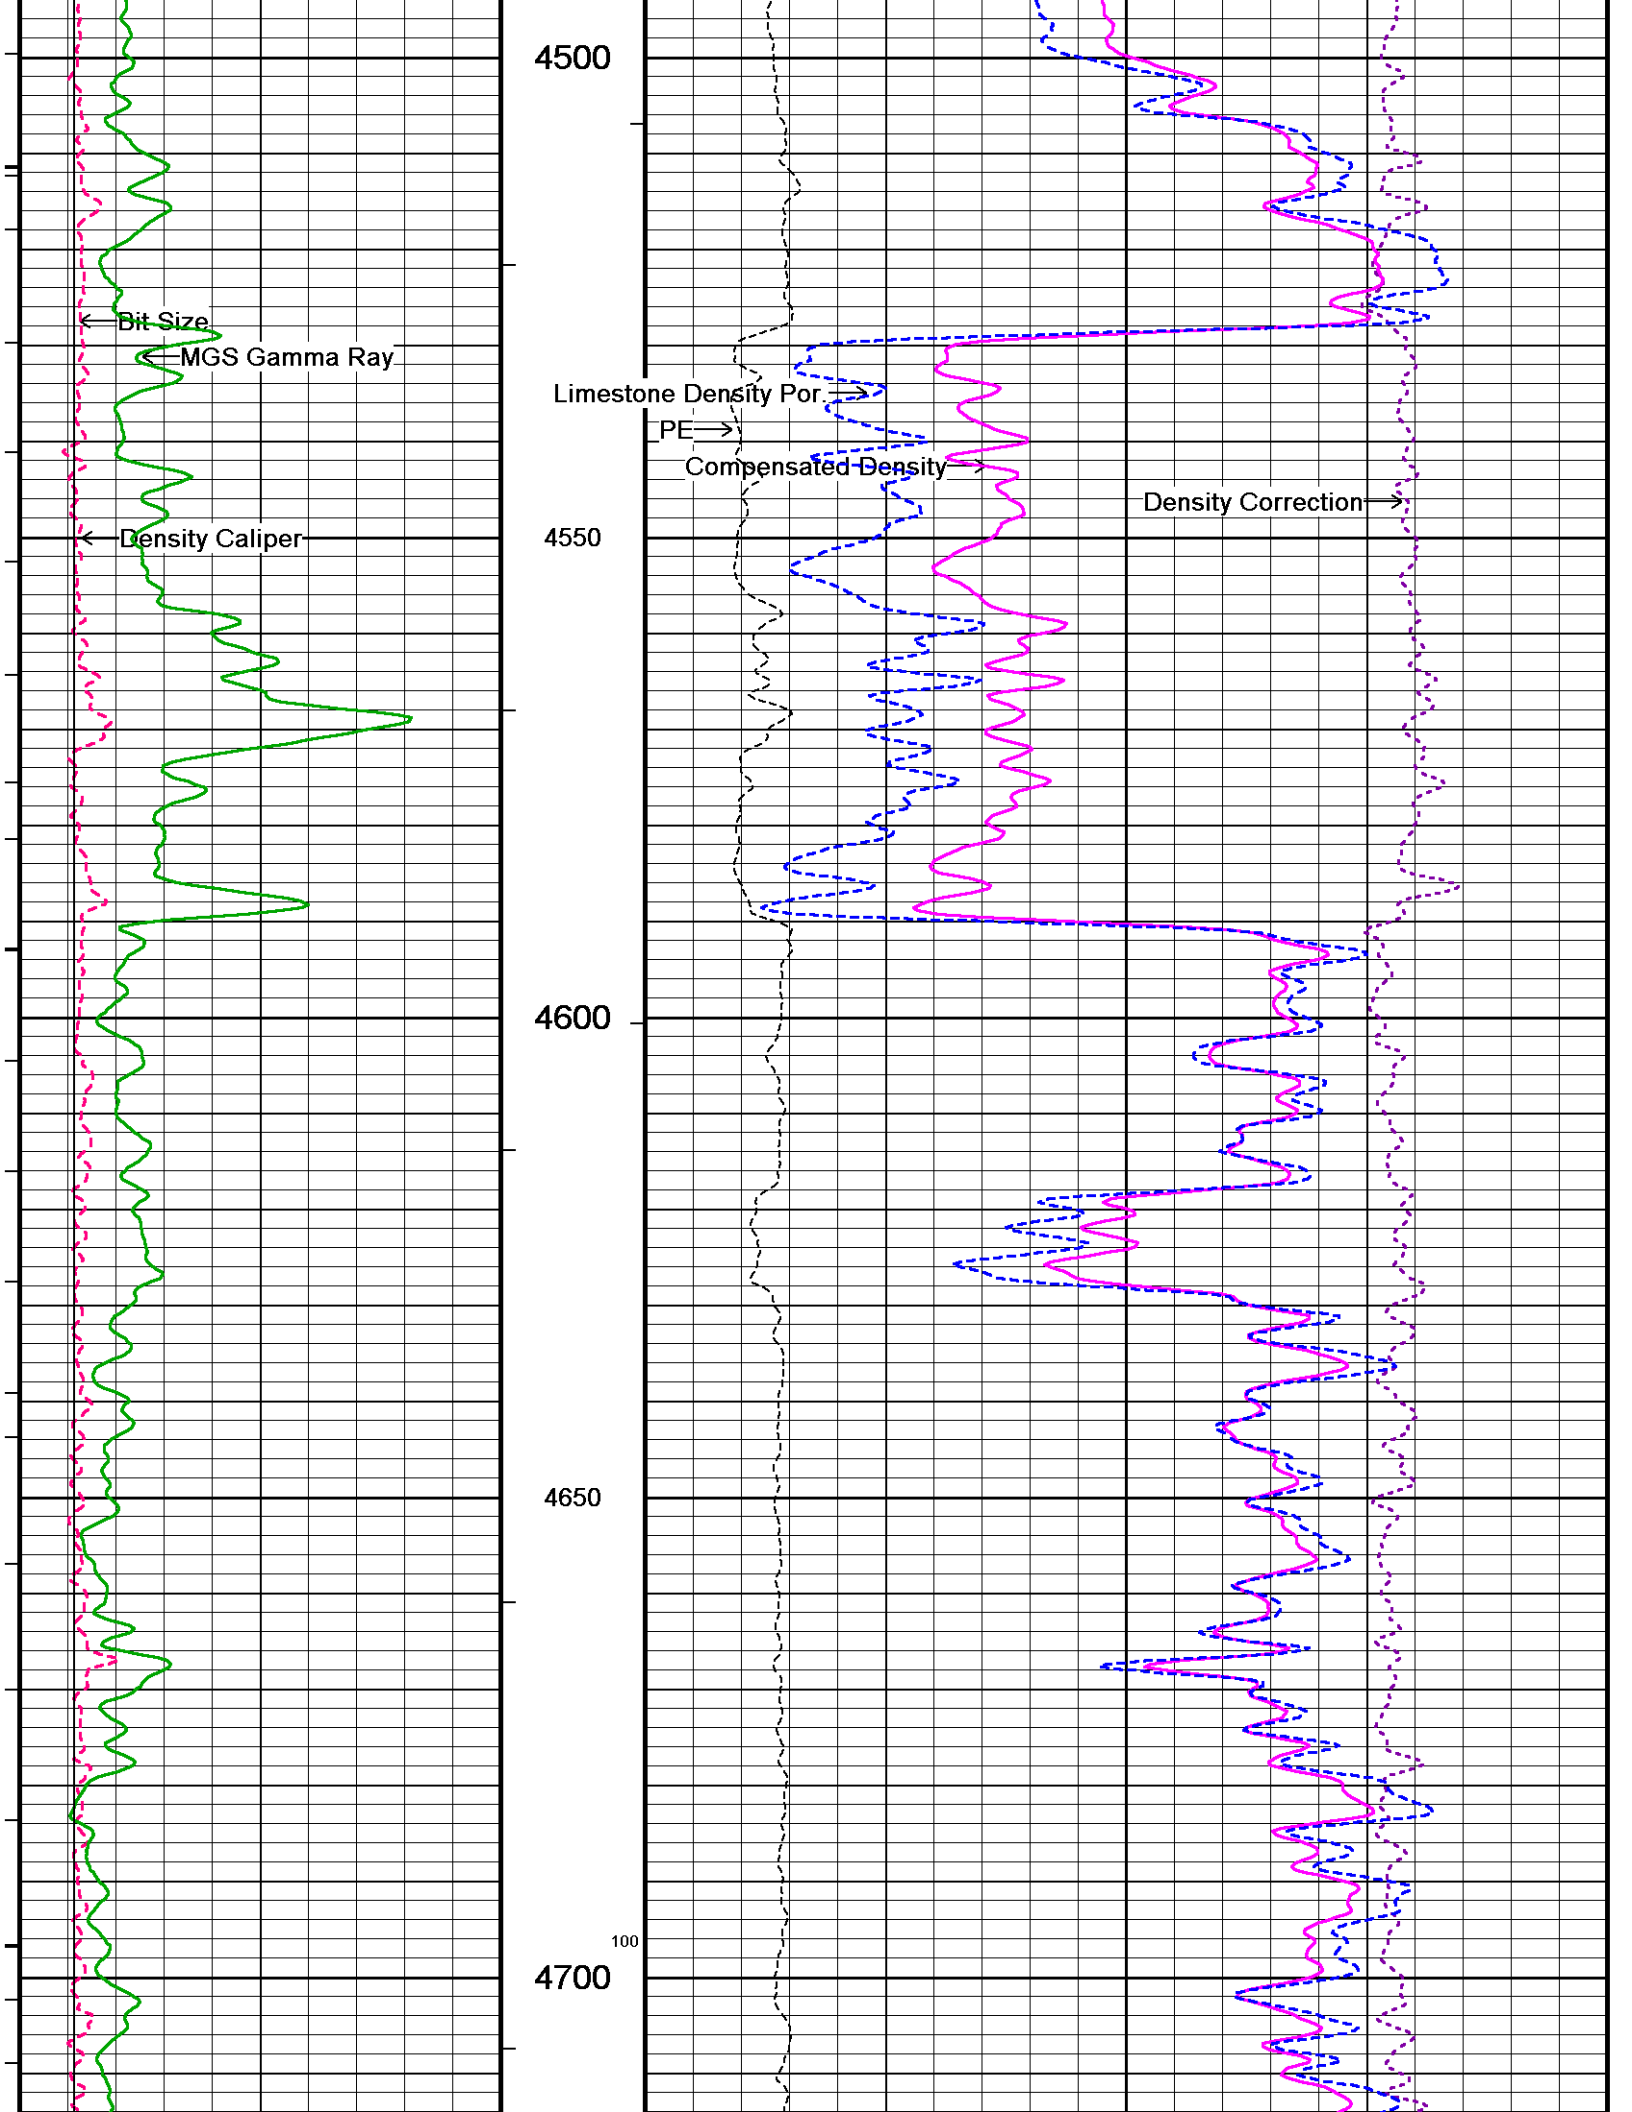


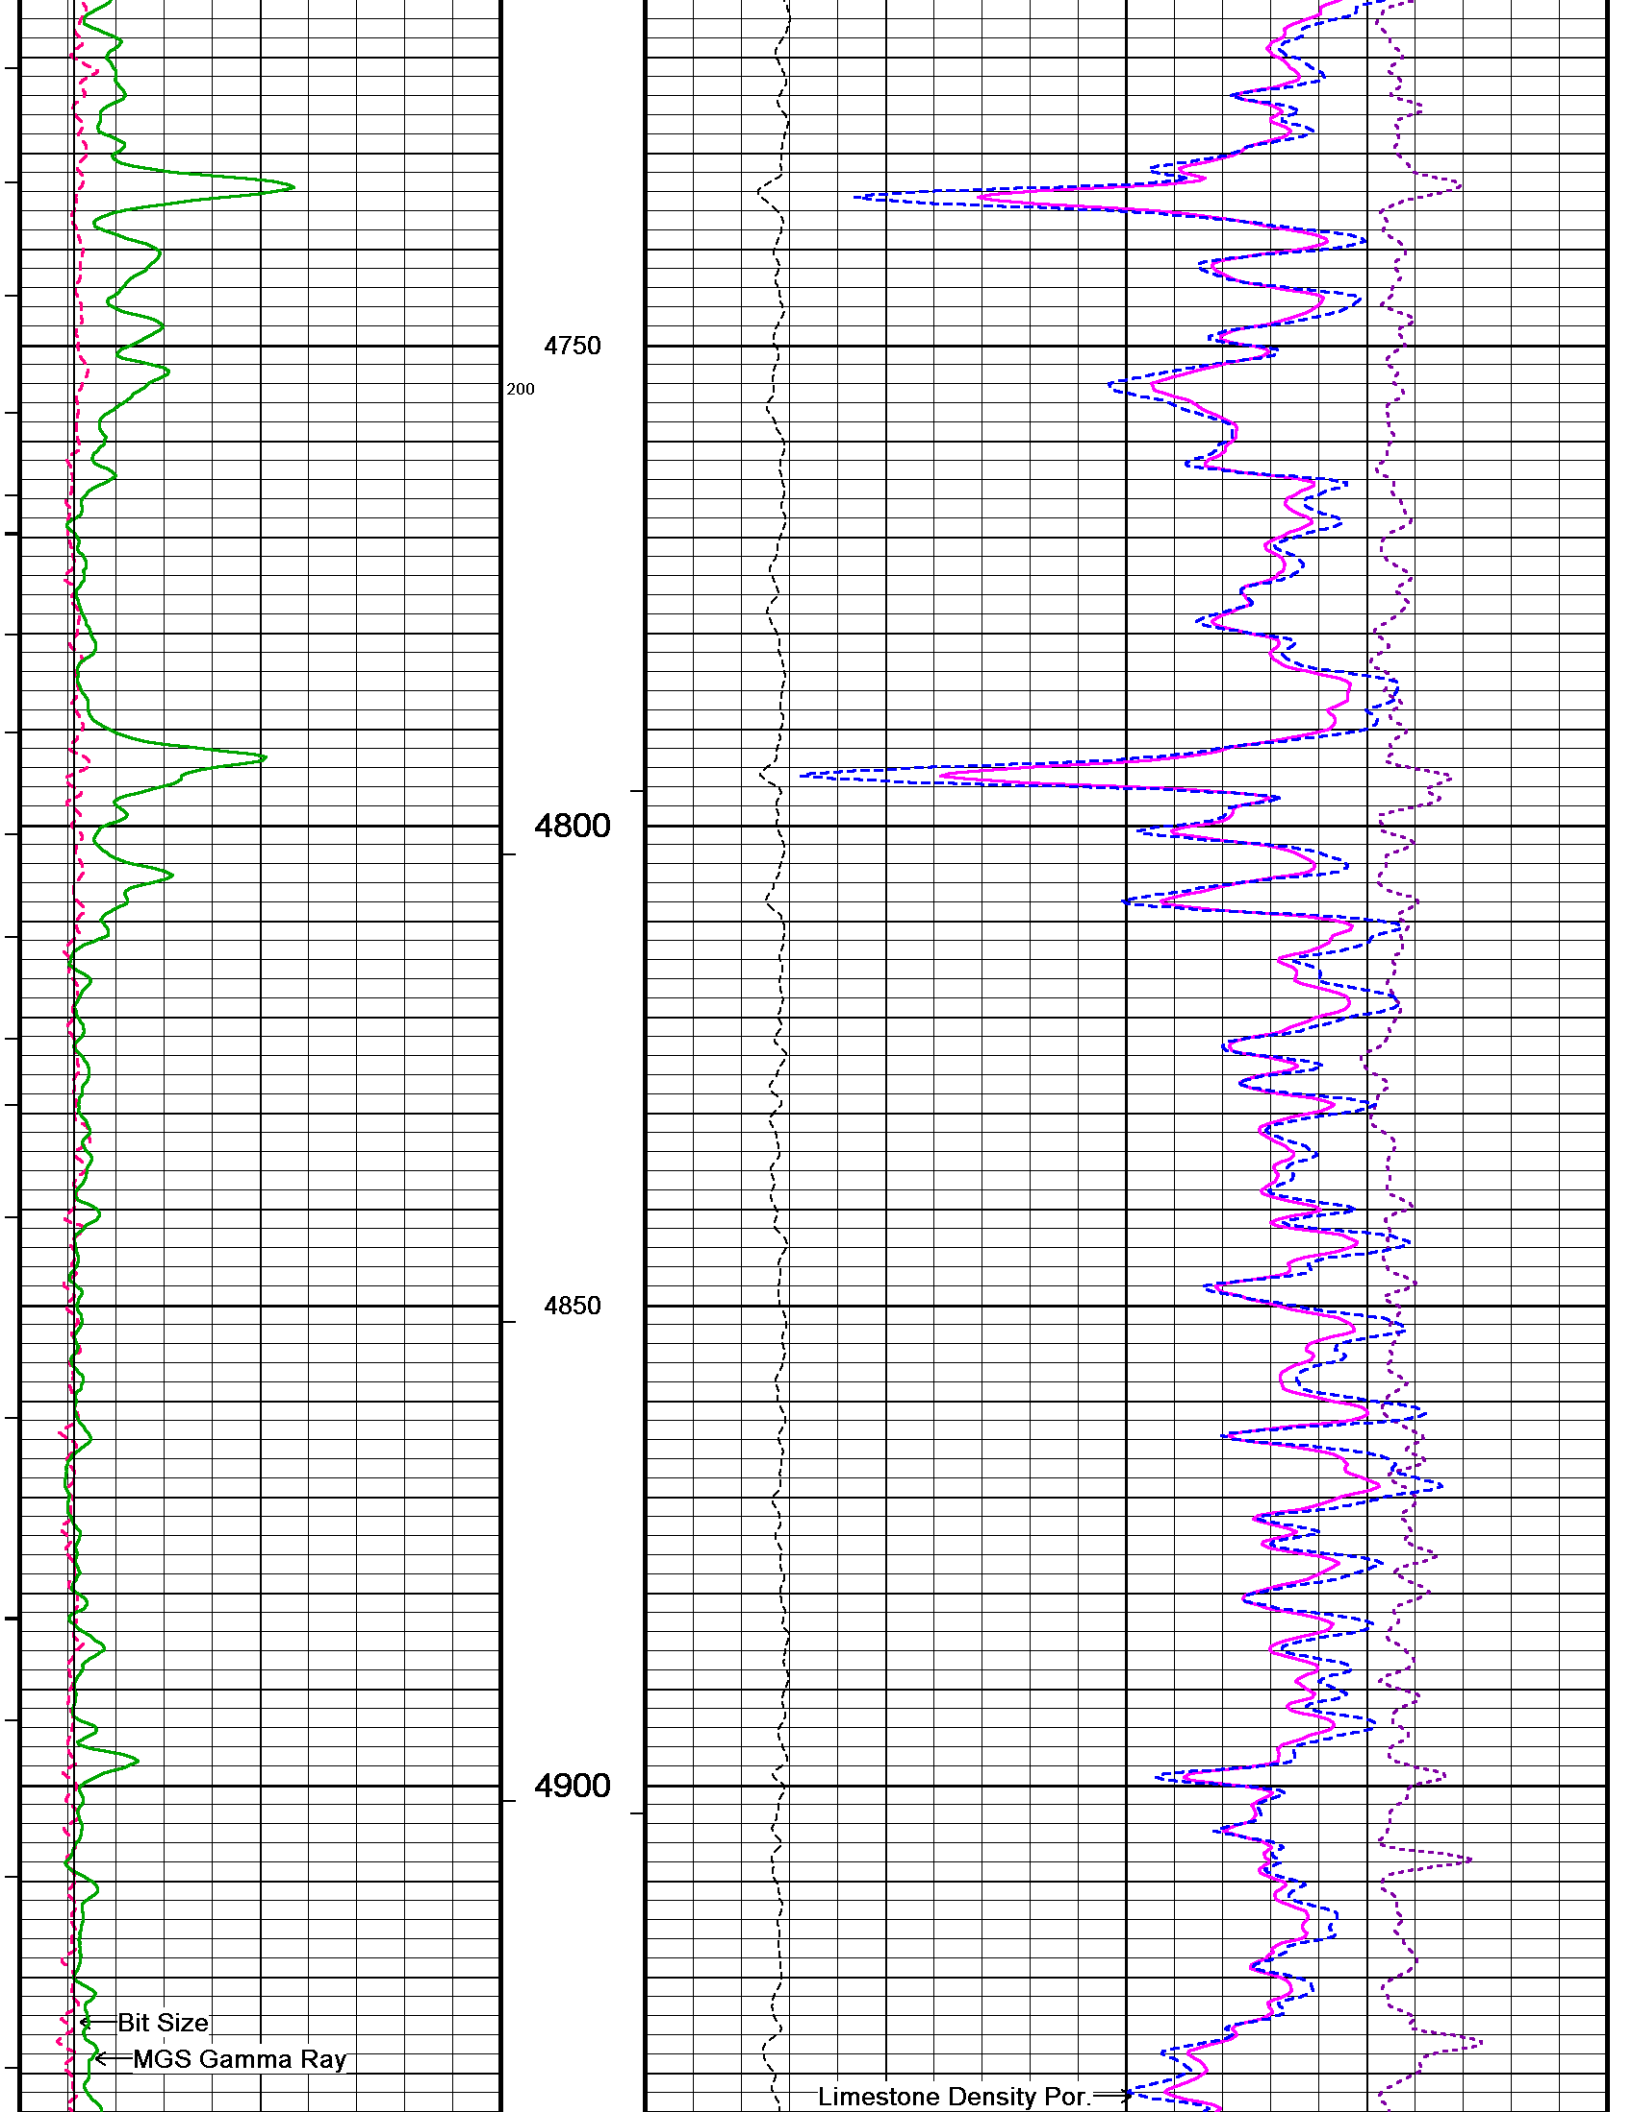


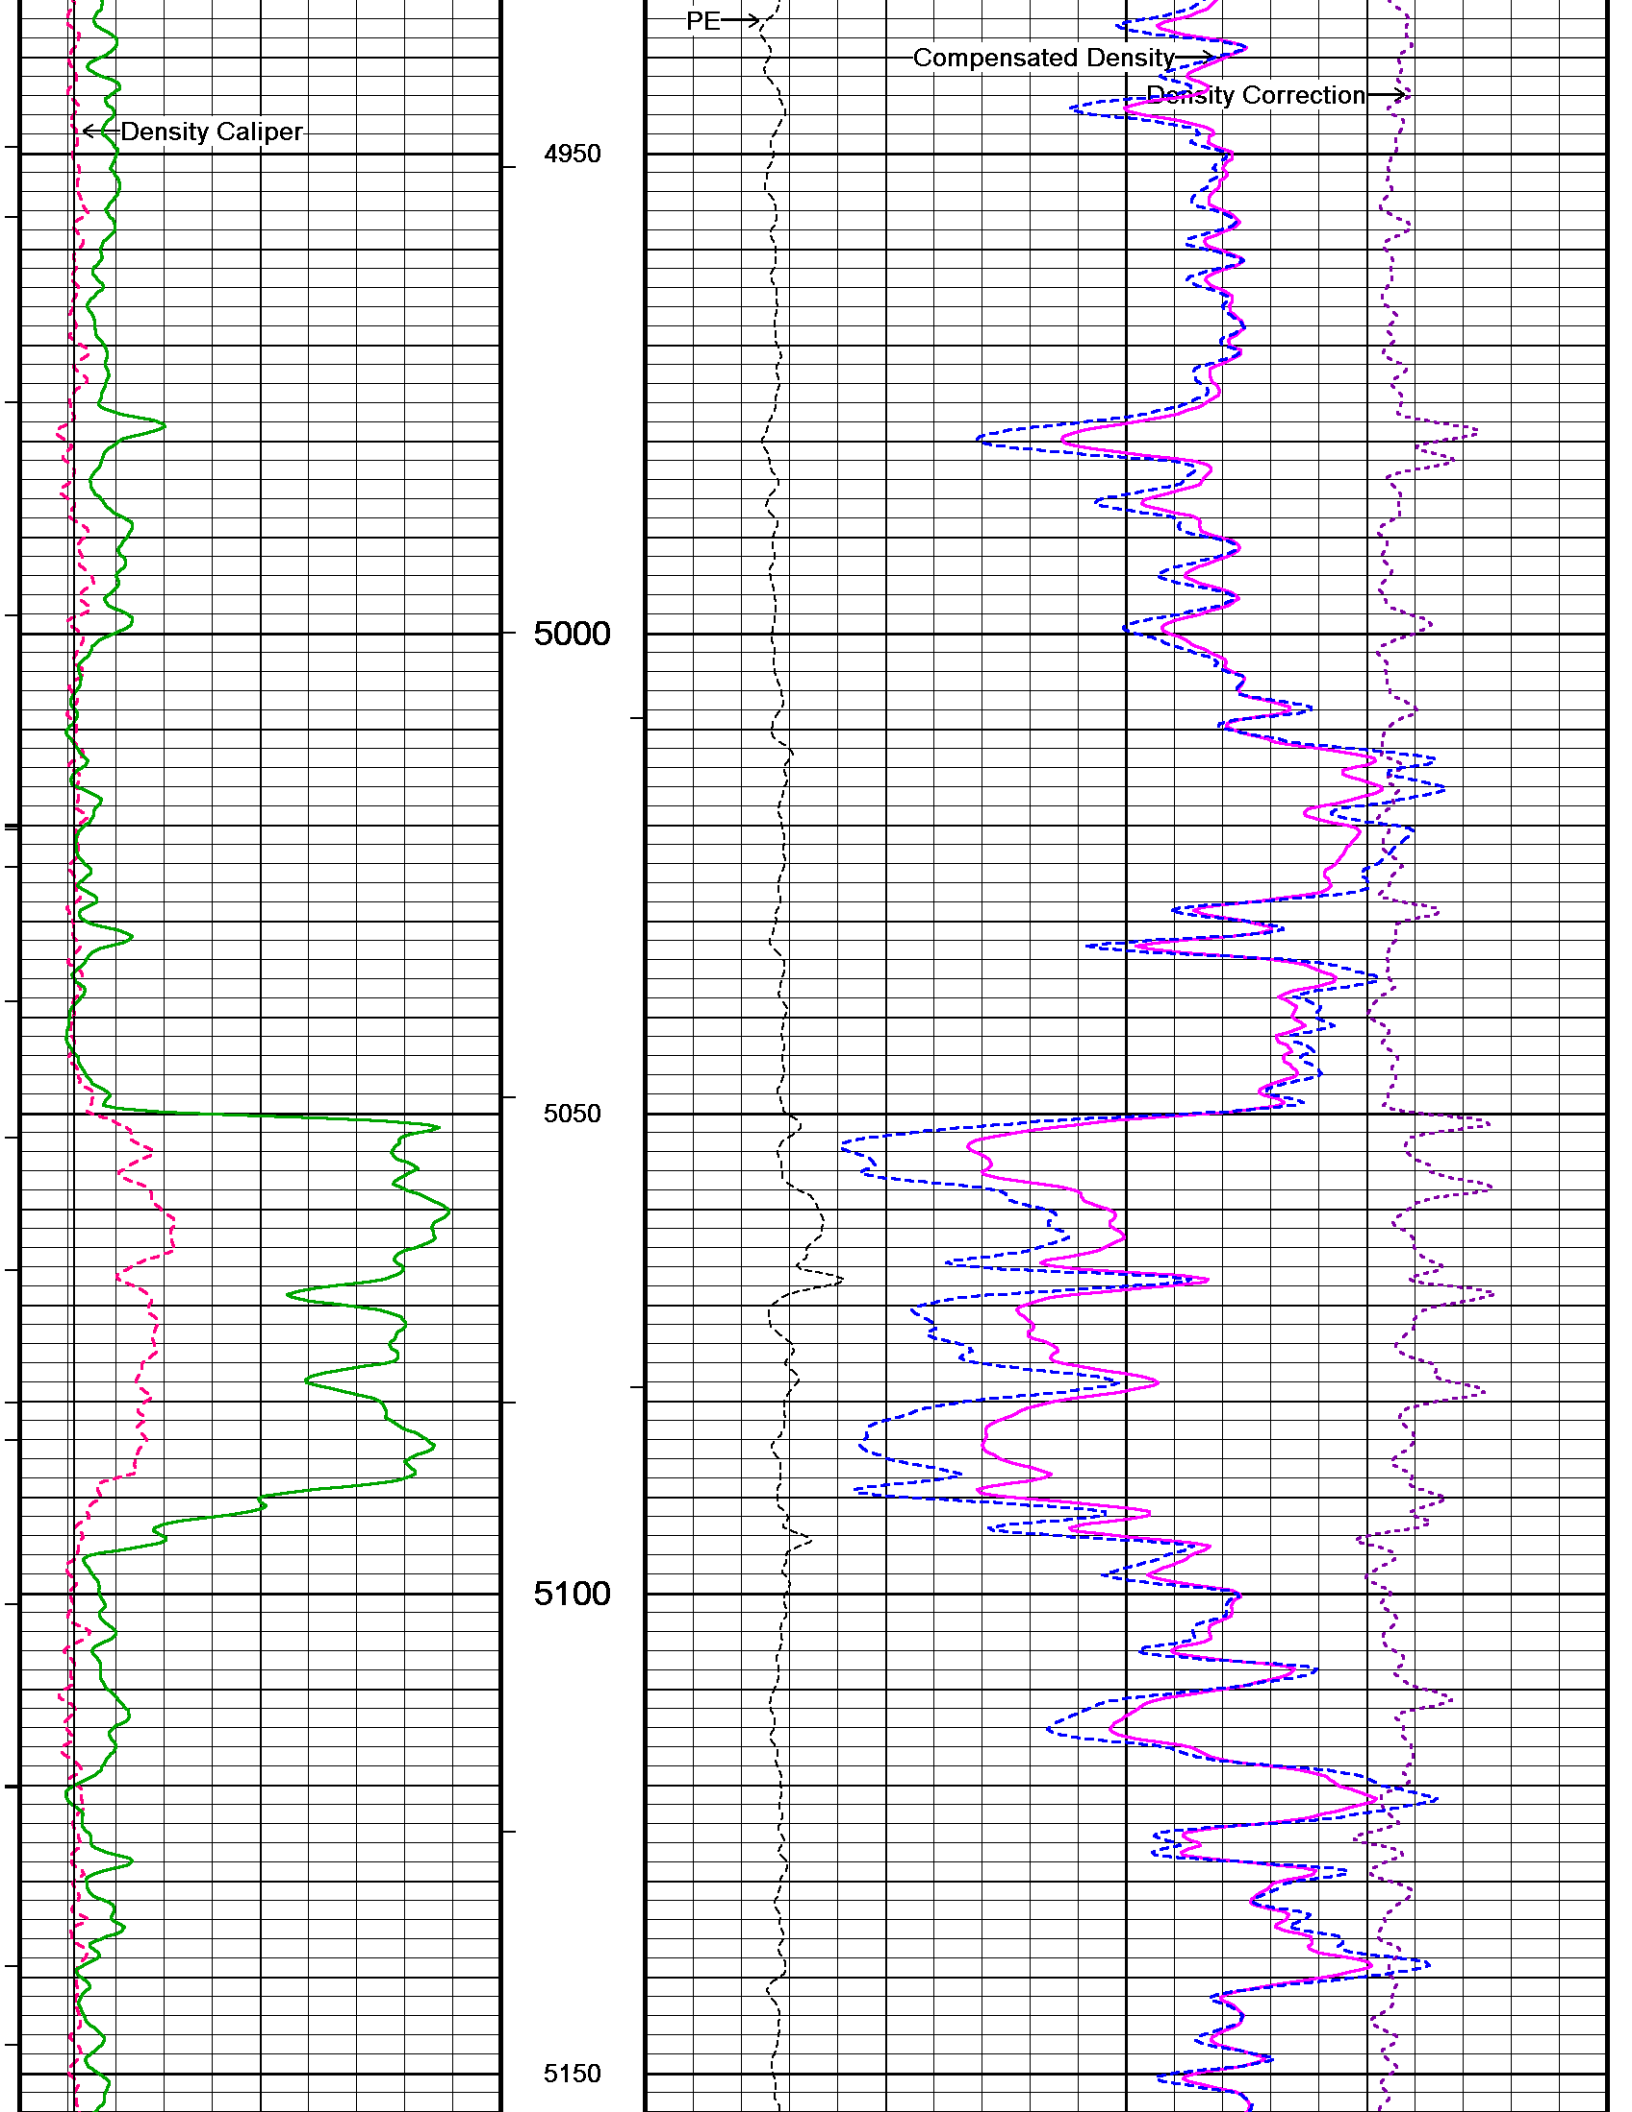

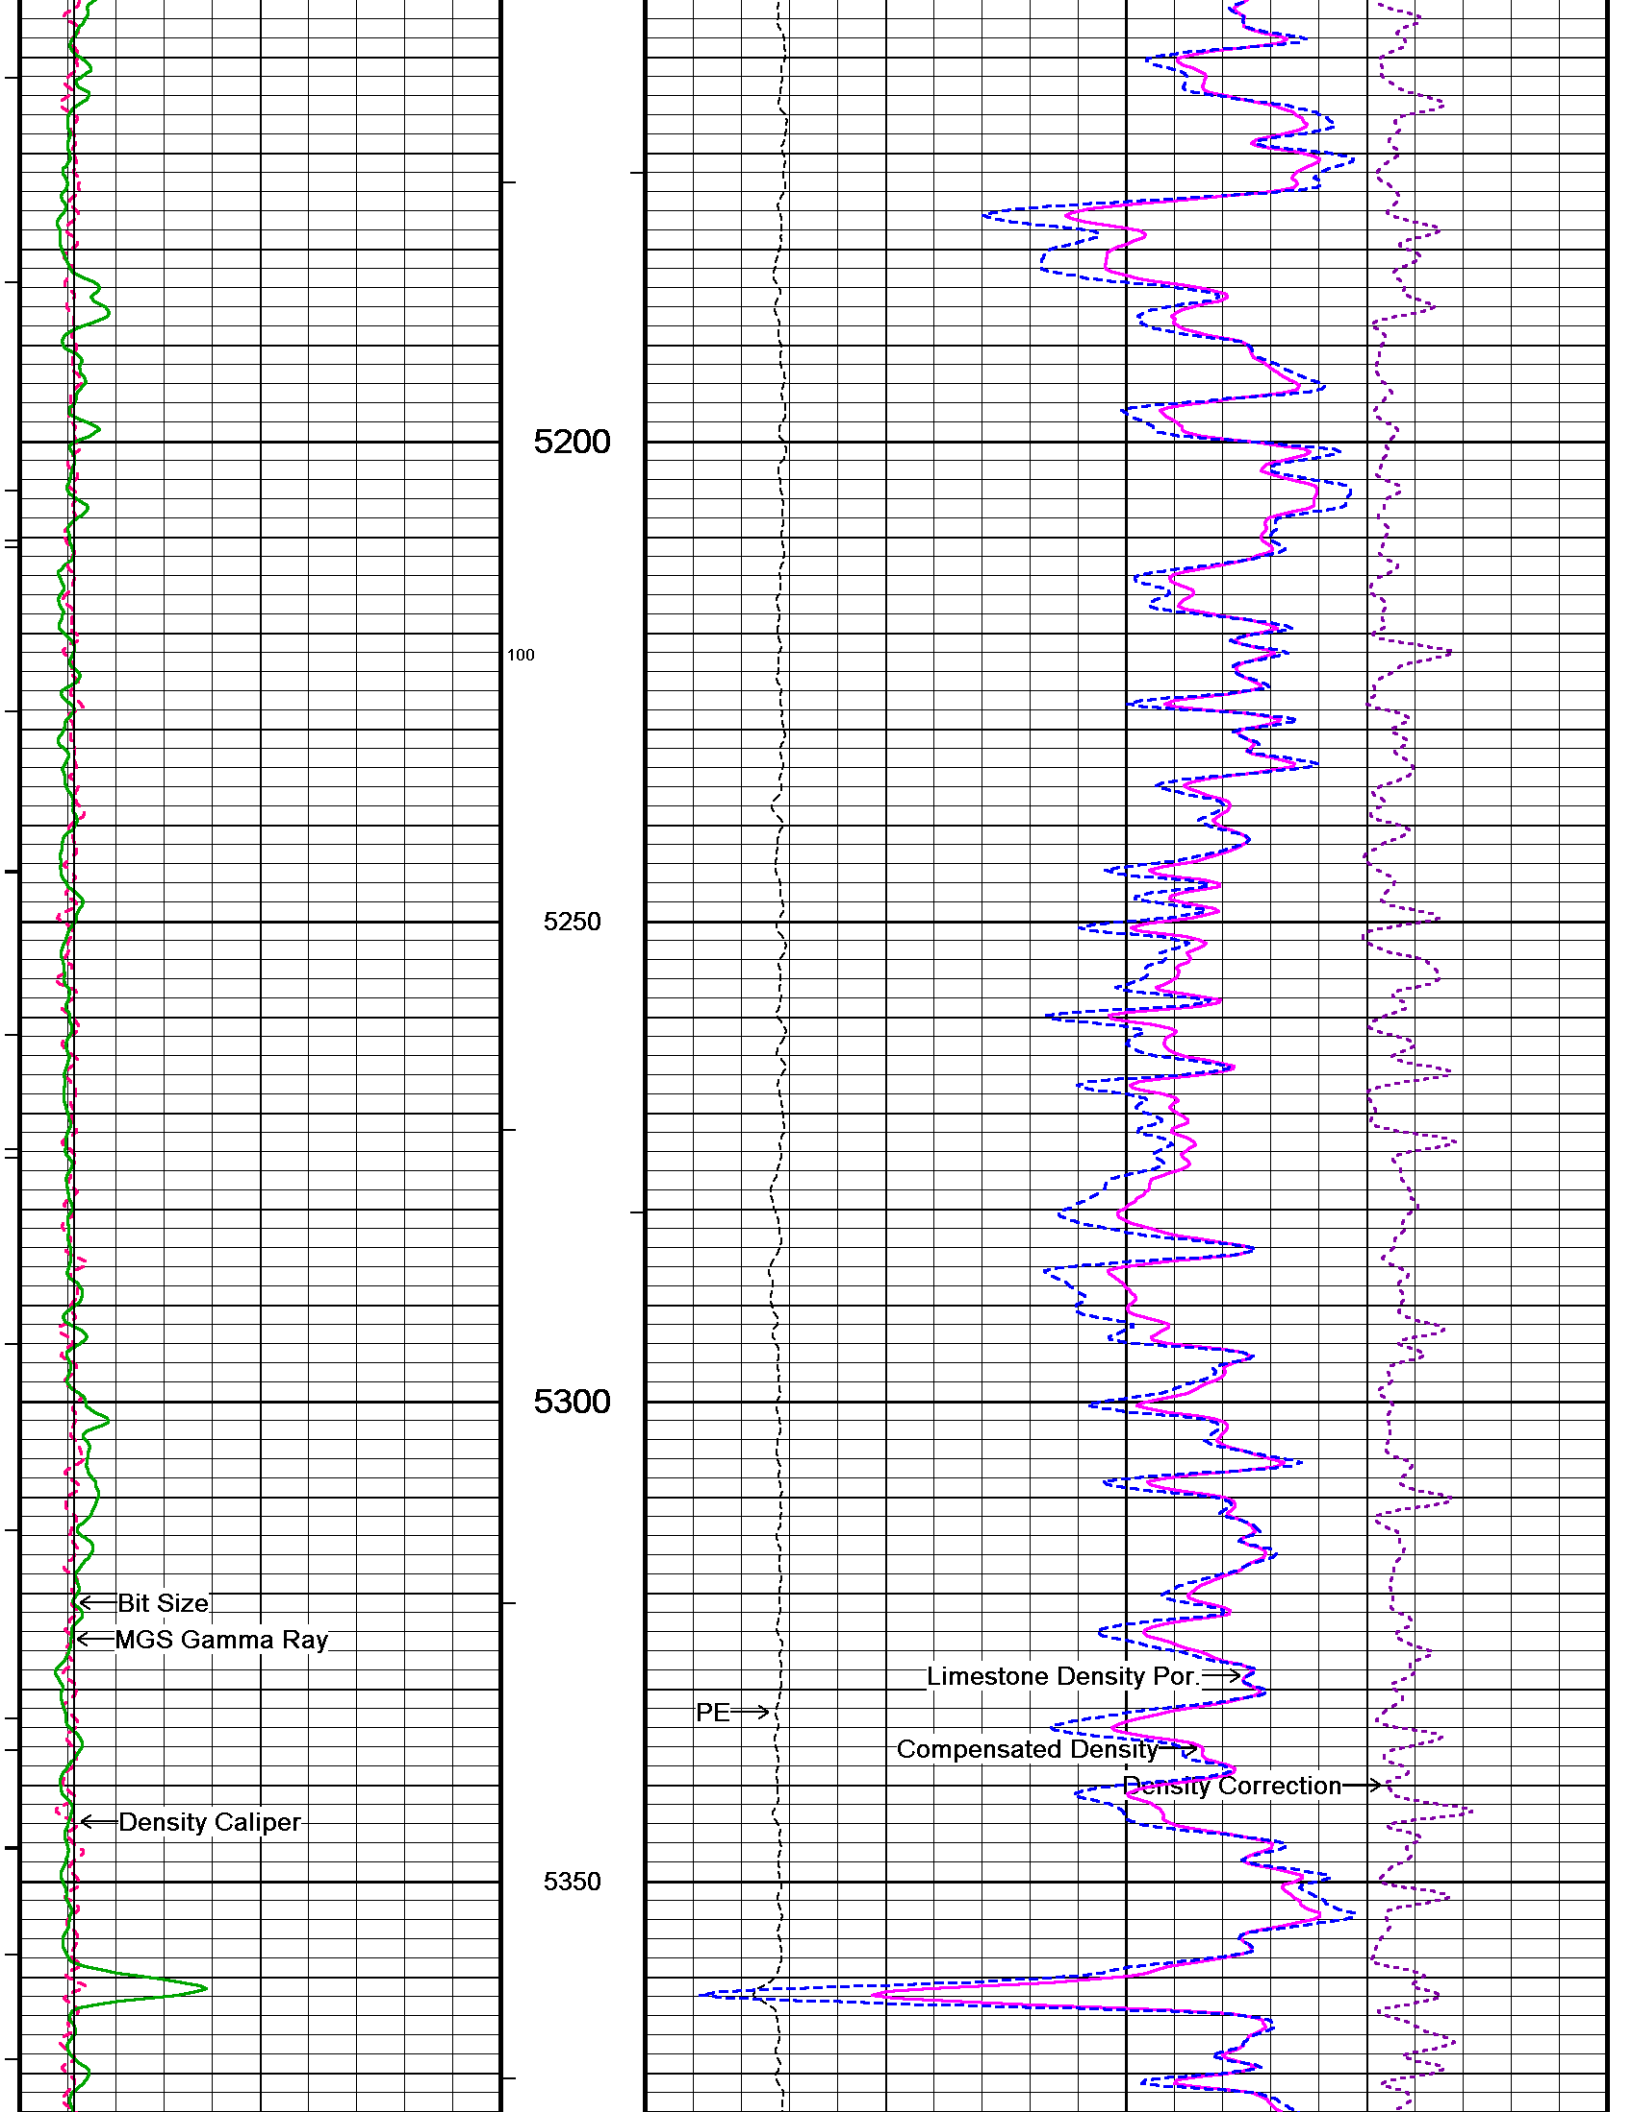

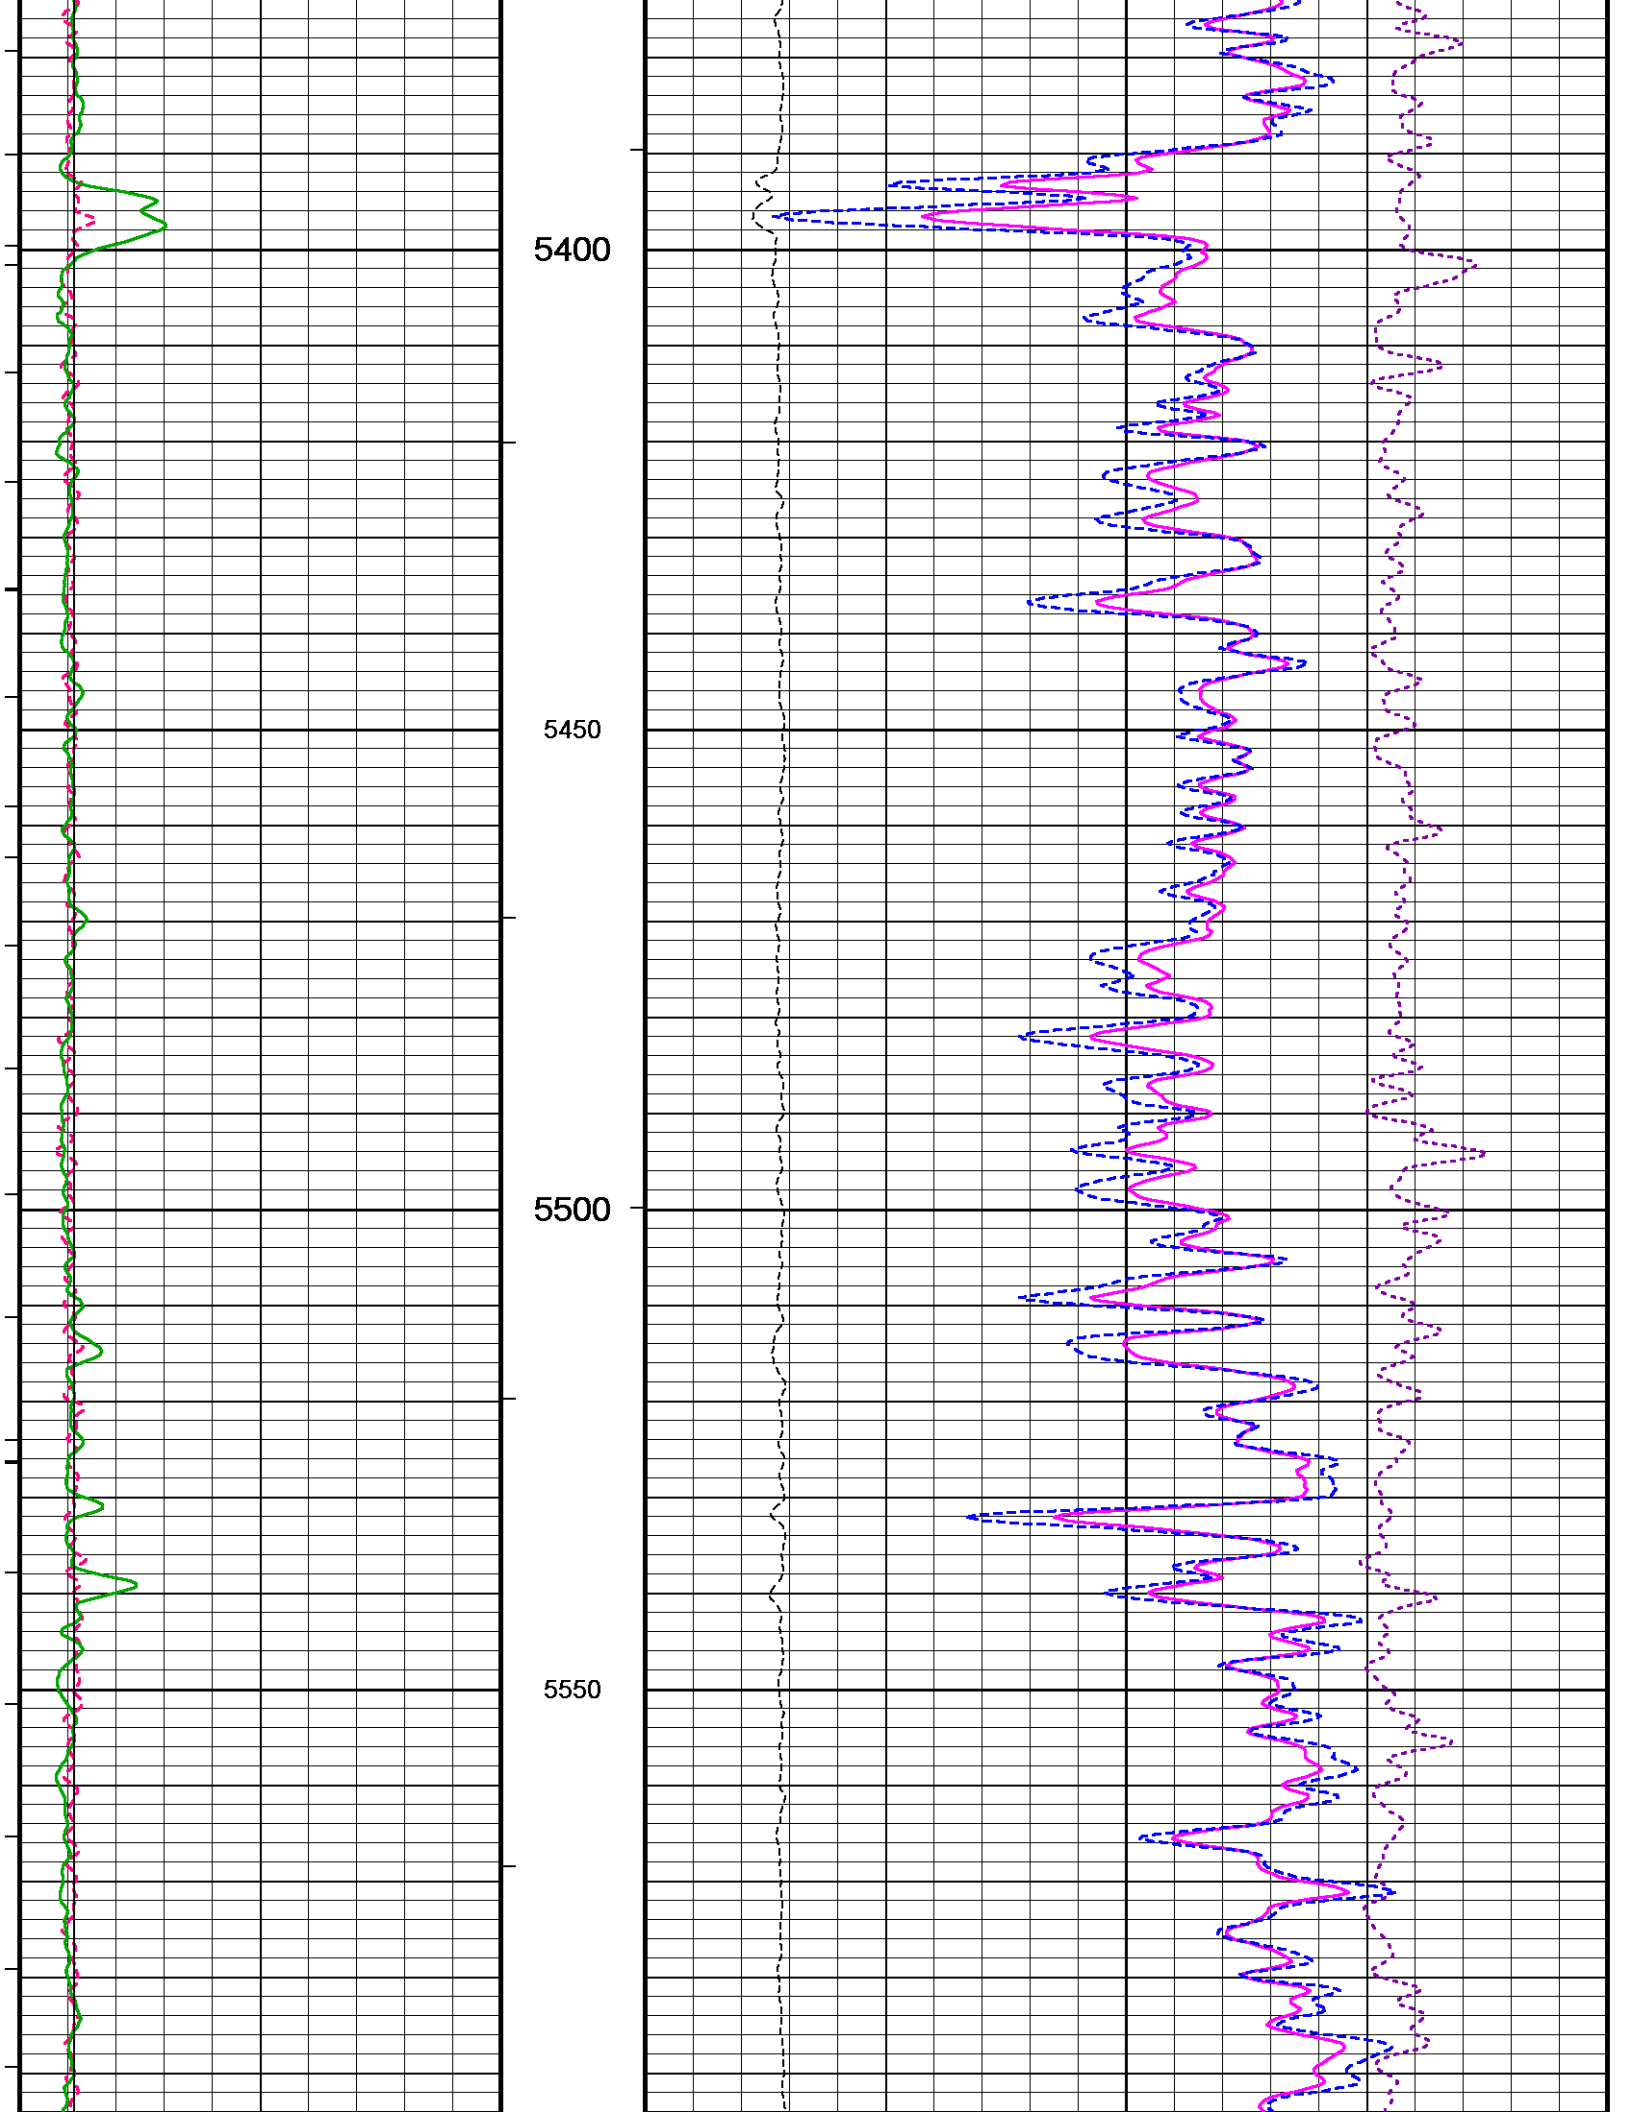

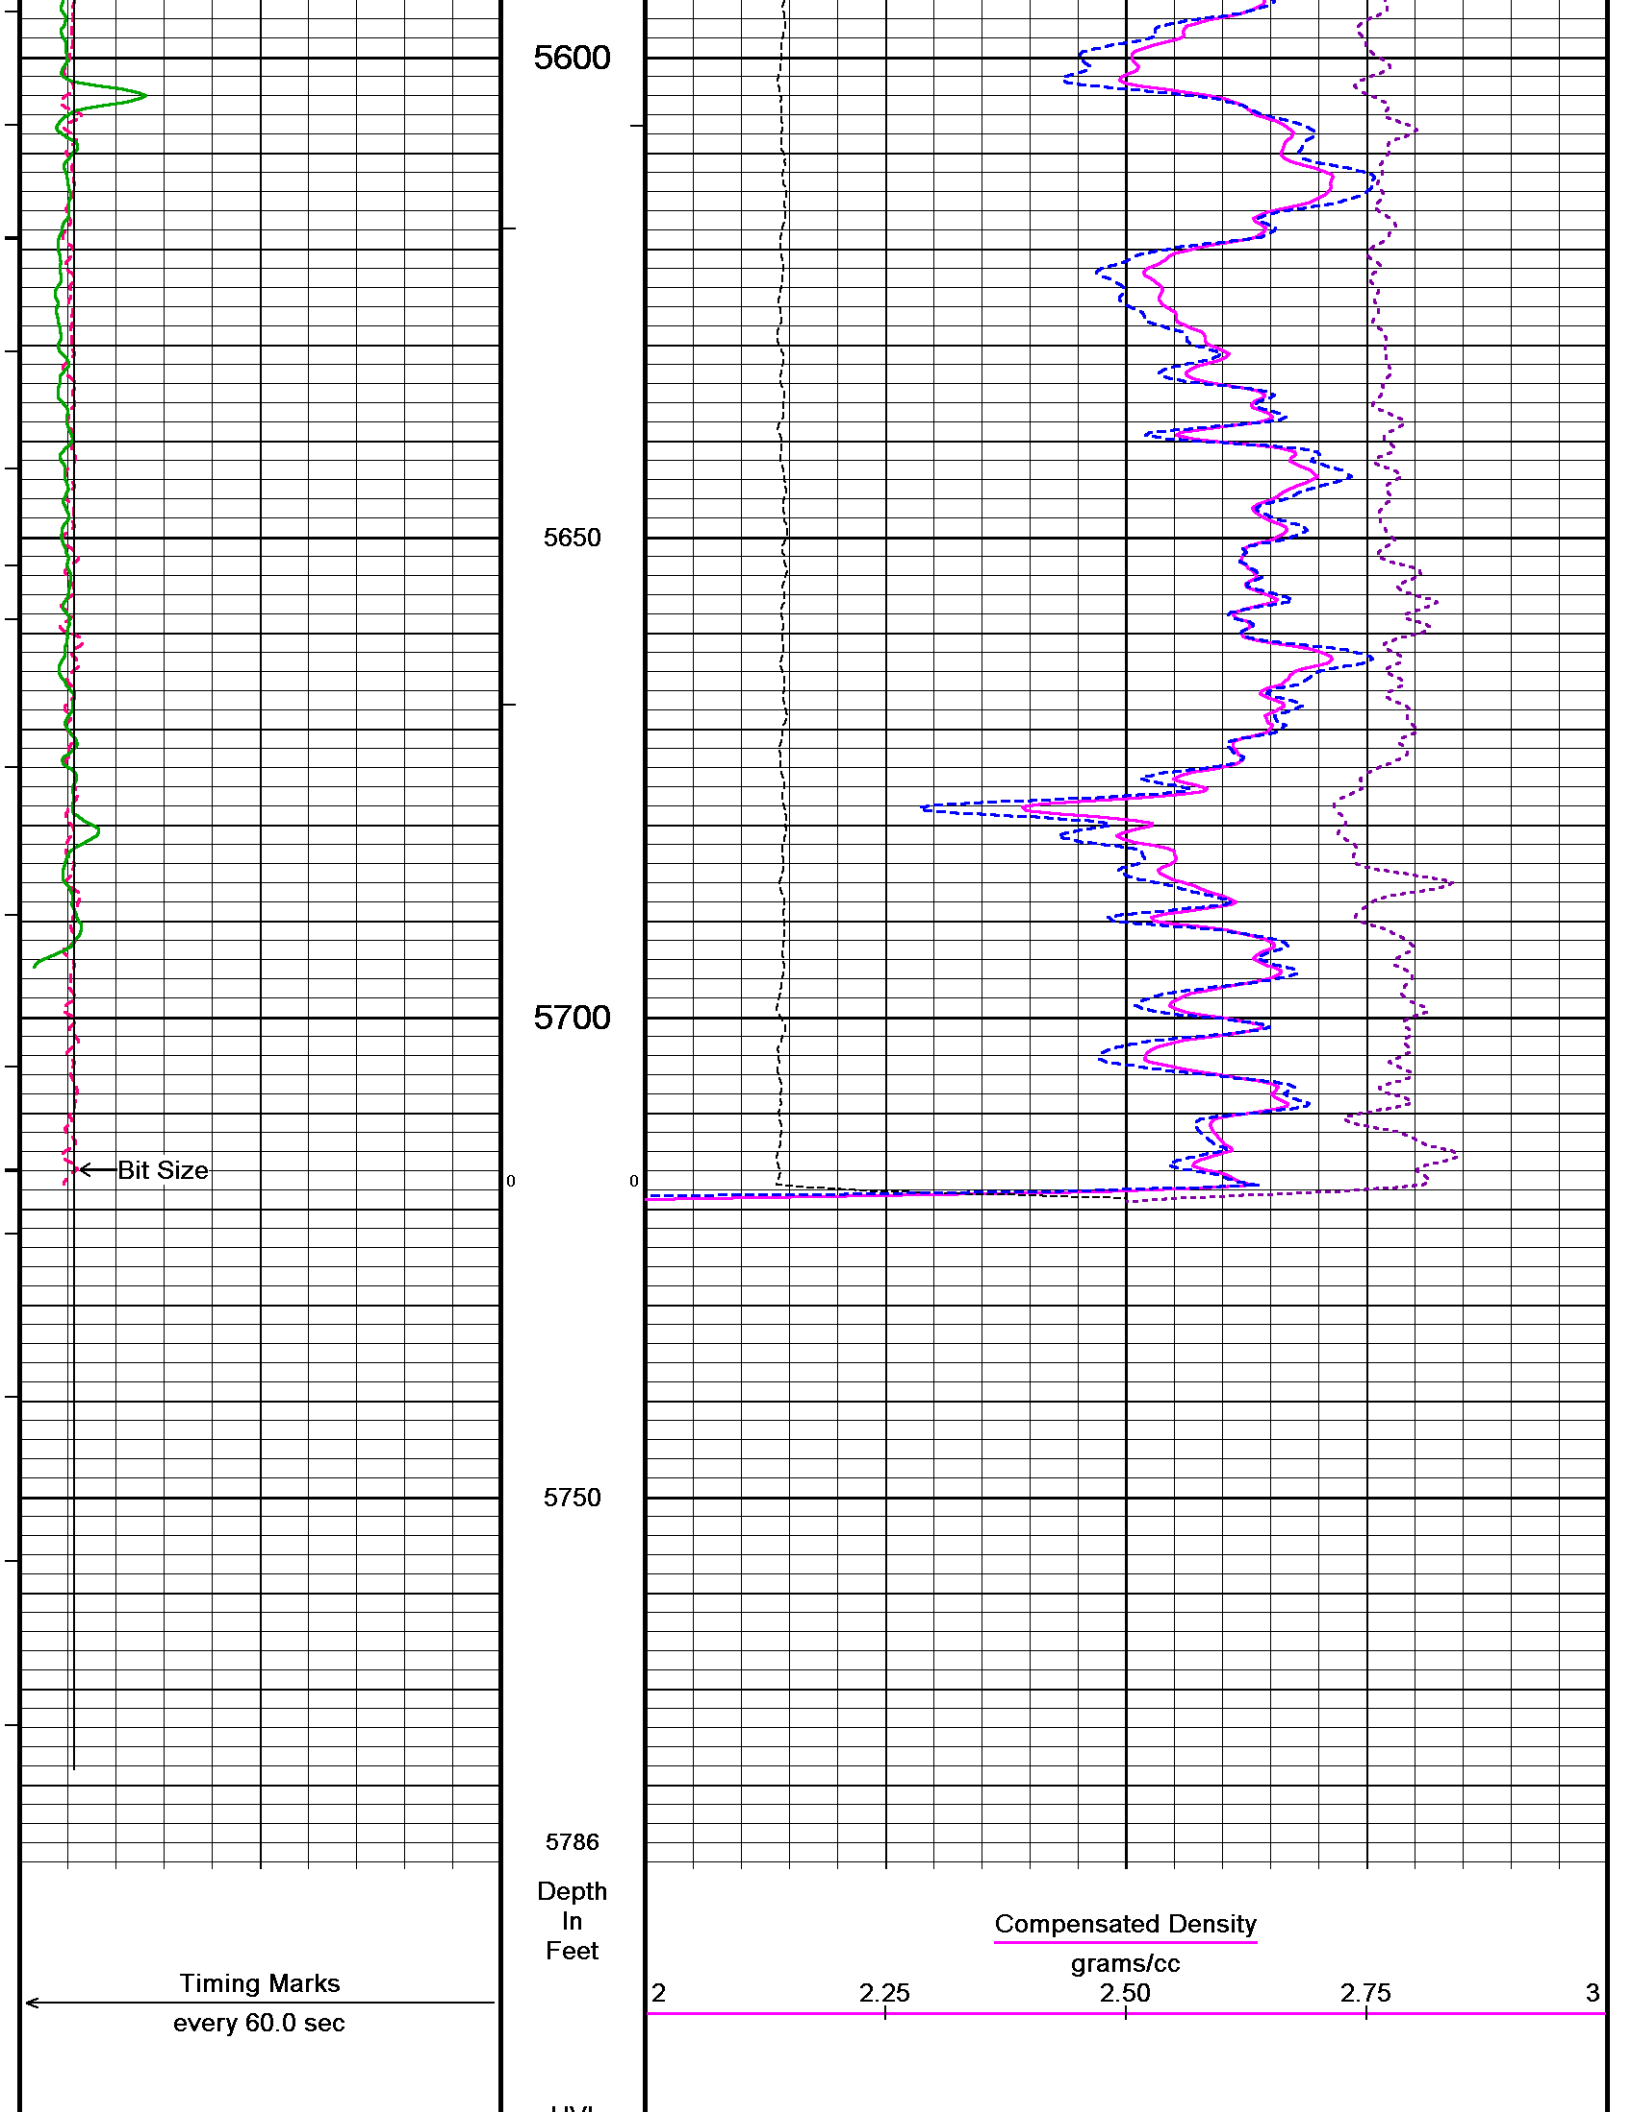

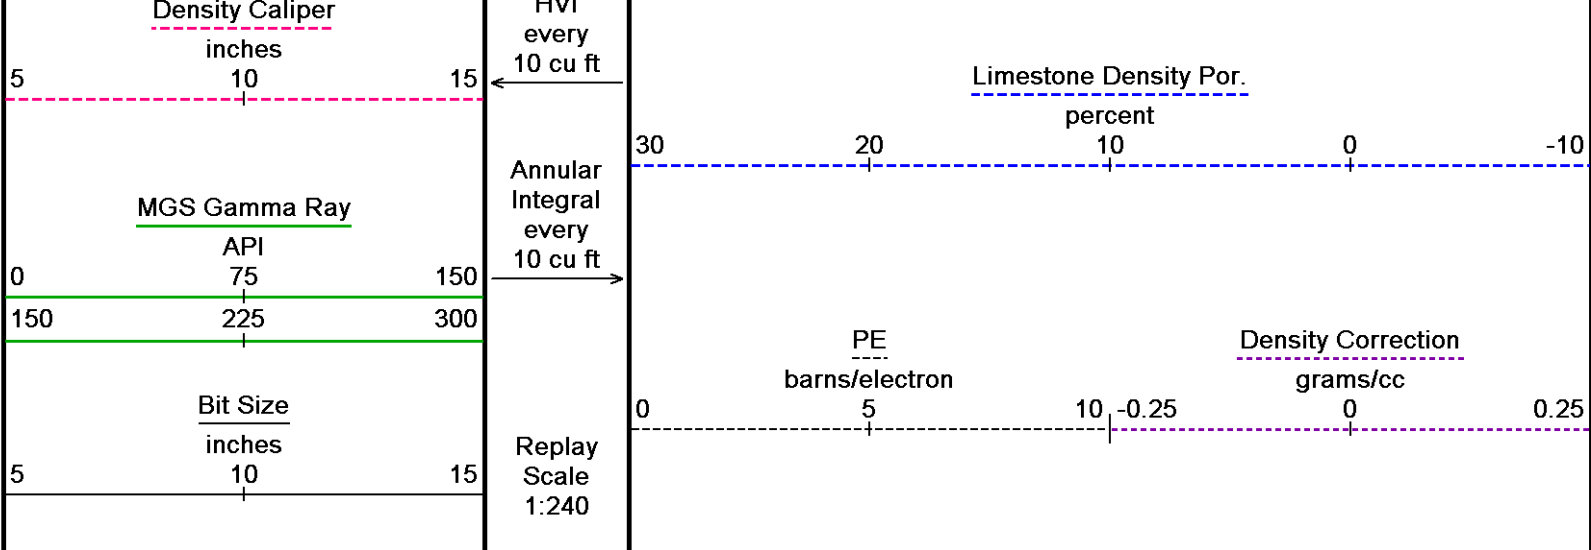

Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 02-DEC-2011 16:22
 Filename: G:\Data\Vess McCord A 20HMccord A 20H plotted\GOOD RTAP.dta
 Recorded on 22-NOV-2011 23:03
 System Versions: Processed with 11.03.4044 Plotted with 12.03.5032

5 INCH BULK DENSITY LOG DSC

BEFORE SURVEY CALIBRATION
 G:\Data\Vess McCord A 20HMccord A 20H plotted\GOOD RTAP.dta

General Constants All 000 Last Edited on 23-NOV-2011,11:17

General Parameters		
Mud Resistivity	0.800	ohm-metres
Mud Resistivity Temperature	55.000	degrees F
Water Level	0.000	feet
Density/Neutron Processing	Wet Hole	
Hole/Annular Volume and Differential Caliper Parameters		
HVOL Method	Single Caliper	
HVOL Caliper 1	Density Caliper	
HVOL Caliper 2	N/A	
Annular Volume Diameter	4.500	inches
Caliper for Differential Caliper	MIE Caliper X	
Rwa Parameters		
Porosity used	Limestone Density Por.	
Resistivity used	Array Ind. Four Res Rt	
RWA Constant A	0.610	
RWA Constant M	2.150	

Down-hole Tension Calibration SMS 0 Field Calibration on 29-MAR-2011 00:00

Reading No	Measured	Calibrated (lbs)
1	15152.07	0.00
2	19175.97	2000.00

MMS Parameters MMS-E.B 167 Last Edited on 21-NOV-2011 19:06

Logging Parameters		
Firmware Version	2v40	
Caliper Open On	MAI	
Caliper Open Delay	0.0	minutes
Caliper Closed On	Unknown	
Caliper Closed Delay	N/A	minutes
Sample Rate	1.00	seconds
Use Deep Sleep	No	
Delay Deep Sleep	N/A	
Deep Sleep Wake Time	N/A	minutes
Deep Sleep Wake on Temperature	N/A	
Deep Sleep Wake Temperature	N/A	degrees C
Deep Sleep Wake on Pressure	N/A	

Deep Sleep Wake Pressure N/A psi
 MMI Pad Pressure 8.0

Release Parameters

Pulse Duration Base Level 10.0 seconds
 Pulse Duration Transition Time 10.0 seconds
 Pulse Duration Status Pulse From 20.0 seconds
 Pulse Duration Caliper Close From 55.0 seconds
 Pulse Duration Caliper Open From 60.0 seconds
 Pulse Duration Release Pulse From 110.0 seconds
 Pulse Duration Release Pulse To 280.0 seconds
 Pulse Release Duration 240.0 seconds
 Pulse Discriminator Pressure Band 32.0 seconds
 Pulse Pressure Discriminator 106.0 seconds
 Use Negative Pulsing No
 Good Status Reply Open Hole 65535.0 seconds
 Good Status Reply Cased Hole 20.0 seconds
 Bad Status Reply 60.0 seconds
 Status Pulse To 30.0 seconds
 Caliper Close To 0.0 seconds
 Caliper Open To 70.0 seconds

Configuration

MMS,MGS,MDN,MPD,MPD,MIM,MIE,MAI

Gamma Calibration MGS-C.J 136

Field Calibration on 17-NOV-2011 08:02

	Measured	Calibrated (API)
Background	40	28
Calibrator (Gross)	1043	724
Calibrator (Net)	1004	696

Gamma Constants MGS-C.J 136

Last Edited on 22-NOV-2011,23:02

Gamma Calibrator Number	36	
Mud Density	1.10	gm/cc
Caliper Source for Processing	Density Caliper	
Tool Position	Eccentred	
Concentration of KCl	0.00	kppm

High Resolution Temperature Calibration MGS-C.J 136

Field Calibration on 17-NOV-2011,08:02

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	100.00	100.00

High Resolution Temperature Constants MGS-C.J 136

Last Edited on

Pre-filter Length	11
-------------------	----

SP Calibration MGS-C.J 136

Field Calibration on 30-MAR-2011 09:03

	Measured	Calibrated (mV)
Reference 1	102.2	98.7
Reference 2	-94.7	-98.3

Neutron Calibration MDN-B.J 388

Base Calibration on 12-OCT-2011 08:45

Field Check on 17-NOV-2011 08:09

Base Calibration

	Measured		Calibrated (cps)	
	Near	Far	Near	Far
Ratio	2961	90	3714	110
	33.000		33.764	

Field Calibrator at Base

	Calibrated (cps)	
Ratio	2455	3622
	0.678	

Field Check

	Calibrated (cps)	
Ratio	2497	3633
	0.687	

Neutron Source Id	P31112B		
Neutron Jig Number	N639		
Epithermal Neutron	No		
Caliper Source for Processing	Density Caliper		
Stand-off	0.00	inches	
Mud Density	1.00	gm/cc	
Limestone Sigma	7.10	cu	
Sandstone Sigma	4.26	cu	
Dolomite Sigma	4.70	cu	
Formation Pressure Source	Constant Value		
Formation Pressure	0.00	kpsi	
Temperature Source	None		
Temperature	20.00	degrees F	
Mud Salinity	0.00	kppm	
Salinity Correction	0		
Formation Fluid Salinity Source	Constant Value		
Formation Fluid Salinity	0.00	kppm	
Barite Mud Correction	Not Applied		

Magnetometer Parameters MIE-A.A 209

Date Of Last Magnetometer Calibration	26-NOV-2010,12:01		
	X Magnetometer	Y Magnetometer	Z Magnetometer
Slope	-1.000000	-1.001951	-1.007691
Offset	0.007782	-0.016800	0.011730

Magnetometer Constants MIE-A.A 209

Last Edited on

Magnetometer Calibrator Number	000
--------------------------------	-----

Accelerometer Parameters MIE-A.A 209

Date Of Last Accelerometer Calibration	25-NOV-2010,12:19		
	X Accelerometer	Y Accelerometer	Z Accelerometer
Slope	-1.113214	-1.109979	-1.101653
Offset	0.005467	0.005399	0.010368

Accelerometer Constants MIE-A.A 209

Last Edited on 25-NOV-2010,12:25

Accelerometer Calibrator Number	000
---------------------------------	-----

Accelerometer Temperature Characterisation

X Accelerometer

Serial Number	826			
Calibration Date	01-Jan-1998			
	B0	B1	B2	B3
Bias(g)	0.00000e+000	2.32377e-005	-1.87334e-008	9.07324e-011
	SF0	SF1	SF2	SF3
Scale Factor(mA/g)	3.00000e+000	2.71389e-004	4.55326e-007	4.58364e-010

Y Accelerometer

Serial Number	617			
Calibration Date	11-May-2008			
	B0	B1	B2	B3
Bias(g)	0.00000e+000	1.76675e-005	6.93464e-010	2.98691e-011
	SF0	SF1	SF2	SF3
Scale Factor(mA/g)	3.00000e+000	2.56882e-004	5.72598e-007	2.37496e-010

Z Accelerometer

Serial Number	844			
Calibration Date	01-Jan-1998			
	B0	B1	B2	B3
Bias(g)	0.00000e+000	-1.21769e-005	-1.46867e-008	-6.44015e-011
	SF0	SF1	SF2	SF3
Scale Factor(mA/g)	3.00000e+000	2.73539e-004	4.65657e-007	2.88996e-010

Caliper Calibration MIE-A.A 209

Base Calibration on 25-NOV-2010 07:56
Field Calibration on 17-NOV-2011 07:55

Base Calibration			
Reading No	Pads 1-5 Meas.	Pads 3-7 Meas.	Calibrator Size (in)

1	26963	26793	5.96
2	36961	37191	7.97
3	46401	44863	9.84
4	58072	58409	11.91
5	0	0	0.00

Reading No	Pad 2 Meas.	Pad 4 Meas.	Pad 6 Meas.	Pad 8 Meas.	Calibrator Size (in)
1	24829	25688	24937	24692	5.96
2	33487	34230	33721	33433	7.97
3	40559	41186	42962	42856	9.84
4	51771	52426	51758	51697	11.91
5	0	0	0	0	0.00

Field Calibration

	Measured Pads 1-5 Caliper(in)	Measured Pads 3-7 Caliper(in)	Actual Caliper(in)		Actual Caliper(in)
	6.06	5.97	5.96		
	Measured Pad 2 Caliper(in)	Measured Pad 4 Caliper(in)	Measured Pad 6 Caliper(in)	Measured Pad 8 Caliper(in)	Actual Caliper(in)
	3.01	2.98	3.02	3.04	5.96

Caliper Constants MIE-A.A 209

Last Edited on 25-NOV-2010,07:57

Caliper Difference for BRKT 0.120 inches

Navigation Constants MIE-A.A 209

Last Edited on 17-NOV-2011,09:51

Magnetic Declination 4.80 degrees East

Imager Pad Check MIE-A.A 209

Field Check on

Pad 1	Pad Not Tested	Pad 5	Pad Not Tested
Pad 2	Pad Not Tested	Pad 6	Pad Not Tested
Pad 3	Pad Not Tested	Pad 7	Pad Not Tested
Pad 4	Pad Not Tested	Pad 8	Pad Not Tested

Compact Micro Imager Constants MIE-A.A 209

Last Edited on 17-NOV-2011,09:51

Sonde Configuration	Imager Mode	degrees
Arm-Pad Kit	0	
Centre Pad 1 Rotational Offset	0.00	
Image/Borehole Ovality Reference	Azimuth of Pad 1	degrees
Non Active Buttons	Omit	feet
Search Angle	45.00	feet
Correlation Interval	3.28	mAmp
Correlation Step	1.64	mAmp
Current Offset	0.0000	
Squasher Start	0.0500	
Image Processing	Enabled	

High Resolution Temperature Calibration MAI-B.J 391

Field Calibration on 19-OCT-2011 10:50

	Measured	Calibrated(Deg F)
Lower	10.00	50.00
Upper	100.00	212.00

High Resolution Temperature Constants MAI-B.J 391

Last Edited on

Pre-filter Length 11

Induction Calibration MAI-B.J 391

Base Calibration on 19-OCT-2011 10:50

Field Check on 17-NOV-2011 07:39

Base Calibration		Measured		Calibrated (mmho/m)	
Test Loop Calibration	Channel	Low	High	Low	High
	1	17.1	473.5	9.3	966.2
	2	6.0	381.9	7.6	821.4
	3	3.8	262.4	5.2	566.0
	4	2.3	133.8	2.6	279.2

Array Temperature 76.6 Deg F

Channel	Base Check (mmho/m)	Field Check (mmho/m)
	Low High	Low High

	Low	High	Low	High
1	0.0	0.0	11.7	3820.4
2	0.0	0.0	29.8	3516.4
3	0.0	0.0	27.0	3009.6
4	0.0	0.0	18.4	2063.4
Deep	0.0	0.0	15.2	1956.4
Medium	0.0	0.0	40.3	3959.2
Shallow	0.0	0.0	46.4	5212.7
Array Temperature		0.0		52.3 Deg F

Induction Constants MAI-B.J 391

Last Edited on 23-NOV-2011,10:03

Induction Model		RtAP-WBM	
Caliper for Borehole Corr.		Density Caliper	
Hole Size for Borehole Correction		N/A	inches
Tool Centred		No	
Stand-off Type		Fins	
Stand-off		0.50	inches
Number of Fins on Stand-off		6.0000	
Stand-off Fin Angle		60.00	degrees
Stand-off Fin Width		0.5000	inches
Borehole Corr. Rm Source		Temperature Corr	
Temp. for Rm Corr.	MGS External Temperature		
Squasher Start		0.0020	mhos/metre
Squasher Offset		N/A	mhos/metre
Borehole Normalisation			
DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000
Calibration Site Corrections			
Channel 1		0.00	mmhos/metre
Channel 2		0.00	mmhos/metre
Channel 3		0.00	mmhos/metre
Channel 4		0.00	mmhos/metre
Apparent Porosity and Water Saturation Constants			
Archie Constant (A)		1.00	
Cementation Exponent (M)		2.00	
Saturation Exponent (N)		2.00	
Saturation of Water for Apor		100.00	percent
Resistivity of Water for Apor and Sw		0.05	ohm-m
Resistivity of Mud Filtrate for Sw		0.00	ohm-m
Source for Rt		0.00	
Source for Rxo		0.00	

Caliper Calibration MPD-C.J 393

Base Calibration on 14-NOV-2011 06:09
Field Calibration on 17-NOV-2011 07:45

Base Calibration		
Reading No	Measured	Calibrator Size (in)
1	14534	4.01
2	24031	5.96
3	32482	7.98
4	40112	9.86
5	48560	11.88
6	N/A	N/A
Field Calibration		
	Measured Caliper (in)	Actual Caliper (in)
	6.00	5.96

Photo Density Calibration MPD-C.J 393

Base Calibration on 19-OCT-2011 09:31
Field Check on 17-NOV-2011 07:52

Density Calibration				
Base Calibration		Measured	Calibrated (sdu)	
	Near	Far	Near	Far
Reference 1	58016	27308	59869	31110

Reference 2 24483 2694 24557 2522

Field Check at Base

1260.5 1380.6

Field Check

1245.1 1363.2

PE Calibration

Base Calibration

Measured

Calibrated

WS

WH

Ratio

Ratio

Background

235

1137

Reference 1

23358

57816

0.408

0.369

Reference 2

6927

24347

0.288

0.271

Field Check at Base

235.4

1137.5

Field Check

230.6

1122.1

Density Constants MPD-C.J 393

Last Edited on 22-NOV-2011,23:02

Density Source Id

p31112b

Nylon Calibrator Number

18006

Aluminium Calibrator Number

18006

Density Shoe Profile

4 inch

Caliper Source for Processing

Density Caliper

PE Correction to Density

Not Applied

Mud Density

1.10

gm/cc

Mud Density Z/A Multiplier

1.11

Mud Filtrate Density

1.00

gm/cc

Dry Hole Mud Filtrate Density

1.00

gm/cc

DNCT

0.03

gm/cc

CRCT

0.00

gm/cc

Density Z/A Correction

Hybrid

Matrix density (gm/cc)

Depth (m)

2.71

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

DOWNHOLE EQUIPMENT

G:\Data\Vess McCord A 20H\Mccord A 20H plotted\TC CMI TOOLSTRING.dta

RUNNING TOOL

MLK-A 1 LG: 4.87 ft WT: 30.9 lb OD: 2.24 in

EMPTY EXT BATTERY

MLK-A 2 LG: 14.23 ft WT: 30.9 lb OD: 2.24 in

EMPTY EXT BATTERY

MLK-A 3 LG: 14.23 ft WT: 30.9 lb OD: 2.24 in

SKJ-D Compact Knuckle Joint

SKJ-D 30 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

MBS-G.A 200v Compact Battery Sub

MBS-G.A 112 LG: 16.66 ft WT: 132.3 lb OD: 2.24 in

Compact Memory Sub E.B

MMS-F B 167 LG: 5.20 ft WT: 37.5 lb OD: 2.24 in



Compact Tool Isolator sub.
MTI-B.A 63 LG: 1.54 ft WT: 13.2 lb OD: 2.24 in

Compact Short Gamma
MGS-C.J 136 LG: 3.41 ft WT: 24.3 lb OD: 2.24 in

SKJ-E.A Compact Knuckle Joint
SKJ-E.A 140 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

SHA-J.A Compact Swivel Head Adaptor
SHA-J.A 208 LG: 2.30 ft WT: 22.0 lb OD: 2.24 in

MIS-A.A Compact Inline Bowspring sub
MIS-A.A 259 LG: 5.70 ft WT: 33.1 lb OD: 2.24 in

Compact Neutron
MDN-B.J 388 LG: 5.04 ft WT: 50.7 lb OD: 2.24 in

Compact Density/Caliper
MPD-C.J 393 LG: 9.59 ft WT: 90.4 lb OD: 2.24 in

MIS-A.A Compact Inline Bowspring sub
MIS-A.A 277 LG: 5.70 ft WT: 33.1 lb OD: 2.24 in

SHA-J.A Compact Swivel Head Adaptor
SHA-J.A 451 LG: 2.30 ft WT: 22.0 lb OD: 2.24 in

SKJ-E.A Compact Knuckle Joint
SKJ-E.A 207 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

MIS-E.B Compact Inline Standoff sub
MIS-E.B 572 LG: 2.14 ft WT: 15.4 lb OD: 2.24 in

SKJ-E.B Compact Knuckle Joint
SKJ-E.B 479 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

MIS-A.A Compact Inline Bowspring sub
MIS-A.A 62 LG: 5.70 ft WT: 33.1 lb OD: 2.24 in

Compact MMI Memory Section
MIM-A.A 209 LG: 4.65 ft WT: 26.5 lb OD: 2.24 in


Compact MMI Electrode Section
MIE-A.A 209 LG: 13.96 ft WT: 99.2 lb OD: 4.09 in

MIS-D.A Compact Inline Bowspring sub
MIS-D.A 590 LG: 5.70 ft WT: 33.1 lb OD: 2.24 in

MIS-E.A Compact Inline Standoff sub
MIS-E.A 184 LG: 2.14 ft WT: 15.4 lb OD: 2.24 in

Compact Induction
MAI-B.J 391 LG: 10.81 ft WT: 48.5 lb OD: 2.24 in

Total Length: 144.53 ft Weight: 919.3 lb

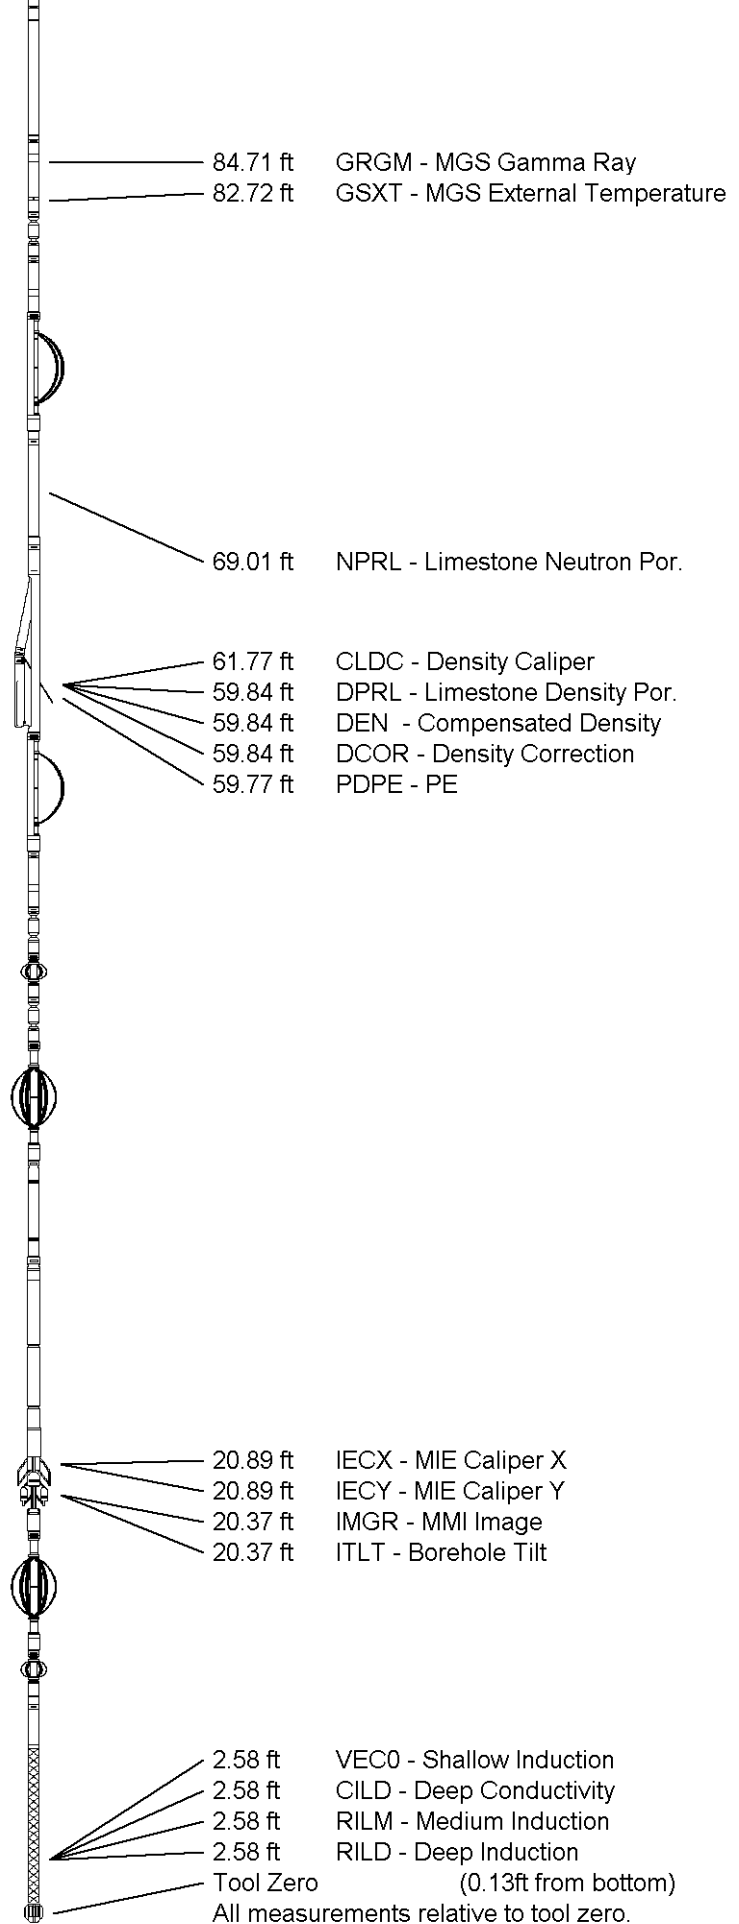

COMPANY
WELL

VESS OIL CORP.
MCCORD 'A' 20H

FIELD BEMIS SHUTTS
PROVINCE/COUNTY ELLIS
COUNTRY/STATE USA / KANSAS

Elevation Kelly Bushing	2100.60	feet	First Reading	5717.00	feet
Elevation Drill Floor	2099.00	feet	Depth Driller	5805.00	feet
Elevation Ground Level	2091.00	feet	Depth Logger	5805.00	feet



Weatherford[®]

CML MESSENGER SHUTTLE
COMPACT PHOTO DENSITY
COMPENSATED DUAL NEUTRON LOG

