



Dual Induction Log

DIGITAL LOG (785) 625-3858

API No.	15-007-23,679-00-00	
Company	N-10 Exploration, LLC.	
Well	Medicine River Ranch 'B' No. 7	
Field	Landis	
County	Barber	State
		Kansas
Location	SW - NW - SE	
Sec: 15	Twp: 34 S	Rge: 11 W
Permanent Datum	Ground Level	Elevation 1338
Log Measured From	Kelly Bushing	10 Ft. Above Perm. Datum
Drilling Measured From	Kelly Bushing	K.B. 1348
		D.F. 1338
		G.L. 1338
		Other Services CNL/CDL

Date	7/9/2011
Run Number	One
Depth Driller	5045
Depth Logger	4038
Bottom Logged Interval	4037
Top Log Interval	250
Casing Driller	8.625 @ 278
Casing Logger	276
Bit Size	7.875
Type Fluid in Hole	Chemical
Salinity, ppm CL	3,000
Density / Viscosity	9.4 53
pH / Fluid Loss	10.5 8.8
Source of Sample	Flowline
Rm @ Meas. Temp	2.70 @ 77
Rmf @ Meas. Temp	2.03 @ 77
Rmc @ Meas. Temp	3.65 @ 77
Source of Rmf / Rmc	Charts
Rm @ BHT	1.62 @ 128
Operating Rig Time	2-1/2 Hours
Max Rec. Temp. F	128
Equipment Number	17
Location	Hays
Recorded By	B. Becker
Witnessed By	Tim Pierce

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
 (785) 625-3858
 Medicine Lodge, Ks; West to 281 & 160 Jct.
 9 South to Gerlane Rd; 7.2 East to Bethel Rd;
 3.6 South to Angus Rd; 2 West; North through Cattle Crossing;
 1 North; 1/4 East at pump jack across cattle crossing;
 Continue 1/4 East; South to location

Database File: n10hd.db
 Dataset Pathname: DIL/n10stk
 Presentation Format: dil2in
 Dataset Creation: Sat Jul 09 19:06:24 2011
 Charted by: Depth in Feet scaled 1:600

0	Gamma Ray	150
-200	SP	0

0	Shallow Resistivity	50
0	Deep Resistivity	50



LSPD




1000	Conductivity	0
------	--------------	---



15000	Line Tension	0
-------	--------------	---


50	Shallow Resistivity	500
----	---------------------	-----

50	Deep Resistivity	500
----	------------------	-----

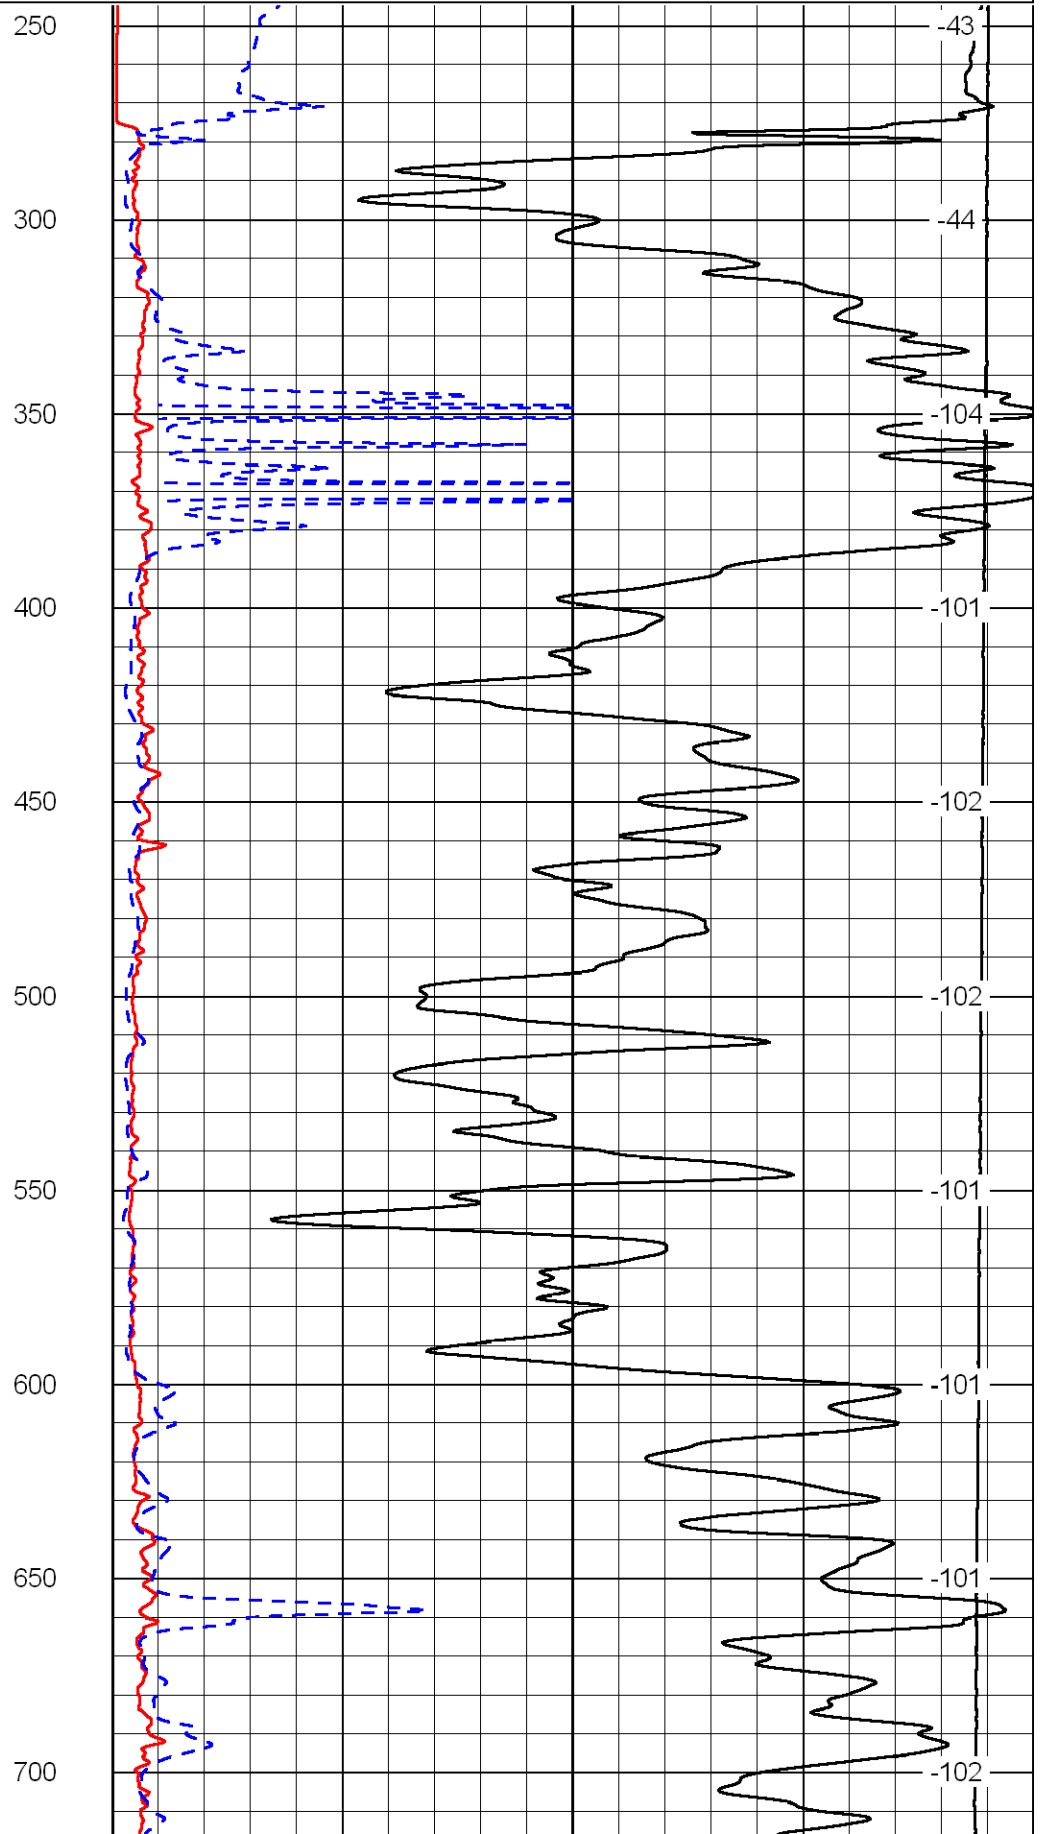
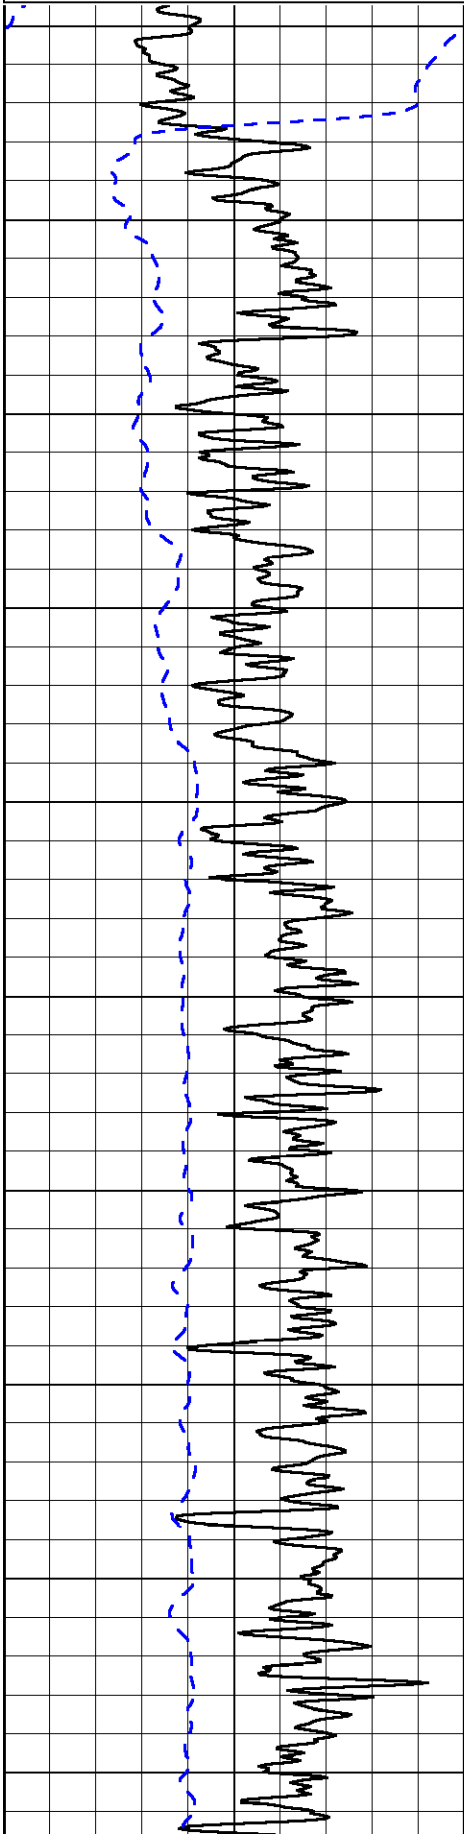


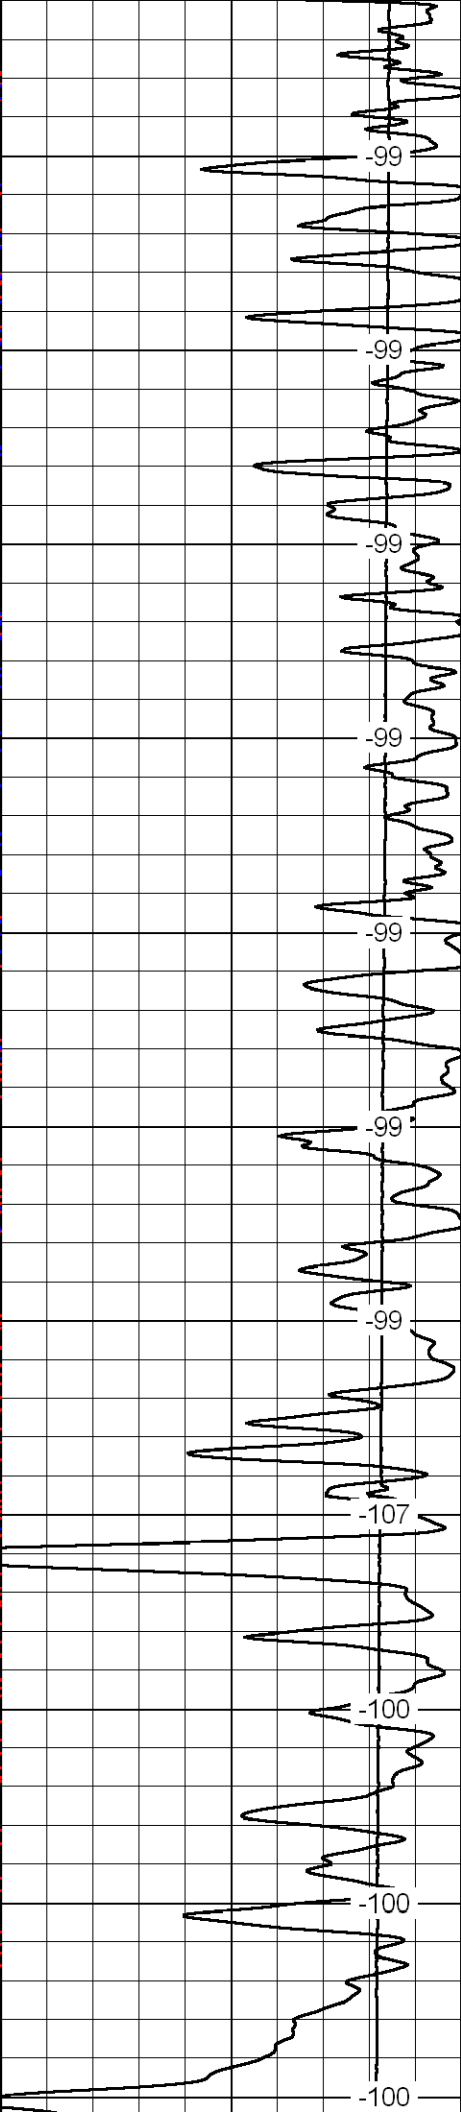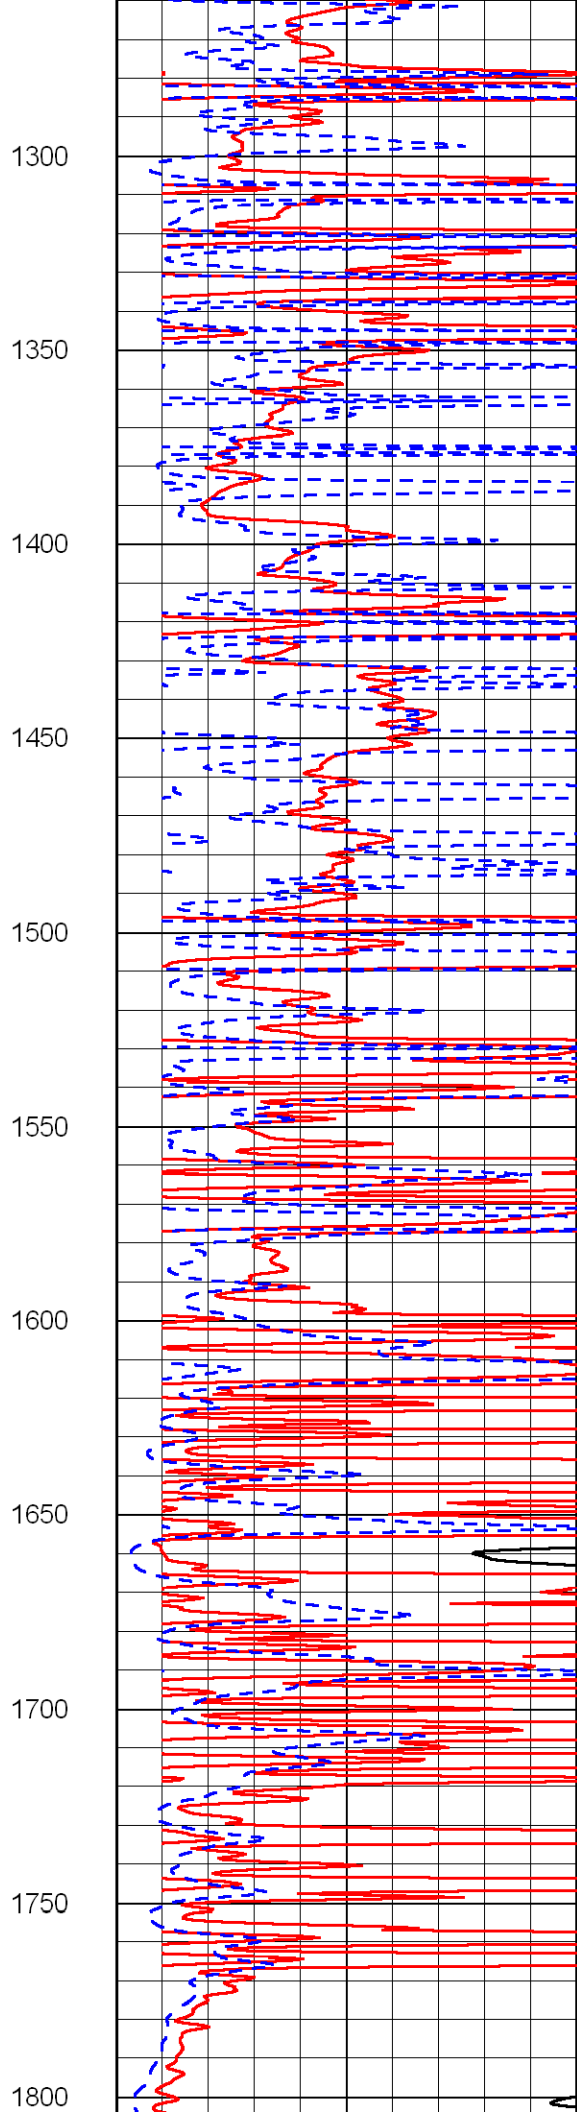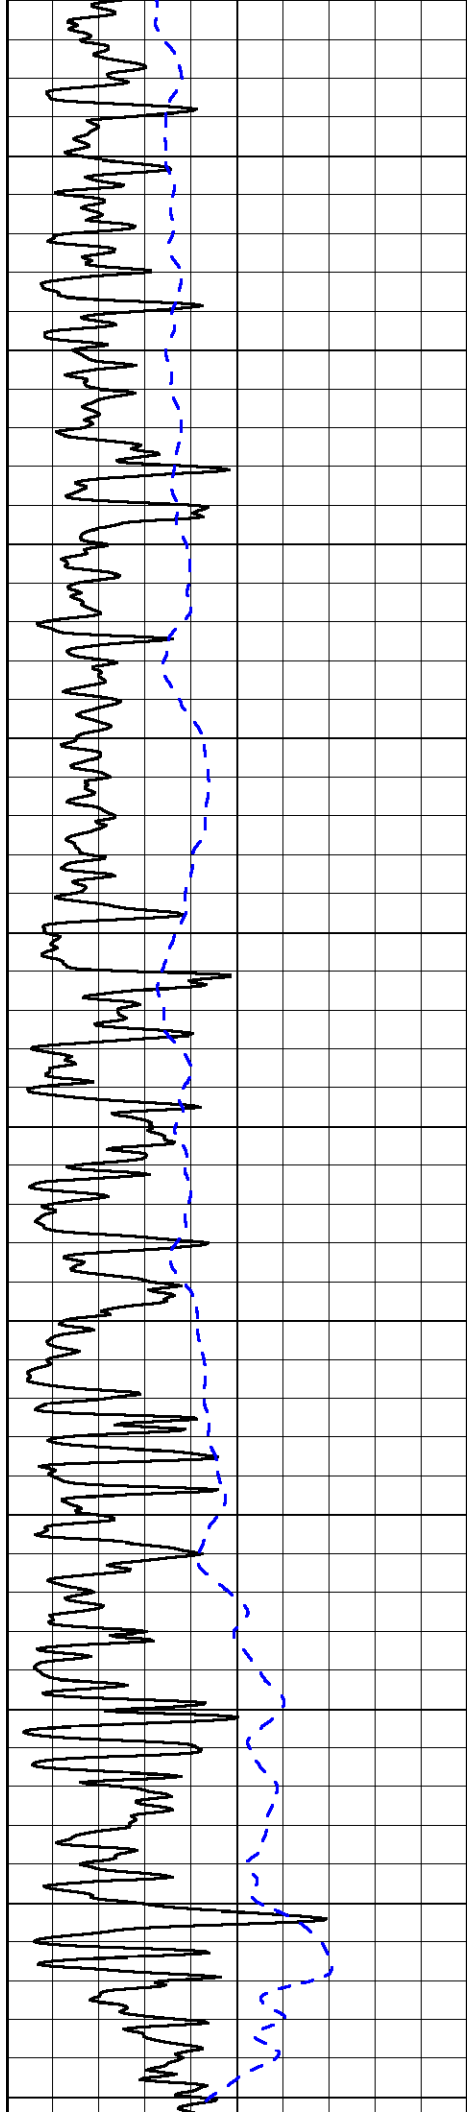


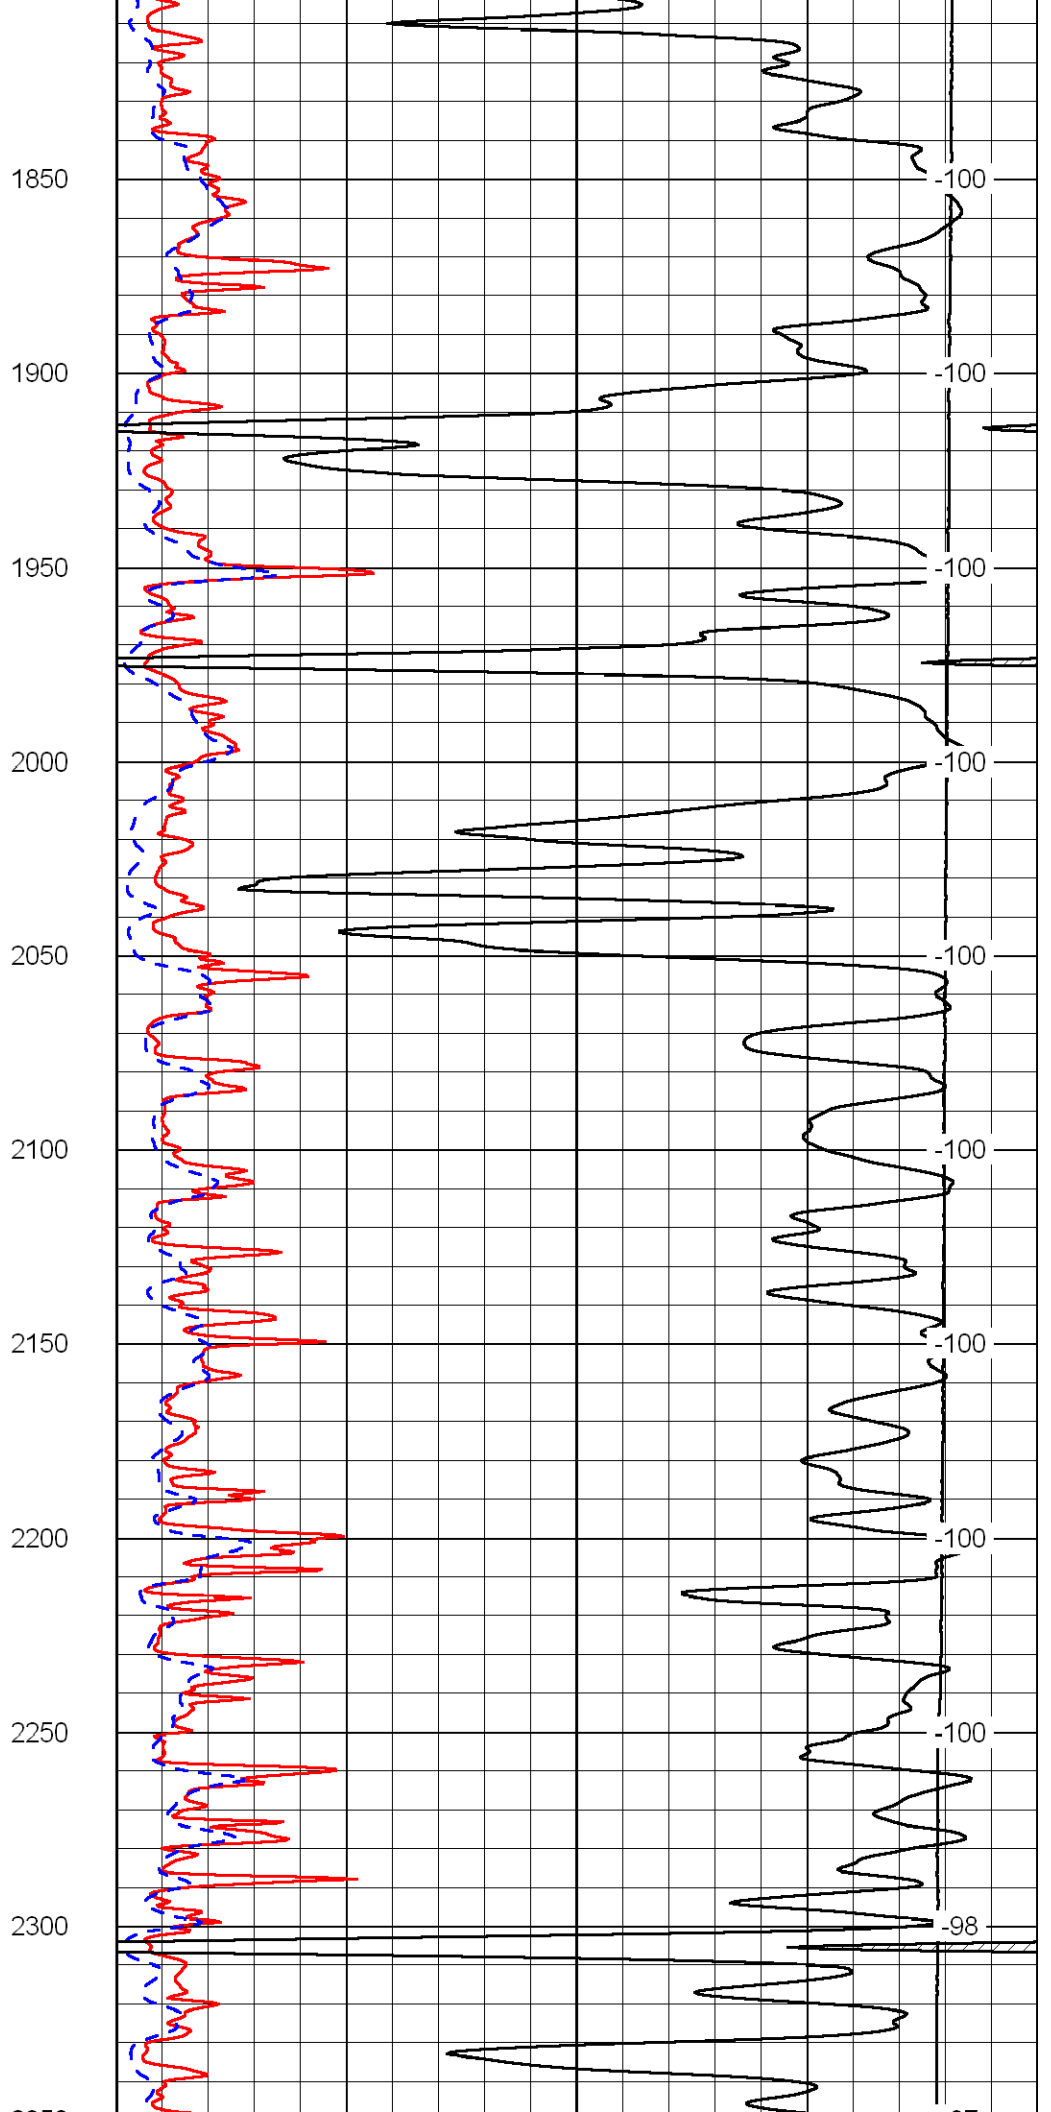
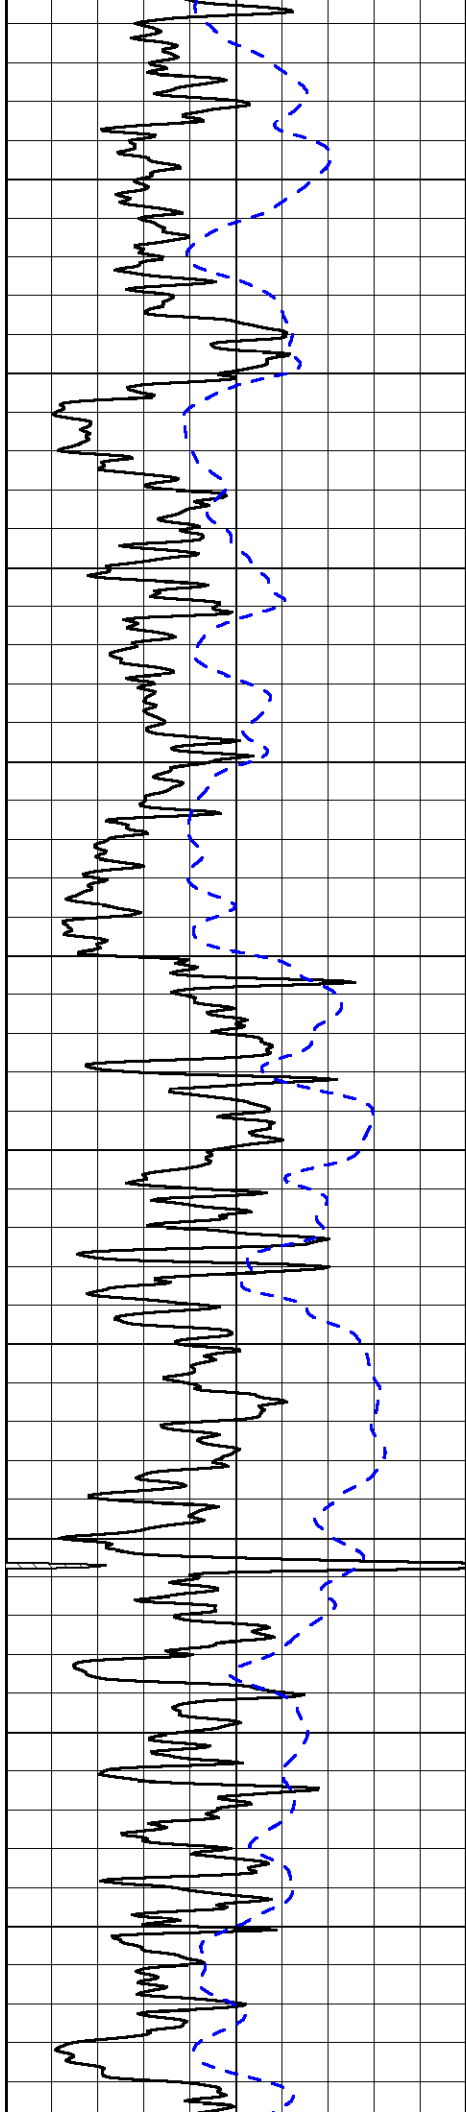



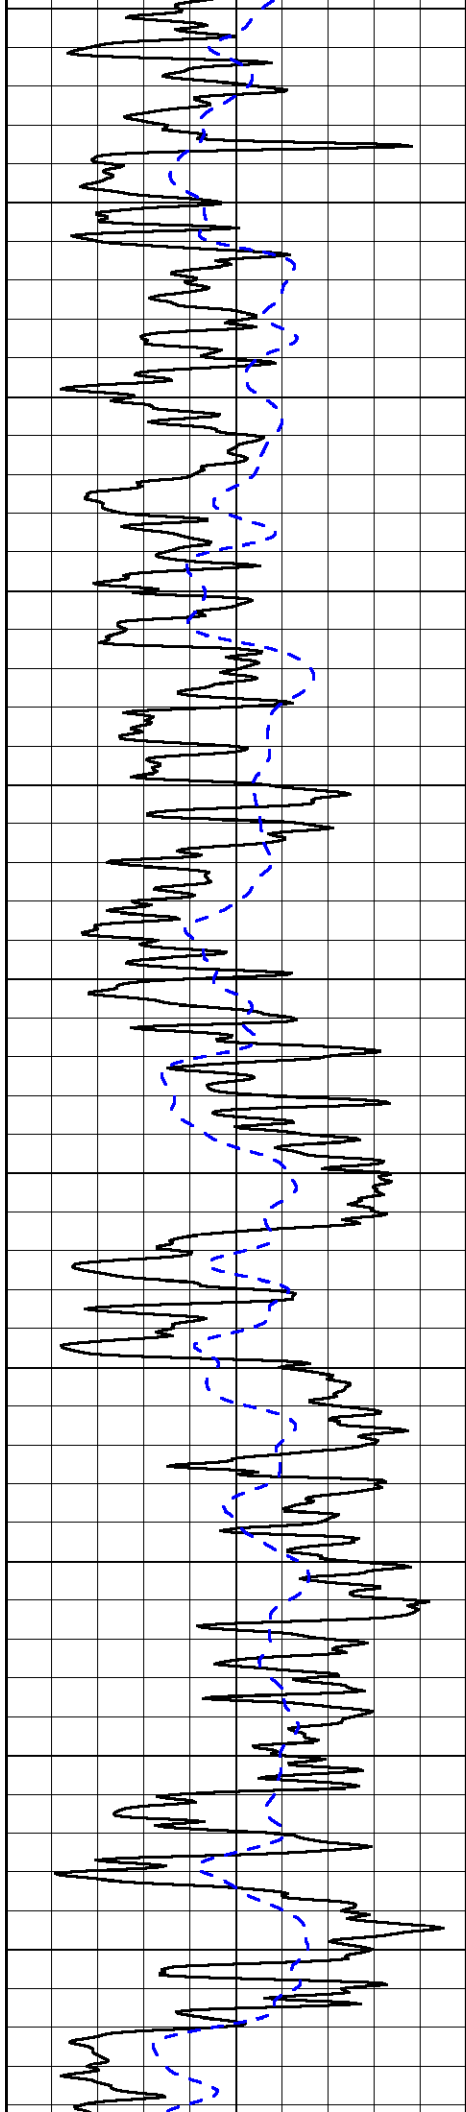





2350
2400
2450
2500
2550
2600
2650
2700
2750
2800
2850

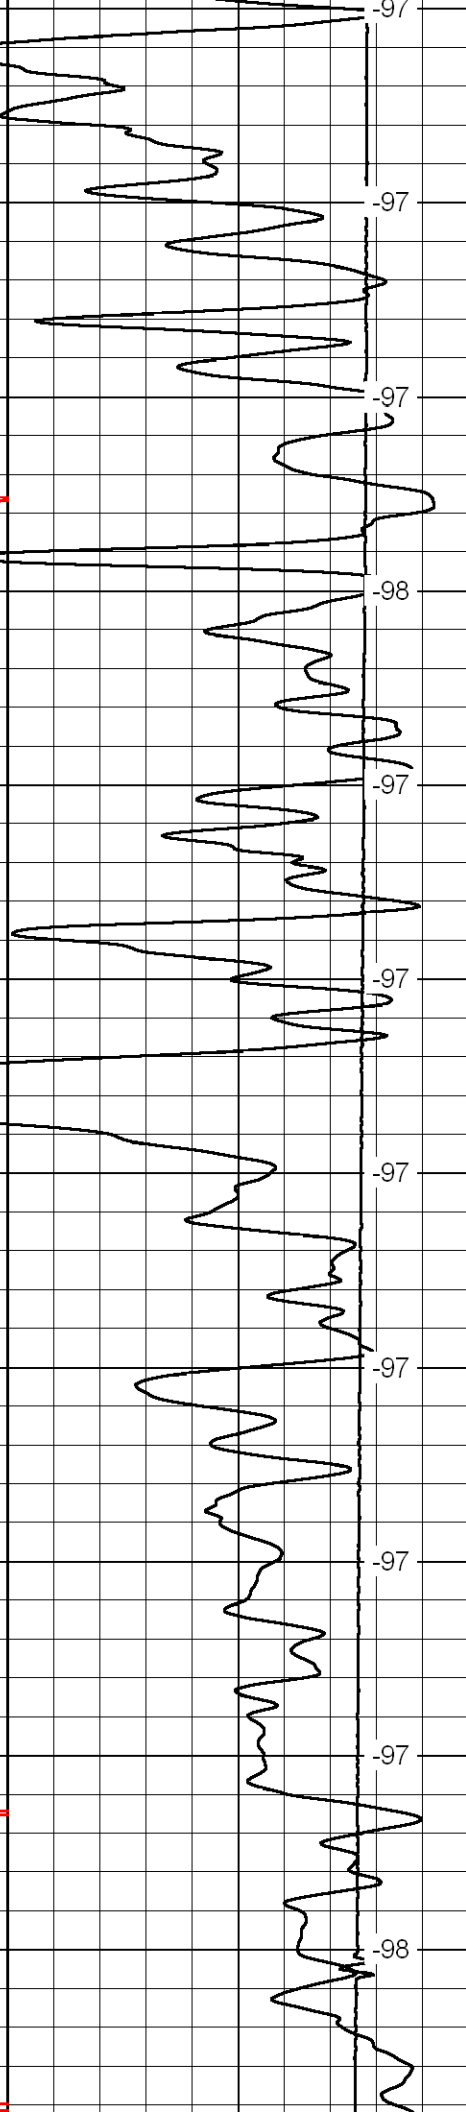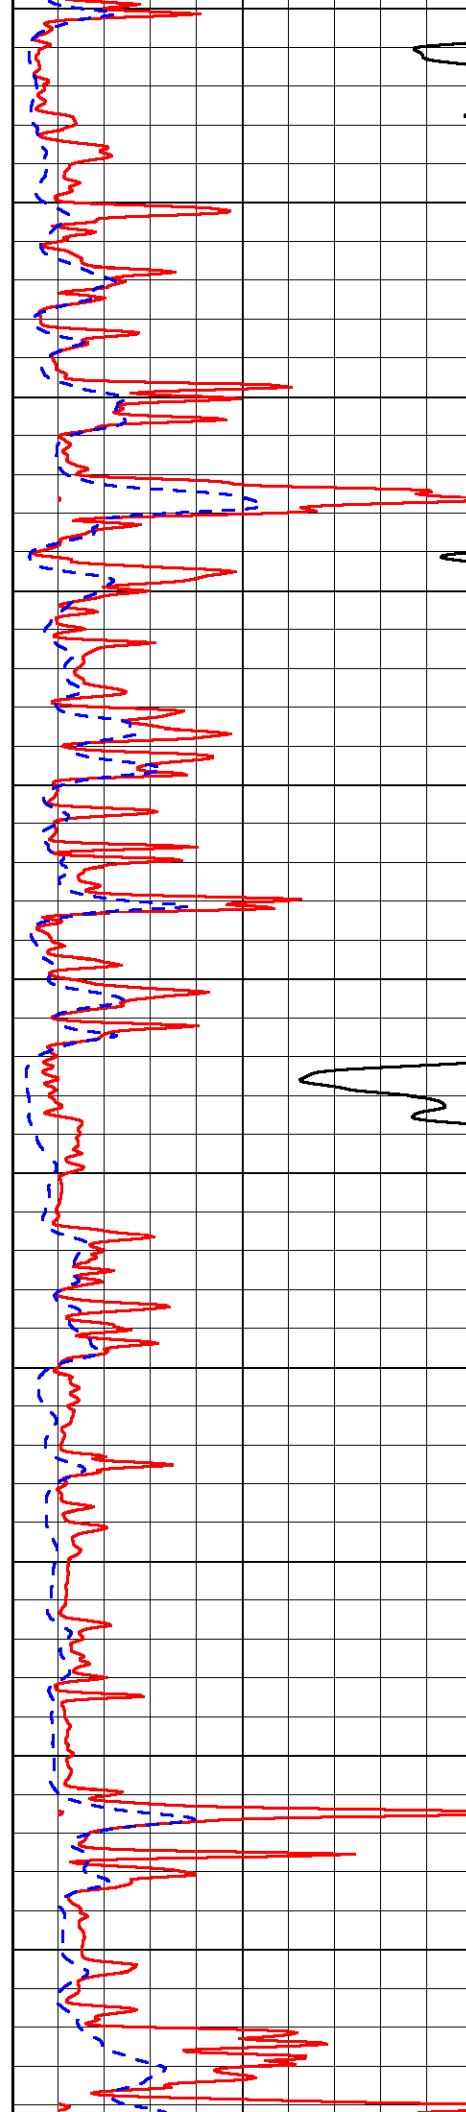


-97
-97
-97
-98
-97
-97
-97
-97
-97
-97
-97
-98

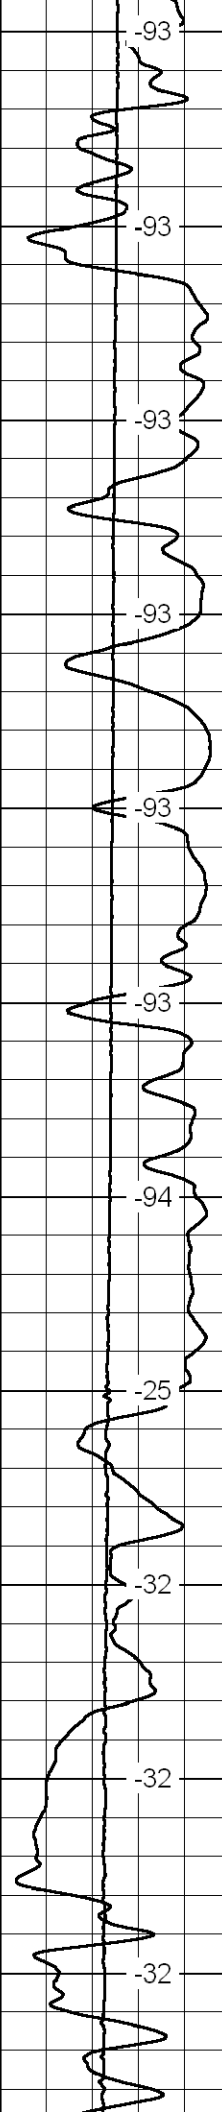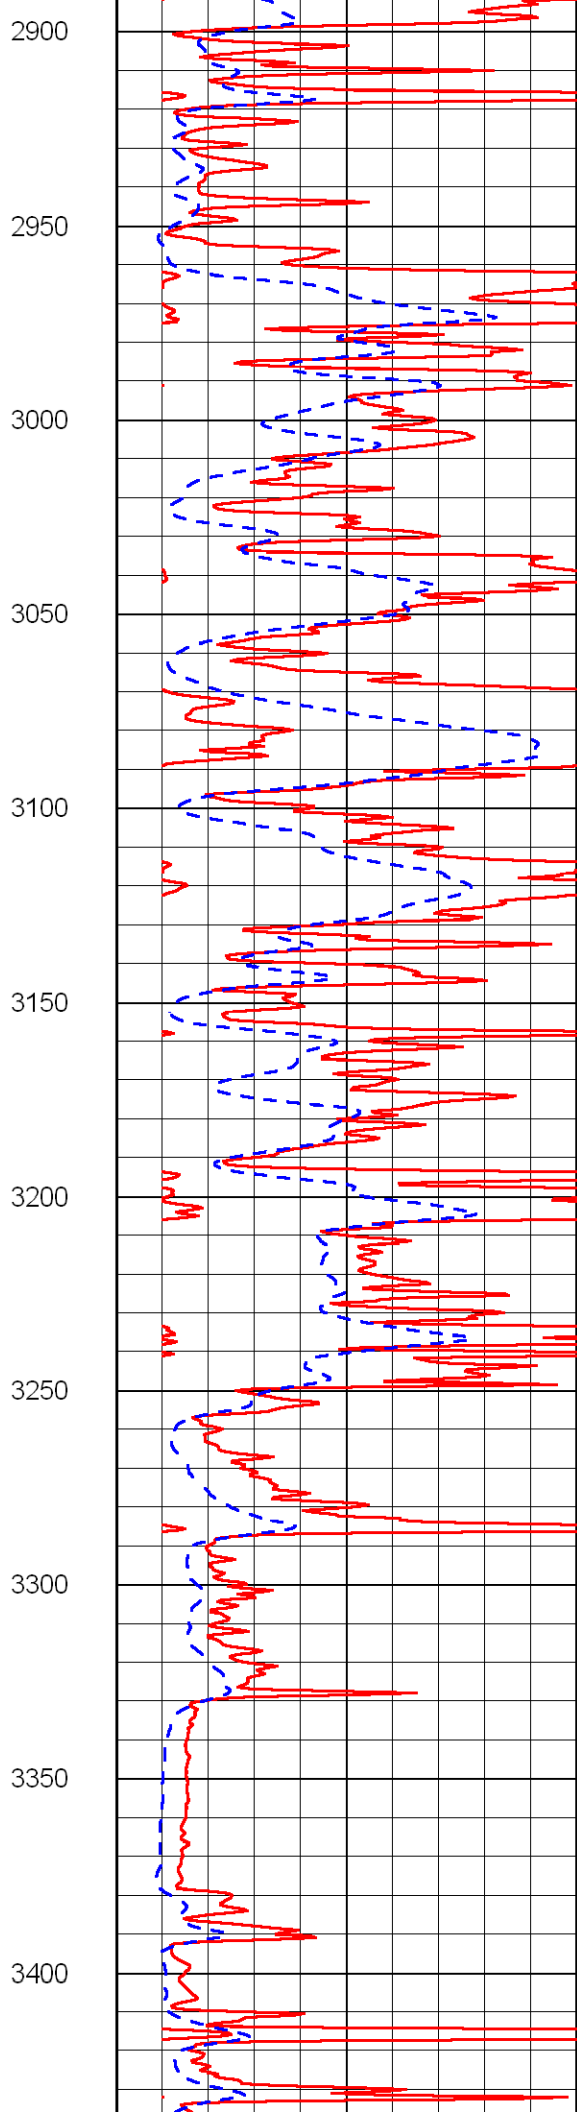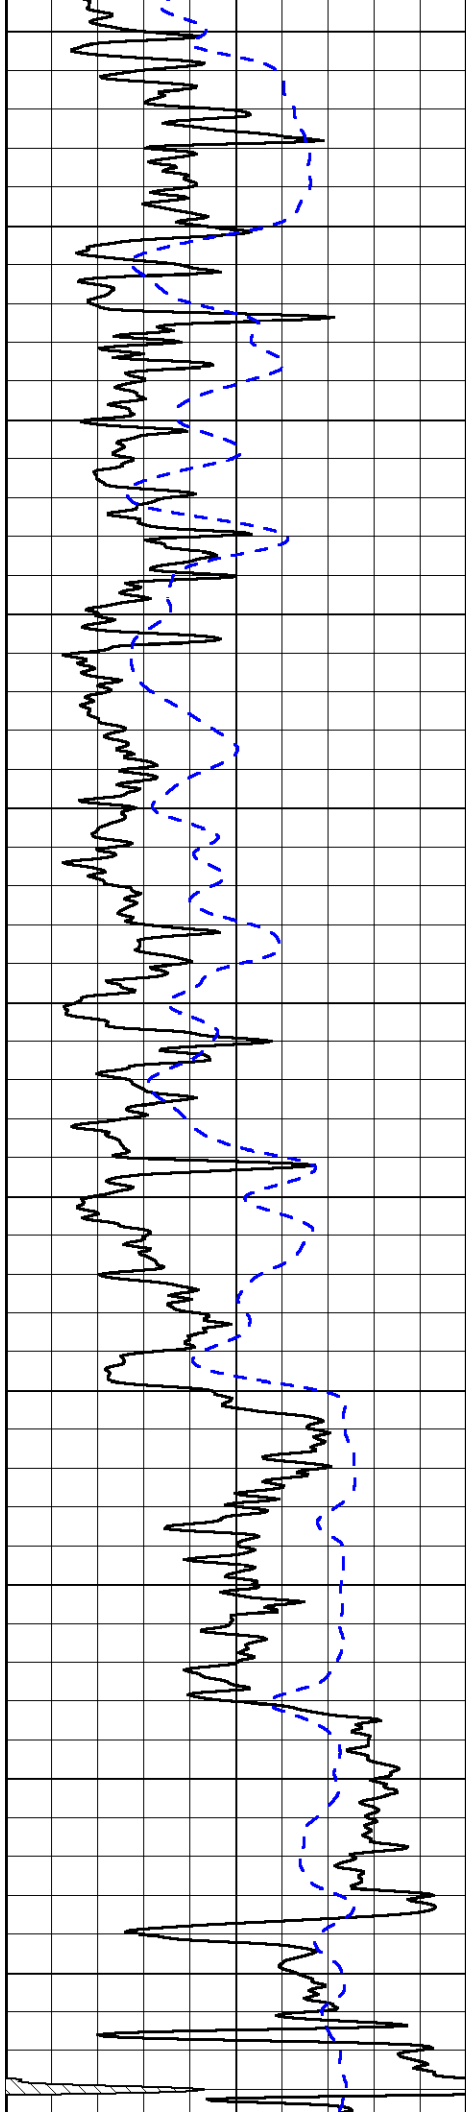

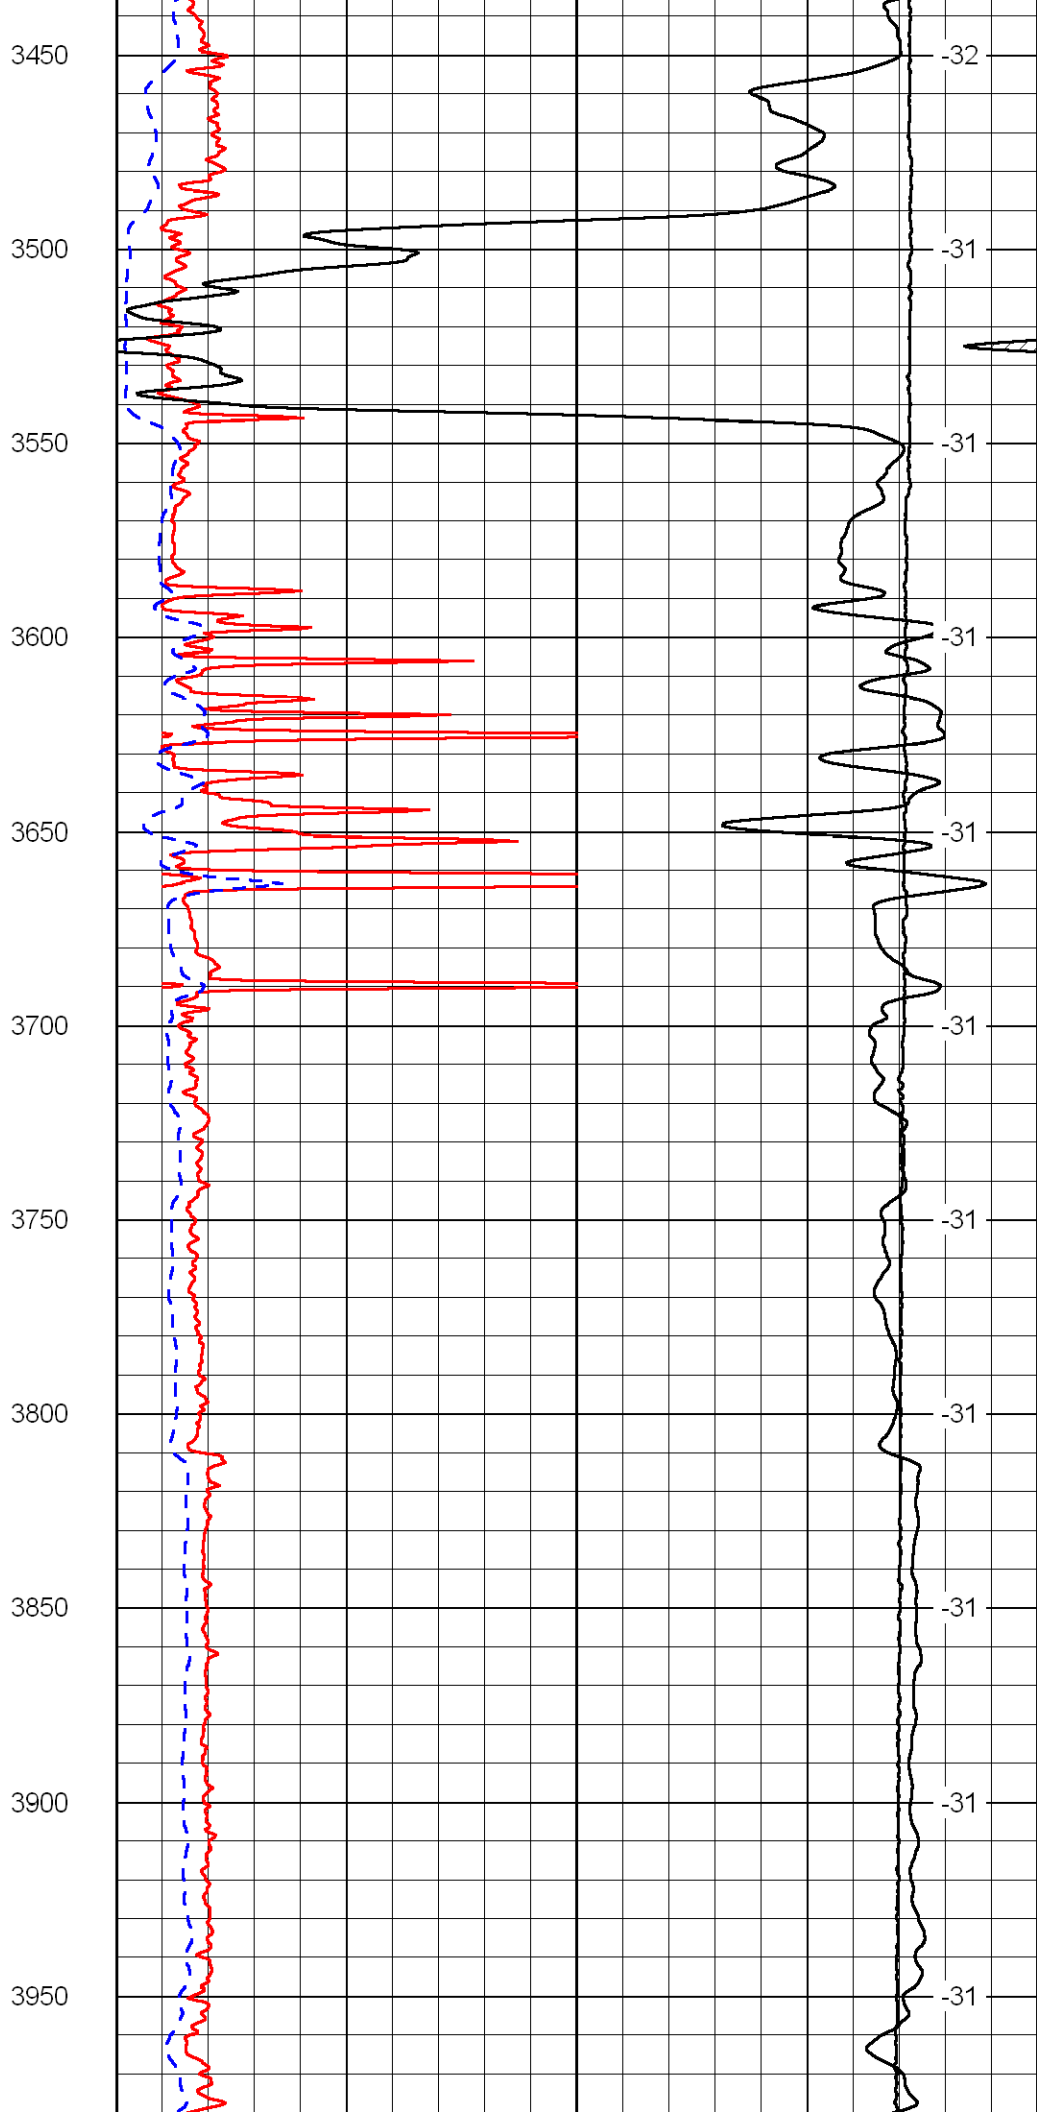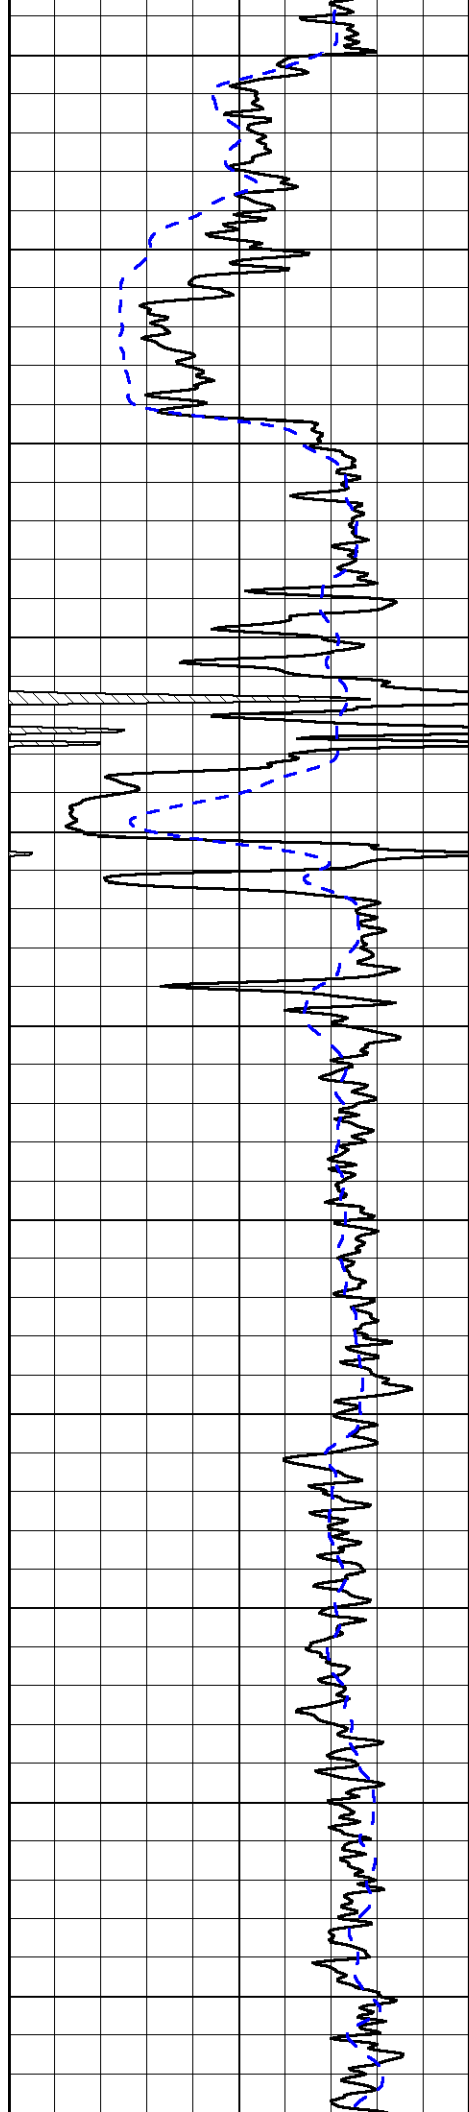

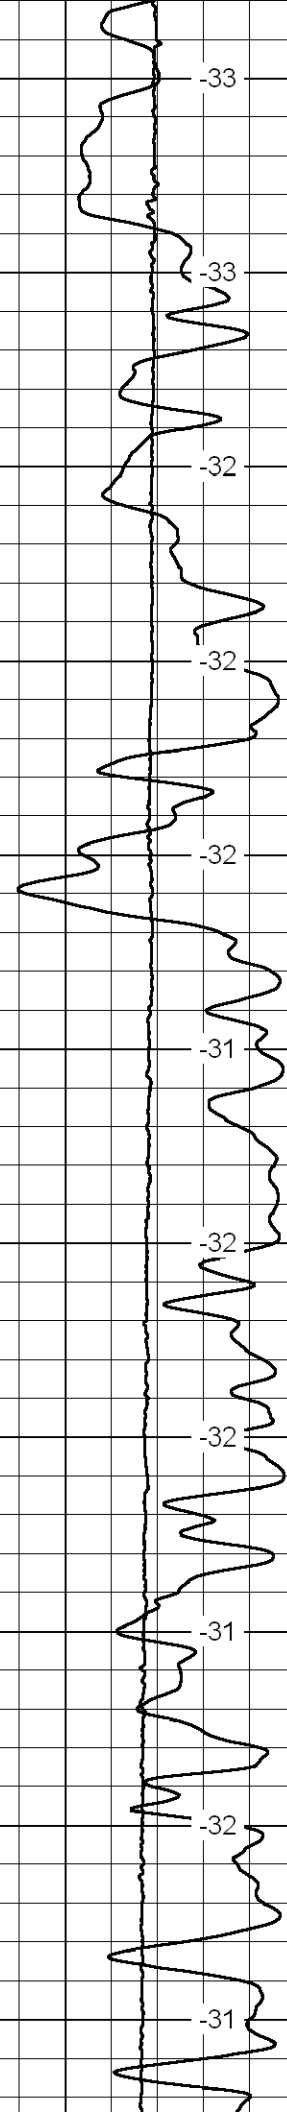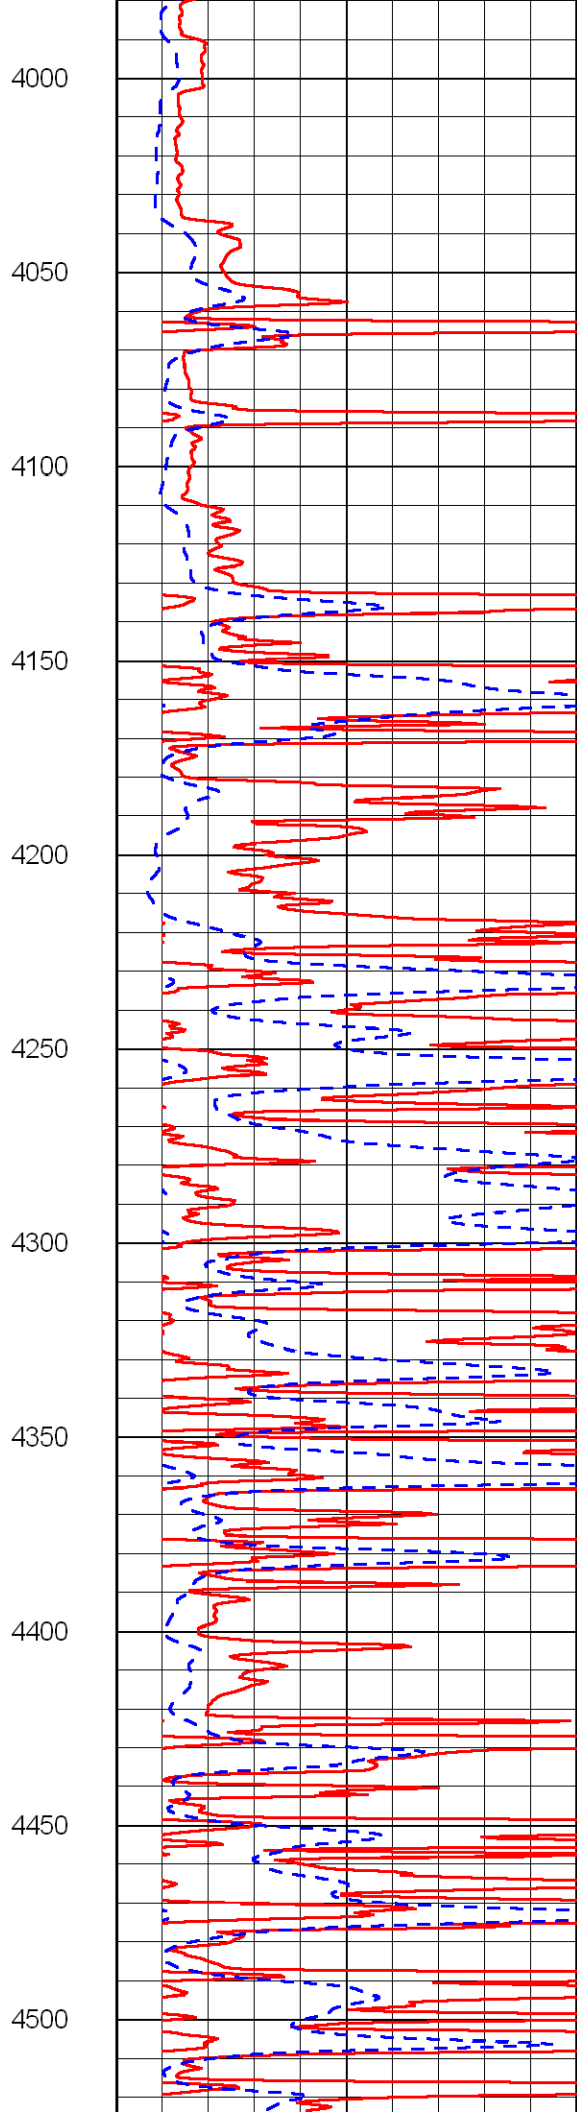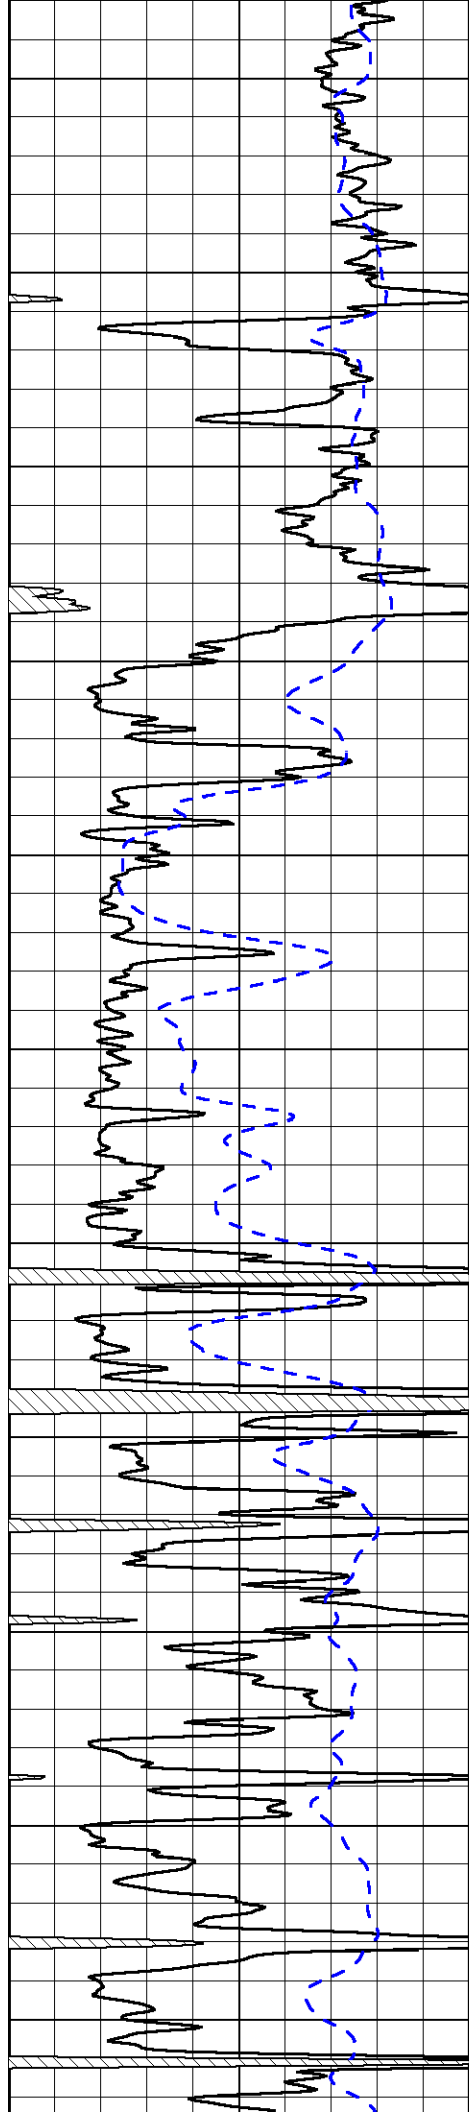

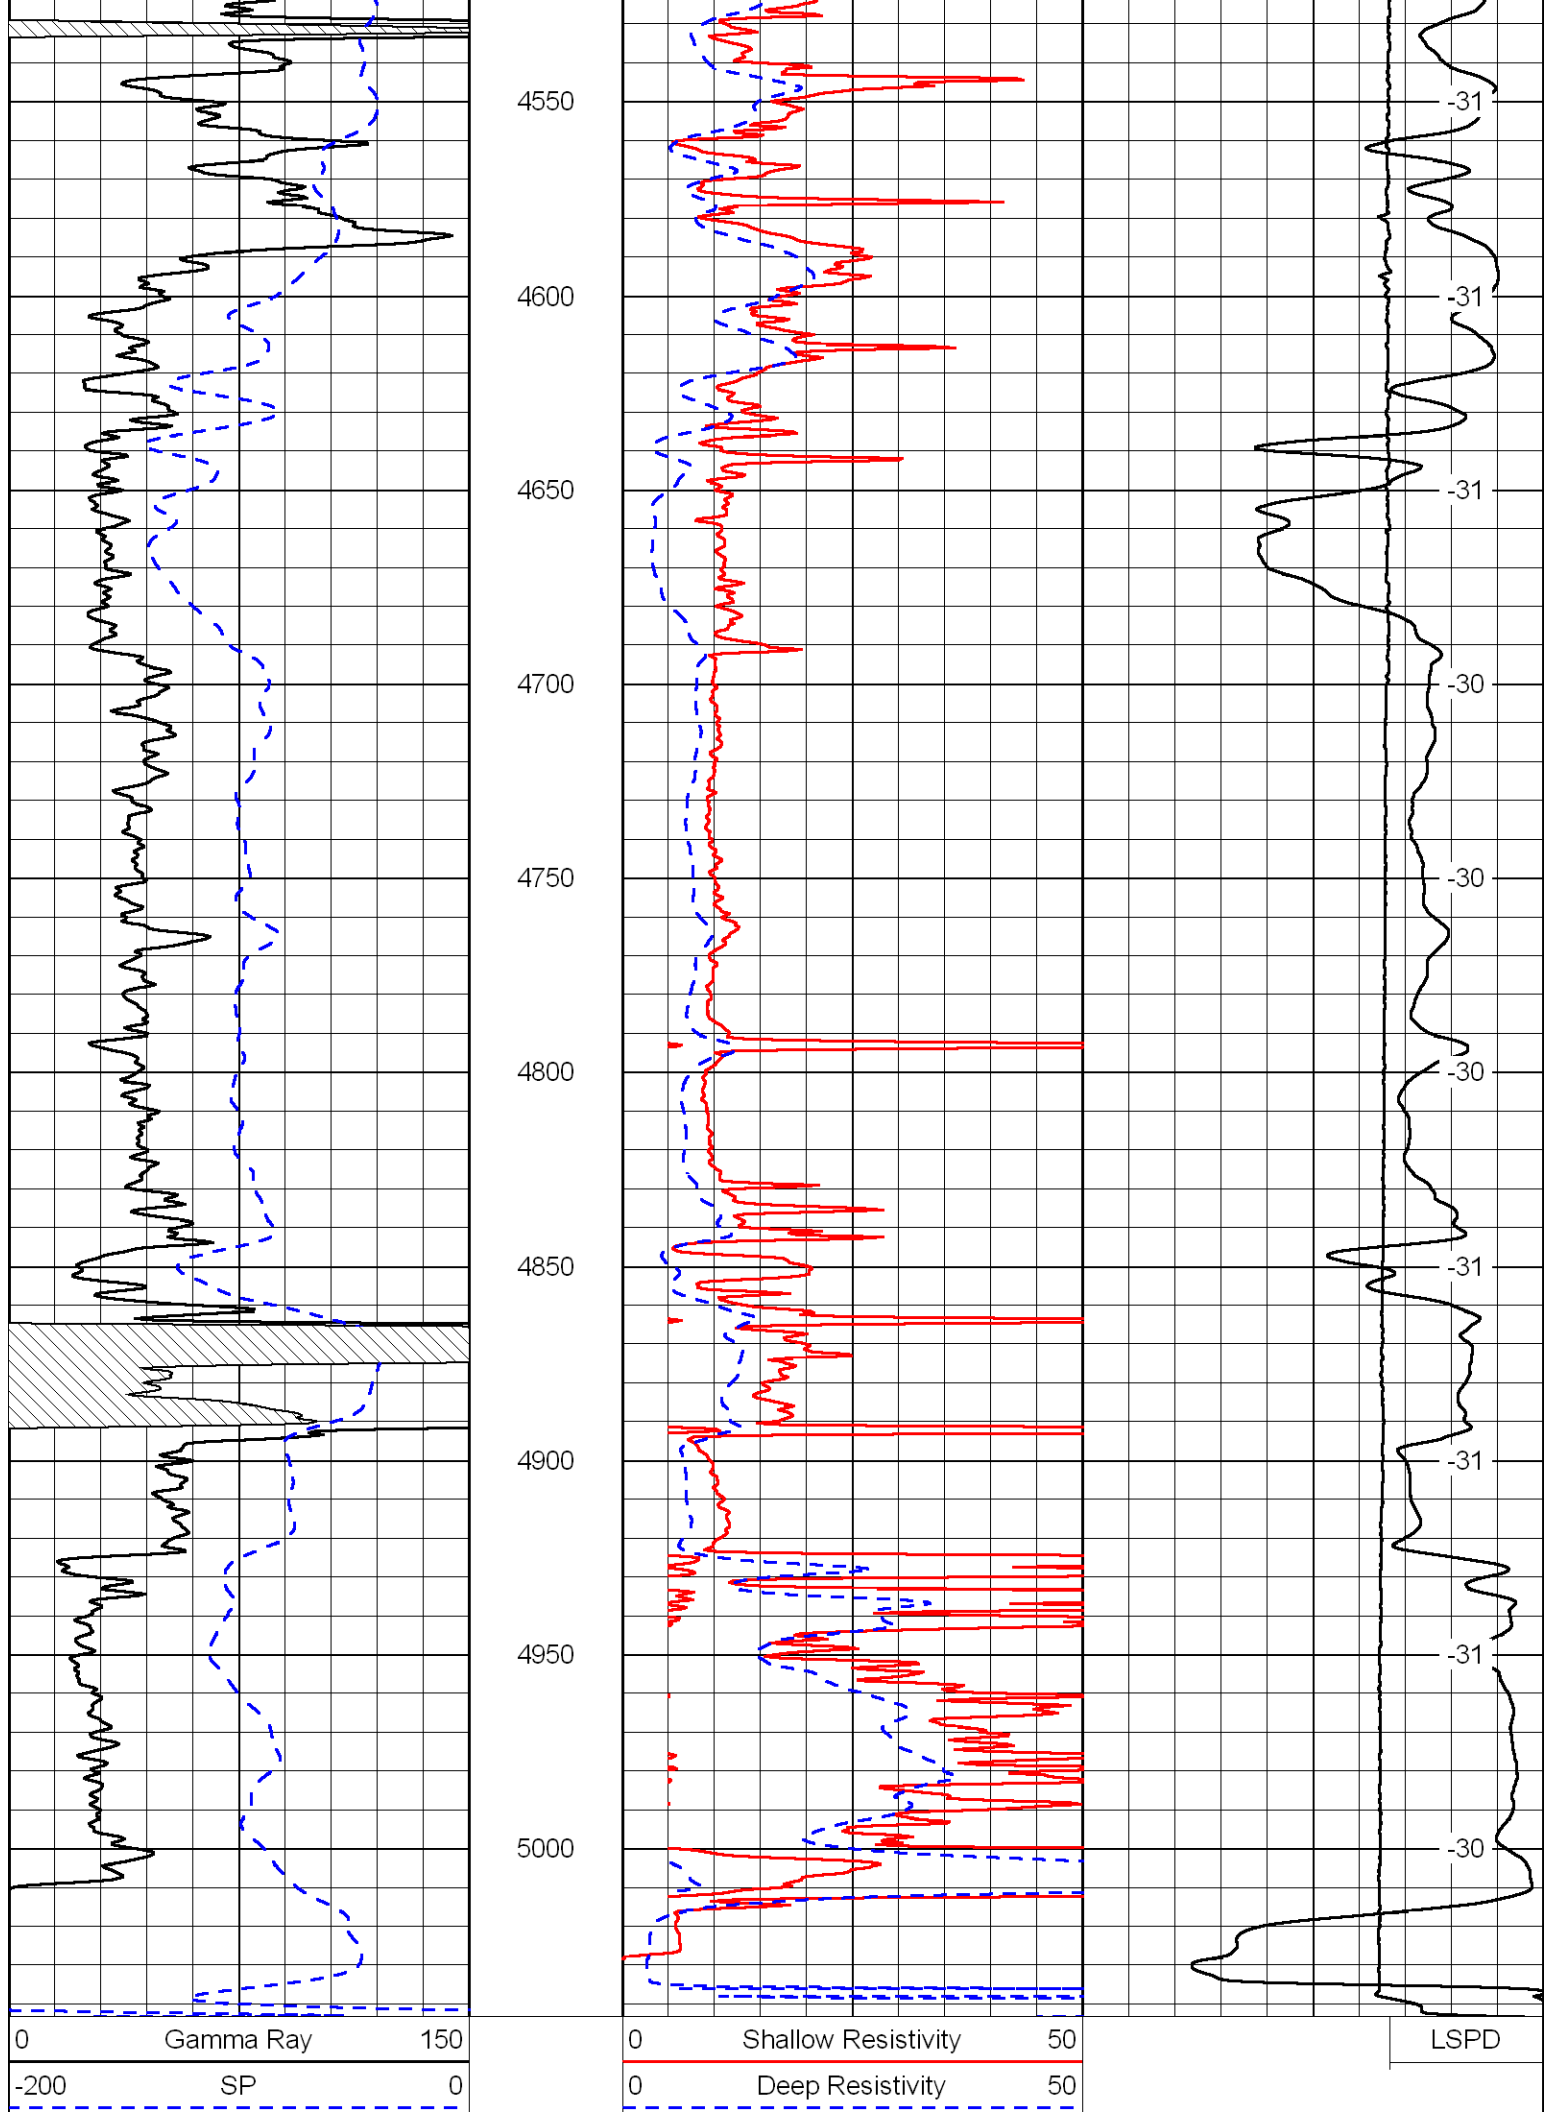


1000	Conductivity	0
15000	Line Tension	0
50	Shallow Resistivity	500
50	Deep Resistivity	500

Database File: n10hd.db
 Dataset Pathname: DIL/n10stk
 Presentation Format: dil
 Dataset Creation: Sat Jul 09 19:06:24 2011
 Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
-160	RXO/RT	40
-200	SP	0

0.2	Deep Resistivity	2000
0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
10000	Line Tension	0


LSPD

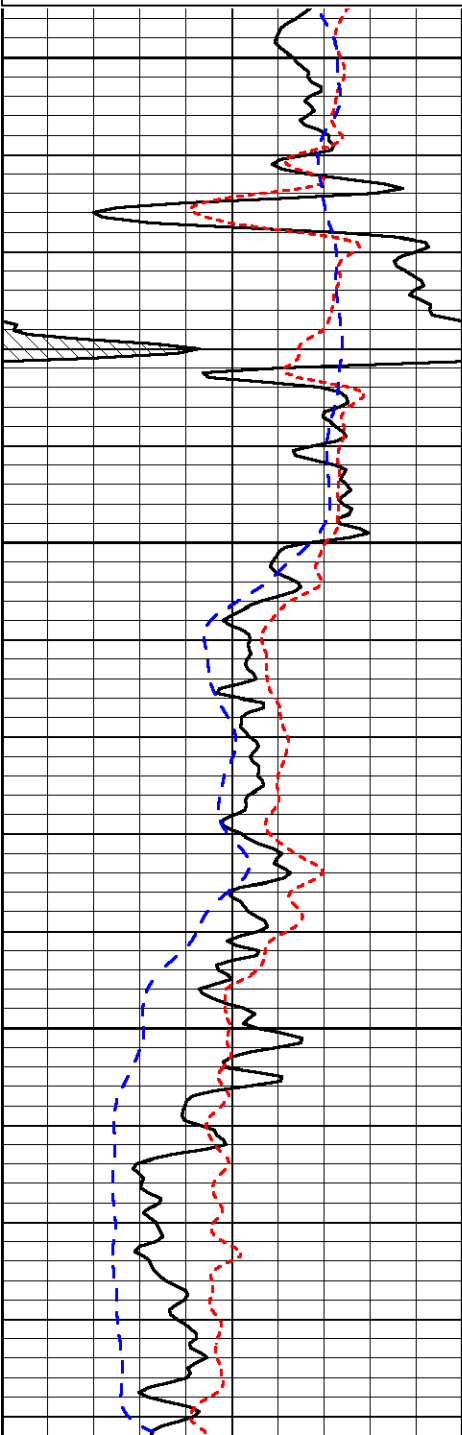

3400

3450


3500

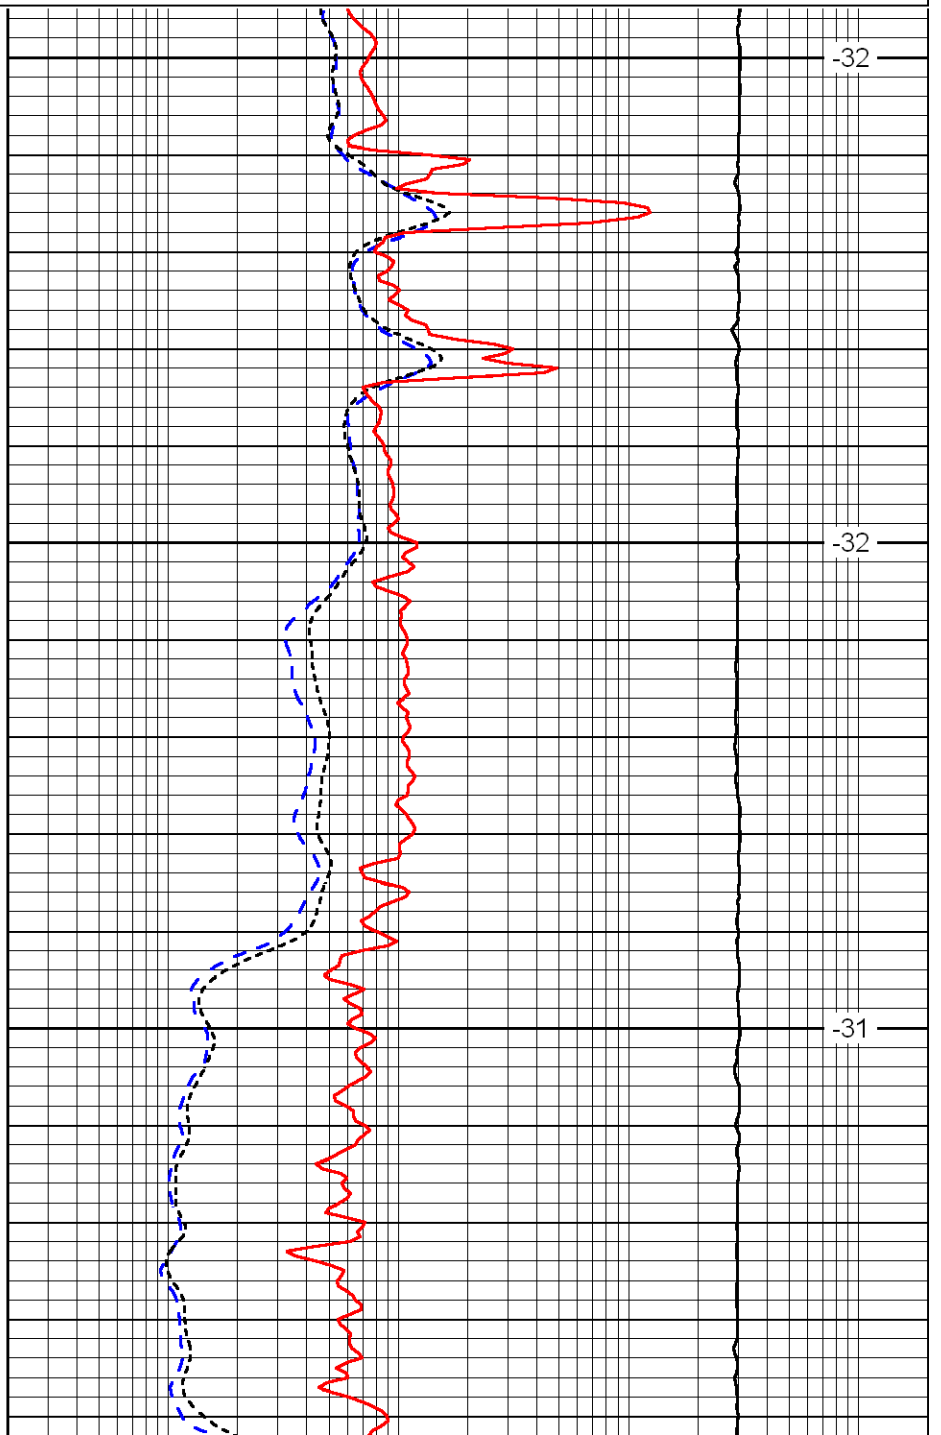

-32

-32

-31

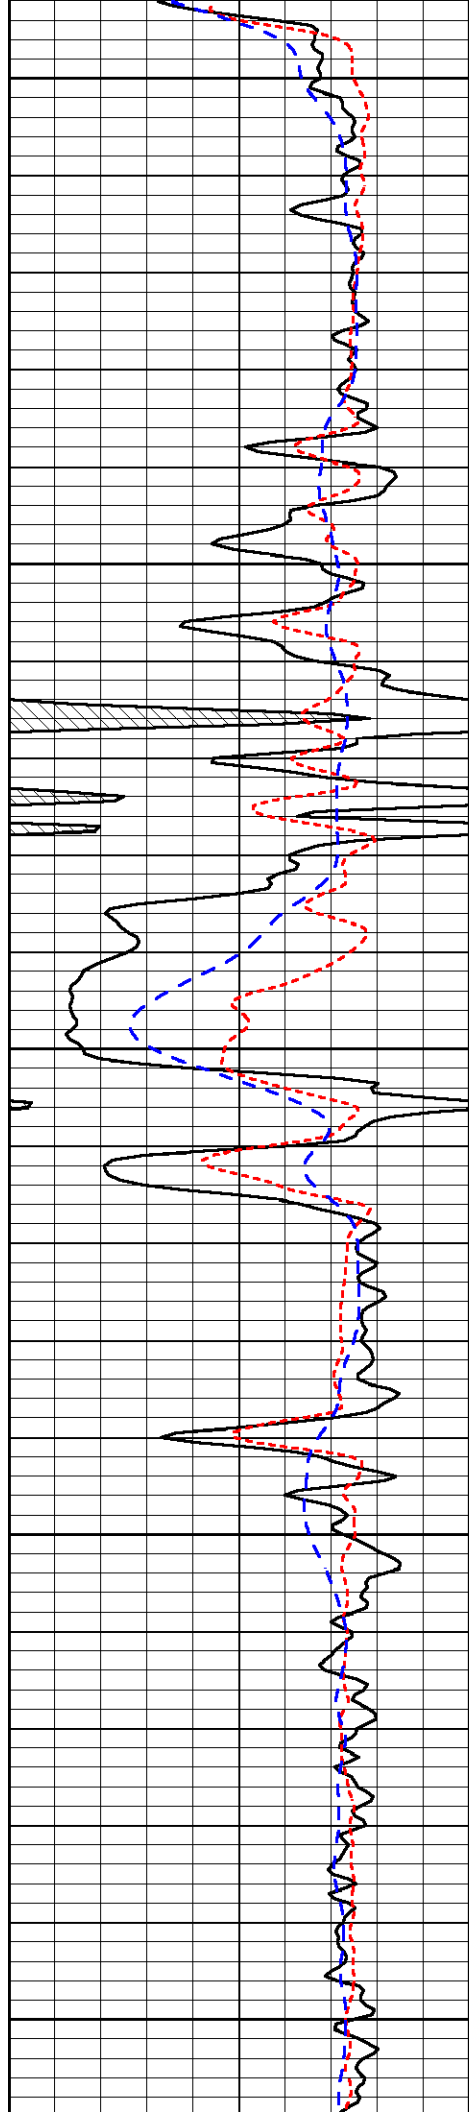


3550

3600

3650

3700

3750

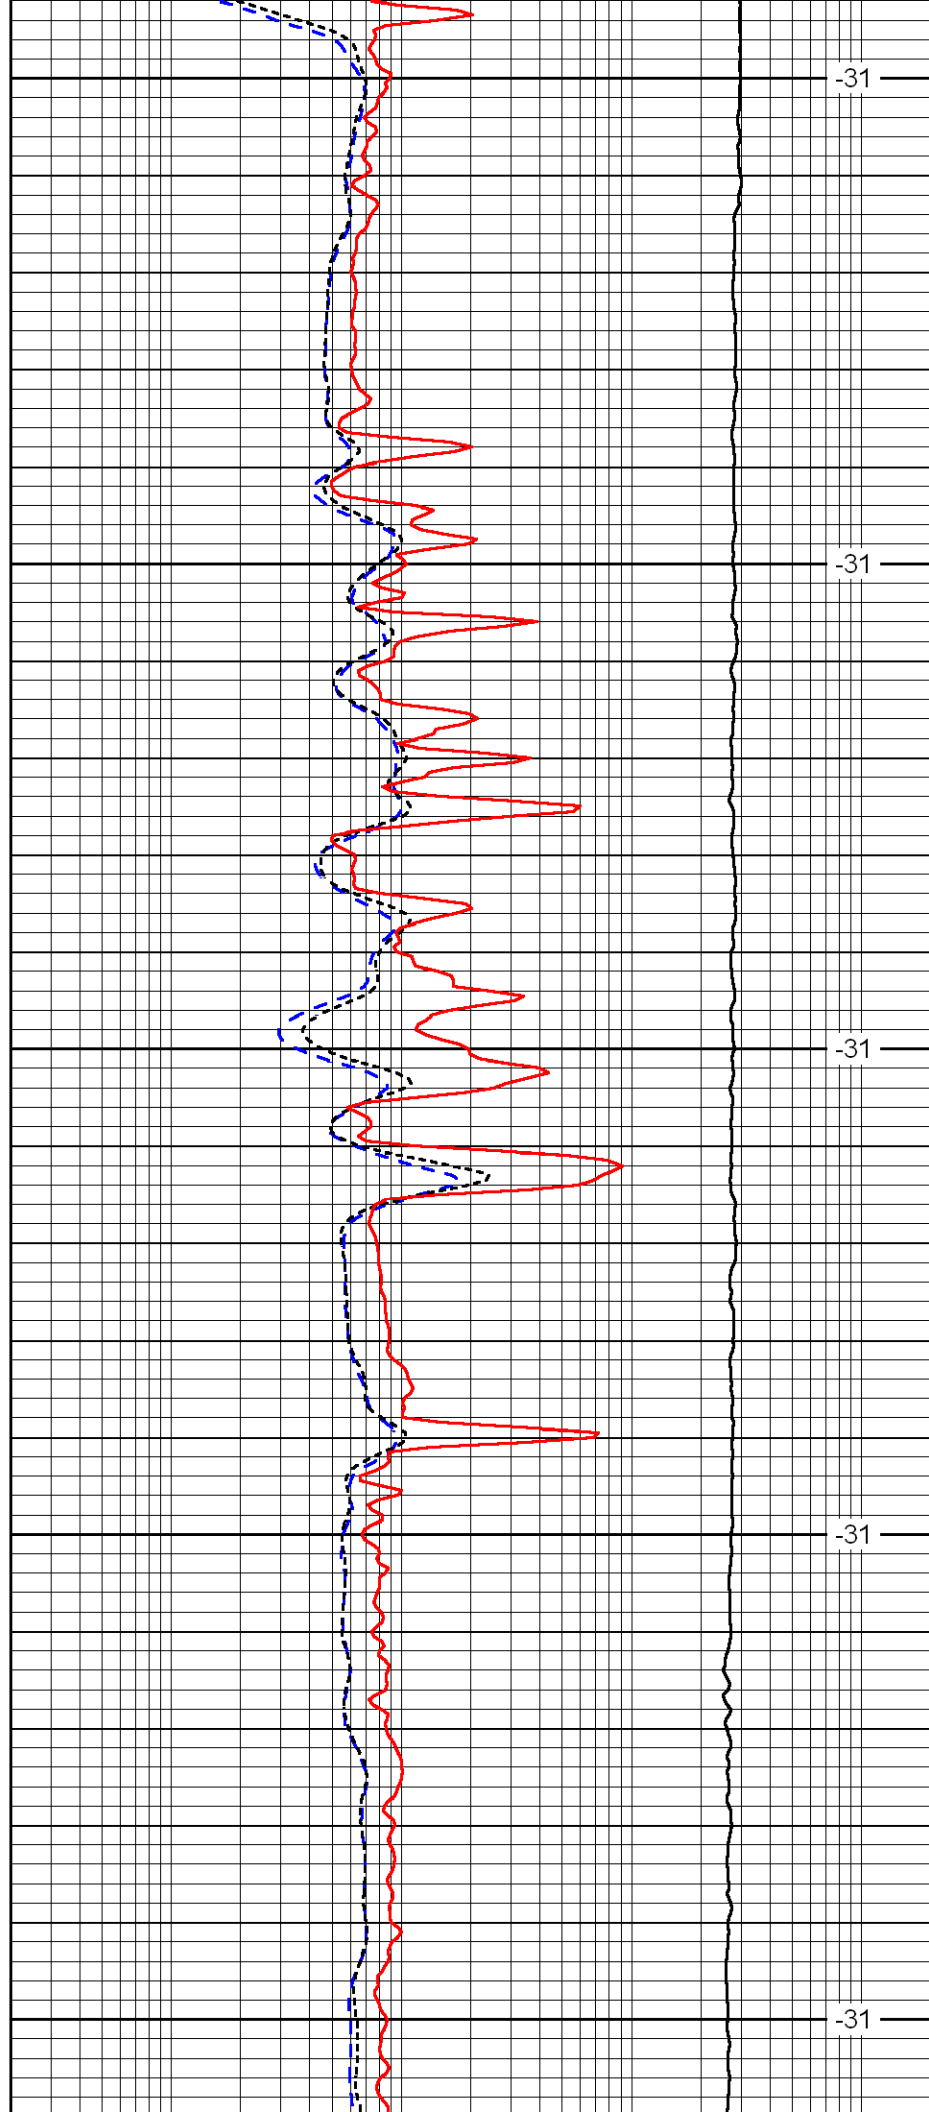


-31

-31

-31

-31

-31

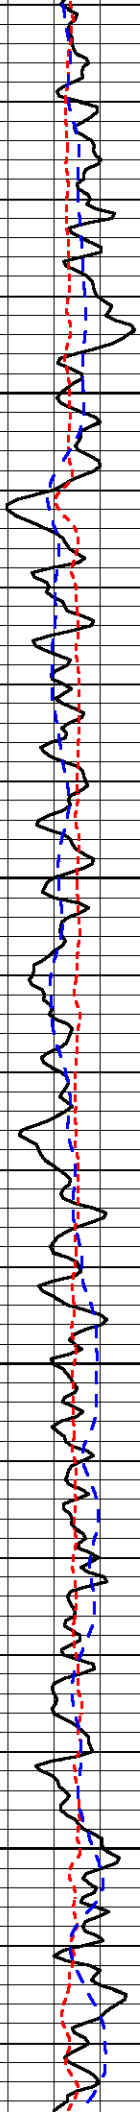


3800

3850

3900

3950



-31

-31

-31

-31




-31

-31

-31

-31

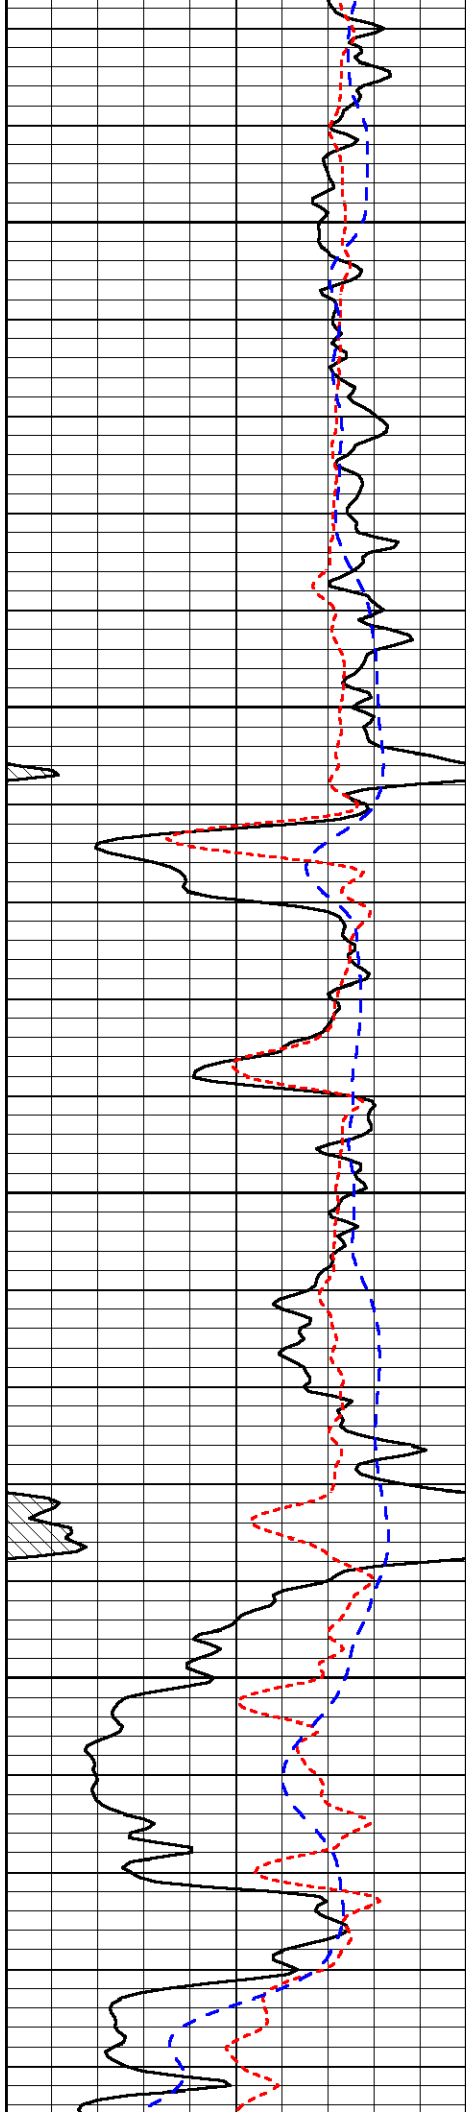


4000

4050

4100

4150

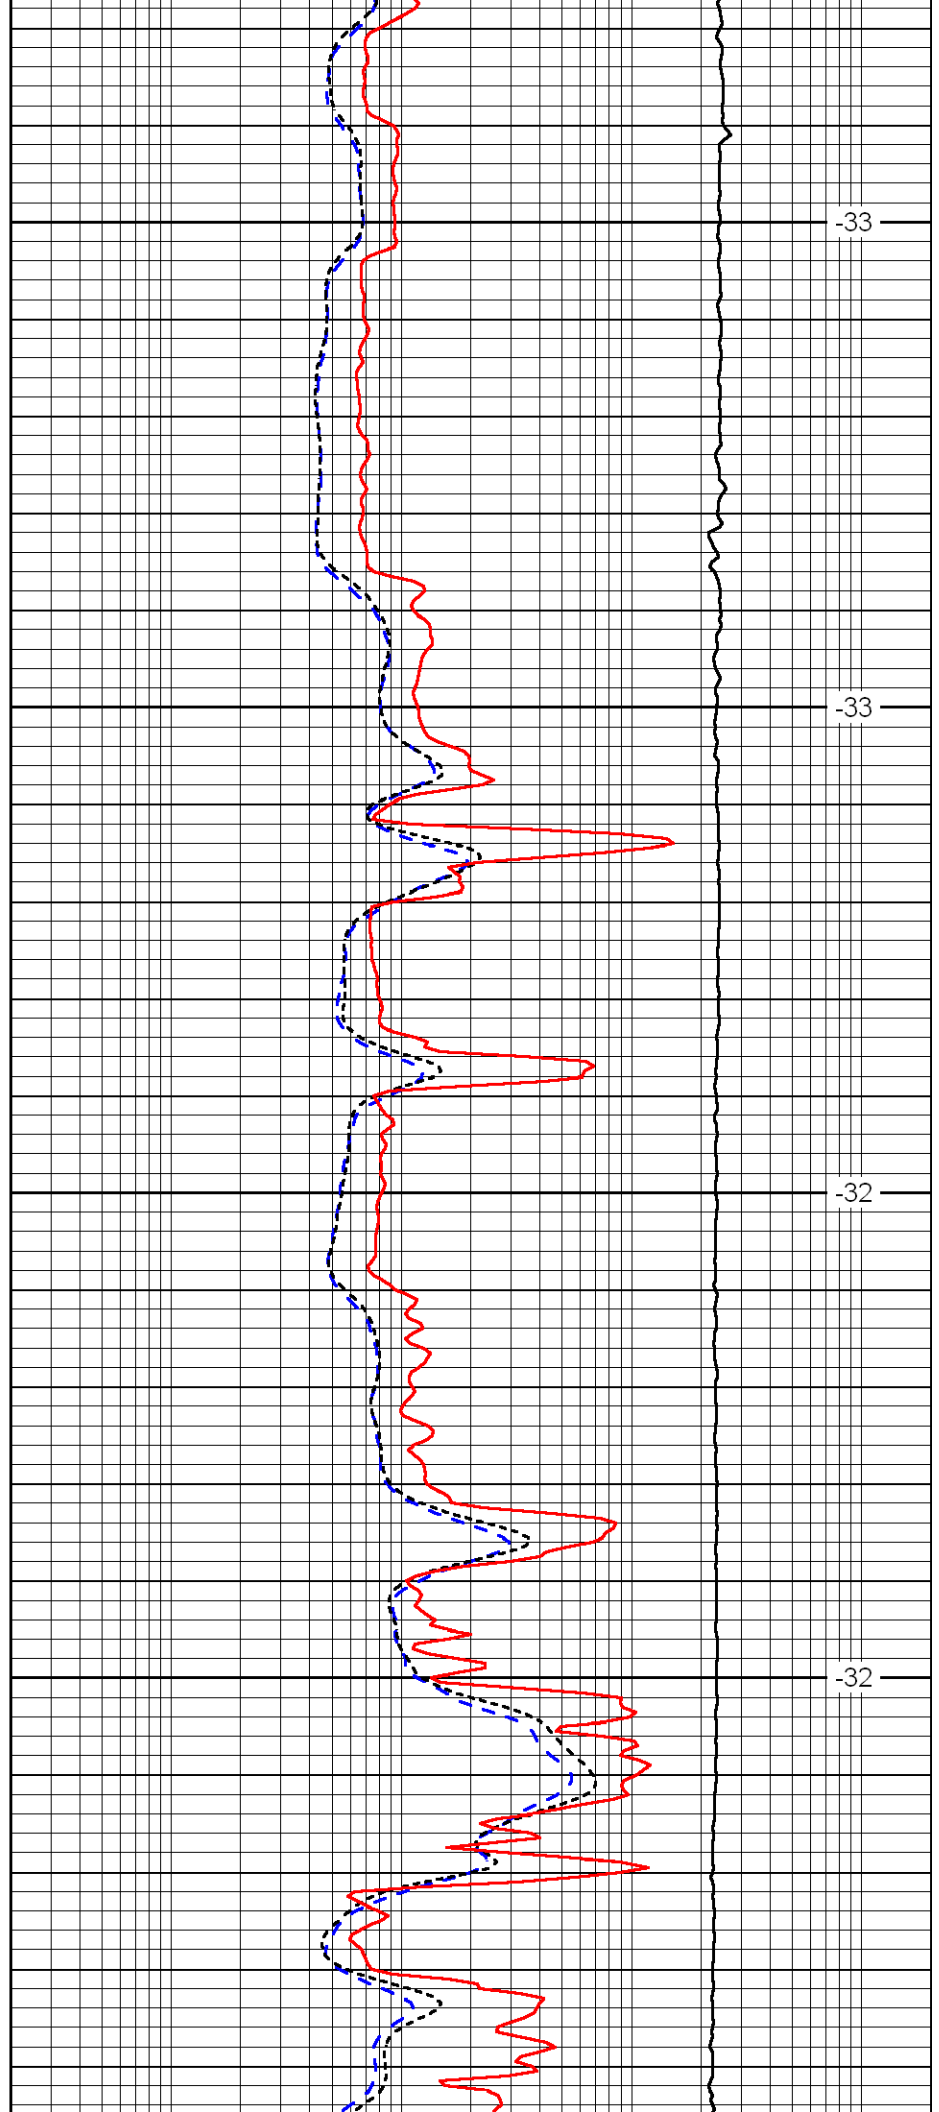


-33

-33

-32

-32

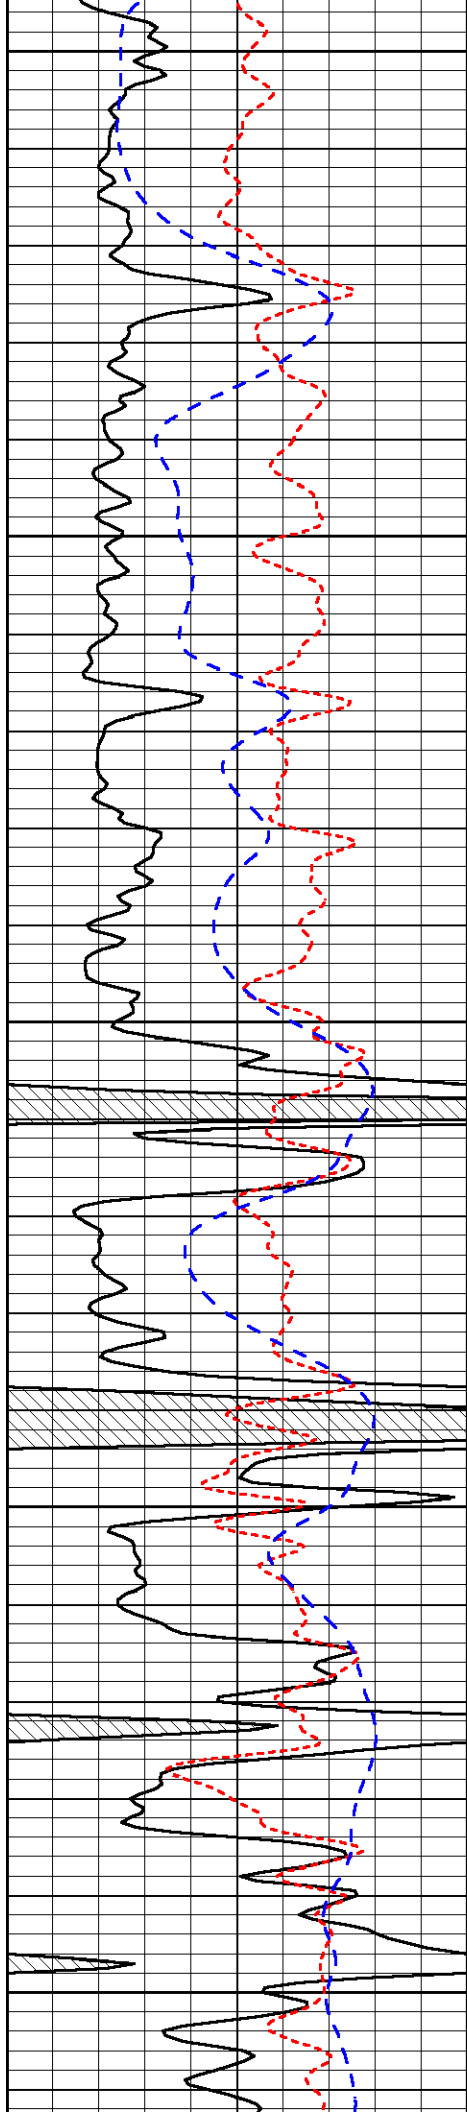


4200

4250

4300

4350

4400

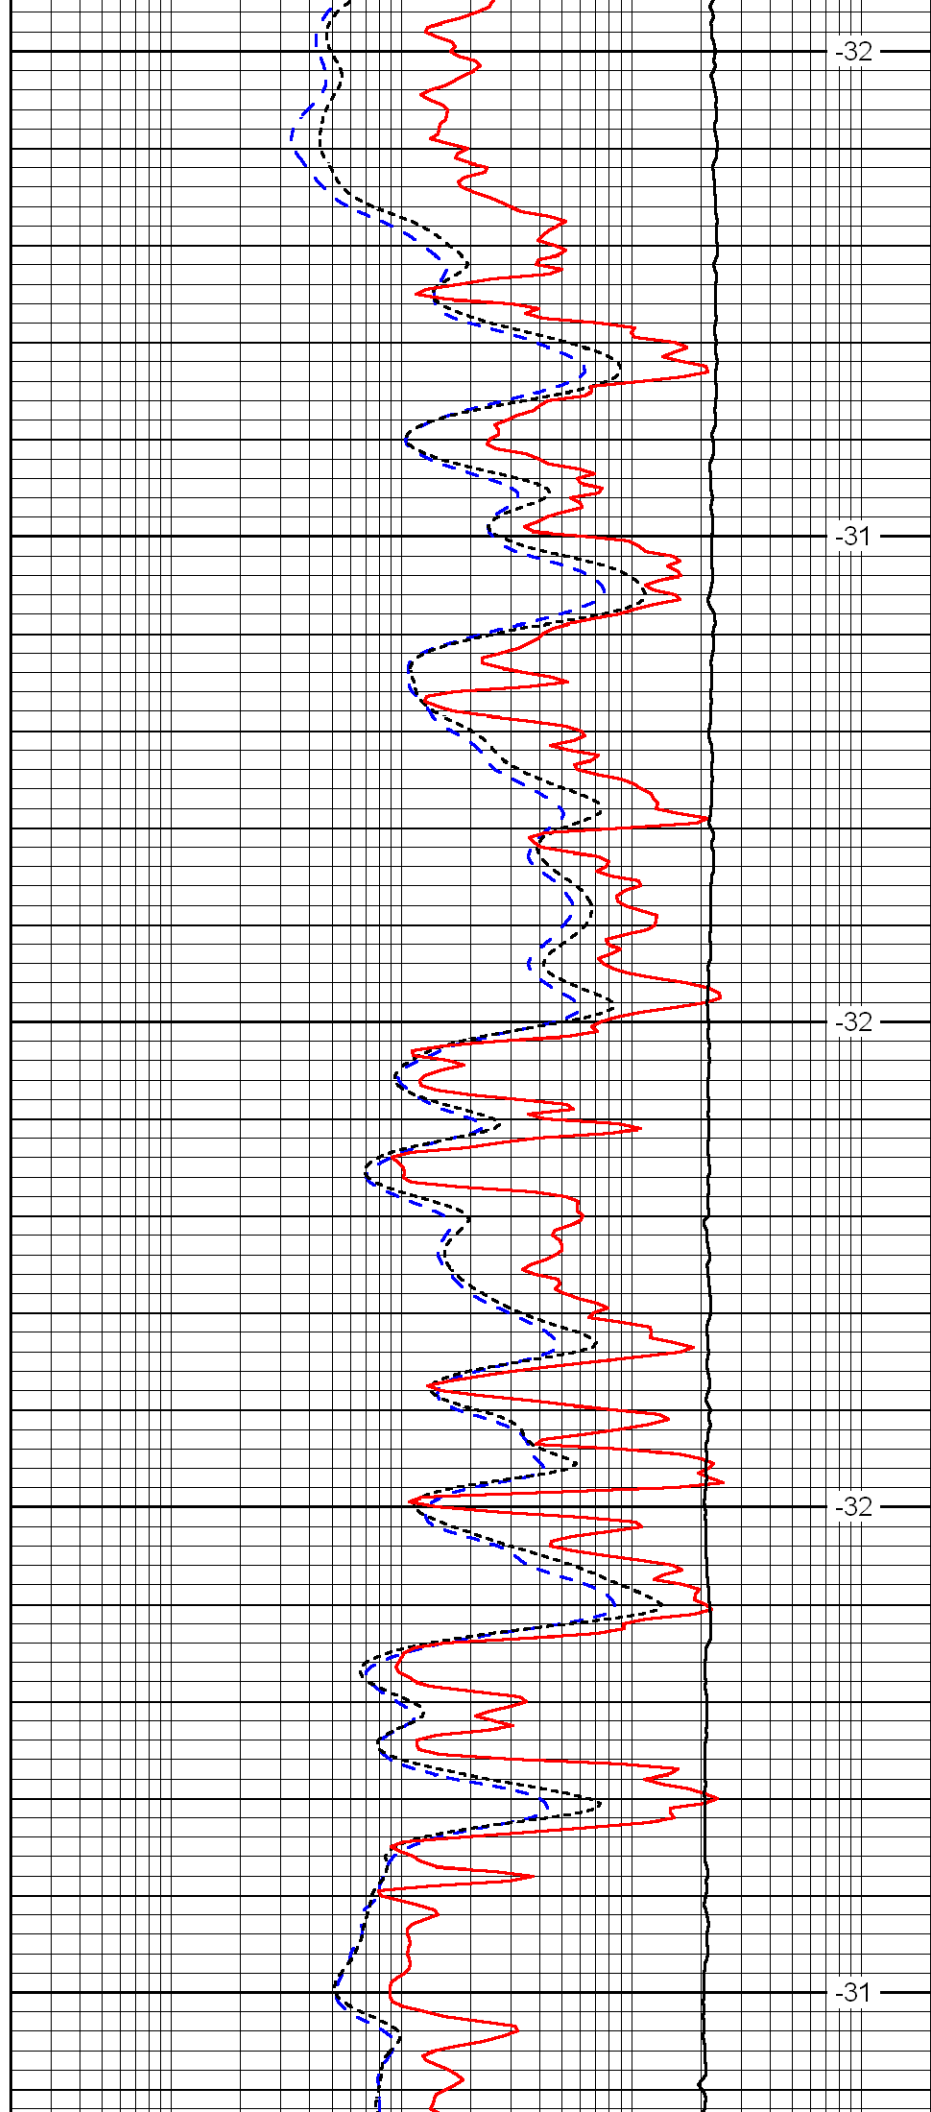


-32

-31

-32

-32

-31

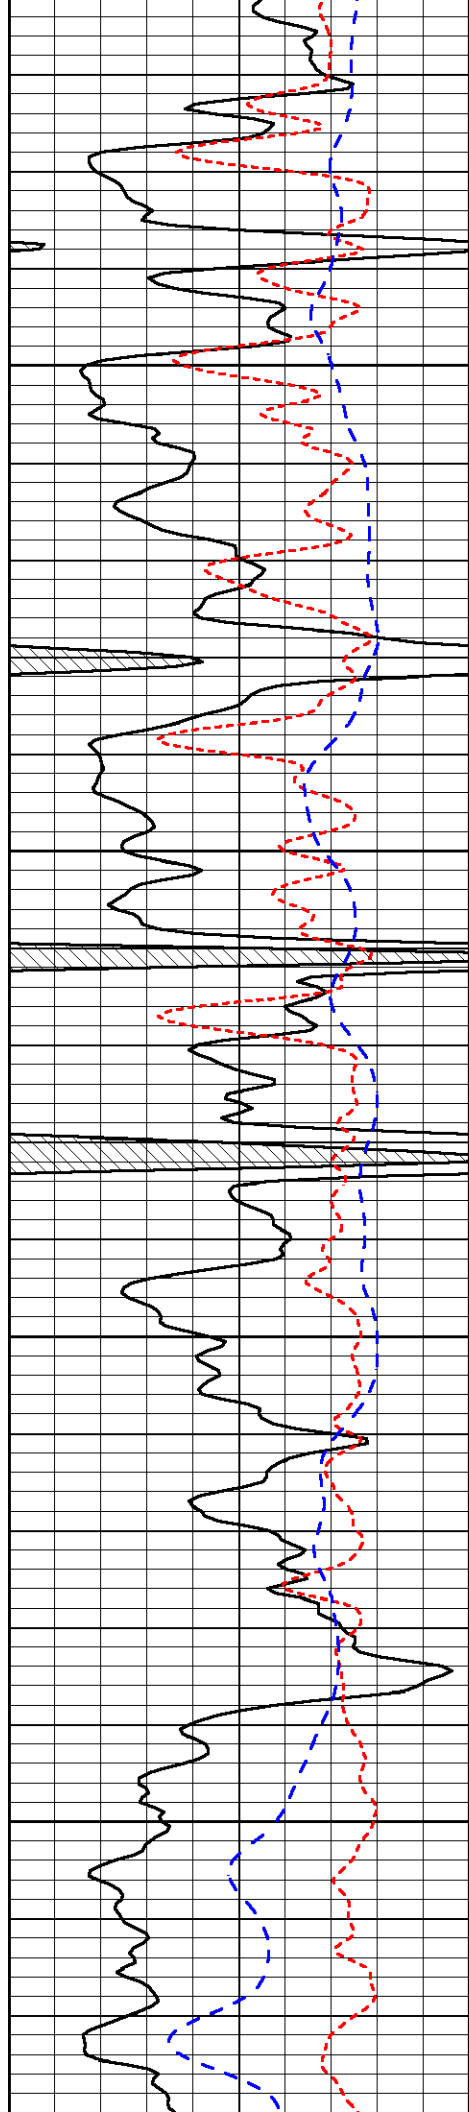


4450

4500

4550

4600

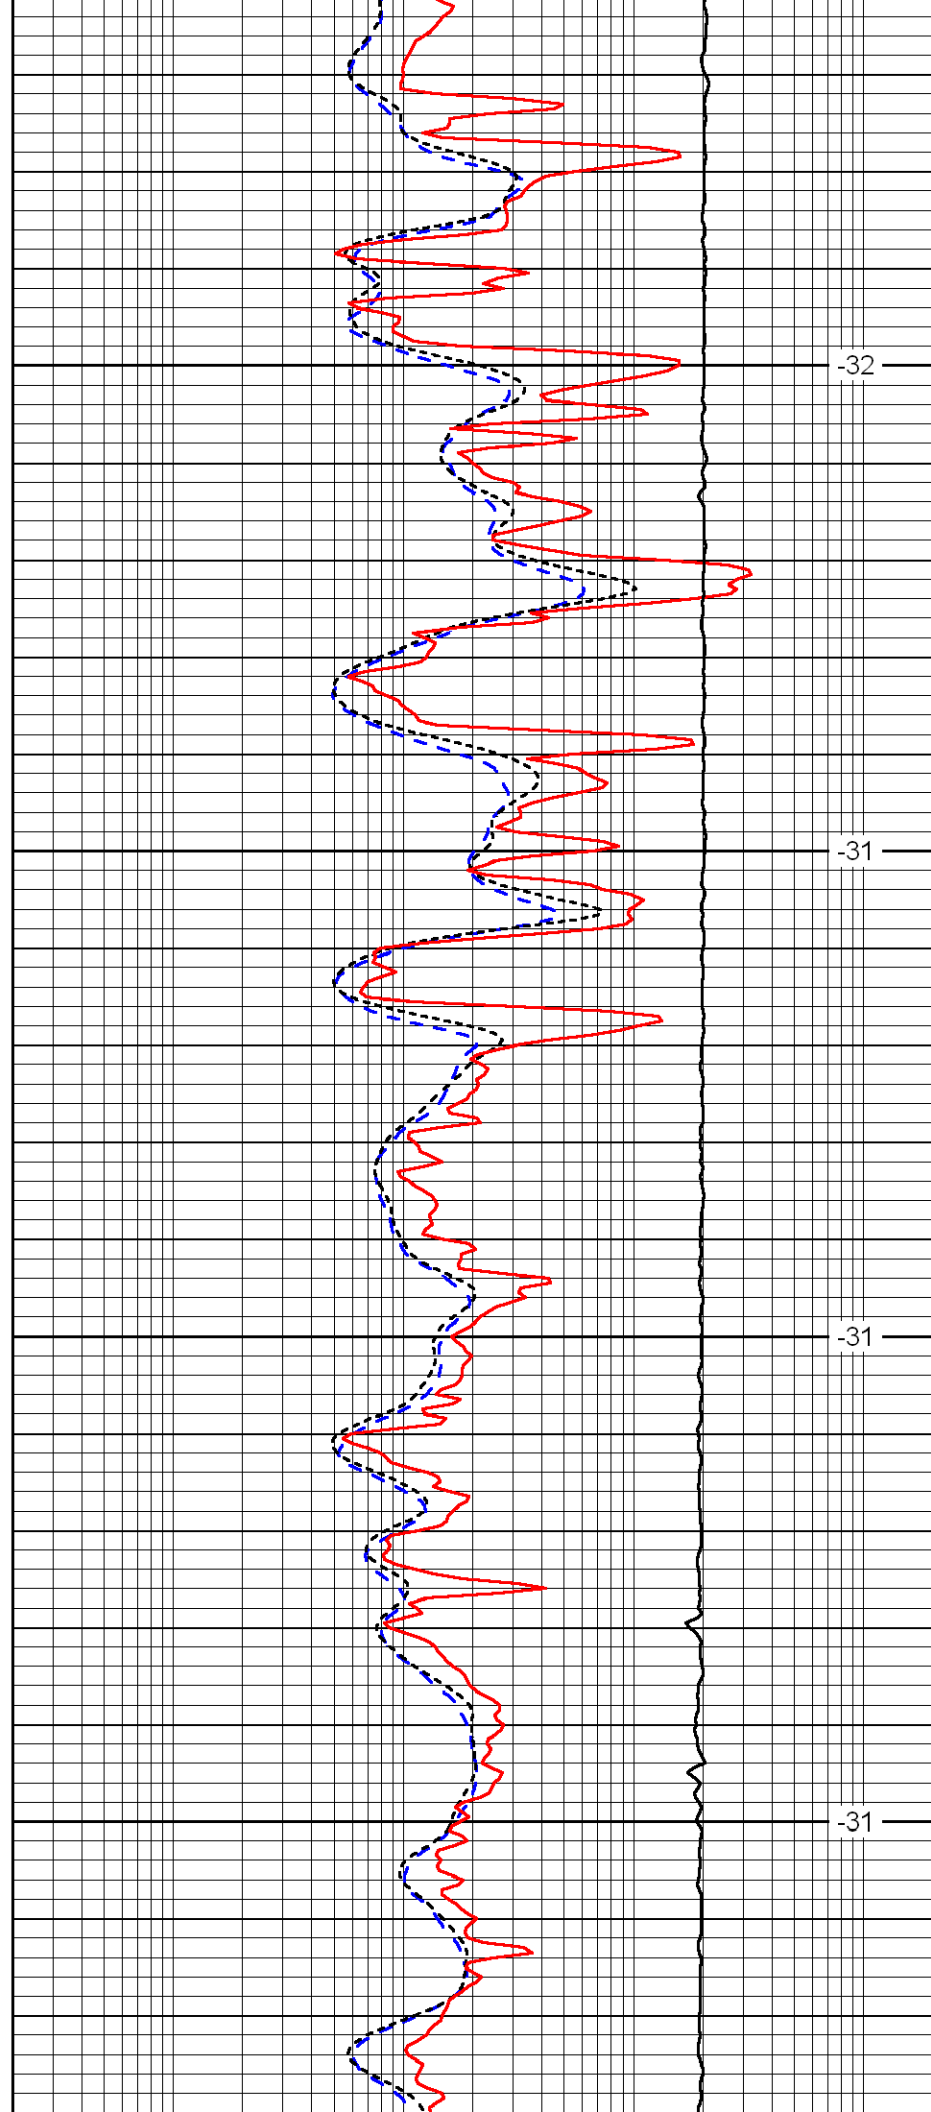


-32

-31

-31

-31

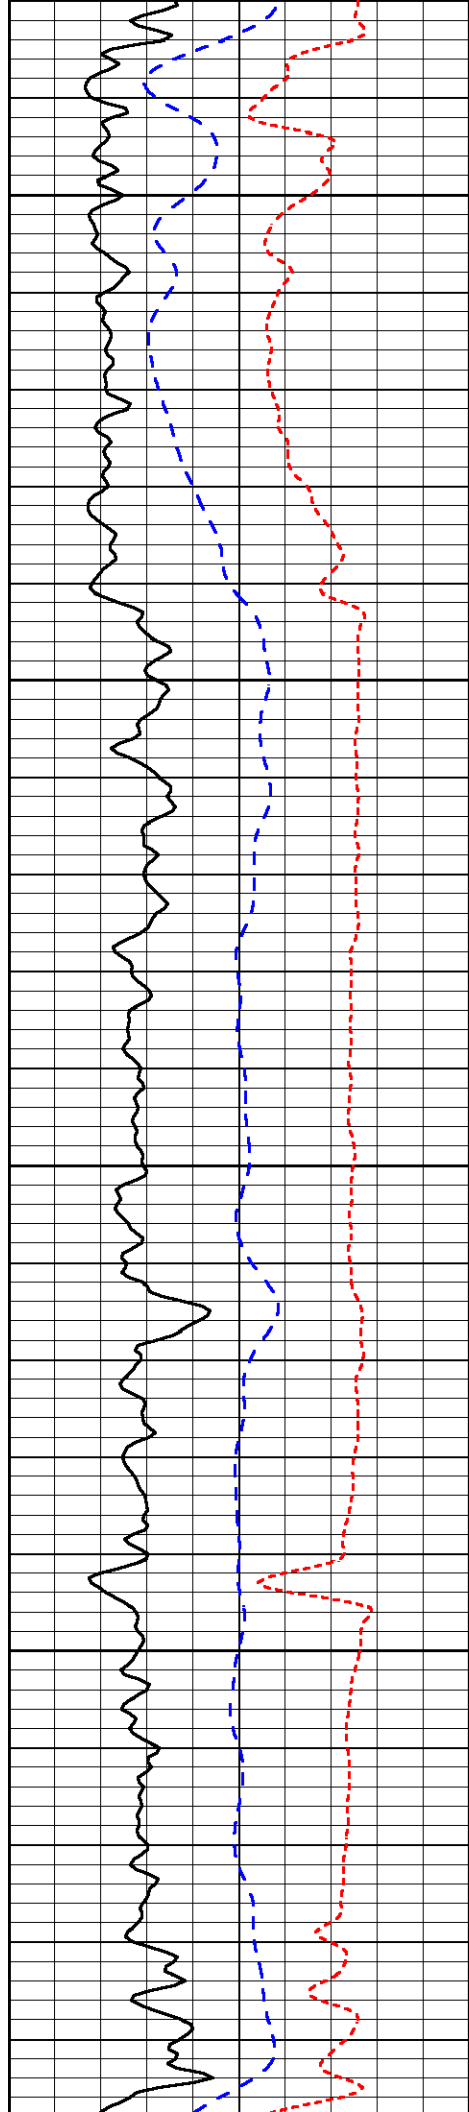


4650

4700

4750

4800

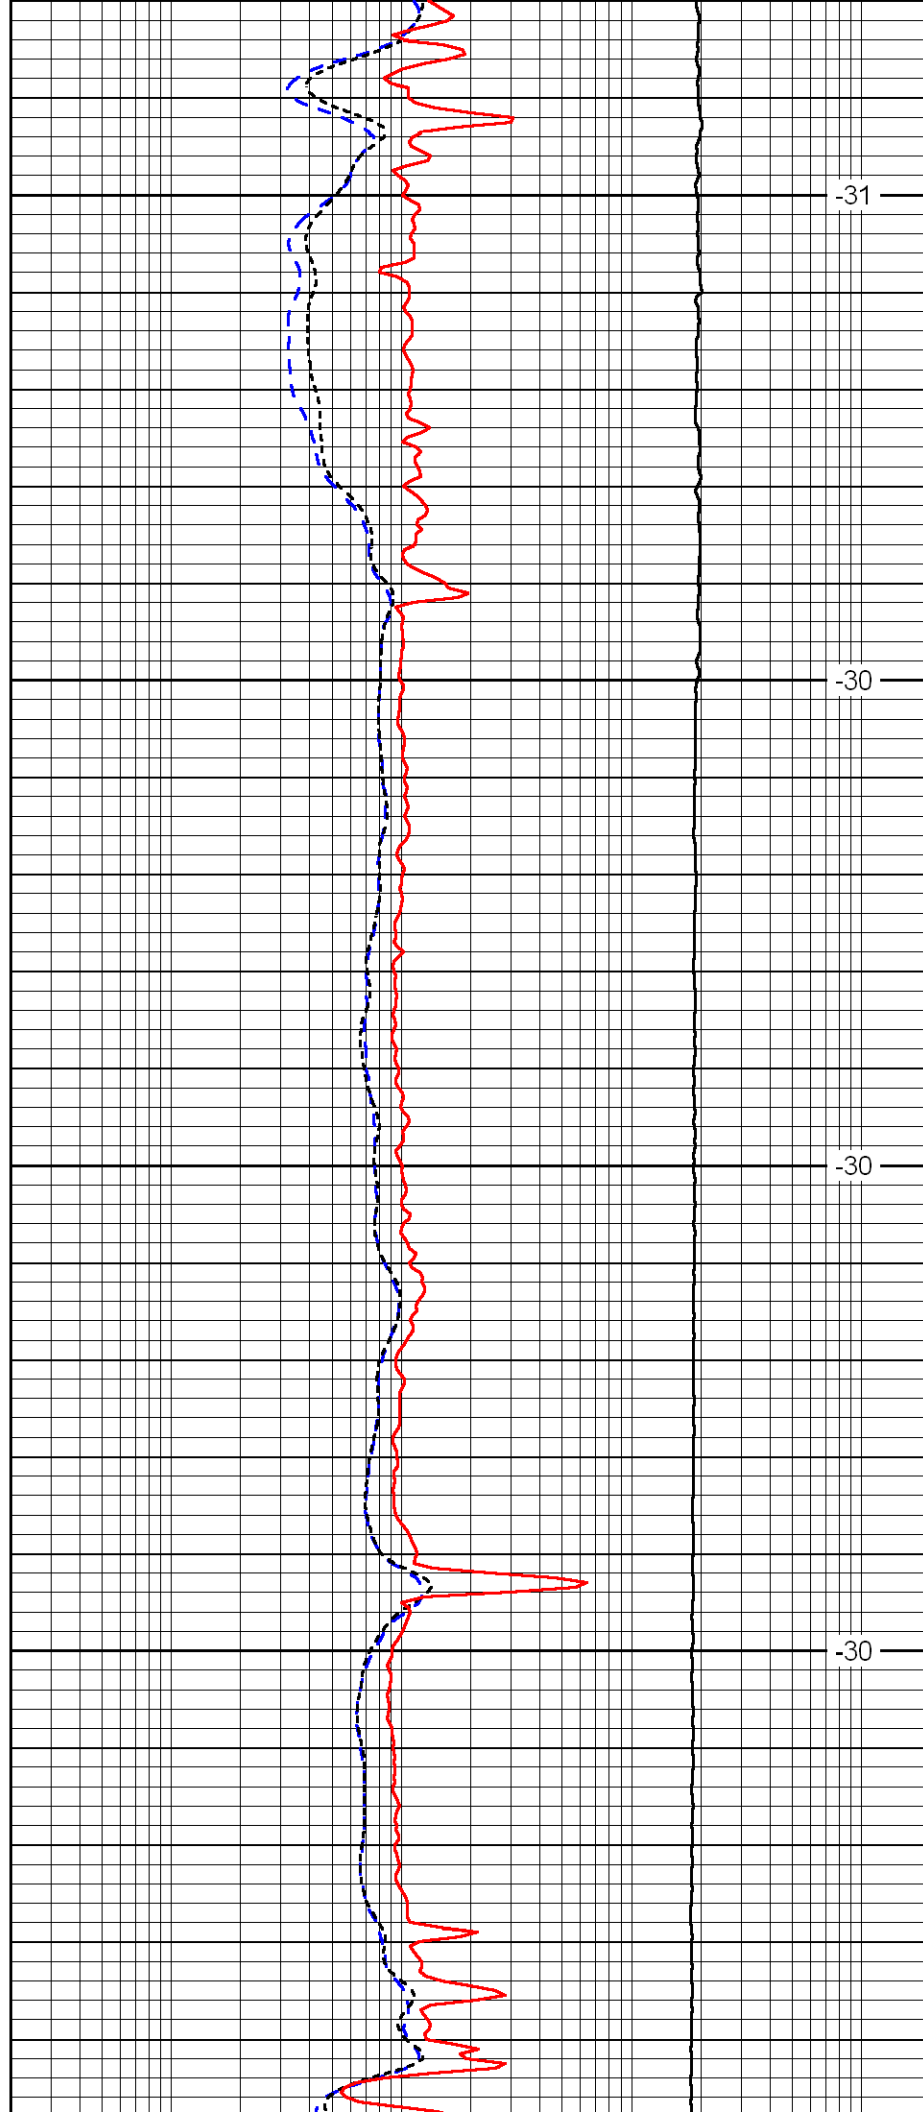


-31


-30

-30

-30

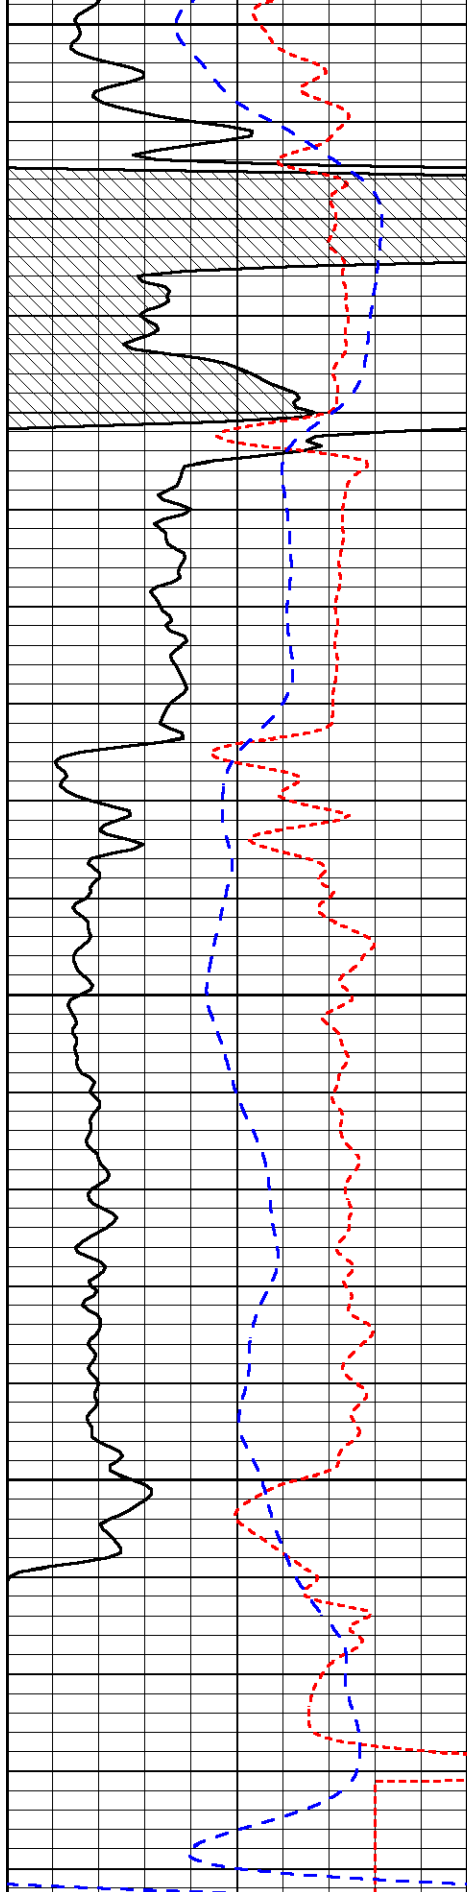

0	Gamma Ray	150
-160	RXO/RT	40
-200	SP	0

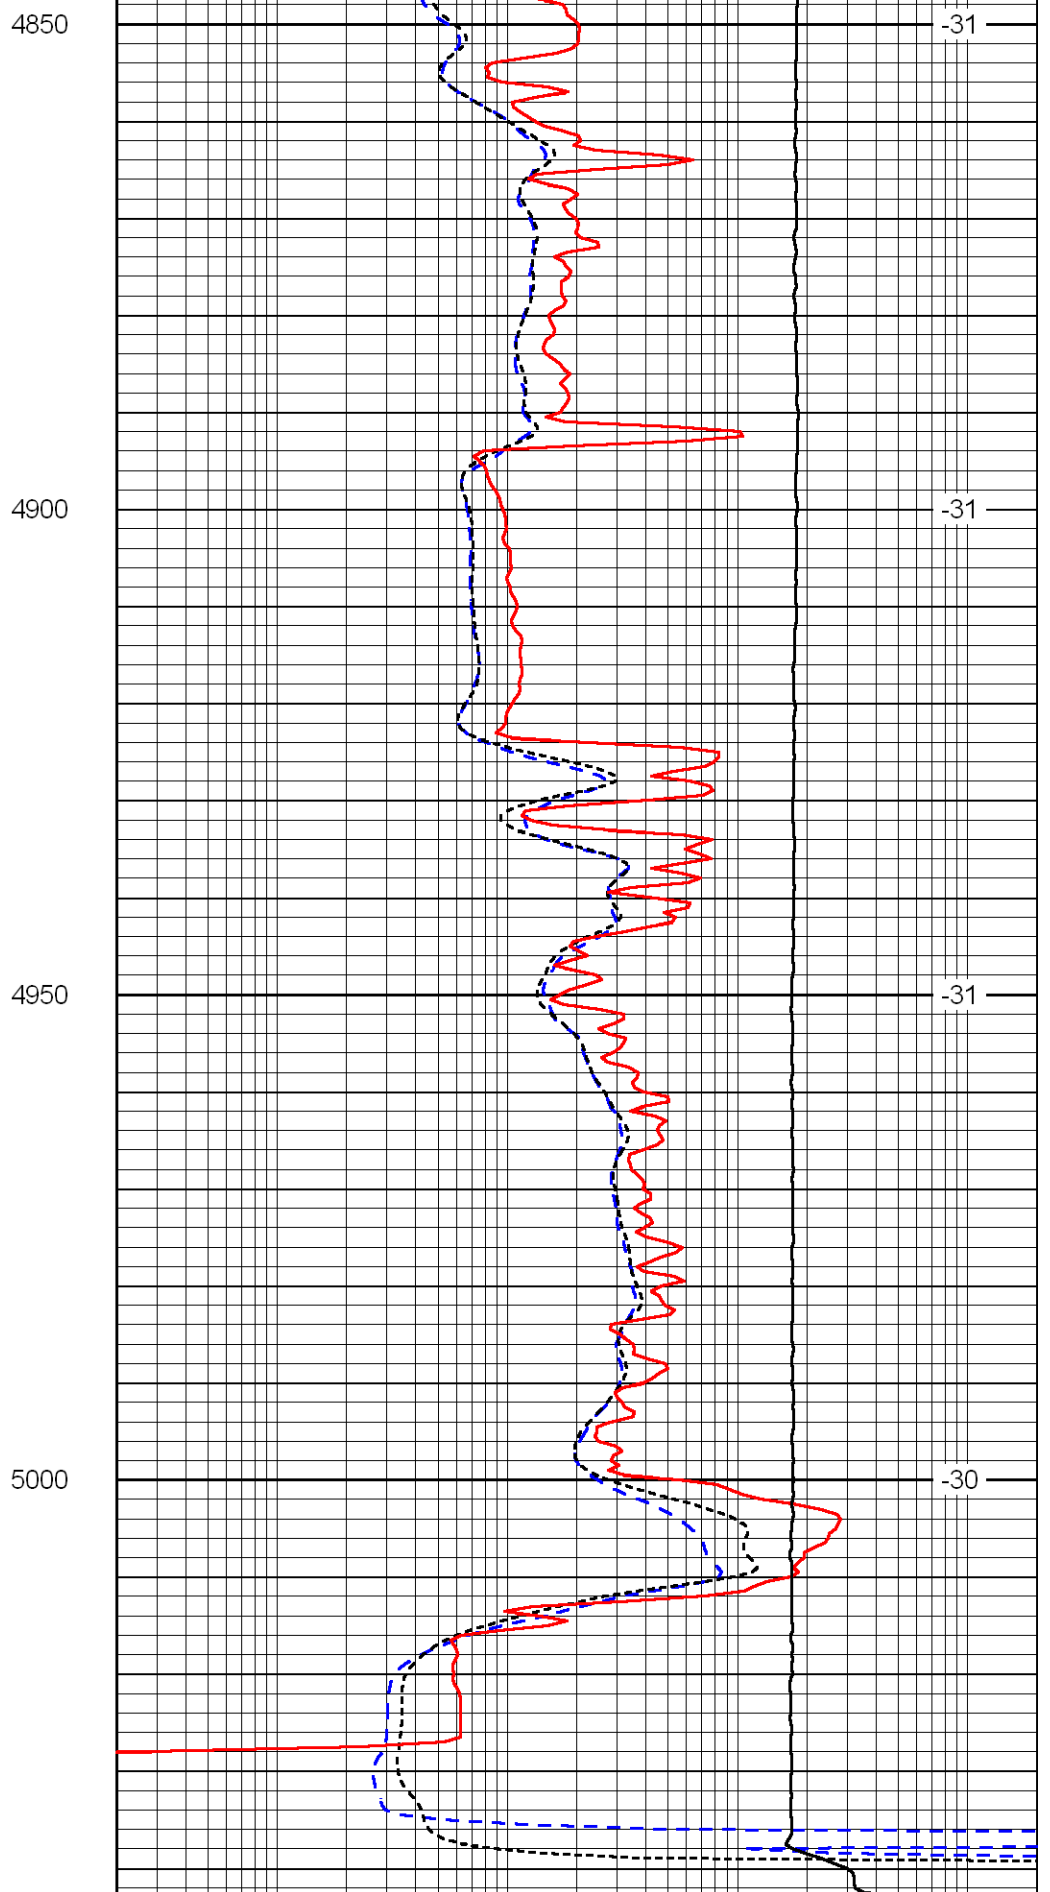

0.2	Deep Resistivity	2000
0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
10000	Line Tension	0

