

HALLIBURTON

MICRO LOG

COMPANY		VAL ENERGY, INC.	
WELL		TALBOT 7-9	
FIELD		SOUTH RHODES	
COUNTY		BARBER	
STATE		KANSAS	
Permanent Datum	GL	Elev. 1337.0 ft	Elev. K.B. 1347.0 ft
Log measured from	KB	10.0 ft above perm. Datum	D.F. 1346.0 ft
Drilling measured from	KB		GL. 1337.0 ft
Date	15-May-12		
Run No.	ONE		
Depth - Driller	4840.00 ft		
Depth - Logger	4839.0 ft		
Bottom - Logged Interval	4817.0 ft		
Top - Logged Interval	3400.0 ft		
Casing - Driller	8.625 in @ 222.0 ft		@
Casing - Logger	224.0 ft		@
Bit Size	7.875 in		@
Type Fluid in Hole	WATER BASED MUD		
Density	9.3 ppq	10.00 s/qt	
PH	11.00 pH	1.0 pptn	
Source of Sample	FLOW LINE		
Rm @ Meas. Temperature	0.170 ohmm	@ 75.00 degF	@
Rmf @ Meas. Temperature	0.14 ohmm	@ 75.00 degF	@
Rmc @ Meas. Temperature	0.200 ohmm	@ 75.00 degF	@
Source Rmf	MEAS	MEAS	
Rm @ BHT	0.11 ohmm	@ 115.0 degF	@
Time Since Circulation			
Time on Bottom	15-May-12 23:45		
Max. Rec. Temperature	115.0 degF	@ 4839.0 ft	@
Equipment	1054696	LIBERAL	
Recorded By	T. HYDE		
Witnessed By	S. VANBUSKIRK		

.....
 Fold here

Service Ticket No.: 9518306		API Serial No.: 15-007-23869		PGM Version: WL INSITE R3.4.2 (Build 2)			
CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE				RESISTIVITY SCALE CHANGES			
Date	Sample No.			Type Log	Depth	Scale Up Hole	Scale Down Hole
Depth-Driller							
Type Fluid in Hole							
Density	Viscosity						
Ph	Fluid Loss						
Source of Sample				RESISTIVITY EQUIPMENT DATA			
Rm @ Meas. Temp	@	@		Run No.	Tool Type & No.	Pad Type	Tool Pos.
Rmf @ Meas. Temp.	@	@		ONE	MICRO	RUBBER	ADJ.
Rmc @ Meas. Temp.	@	@			M296		
Source Rmf	Rmc						
Rm @ BHT	@	@					
Rmf @ BHT	@	@					
Rmc @ BHT	@	@					
EQUIPMENT DATA							
GAMMA		ACOUSTIC		DENSITY		NEUTRON	
Run No.	ONE	Run No.		Run No.		Run No.	
Serial No.	11048627	Serial No.		Serial No.		Serial No.	
Model No.	GTET	Model No.		Model No.		Model No.	
Diameter	3.625"	No. of Cent.		Diameter		Diameter	
Detector Model No.	T-102	Spacing		Log Type		Log Type	
Type	SCINT			Source Type		Source Type	
Length	8"	LSA [Y/N]		Serial No.		Serial No.	
Distance to Source	10'	FWDA [Y/N]		Strength		Strength	
LOGGING DATA							
GENERAL		GAMMA		ACOUSTIC		DENSITY	

GENERAL

GAMMA

ACOUSTIC

DENSITY

NEUTRON

Run No.	Depth		Speed ft/min	Scale		Scale		Matrix	Scale		Matrix	Scale		Matrix
	From	To		L	R	L	R		L	R		L	R	
ONE	4839	3400	REC	0	150									

DIRECTIONAL INFORMATION

Maximum Deviation @ KOP @

Remarks: ANNULAR HOLE VOLUME CALCULATED FOR 5.5 INCH CASING
CHLORIDES REPORTED AT 5000 MG/L

TODAY'S CREW P. COBLE V. JAIME


THANK YOU FOR CHOOSING HALLIBURTON ENERGY SERVICES LIBERAL, KS 620-624-8123


HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.

HALLIBURTON

Plot Time: 16-May-12 00:22:58
 Plot Range: 3398 ft to 4845 ft
 Data: TALBOTT_7_9\Well Based\DAQ-0001-004\
 Plot File: \\-LOCAL-TALBOTT_7_9\0001 SP-GTET-DSN-SDL-ACRT-CH\MICRO\Microlog_IQ_5_main_lib

5 INCH MAIN LOG

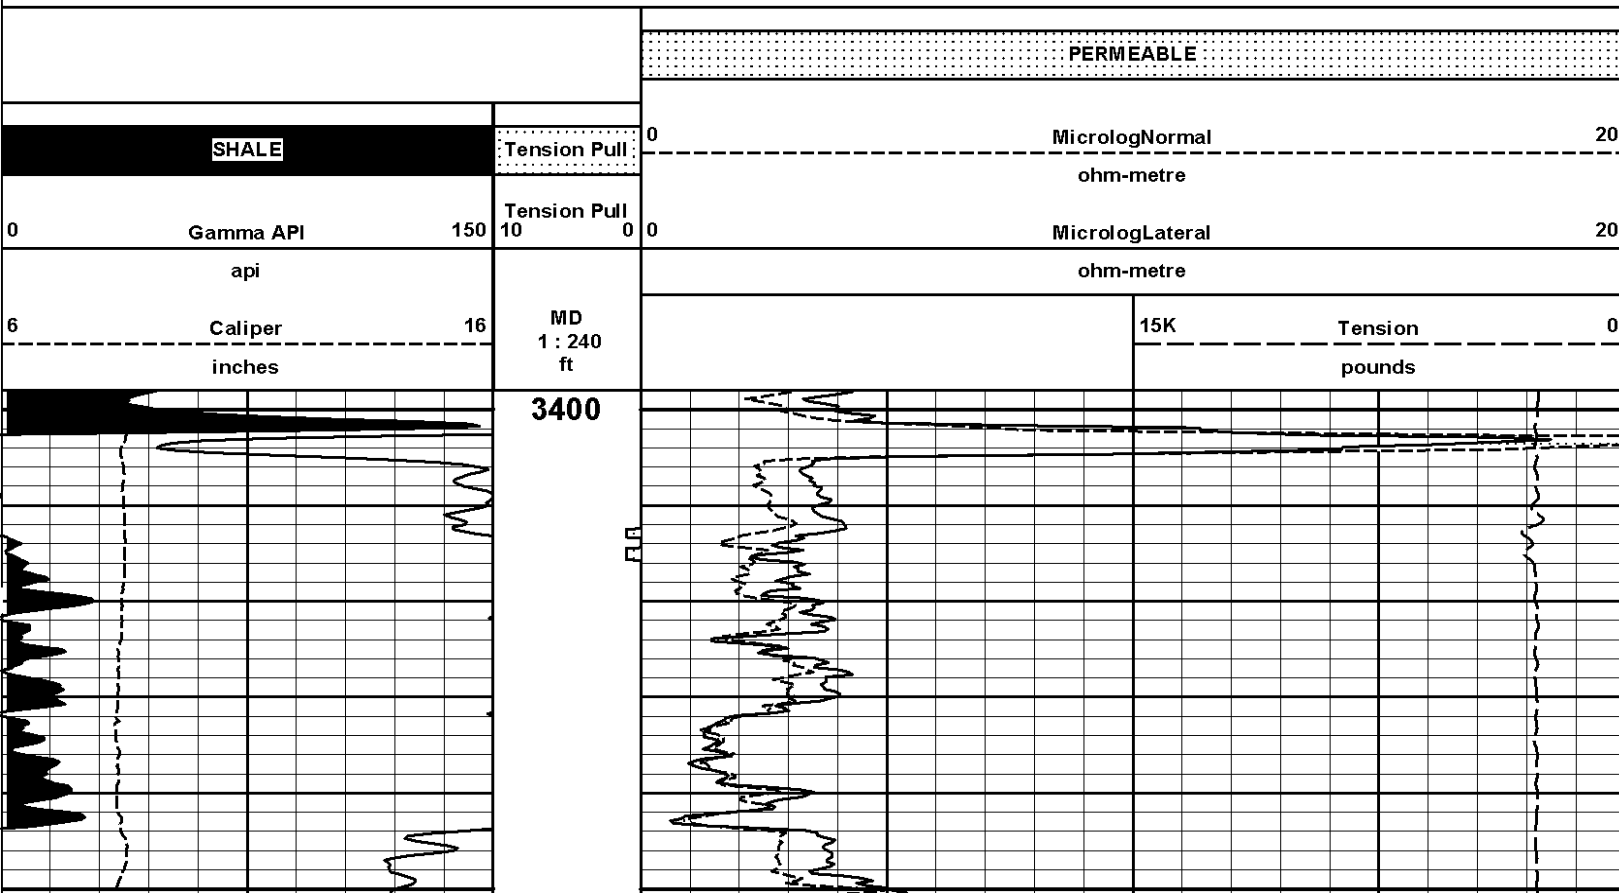

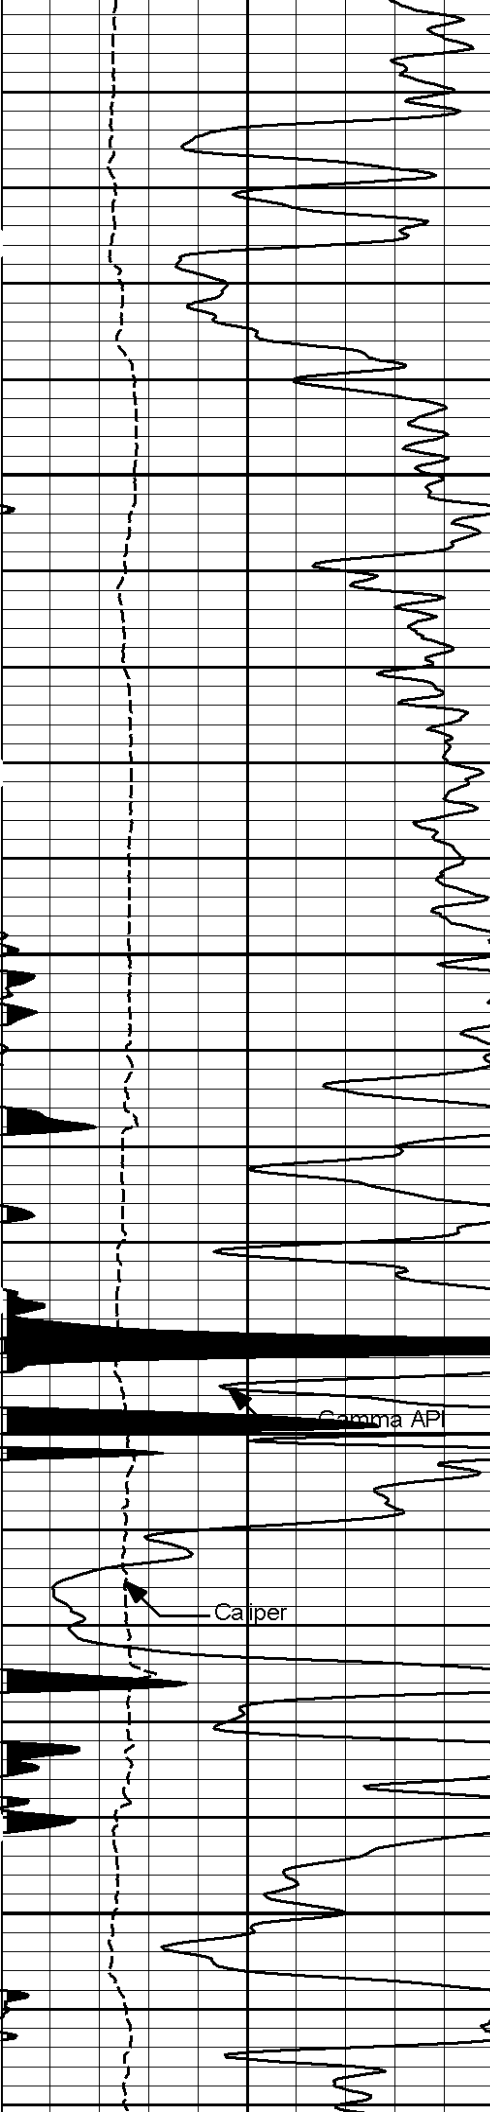


3500

3600


Gamma API

Caliper

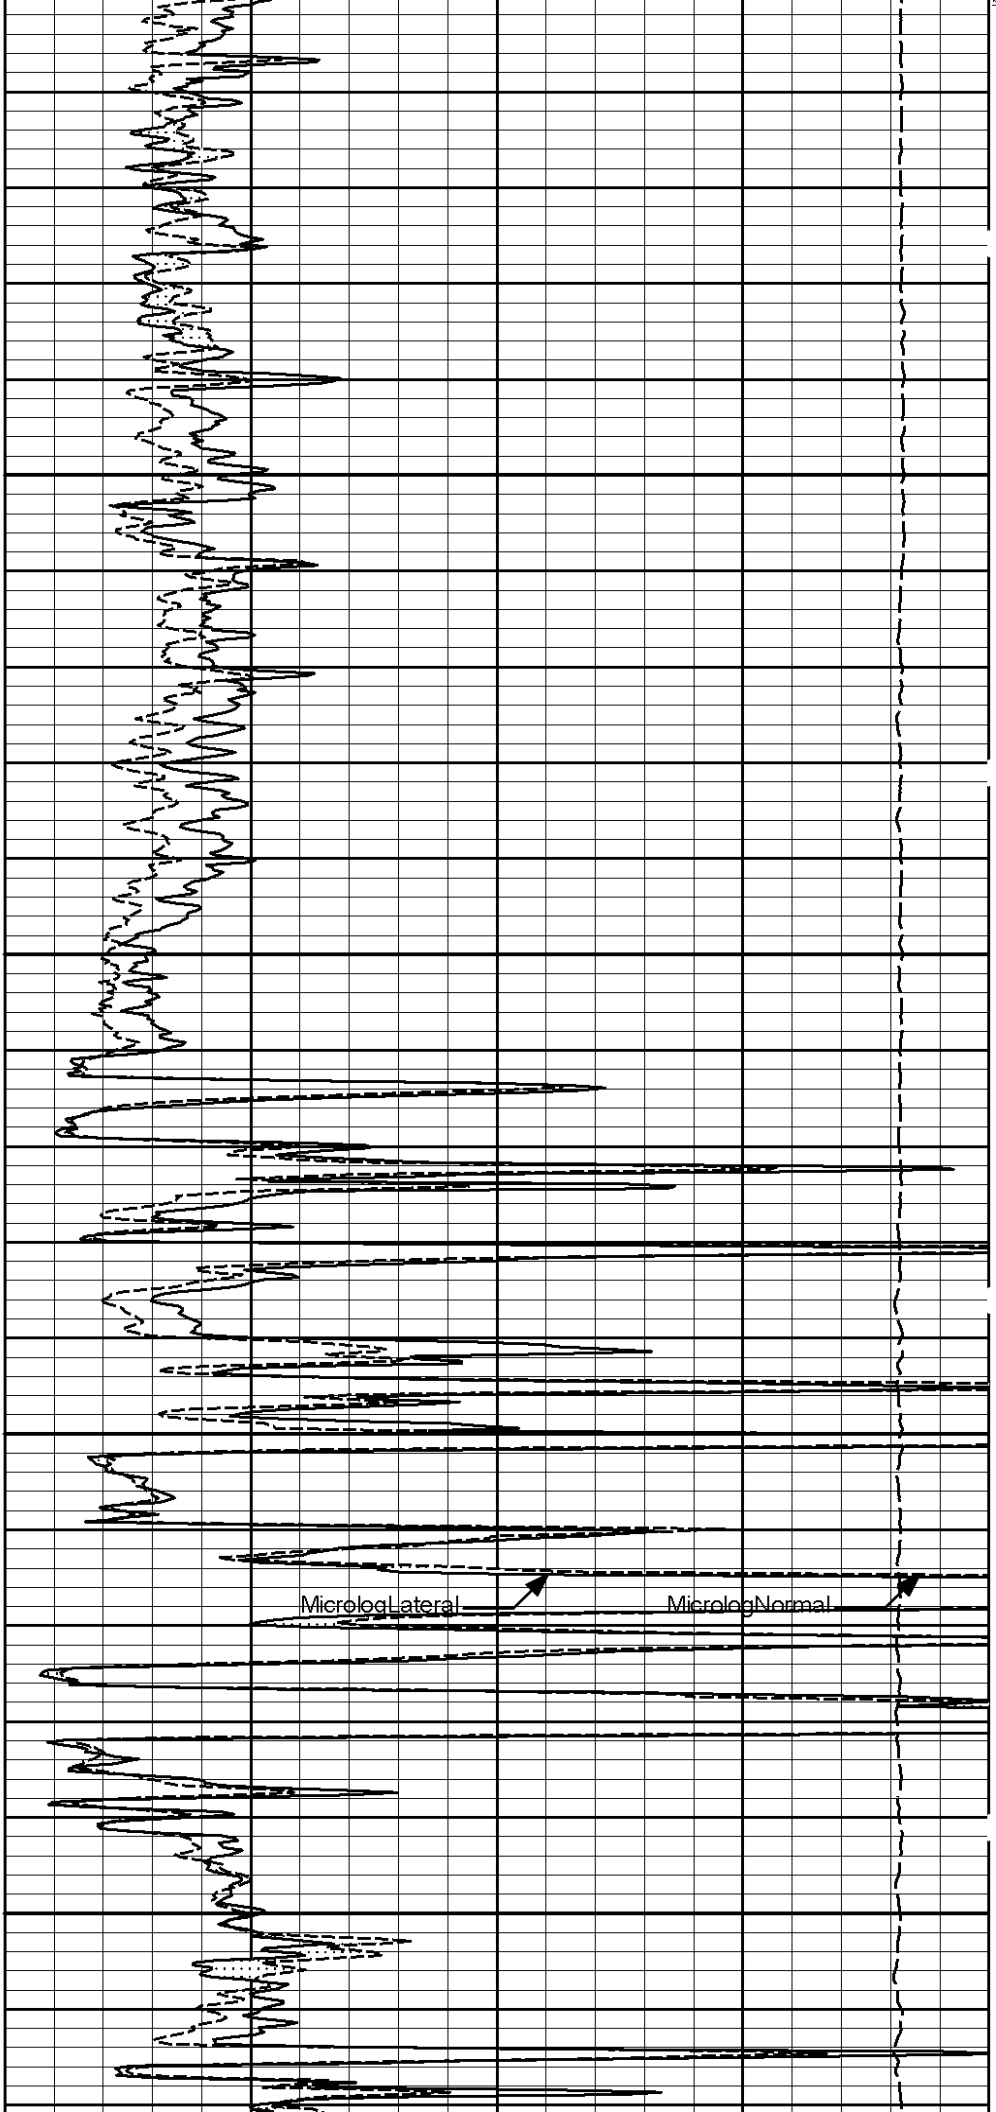

Microlog Lateral

Microlog Normal

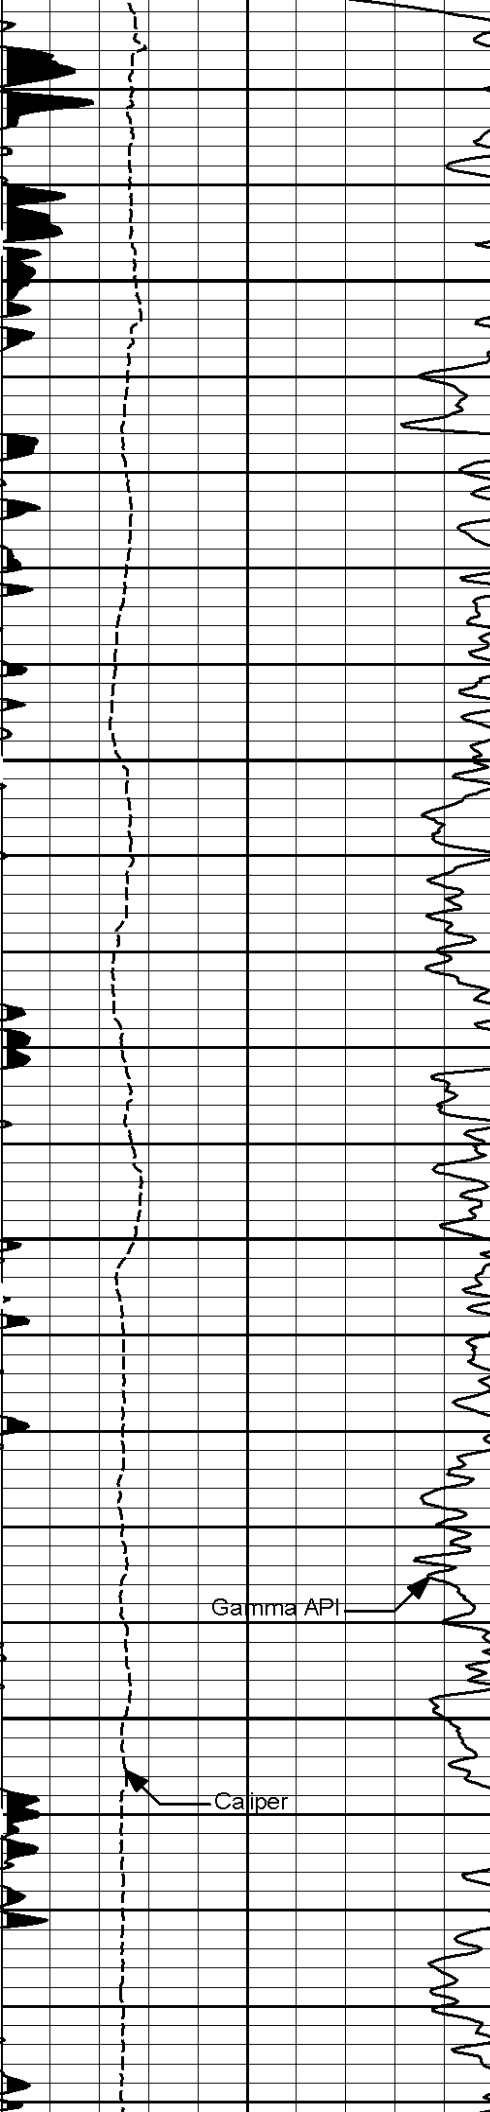


3700

3800


Gamma API

Caliper

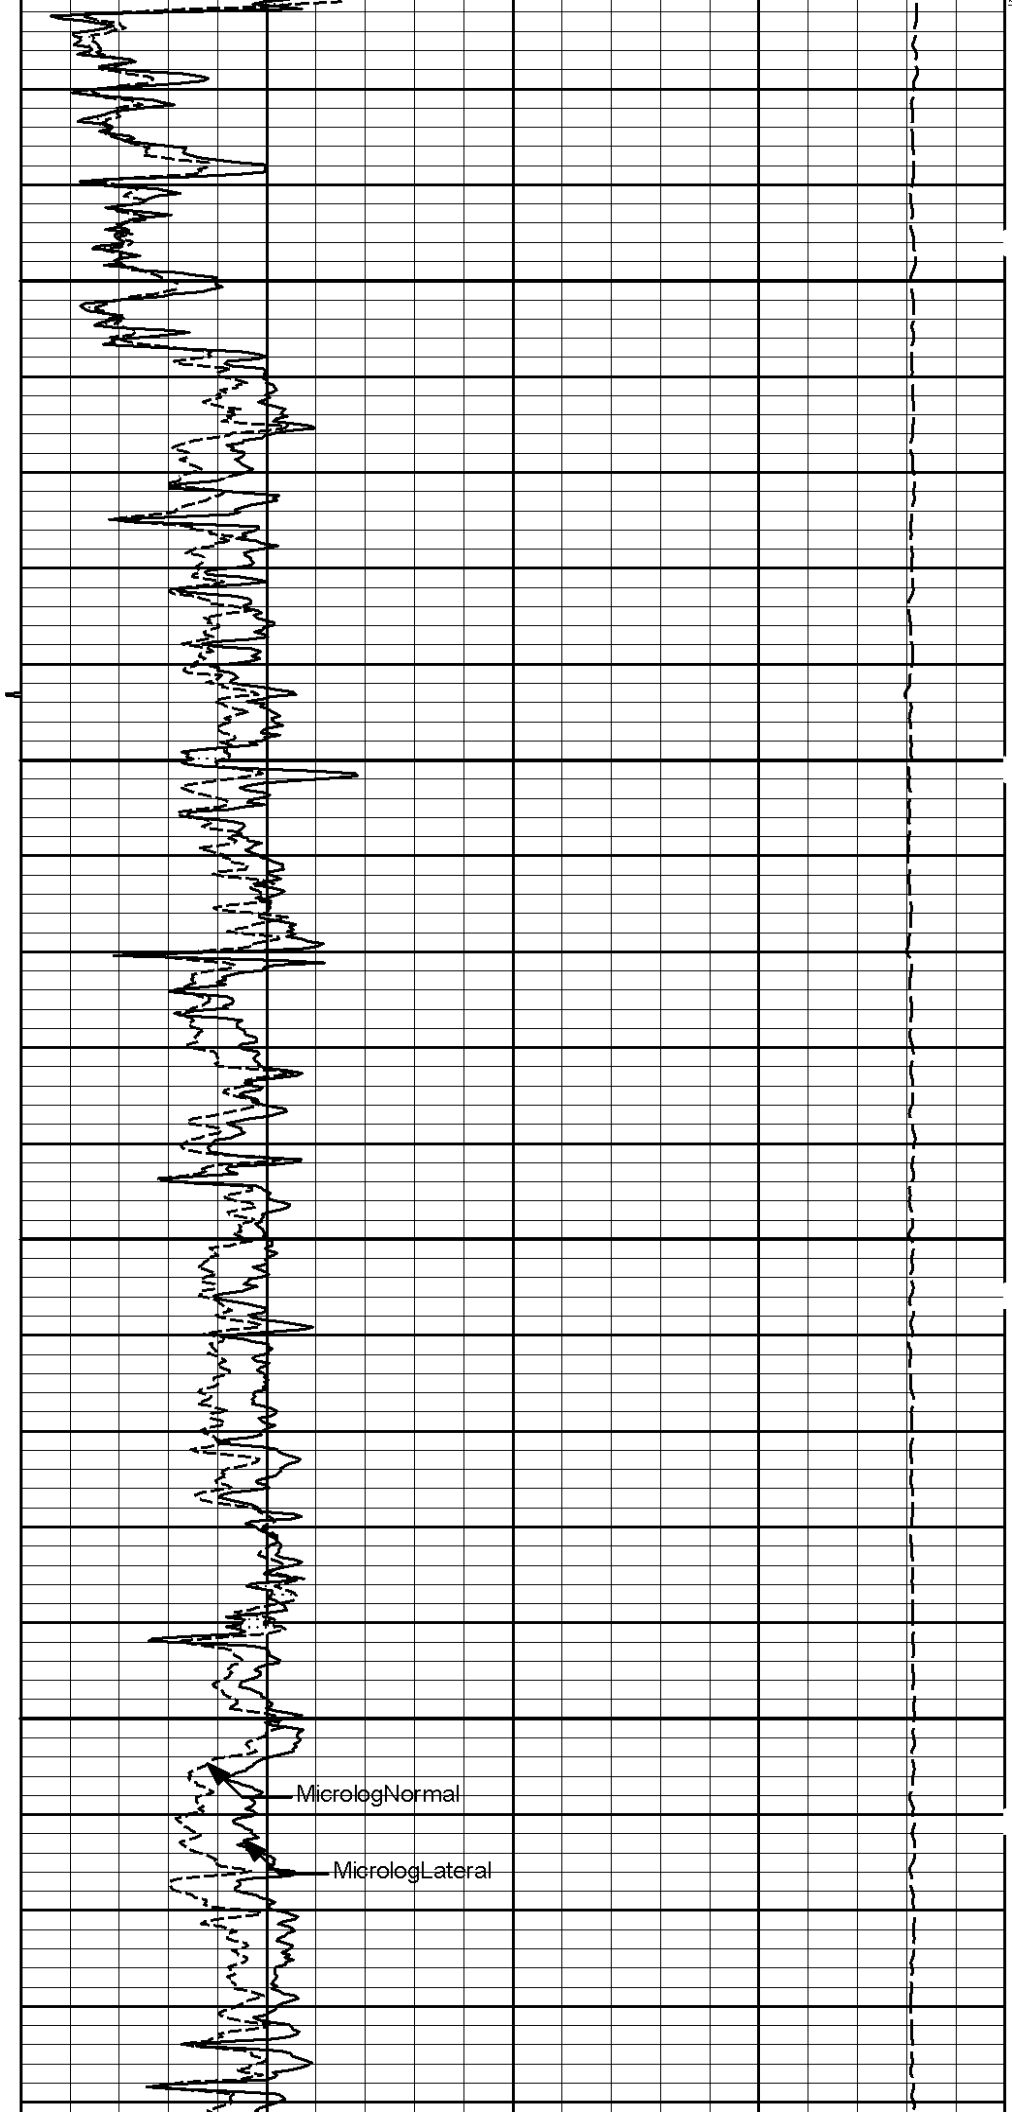

MicrologNormal

MicrologLateral

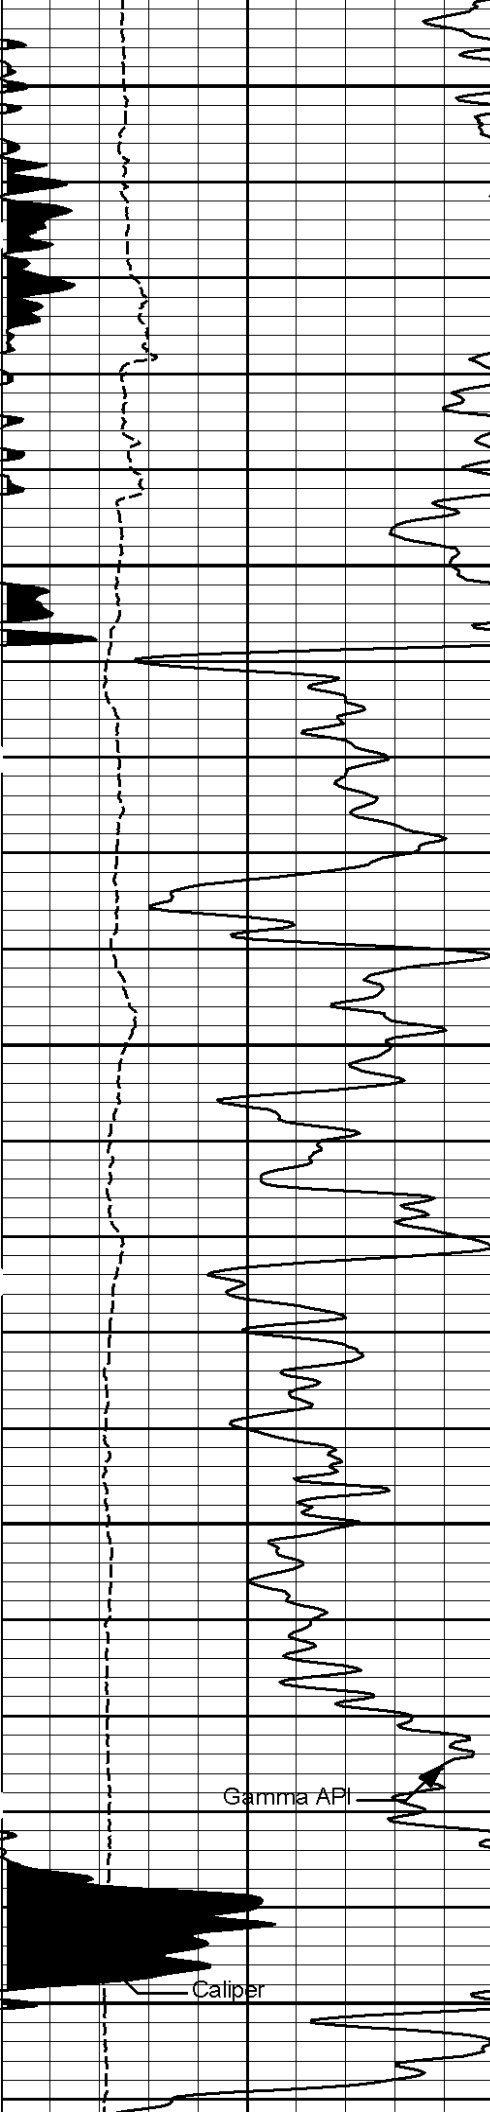


3900

4000

4100


Gamma API

Caliper

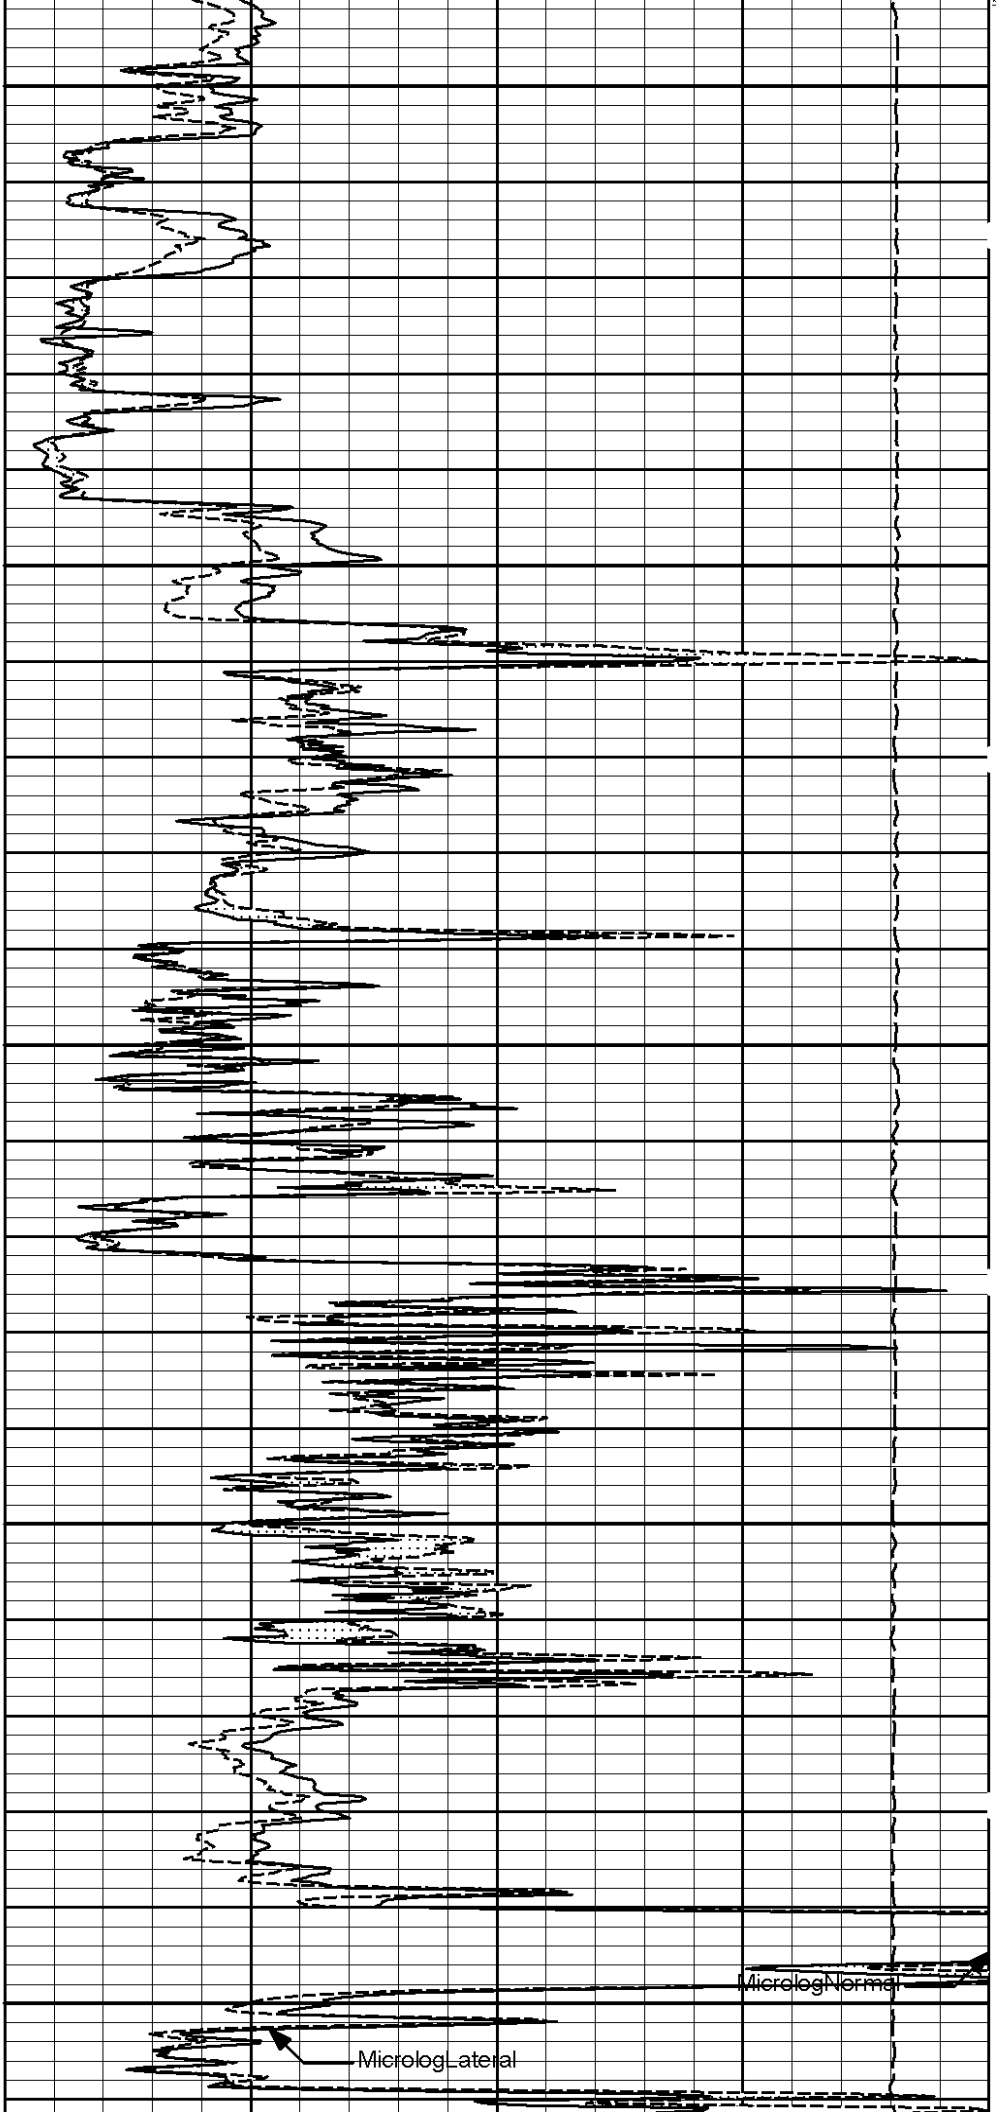


MicrologNormal


MicrologLateral

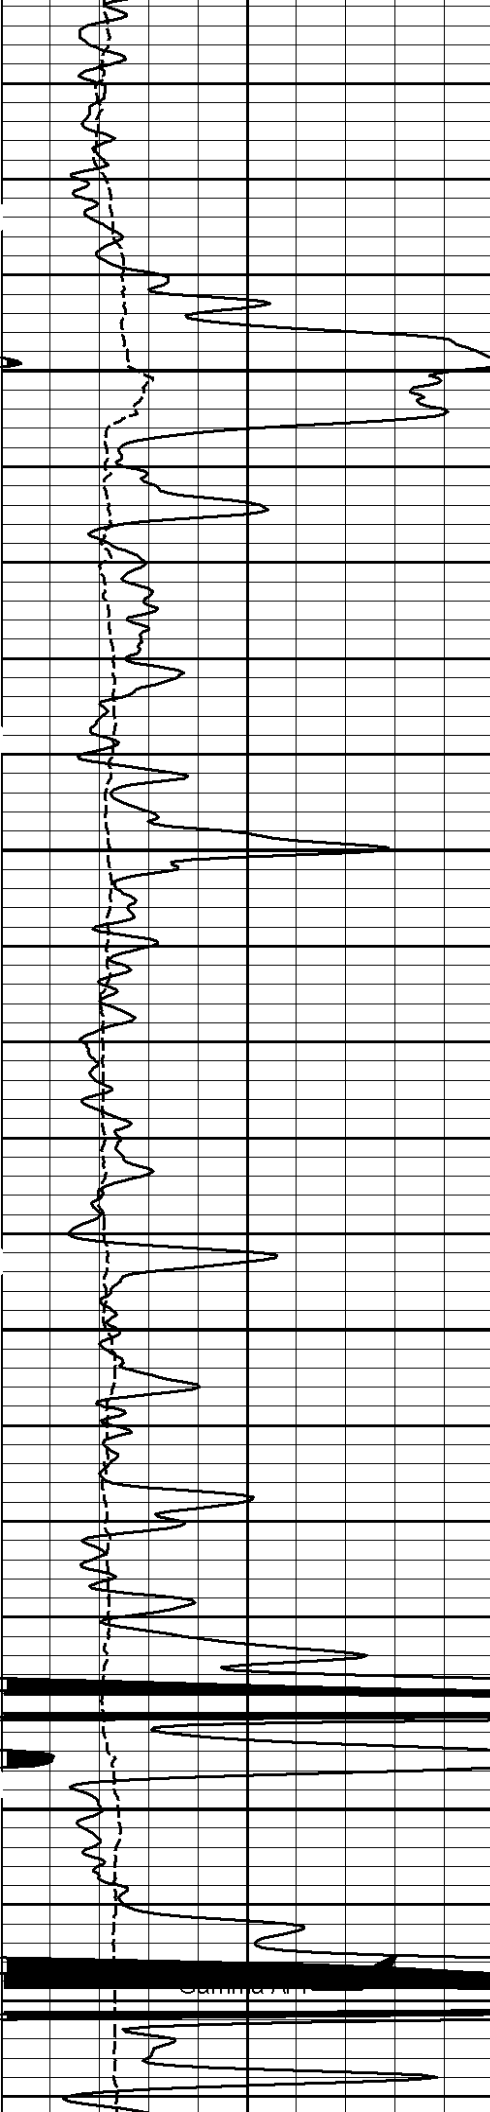

4200


4300

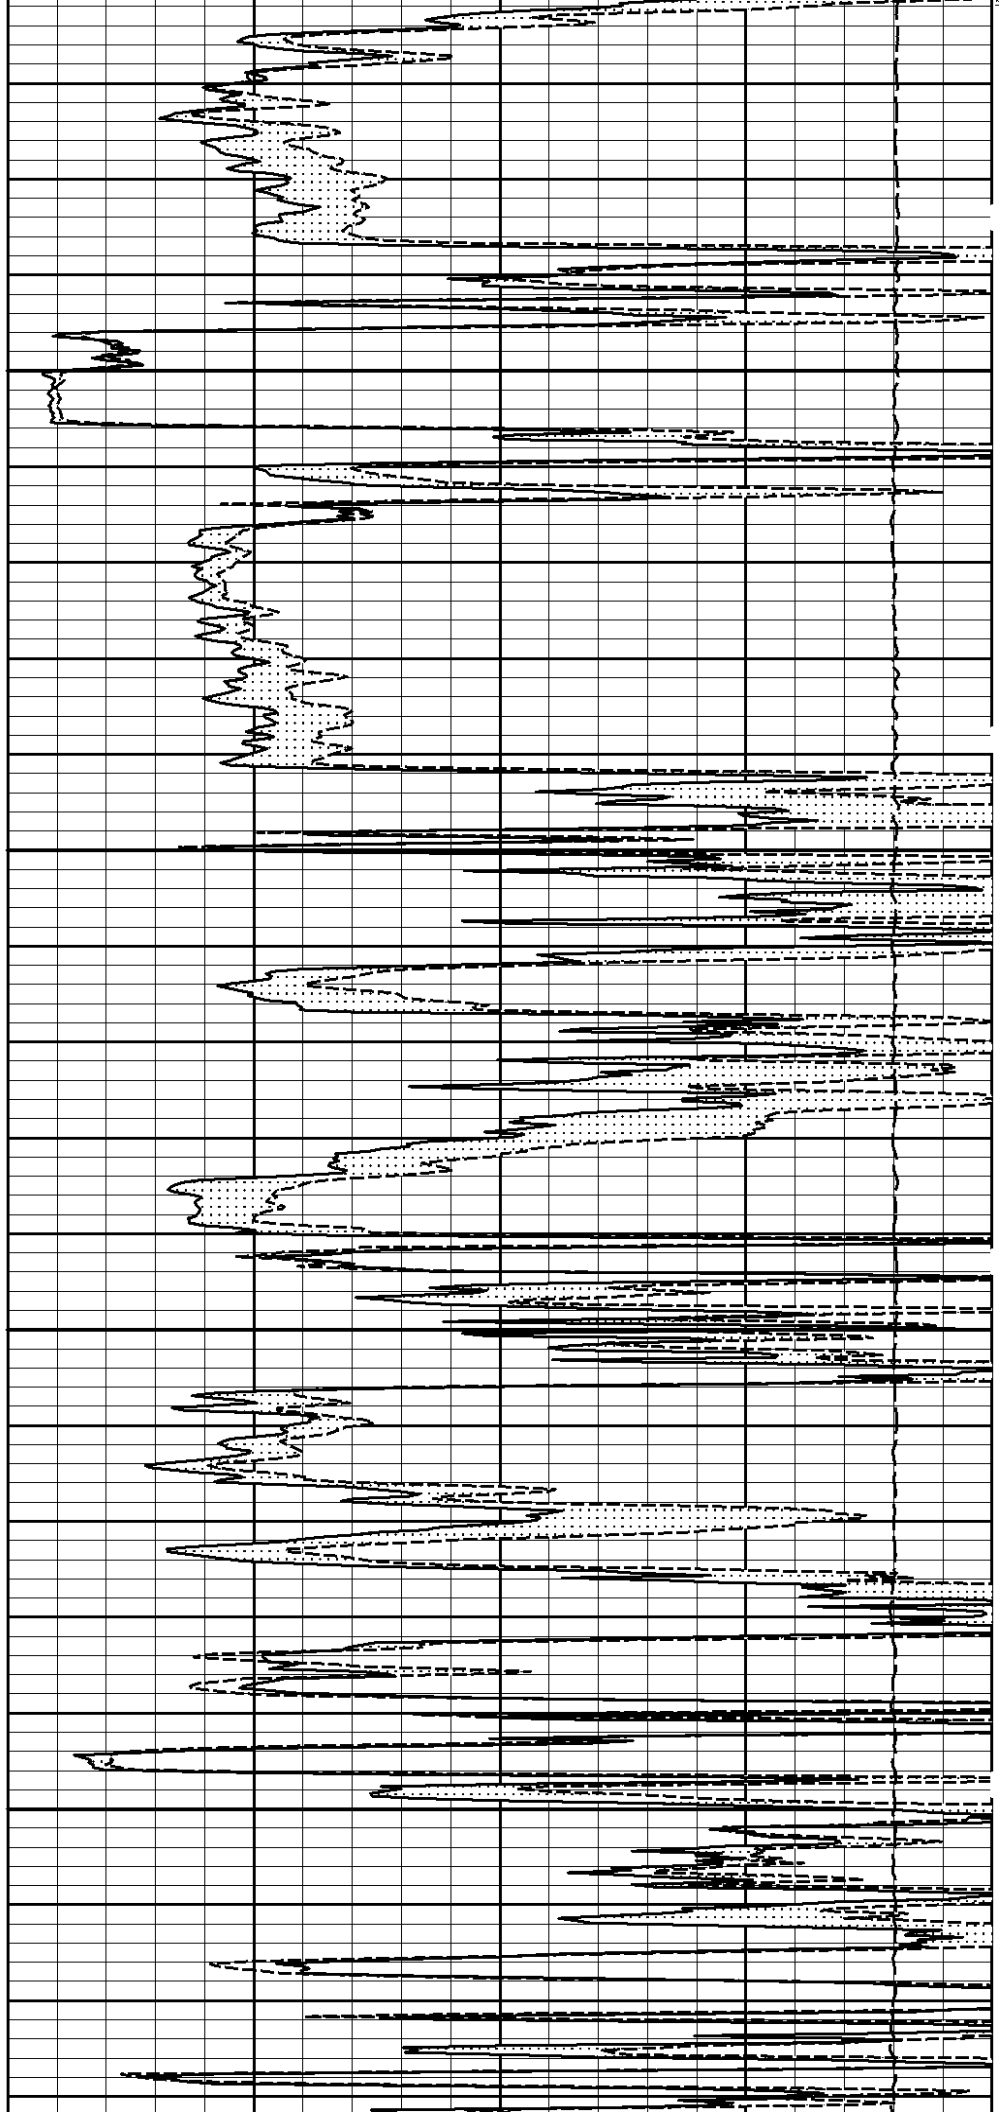


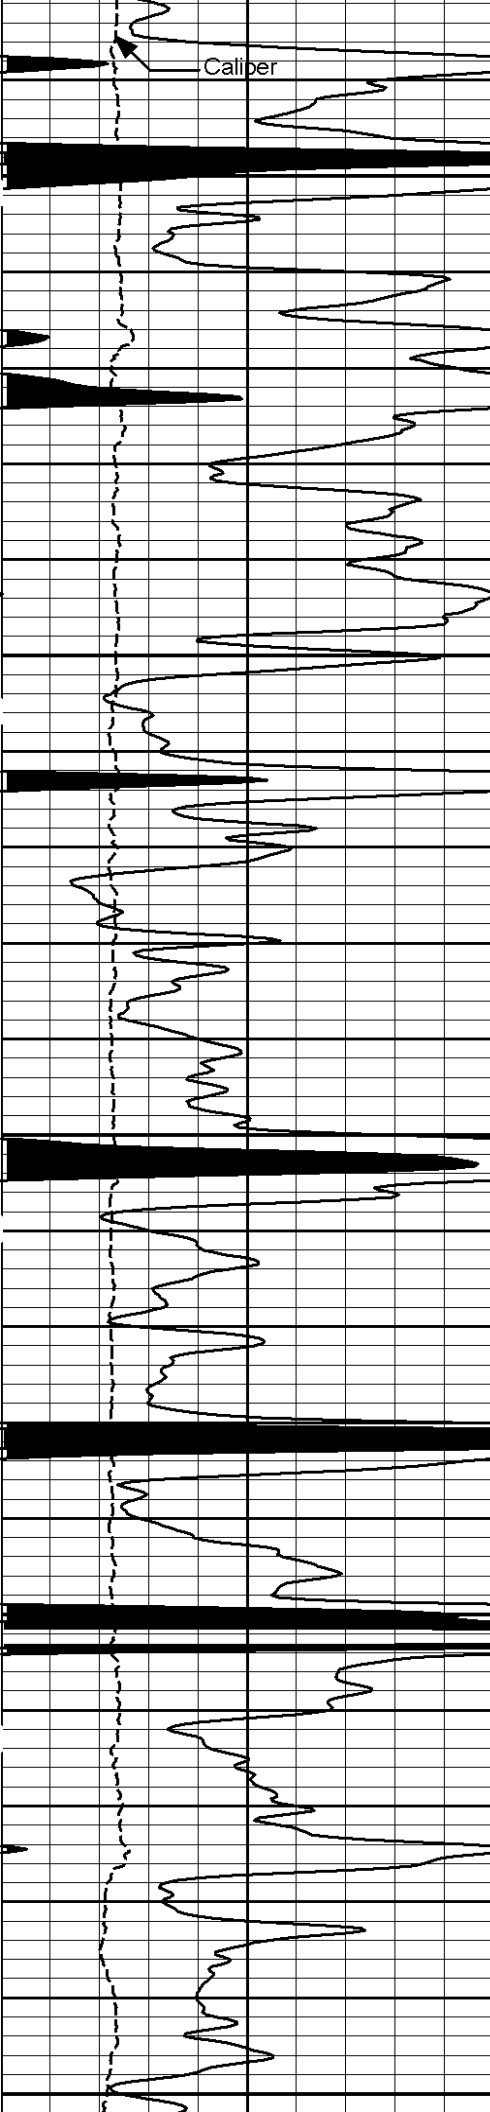

4400


4500

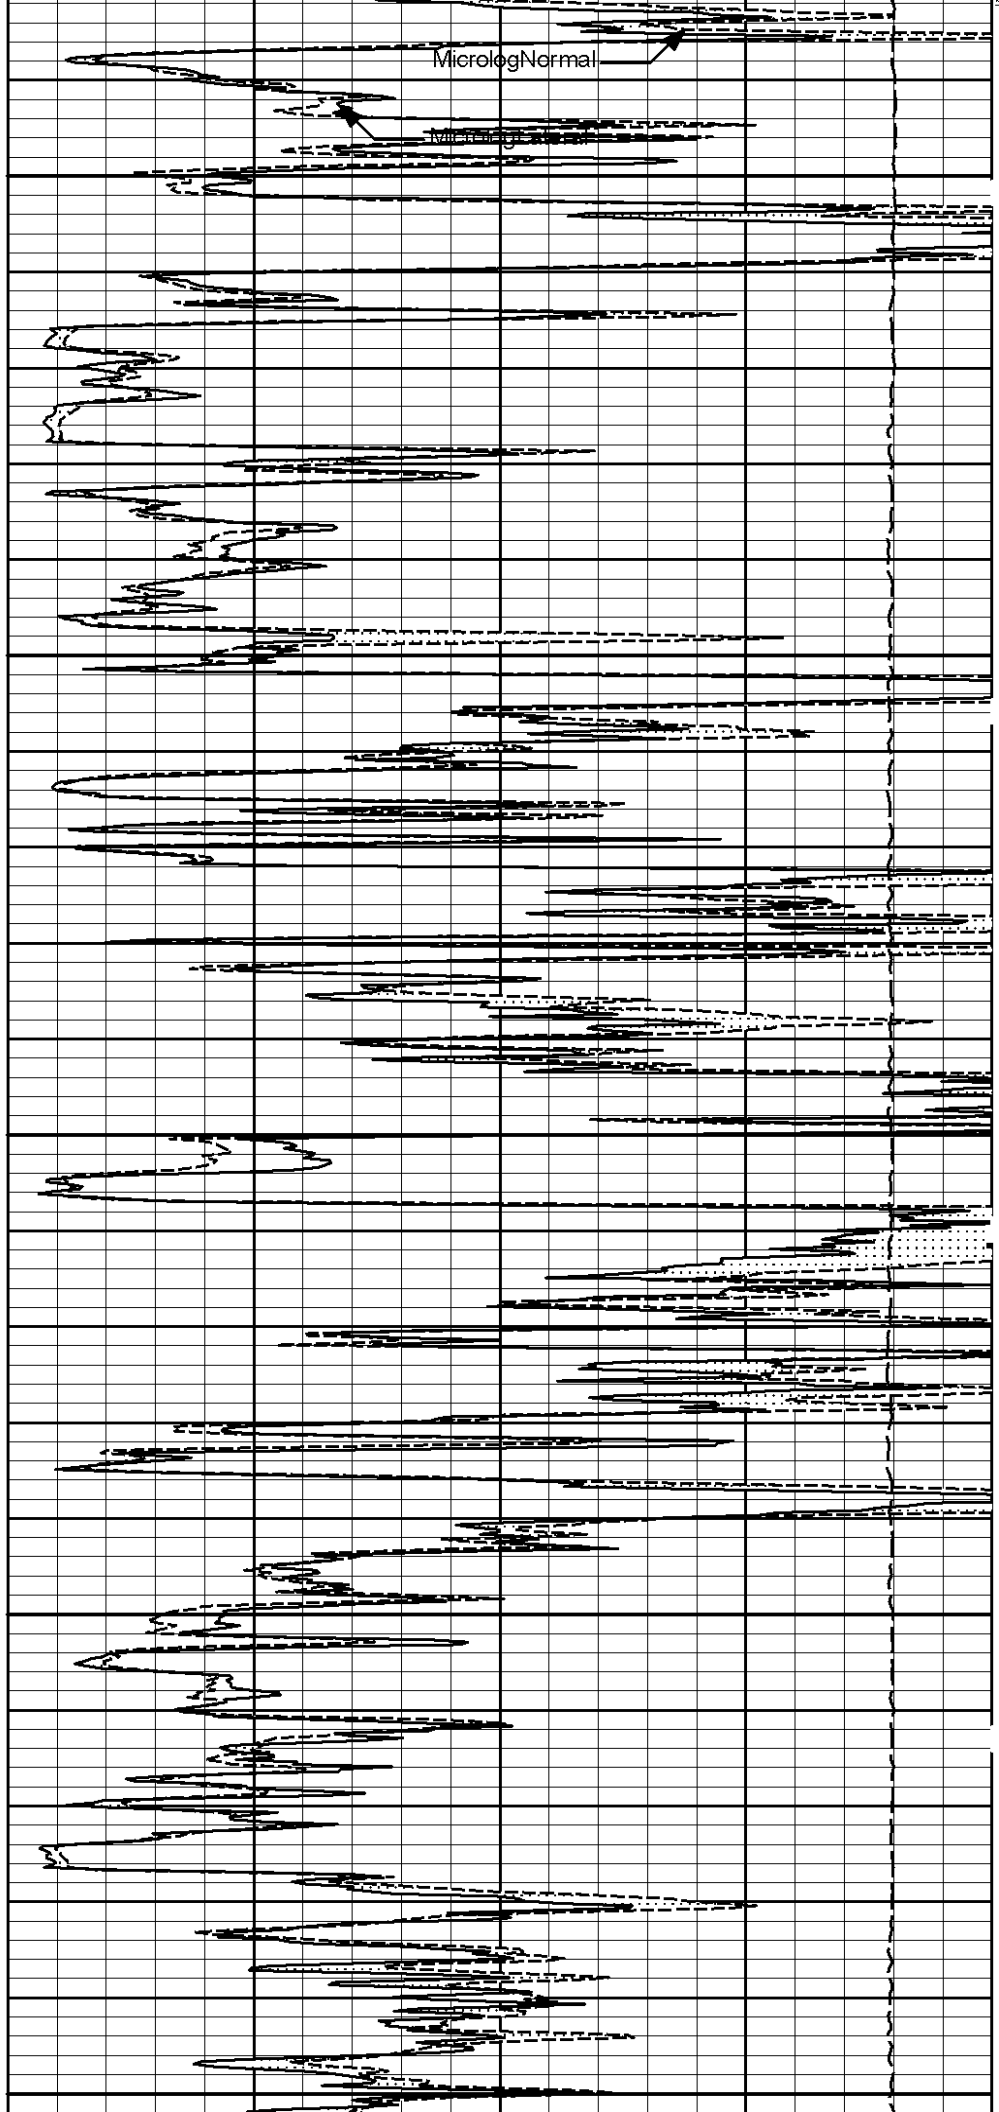


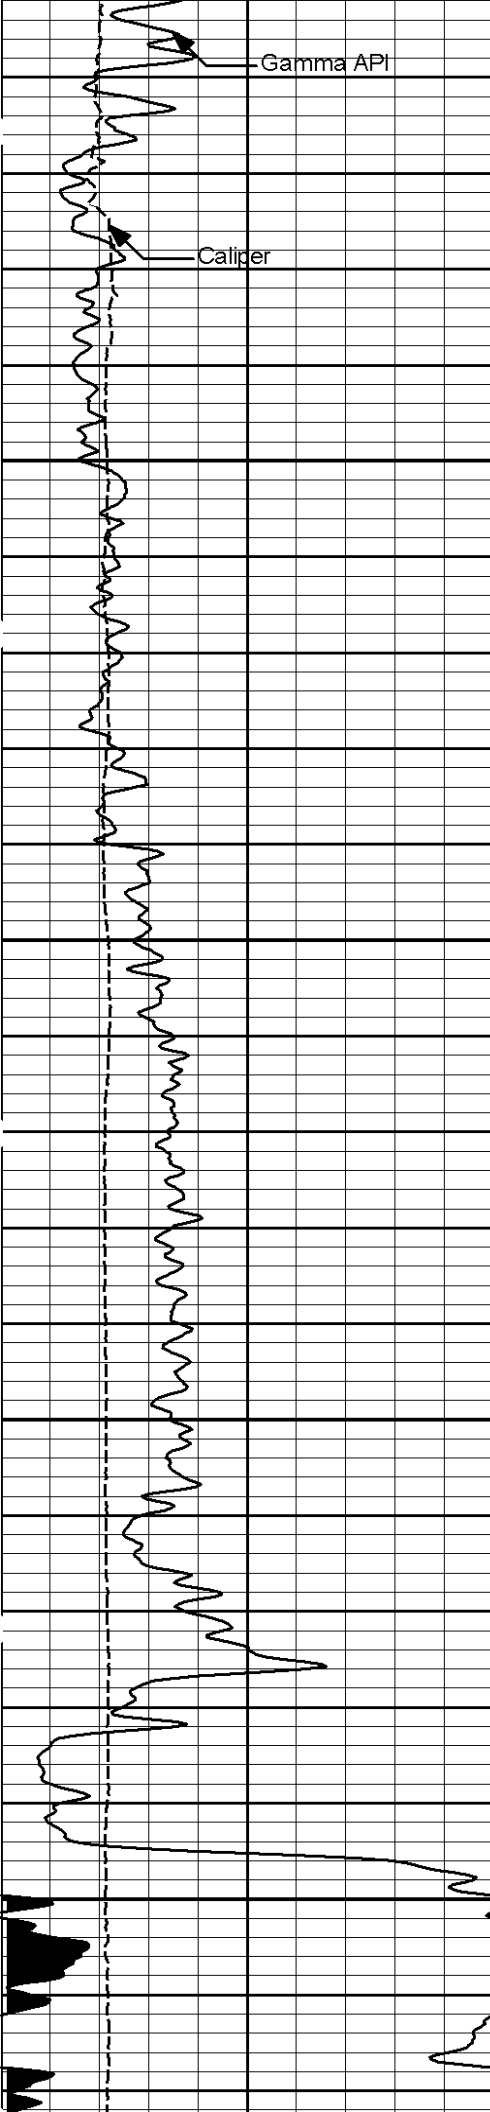

4600

4700

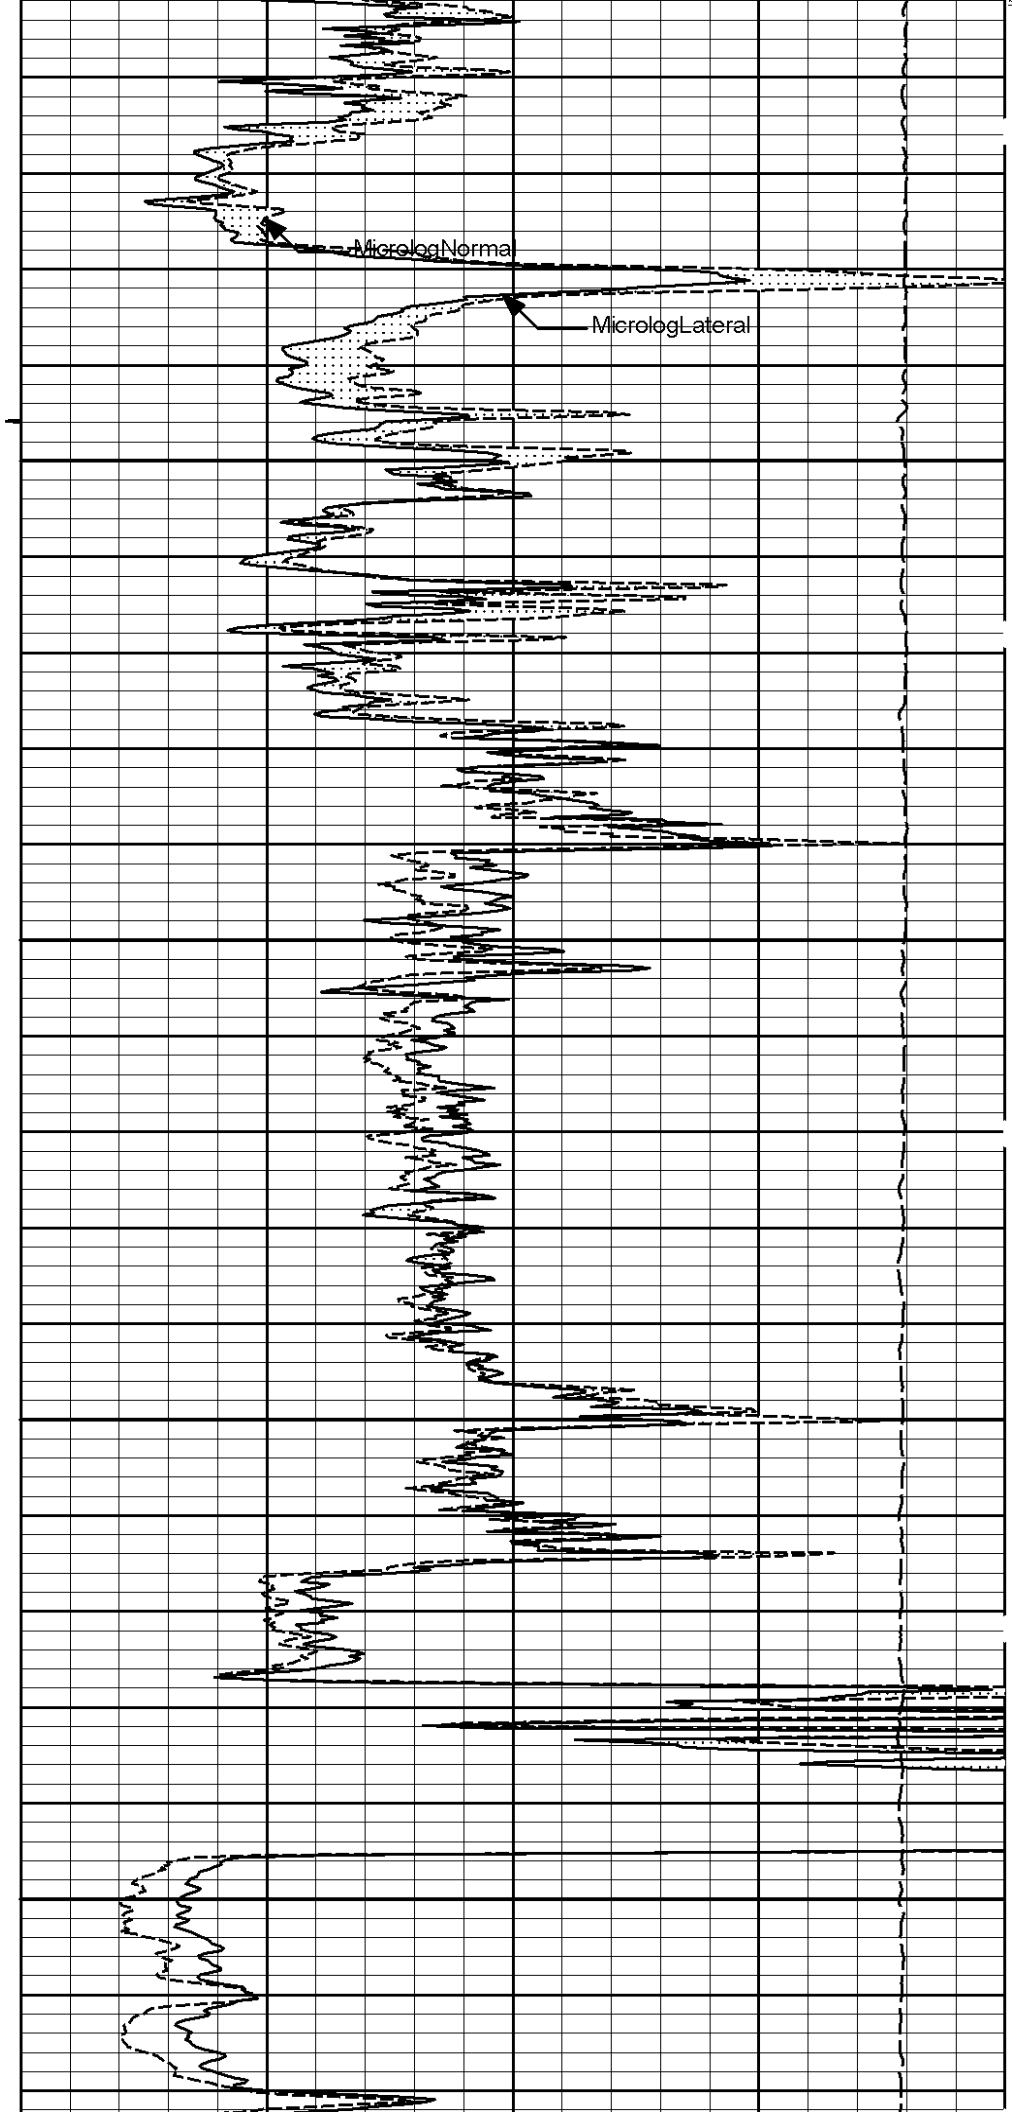

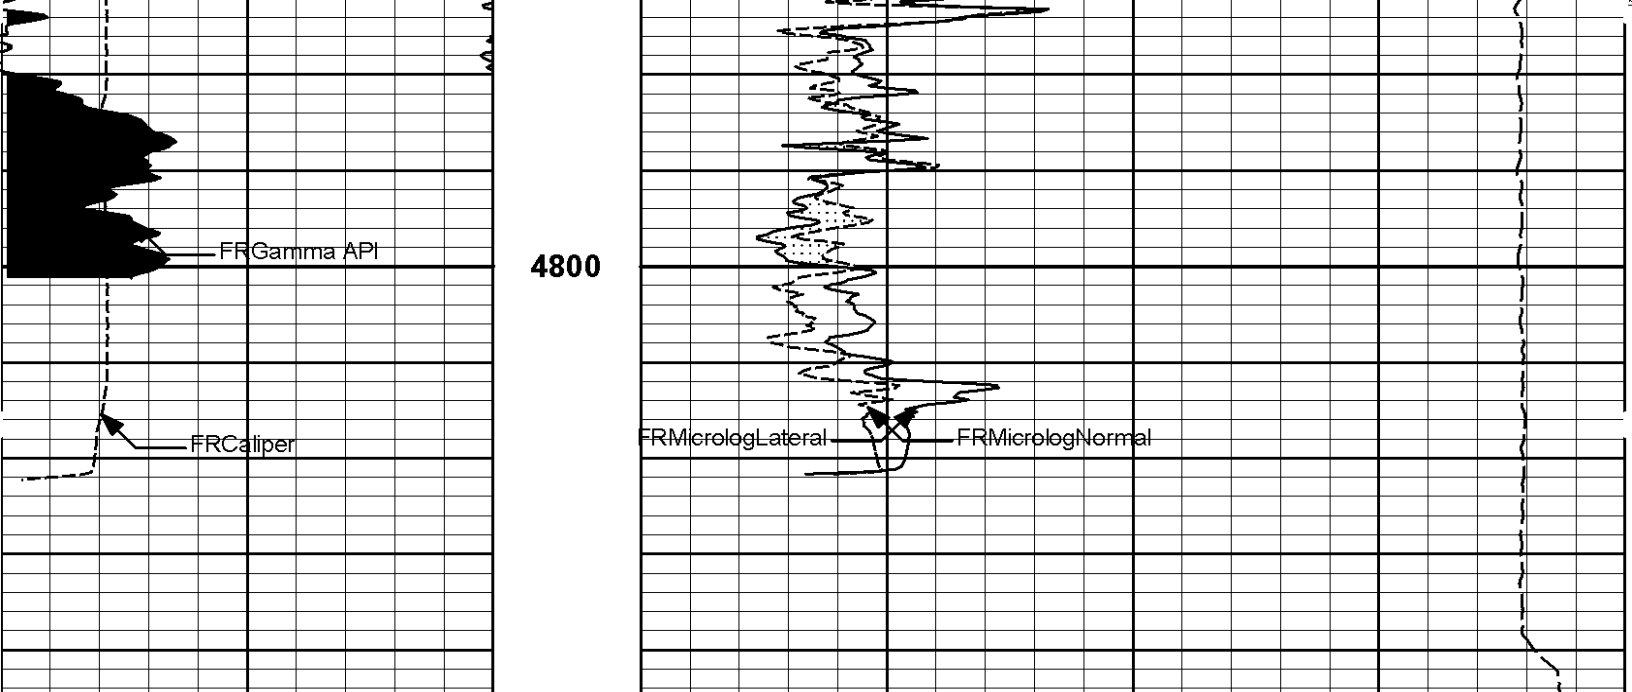

6	Caliper	16	MD	15K	Tension	0
	inches		1 : 240 ft		pounds	
0	Gamma API	150	Tension Pull	0	MicrologLateral	20
	api		10		ohm-metre	
	SHALE		Tension Pull	0	MicrologNormal	20
					ohm-metre	
					PERMEABLE	


Plot Time: 16-May-12 00:23:04
 Plot Range: 3398 ft to 4845 ft
 Data: TALBOTT_7_9\Well Based\DAQ-0001-004\
 Plot File: \\-LOCAL-TALBOTT_7_9\0001 SP-GTET-DSN-SDL-ACRT-CH\MICRO\Microlog_IQ_5_main_lib

5 INCH MAIN LOG

Plot Time: 16-May-12 00:23:04
 Plot Range: 4550 ft to 4841 ft
 Data: TALBOTT_7_9\Well Based\DAQ-0001-003\
 Plot File: \\-LOCAL-TALBOTT_7_9\0001 SP-GTET-DSN-SDL-ACRT-CH\MICRO\Microlog_IQ_5_rep_lib


REPEAT SECTION


					PERMEABLE	
	SHALE		0		MicrologNormal	20
					ohm-metre	
0	Gamma API	150	0		MicrologLateral	20
	api				ohm-metre	
6	Caliper	16	MD	15K	Tension	0
	inches		1 : 240 ft		pounds	

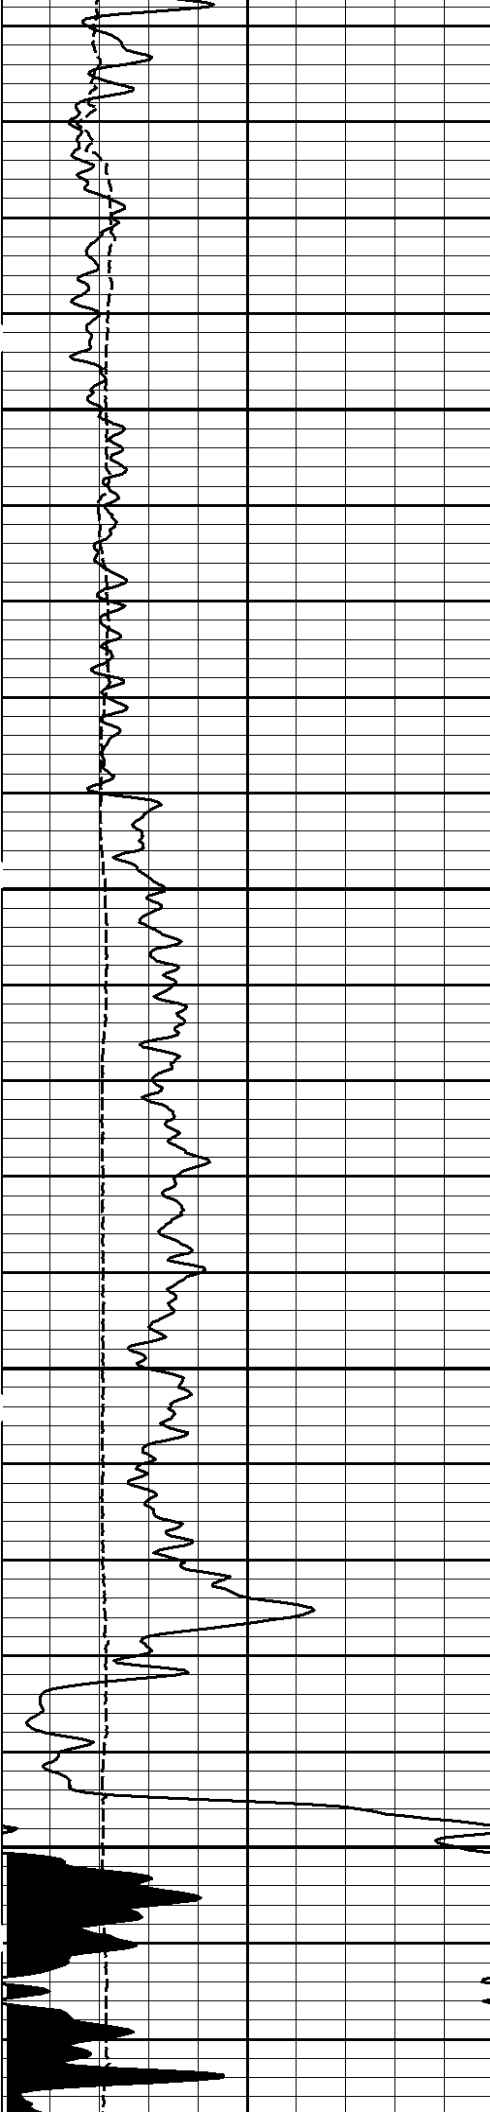

4600

4700

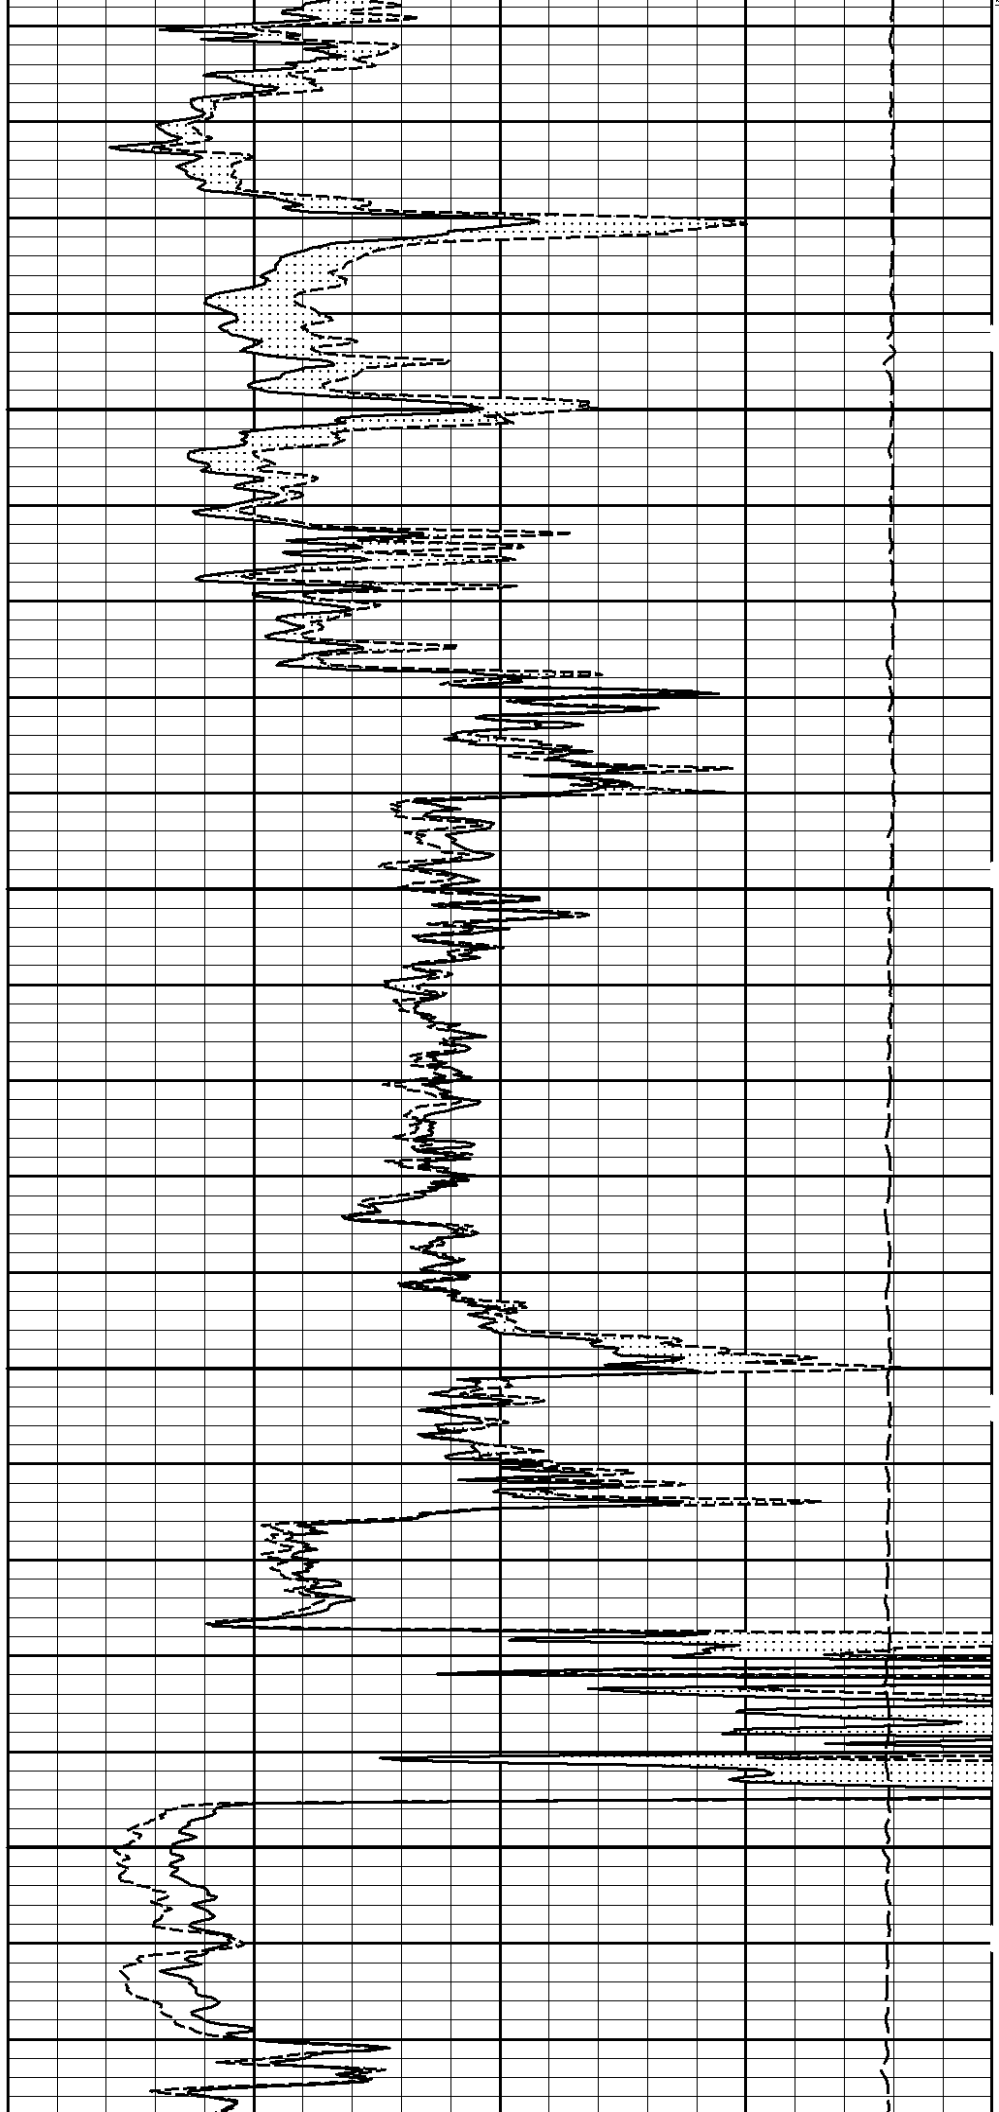

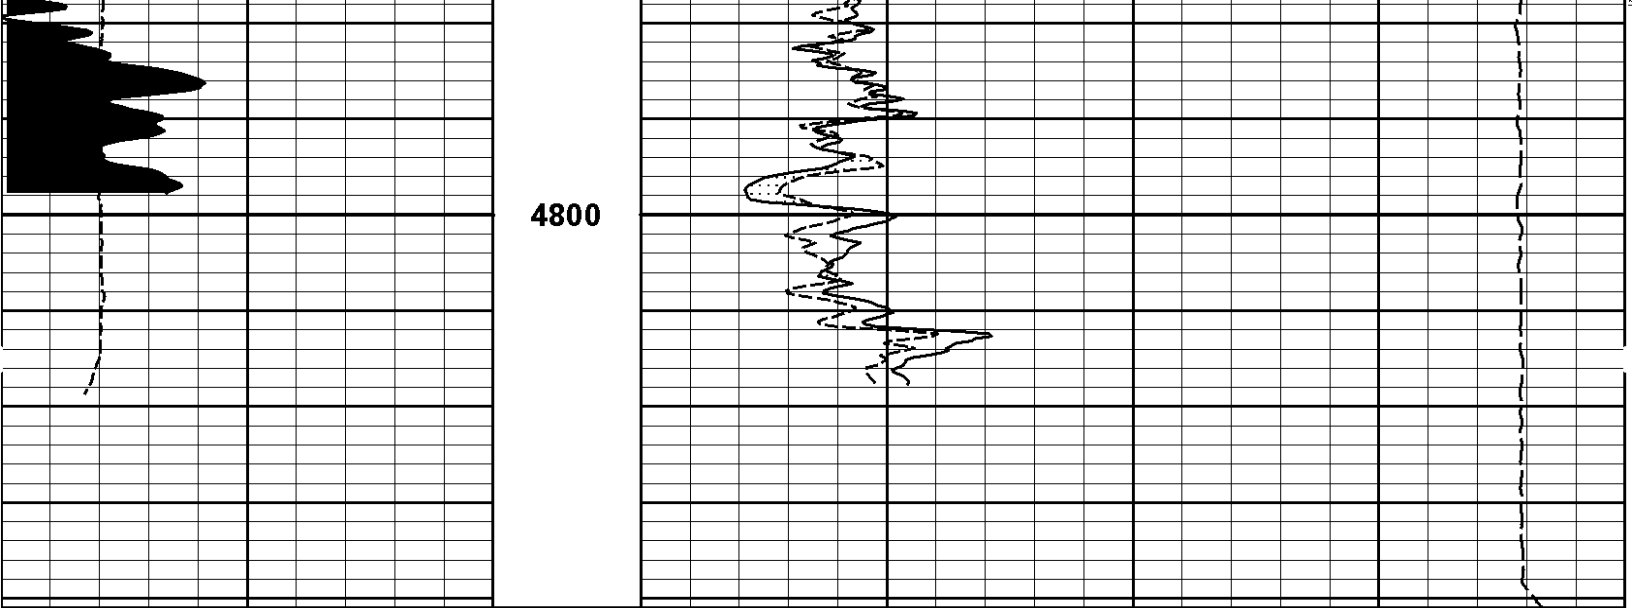


6	Caliper	16	MD 1 : 240 ft	15K	Tension	0
	inches				pounds	
0	Gamma API	150	0	MicrologLateral		20
	api			ohm-metre		
	SHALE		0	MicrologNormal		20
				ohm-metre		
			PERMEABLE			

Plot Time: 16-May-12 00:23:05
 Plot Range: 4550 ft to 4841 ft
 Data: TALBOTT_7_9\Well Based\DAQ-0001-003\
 Plot File: \\-LOCAL-TALBOTT_7_9\0001 SP-GTET-DSN-SDL-ACRT-CH\MICRO\Microlog_IQ_5_rep.lib

REPEAT SECTION

TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
Cable Head- PROT01 30.00 lbs		Ø 3.625 in →			1.92 ft	54.51 ft
SP Sub-001 60.00 lbs		Ø 3.625 in →		← SP @ 50.81 ft	3.74 ft	52.59 ft
GTET-11048627 165.00 lbs		Ø 3.625 in →		← GammaRay @ 42.79 ft	8.52 ft	48.85 ft
						40.33 ft

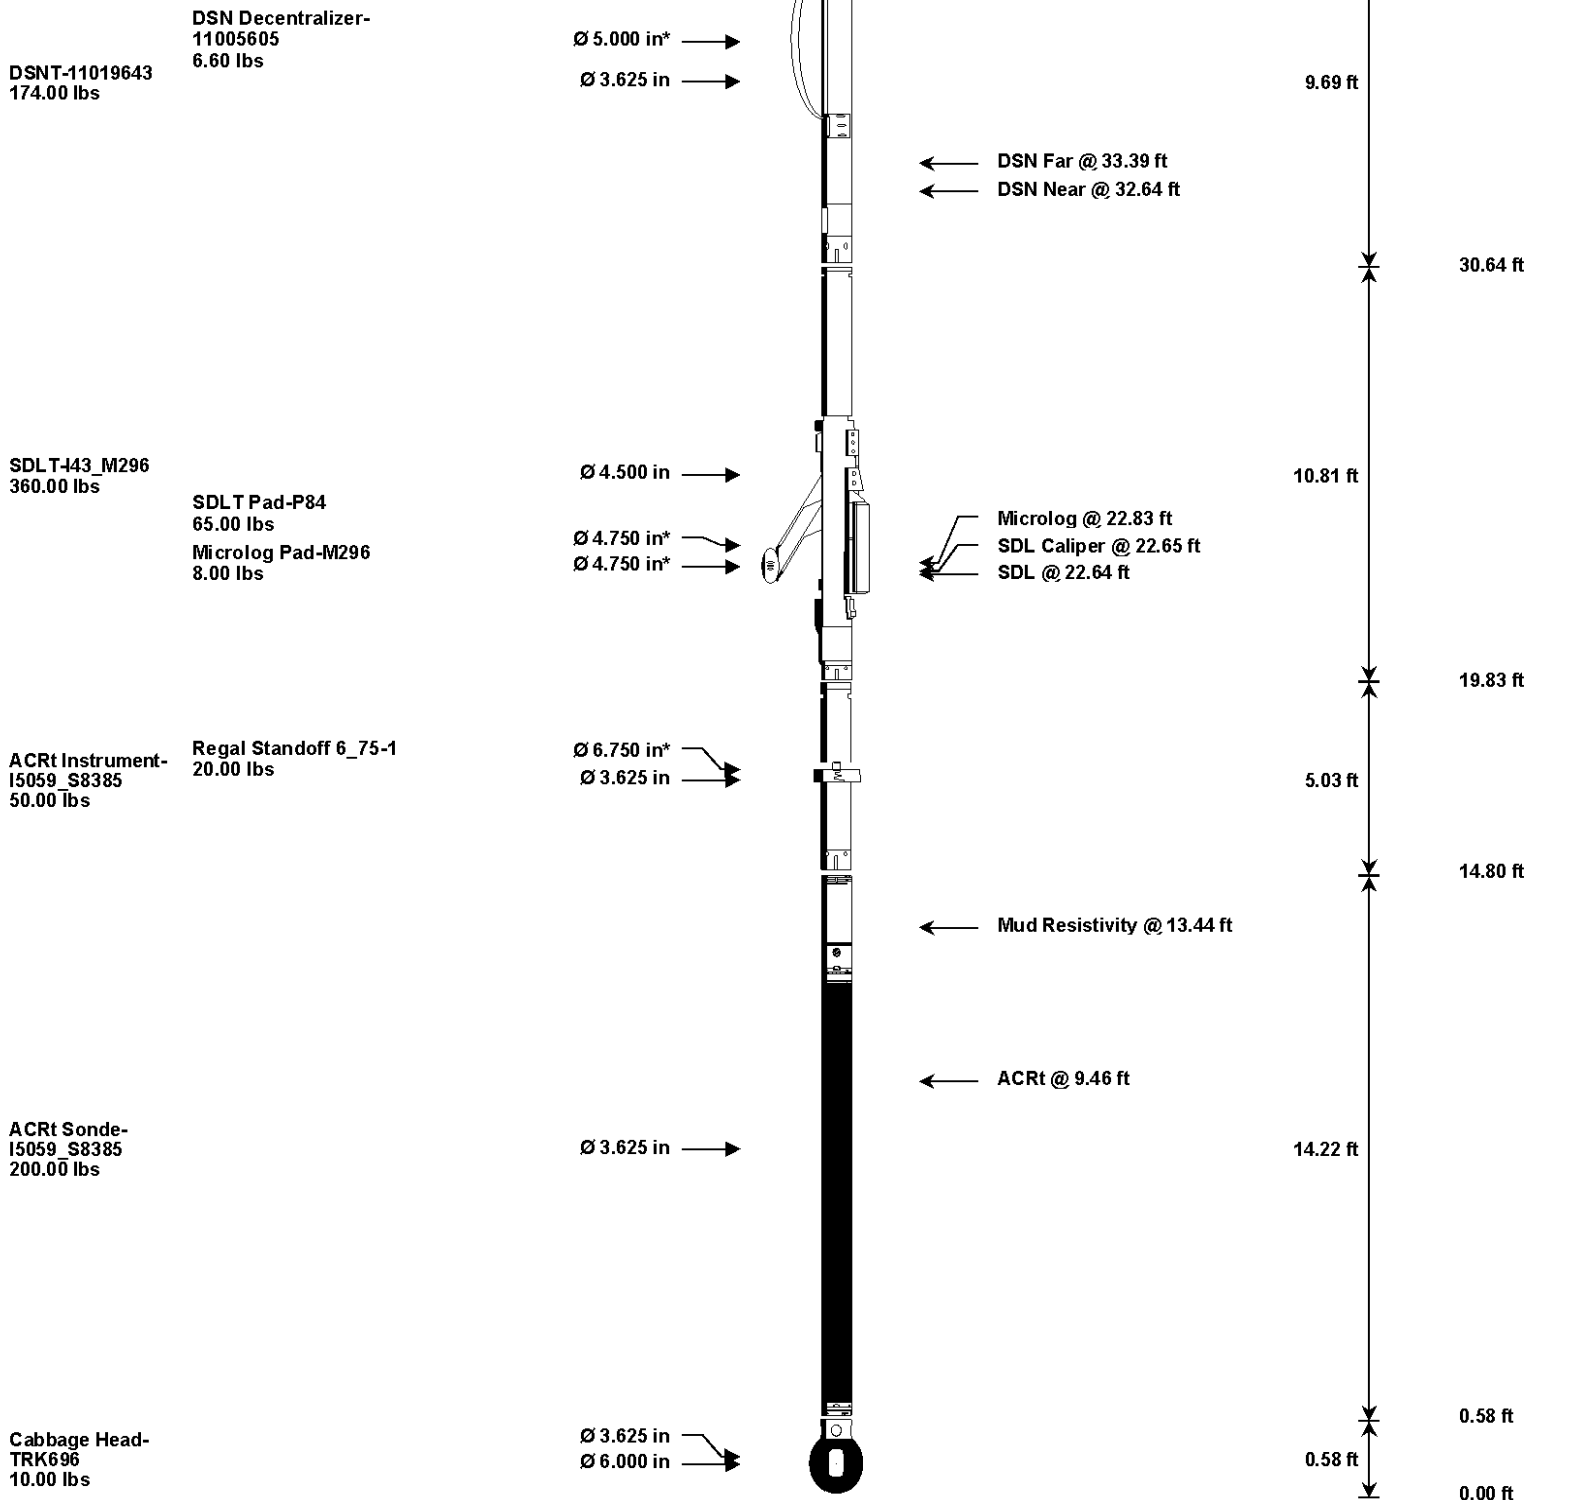

Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)
CH	Standard OH Cable Head	PROT01	30.00	1.92	52.59	300.00
SP	SP Sub	001	60.00	3.74	48.85	300.00
GTET	Gamma Telemetry Tool	11048627	165.00	8.52	40.33	60.00
DSNT	Dual Spaced Neutron	11019643	174.00	9.69	30.64	60.00
DCNT	DSN Decentralizer	11005605	6.60	5.13 *	33.97	300.00
SDLT	Spectral Density Tool	I43_M296	360.00	10.81	19.83	60.00
SDLP	Density Insite Pad	P84	65.00	2.55 *	22.04	60.00
MICP	Microlog Pad	M296	8.00	1.00 *	22.33	60.00
ACRT	Array Compensated True Resistivity Instrument Section	I5059_S8385	50.00	5.03	14.80	300.00
RSOF	Regal Standoff 6.75in	1	20.00	0.52 *	17.21	300.00
ACRT	Array Compensated True Resistivity	I5059_S8385	200.00	14.22	0.58	300.00
CBHD	Cabbage Head	TRK696	10.00	0.58	0.00	300.00
Total			1,148.60	54.51		

CALIBRATION REPORT

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name:	GTET - 11048627	Reference Calibration Date:	15-May-12 17:50:17
Engineer:	T. HYDE	Calibration Date:	15-May-12 17:53:19
Software Version:	WL INSITE R3.4.2 (Build 2)	Calibration Version:	1

Calibrator Source S/N: TB146
 Calibrator API Reference:265.00 api
 Equivalent Calibrator API Reference:269.6 api

Measurement	Measured	Calibrated	Units
Background	207.7	210.4	api
Background + Calibrator	474.0	480.0	api
Calibrator	266.3	269.6	api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION

Tool Name:	GTET - 11048627	Reference Calibration Date:	15-May-12 17:53:19
Engineer:	T. HYDE	Calibration Date:	15-May-12 17:56:03
Software Version:	WL INSITE R3.4.2 (Build 2)	Calibration Version:	1

Calibrator Source S/N: TB146
 Calibrator API Reference:265.00 api
 Equivalent Calibrator API Reference:269.6 api

Field Verification	Shop	Field	Units
Background	210.4	212.2	api
Background + Calibrator	480.0	483.7	api
Calibrator	269.6	271.5	api

Shop	Field	Difference	Tolerance
269.6	271.5	-1.9	+/- 9.00

MICRO LOG SHOP CALIBRATION

Tool Name:	Microlog Pad - M296	Reference Calibration Date:	22-Apr-12 00:30:38
Engineer:	T. HYDE	Calibration Date:	22-Apr-12 00:32:51
Software Version:	WL INSITE R3.4.2 (Build 2)	Calibration Version:	1

CALIBRATION COEFFICIENT SUMMARY

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Measured	Calibrated	Measured	Calibrated	
Tool Zero	-0.07	-0.07	-0.06	-0.05	ohmm
Calibration Point #1	-0.00	0.00	-0.01	0.00	ohmm
Calibration Point #2	19.99	20.00	20.00	20.00	ohmm
Internal Reference	19.91	19.93	19.94	19.95	ohmm

Measurement	Micro Log Normal Tool Value	Micro Log Lateral Tool Value	Units
Tool Zero	-0.61	0.60	V
Calibration Point #1	18.13	19.64	V
Calibration Point #2	505.17	700.00	V

Calibration Point #2	5354.17	7020.93	V
Internal Reference	5334.88	7002.73	V

MICRO LOG FIELD CHECK

Tool Name: Microlog Pad - M296	Reference Calibration Date: 22-Apr-12 00:32:51
Engineer: T. HYDE	Calibration Date: 15-May-12 17:49:35
Software Version: WL INSITE R3.4.2 (Build 2)	Calibration Version: 1

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Shop	Field	Shop	Field	
Tool Zero	-0.07	-0.07	-0.05	-0.05	ohmm
Internal Reference	19.93	19.97	19.95	19.99	ohmm

Summary

Signal	Shop	Field	Difference	Tolerance
Microlog Normal	19.93	19.97	-0.04	+/- 0.80
Microlog Lateral	19.95	19.99	-0.04	+/- 0.80

CALIBRATION SUMMARY

Sensor	Shop	Field	Post	Difference	Tolerance	Units
GTET-11048627						
Gamma Ray Calibrator	269.6	271.5	-----	-1.9	+/- 9.00	api
Microlog Pad-M296						
MicroLog Normal	19.93	19.97	-----	-0.04	+/-0.80	ohmm
MicroLog Lateral	19.95	19.99	-----	-0.04	+/-0.80	ohmm

Data: TALBOTT_7_910001 SP-GTET-DSN-SDL-ACRT-CHIDLE Date: 15-May-12 23:24:19

PARAMETERS REPORT

Depth ((ft))	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.300	ppg
	SHARED	WAGT	Weighting Agent	Natural	
	SHARED	BSAL	Borehole salinity	0.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	2.000	ohmm
	SHARED	TRM	Temperature of Mud	75.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in
	SHARED	ST	Surface Temperature	75.0	degF
	SHARED	TD	Total Well Depth	4840.00	ft
	SHARED	BHT	Bottom Hole Temperature	200.0	degF
	SHARED	SVTM	Navigation and Survey Master Tool	NONE	
	SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
	SHARED	TEMM	Temperature Master Tool	NONE	
	SHARED	BHSM	Borehole Size Master Tool	NONE	
	Rwa /	YPOK	Process Greenlet?	Yes	

CrossPlot	XPOK	Process Crossplot?	Yes	
Rwa / CrossPlot	FCHO	Select Source of F	Automatic	
Rwa / CrossPlot	AFAC	Archie A factor	0.6200	
Rwa / CrossPlot	MFAC	Archie M factor	2.1500	
Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF
Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
GTET	GROK	Process Gamma Ray?	Yes	
GTET	GRSO	Gamma Tool Standoff	0.000	in
GTET	GEOK	Process Gamma Ray EVR?	No	
GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
DSNT	DNOK	Process DSN?	Yes	
DSNT	DEOK	Process DSN EVR?	No	
DSNT	NLIT	Neutron Lithology	Limestone	
DSNT	DNOS	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
DSNT	DNTP	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
SDLT	CLOK	Process Caliper Outputs?	Yes	
SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	No	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Up	
ACRt Sonde	TPOS	Tool Position	Eccentered	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMIN	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	

BOTTOM _____

Data: TALBOTT_7_9I0001 SP-GTET-DSN-SDL-ACRT-CHIDLE Date: 15-May-12 23:25:00

INPUTS, DELAYS AND FILTERS TABLE

Mnemonic	Input Description	Delay (ft)	Filter Type	Filter Length (ft)
Depth Panel				
TENS	Tension	0.00	NO	
SP Sub				

PLTC	Plot Control Mask	50.81	NO	
SP	Spontaneous Potential	50.81	BLK	1.250
SPR	Raw Spontaneous Potential	50.81	NO	
SPO	Spontaneous Potential Offset	50.81	NO	
GTET				
TPUL	Tension Pull	42.79	NO	
GR	Natural Gamma Ray API	42.79	TRI	1.750
GRU	Unfiltered Natural Gamma Ray API	42.79	NO	
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution	42.79	W	1.416 , 0.750
ACCZ	Accelerometer Z	0.00	BLK	0.083
DEVI	Inclination	0.00	NO	
DSNT				
TPUL	Tension Pull	32.54	NO	
RNDS	Near Detector Telemetry Counts	32.64	BLK	1.417
RFDS	Far Detector Telemetry Counts	33.39	TRI	0.583
DNTT	DSN Tool Temperature	32.64	NO	
DSNS	DSN Tool Status	32.54	NO	
ERND	Near Detector Telemetry Counts EVR	32.64	BLK	0.000
ERFD	Far Detector Telemetry Counts EVR	33.39	BLK	0.000
ENTM	DSN Tool Temperature EVR	32.64	NO	
SDLT				
TPUL	Tension Pull	22.65	NO	
PCAL	Pad Caliper	22.65	TRI	0.250
ACAL	Arm Caliper	22.65	TRI	0.250
ACRt Sonde				
TPUL	Tension Pull	2.97	NO	
F1R1	ACRT 12KHz - 80in R value	9.22	BLK	0.000
F1X1	ACRT 12KHz - 80in X value	9.22	BLK	0.000
F1R2	ACRT 12KHz - 50in R value	6.72	BLK	0.000
F1X2	ACRT 12KHz - 50in X value	6.72	BLK	0.000
F1R3	ACRT 12KHz - 29in R value	5.22	BLK	0.000
F1X3	ACRT 12KHz - 29in X value	5.22	BLK	0.000
F1R4	ACRT 12KHz - 17in R value	4.22	BLK	0.000
F1X4	ACRT 12KHz - 17in X value	4.22	BLK	0.000
F1R5	ACRT 12KHz - 10in R value	3.72	BLK	0.000
F1X5	ACRT 12KHz - 10in X value	3.72	BLK	0.000
F1R6	ACRT 12KHz - 6in R value	3.47	BLK	0.000
F1X6	ACRT 12KHz - 6in X value	3.47	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	9.22	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	9.22	BLK	0.000
F2R2	ACRT 36KHz - 50in R value	6.72	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.72	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	5.22	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	5.22	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	4.22	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	4.22	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.72	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.72	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.47	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.47	BLK	0.000
F3R1	ACRT 72KHz - 80in R value	9.22	BLK	0.000
F3X1	ACRT 72KHz - 80in X value	9.22	BLK	0.000

F3R2	ACRT 72KHz - 50in R value	6.72	BLK	0.000
F3X2	ACRT 72KHz - 50in X value	6.72	BLK	0.000
F3R3	ACRT 72KHz - 29in R value	5.22	BLK	0.000
F3X3	ACRT 72KHz - 29in X value	5.22	BLK	0.000
F3R4	ACRT 72KHz - 17in R value	4.22	BLK	0.000
F3X4	ACRT 72KHz - 17in X value	4.22	BLK	0.000
F3R5	ACRT 72KHz - 10in R value	3.72	BLK	0.000
F3X5	ACRT 72KHz - 10in X value	3.72	BLK	0.000
F3R6	ACRT 72KHz - 6in R value	3.47	BLK	0.000
F3X6	ACRT 72KHz - 6in X value	3.47	BLK	0.000
RMUD	Mud Resistivity	12.76	BLK	0.000
F1RT	Transmitter Reference 12 KHz Real Signal	2.97	BLK	0.000
F1XT	Transmitter Reference 12 KHz Imaginary Signal	2.97	BLK	0.000
F2RT	Transmitter Reference 36 KHz Real Signal	2.97	BLK	0.000
F2XT	Transmitter Reference 36 KHz Imaginary Signal	2.97	BLK	0.000
F3RT	Transmitter Reference 72 KHz Real Signal	2.97	BLK	0.000
F3XT	Transmitter Reference 72 KHz Imaginary Signal	2.97	BLK	0.000
TFPU	Upper Feedpipe Temperature Calculated	2.97	BLK	0.000
TFPL	Lower Feedpipe Temperature Calculated	2.97	BLK	0.000
ITMP	Instrument Temperature	2.97	BLK	0.000
TCVA	Temperature Correction Values Loop Off	2.97	NO	
TIDV	Instrument Temperature Derivative	2.97	NO	
TUDV	Upper Temperature Derivative	2.97	NO	
TLDV	Lower Temperature Derivative	2.97	NO	
TRBD	Receiver Board Temperature	2.97	NO	

SDLT Pad

TPUL	Tension Pull	22.64	NO	
NAB	Near Above	22.46	BLK	0.920
NHI	Near Cesium High	22.46	BLK	0.920
NLO	Near Cesium Low	22.46	BLK	0.920
NVA	Near Valley	22.46	BLK	0.920
NBA	Near Barite	22.46	BLK	0.920
NDE	Near Density	22.46	BLK	0.920
NPK	Near Peak	22.46	BLK	0.920
NLI	Near Lithology	22.46	BLK	0.920
NBAU	Near Barite Unfiltered	22.46	BLK	0.250
NLIU	Near Lithology Unfiltered	22.46	BLK	0.250
FAB	Far Above	22.81	BLK	0.250
FHI	Far Cesium High	22.81	BLK	0.250
FLO	Far Cesium Low	22.81	BLK	0.250
FVA	Far Valley	22.81	BLK	0.250
FBA	Far Barite	22.81	BLK	0.250
FDE	Far Density	22.81	BLK	0.250
FPK	Far Peak	22.81	BLK	0.250
FLI	Far Lithology	22.81	BLK	0.250
PTMP	Pad Temperature	22.65	BLK	0.920
NHV	Near Detector High Voltage	22.04	NO	
FHV	Far Detector High Voltage	22.04	NO	
ITMP	Instrument Temperature	22.04	NO	
DDHV	Detector High Voltage	22.04	NO	

Microlog Pad

TPUL	Tension Pull	22.83	NO	
MINV	Microlog Lateral	22.83	BLK	0.750
MNOR	Microlog Normal	22.83	BLK	0.750

COMPANY	VAL ENERGY, INC.		
WELL	TALBOT 7-9		
FIELD	SOUTH RHODES		
COUNTY	BARBER	STATE	KANSAS
HALLIBURTON		MICRO LOG	