




Weatherford[®]

MICRORESISTIVITY LOG

COMPANY **MULL DRILLING COMPANY, INC.**
WELL **BLEUMER # 1-13**
FIELD **WILDCAT**
PROVINCE/COUNTY **GRAY COUNTY**
COUNTRY/STATE **U.S.A. / KANSAS**
LOCATION **2112' FNL & 778' FWL**
SW/4 NW/4



SEC	TWP	RGE	Other Services	SGS	Elevations:
13	26S	30W	MPD/MDN		KB 2785.00
API Number	15-069-20371		MSS		DF 2783.00
Permit Number			MA/MFE		GL 2772.00
Permanent Datum G.L., Elevation 2772 feet					
Log Measured From KB					
Drilling Measured From K.B.					
Date	07-MAY-2012				

Run Number	ONE				
Depth Driller	6200.00	feet			
Depth Logger	6193.00	feet			
First Reading	6146.00	feet			
Last Reading	3700.00	feet			
Casing Driller	464.00	feet			
Casing Logger	462.00	feet			
Bit Size	7.875	inches			
Hole Fluid Type	CHEMICAL				
Density / Viscosity	9.40	lb/USg	57.00	CP	
PH / Fluid Loss	8.50		8.00	ml/30Min	
Sample Source	FLOWLINE				
Rm @ Measured Temp	0.87 @ 70.0	ohm-m			
Rmf @ Measured Temp	0.70 @ 70.0	ohm-m			
Rmc @ Measured Temp	1.04 @ 70.0	ohm-m			
Source Rmf / Rmc	CALC	CALC			
Rm @ BHT	0.49 @ 129.0	ohm-m			
Time Since Circulation	5 HOURS				
Max Recorded Temp	130.00	deg F			
Equipment Name	COMPACT				
Equipment / Base	13096	LIB			
Recorded By	A. GIAMBALVO				
Witnessed By	PAUL GERLACH				
S.O. / JOB #	3534535				LB12-115

BOREHOLE RECORD

Last Edited: 07-MAY-2012 07:55

Bit Size inches	Depth From feet	Depth To feet
7.875	462.00	6193.00

CASING RECORD

Type	Size inches	Depth From feet	Shoe Depth feet	Weight pounds/ft
SURFACE	8.625	13.00	462.00	24.00

REMARKS

Tools Ran: MCG, SGS, MML, MDN, MPD, SKJ, MFE, MSS, MAI.
 Hardware Used: MDN Dual Eccentralizer used. MPD 8 inch profile plate used. MFE, MSS and MAI 0.5 inch standoffs used.
 2.71 g/cc Limestone Density Matrix used to calculate porosity.
 Sonic porosity calculated using a Limestone scale (47.5 usec/ft).
 All intervals logged and scaled per customer's request.
 Annular volume with 5 inch production casing from TD to Surface Casing = 1468 cu. ft.
 Total hole volume from TD to Surface Casing = 2248 cu. ft.
 Service order: #3534535
 Rig: Duke # 9
 Engineer: A. Giambalvo
 Operator(s): J. LaPoint, N. Adame

All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not, guarantee the accuracy or correctness of any interpretations, and we shall not, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions in our price schedule.



5 INCH MAIN








Depth Based Data - Maximum Sampling Increment 10.0cm

Plotted on 07-MAY-2012 08:24

Filename: C:\Minimus 11_03_4044\Data\M...Mull Drilling Company, Inc. Bleumer # 1-13 Run 1_001.dta

Recorded on 07-MAY-2012 03:49

System Versions: Logged with 11.03.4044 Plotted with 11.03.4044

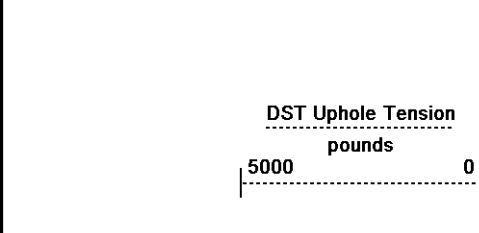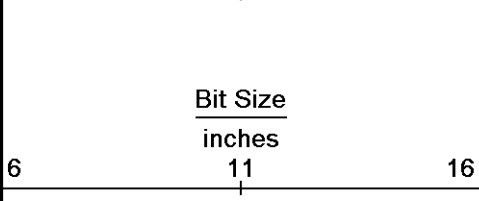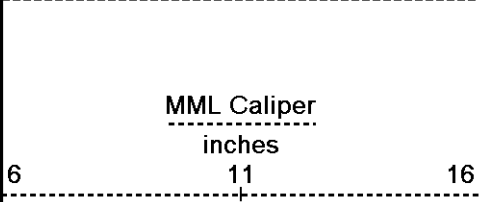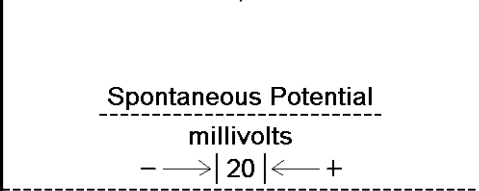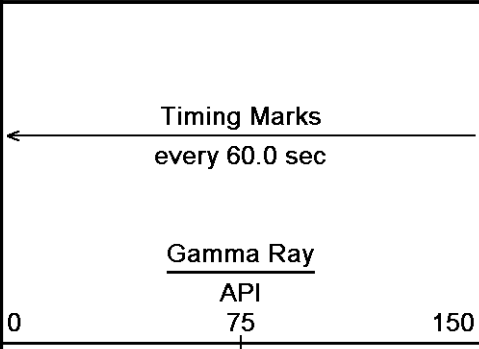

Depth
in
Feet

Borehole
Temp in
deg F


Replay
Scale
1:240

3700




115°



3750


Micro-normal
ohm metres




Micro-inverse
ohm metres

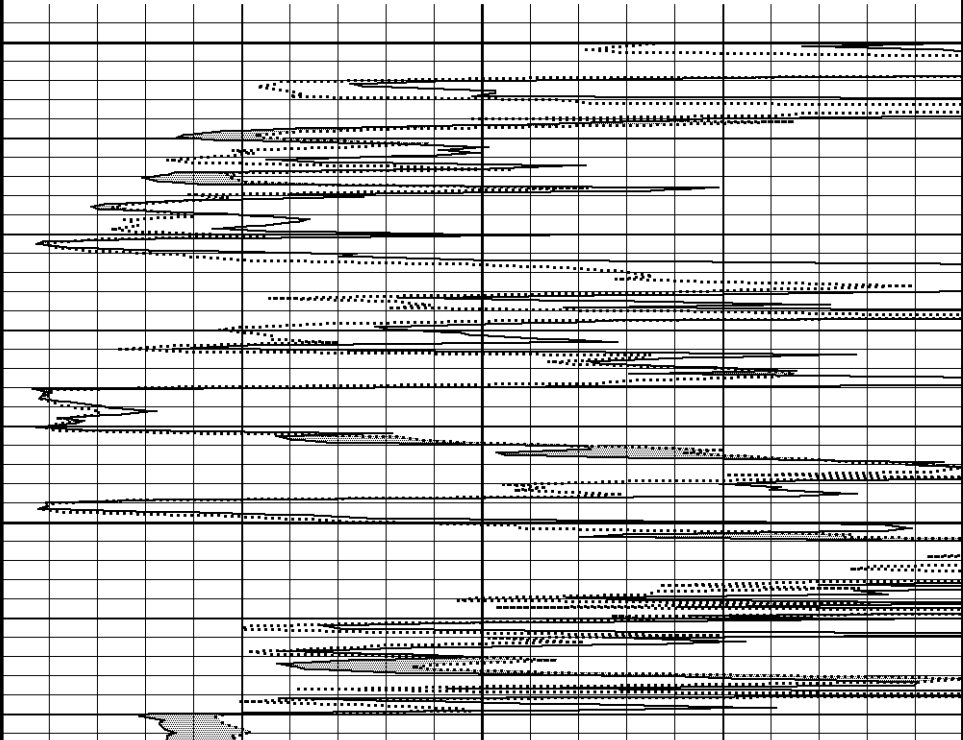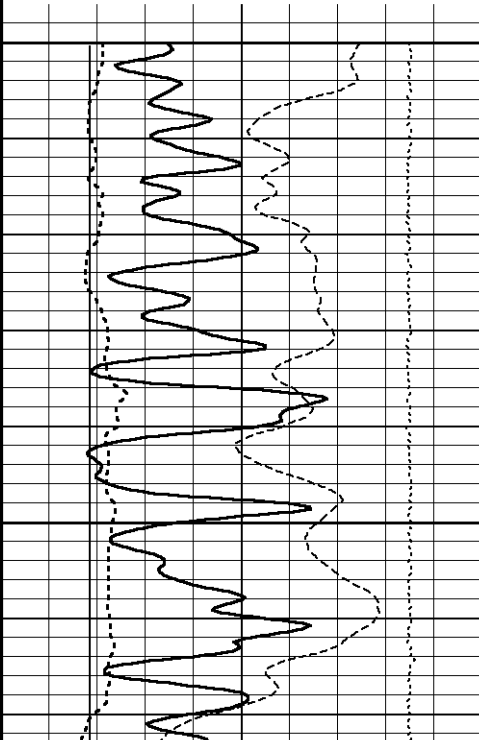

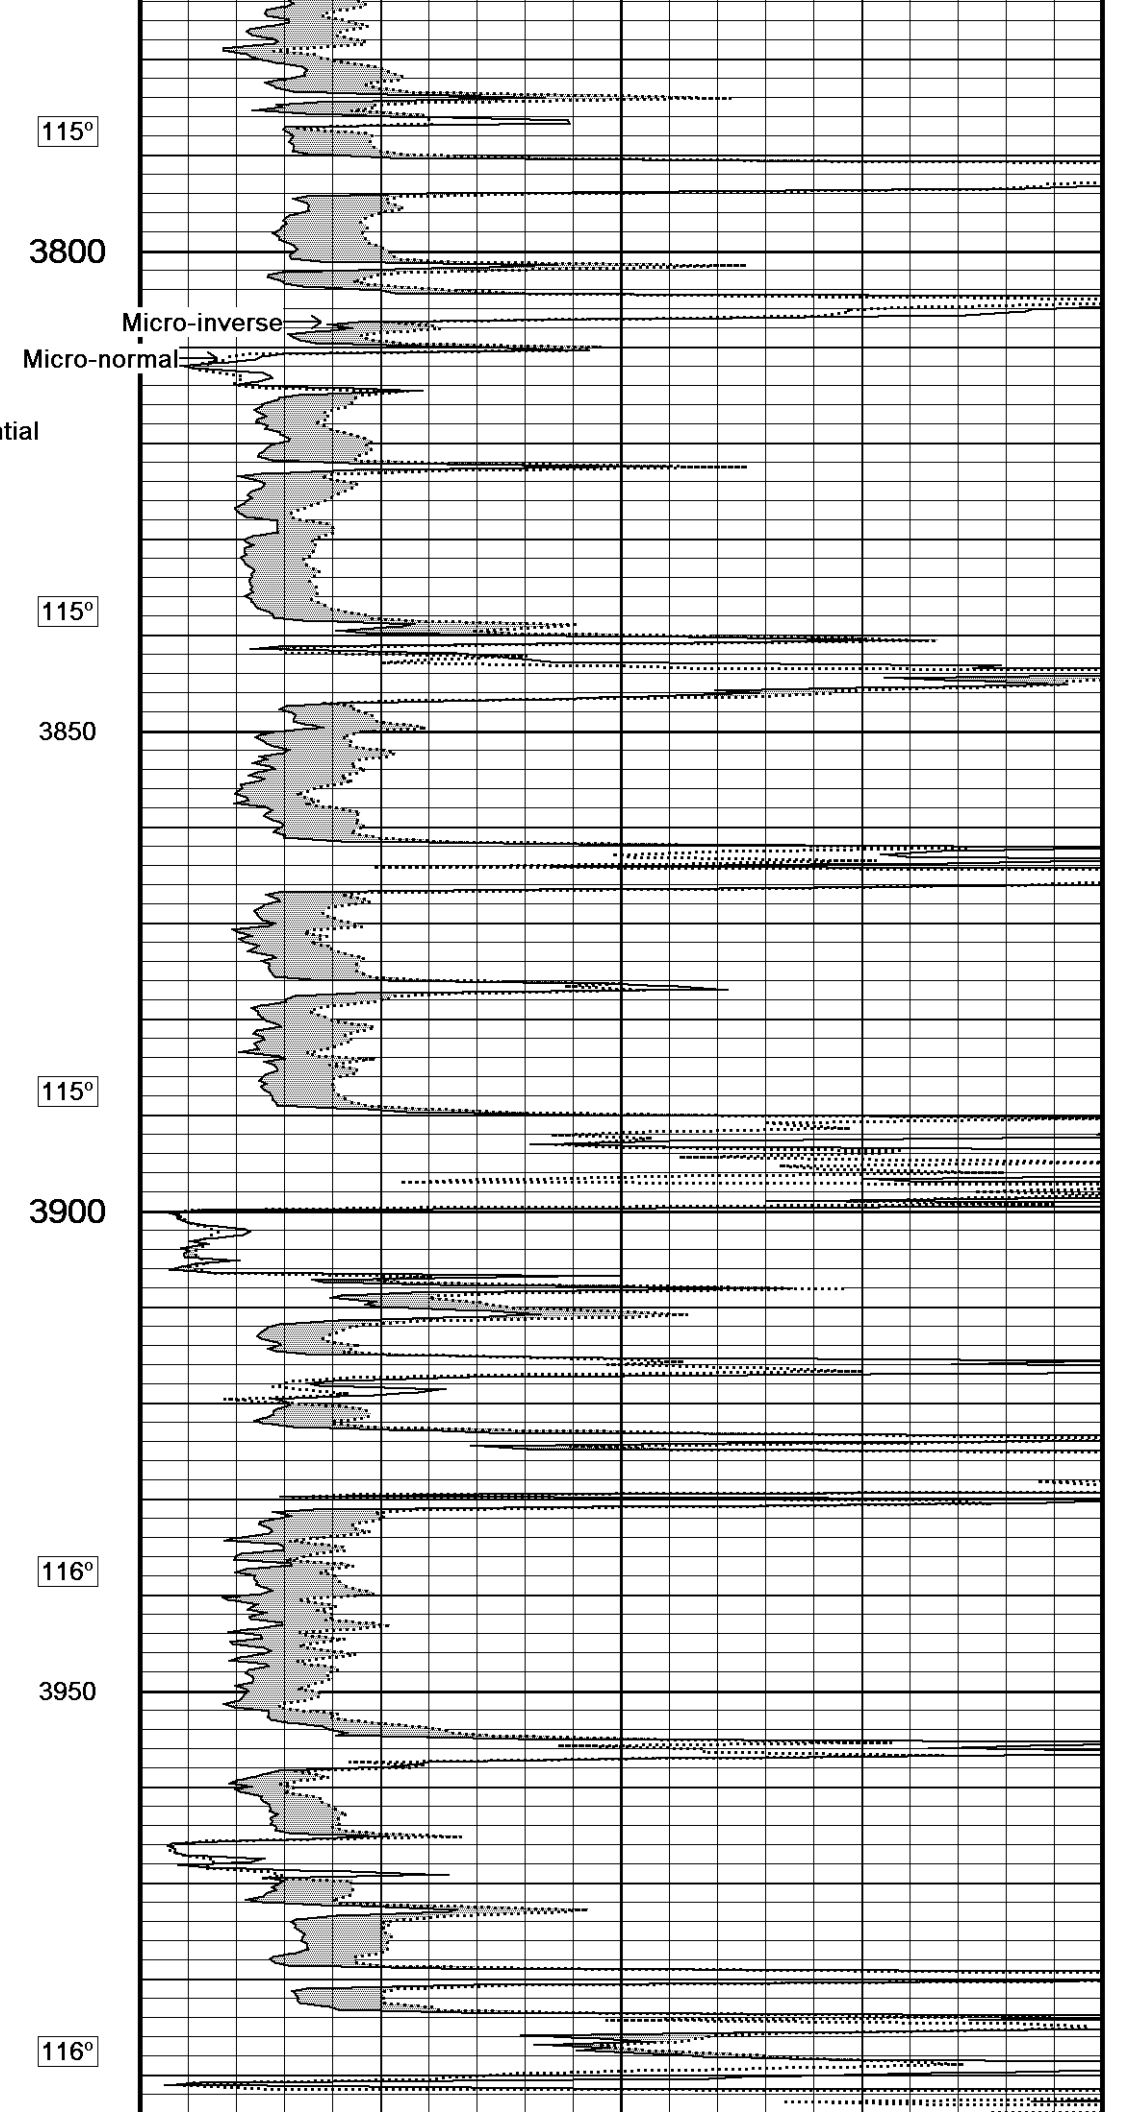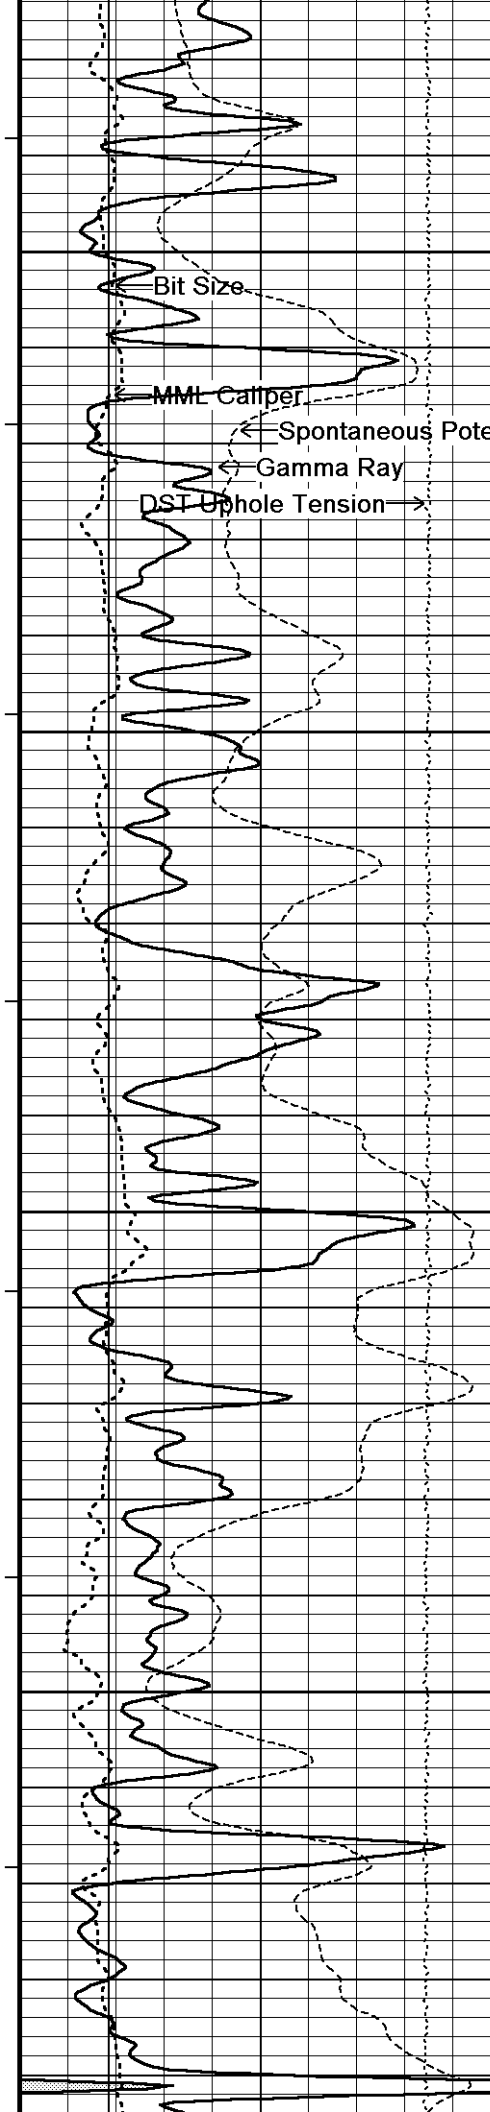


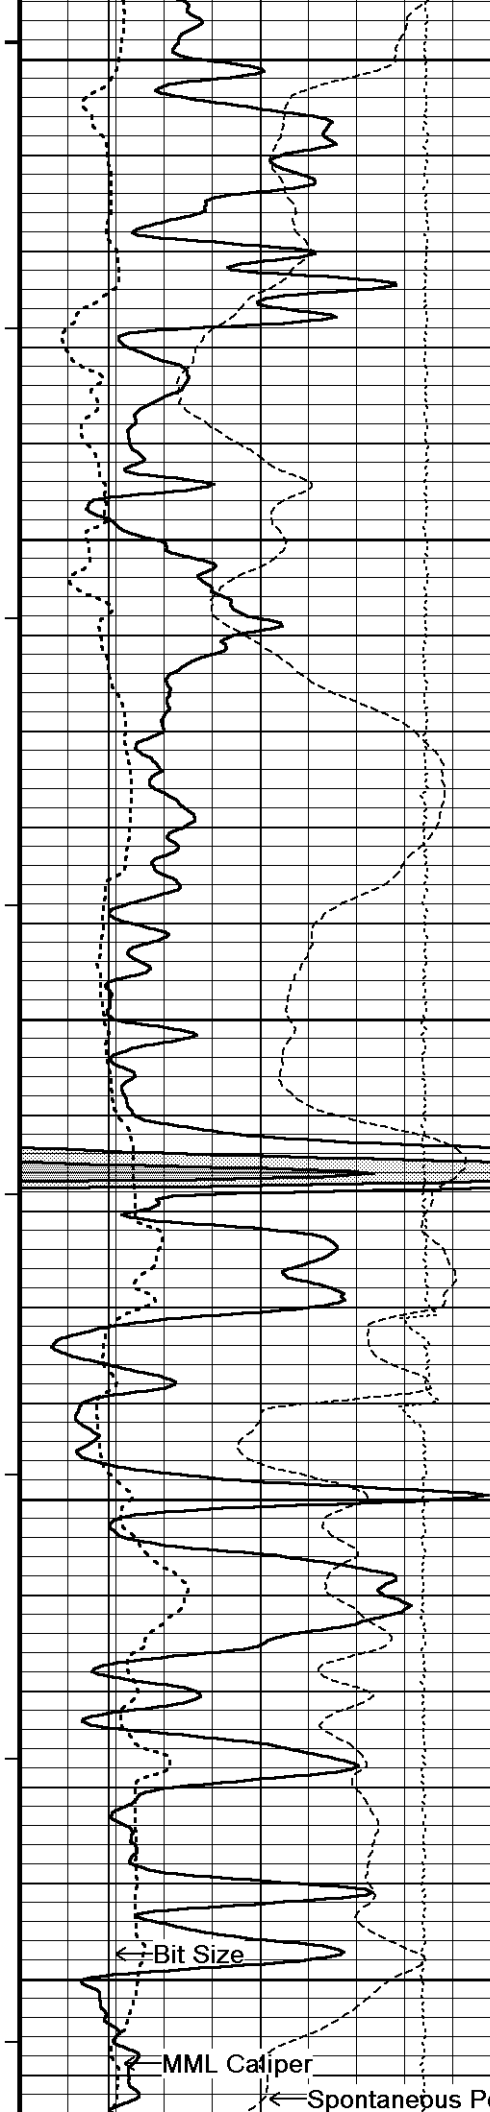


4000
116°
4050
117°
4100
117°
4150
117°
4200

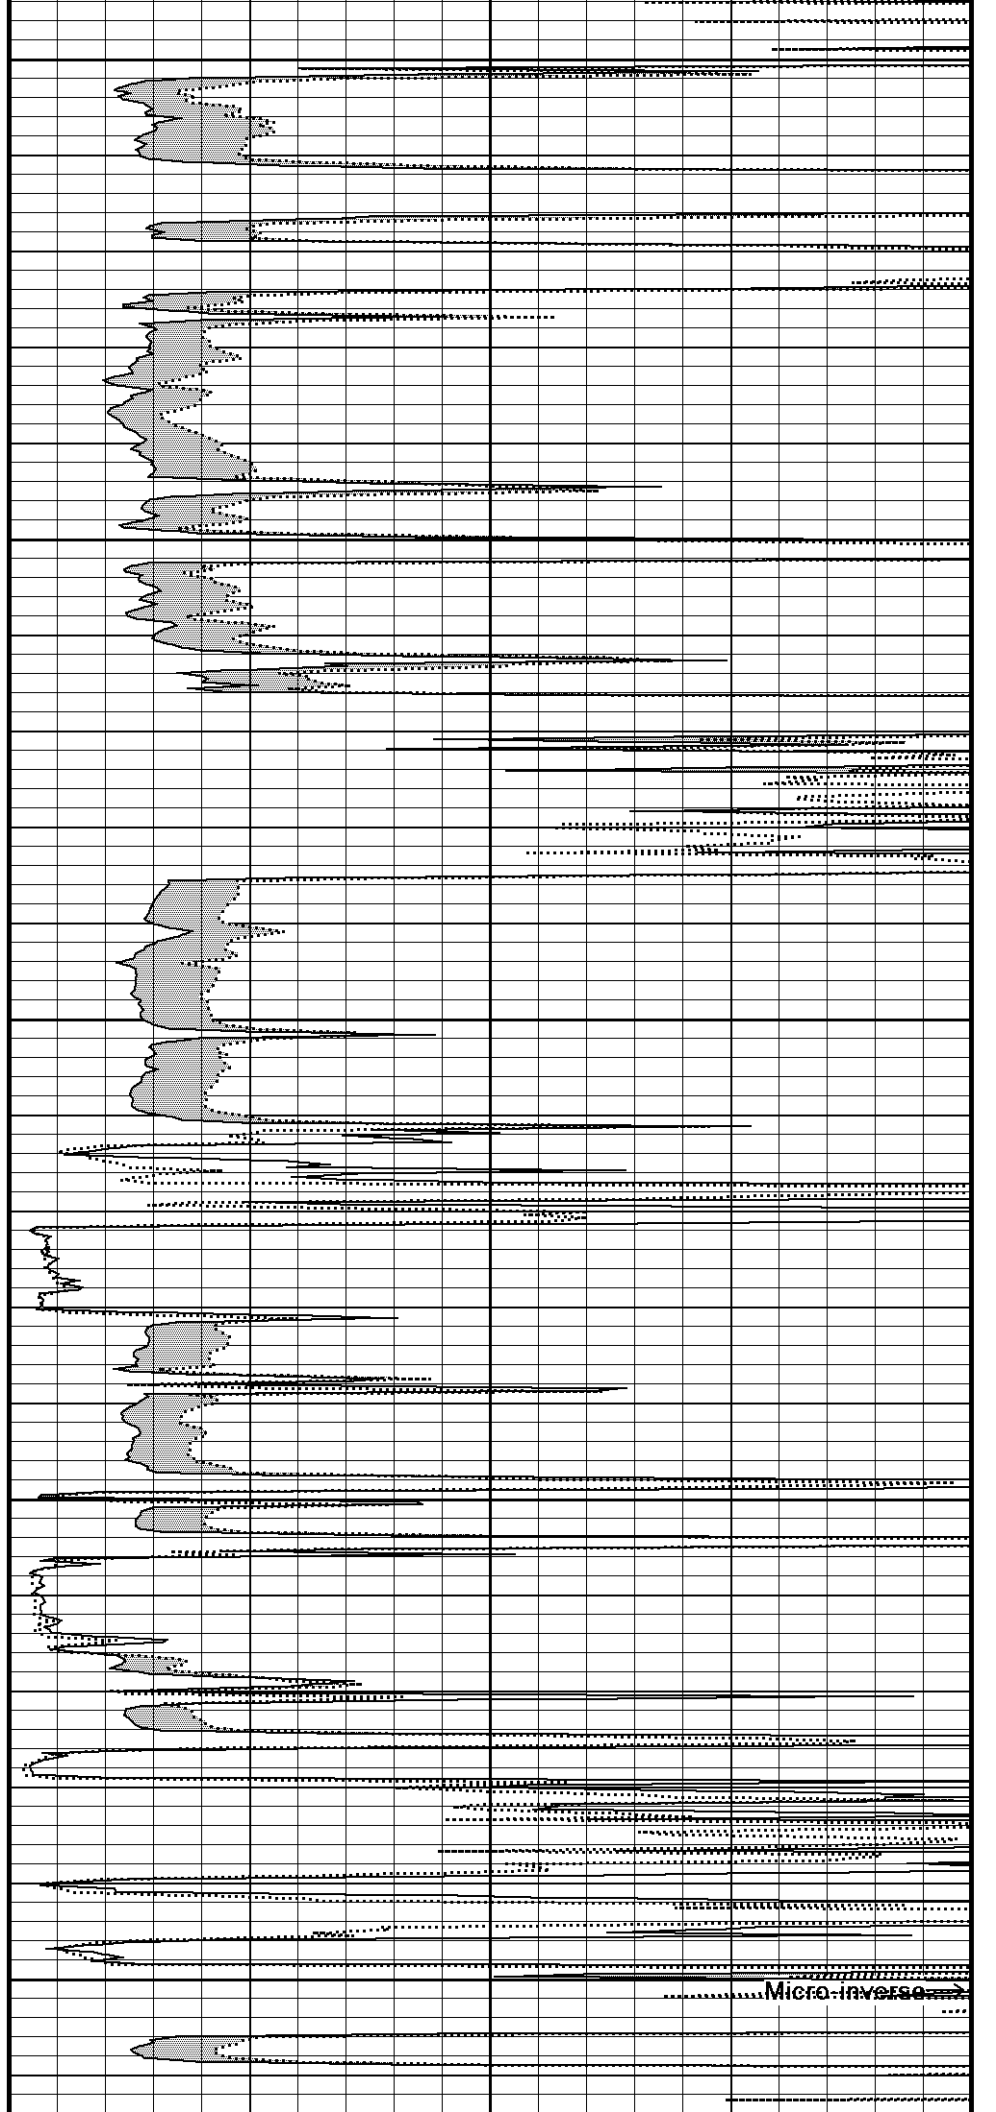


← Bit Size
MML Caliper
← Spontaneous Potential

Micro-inverse →

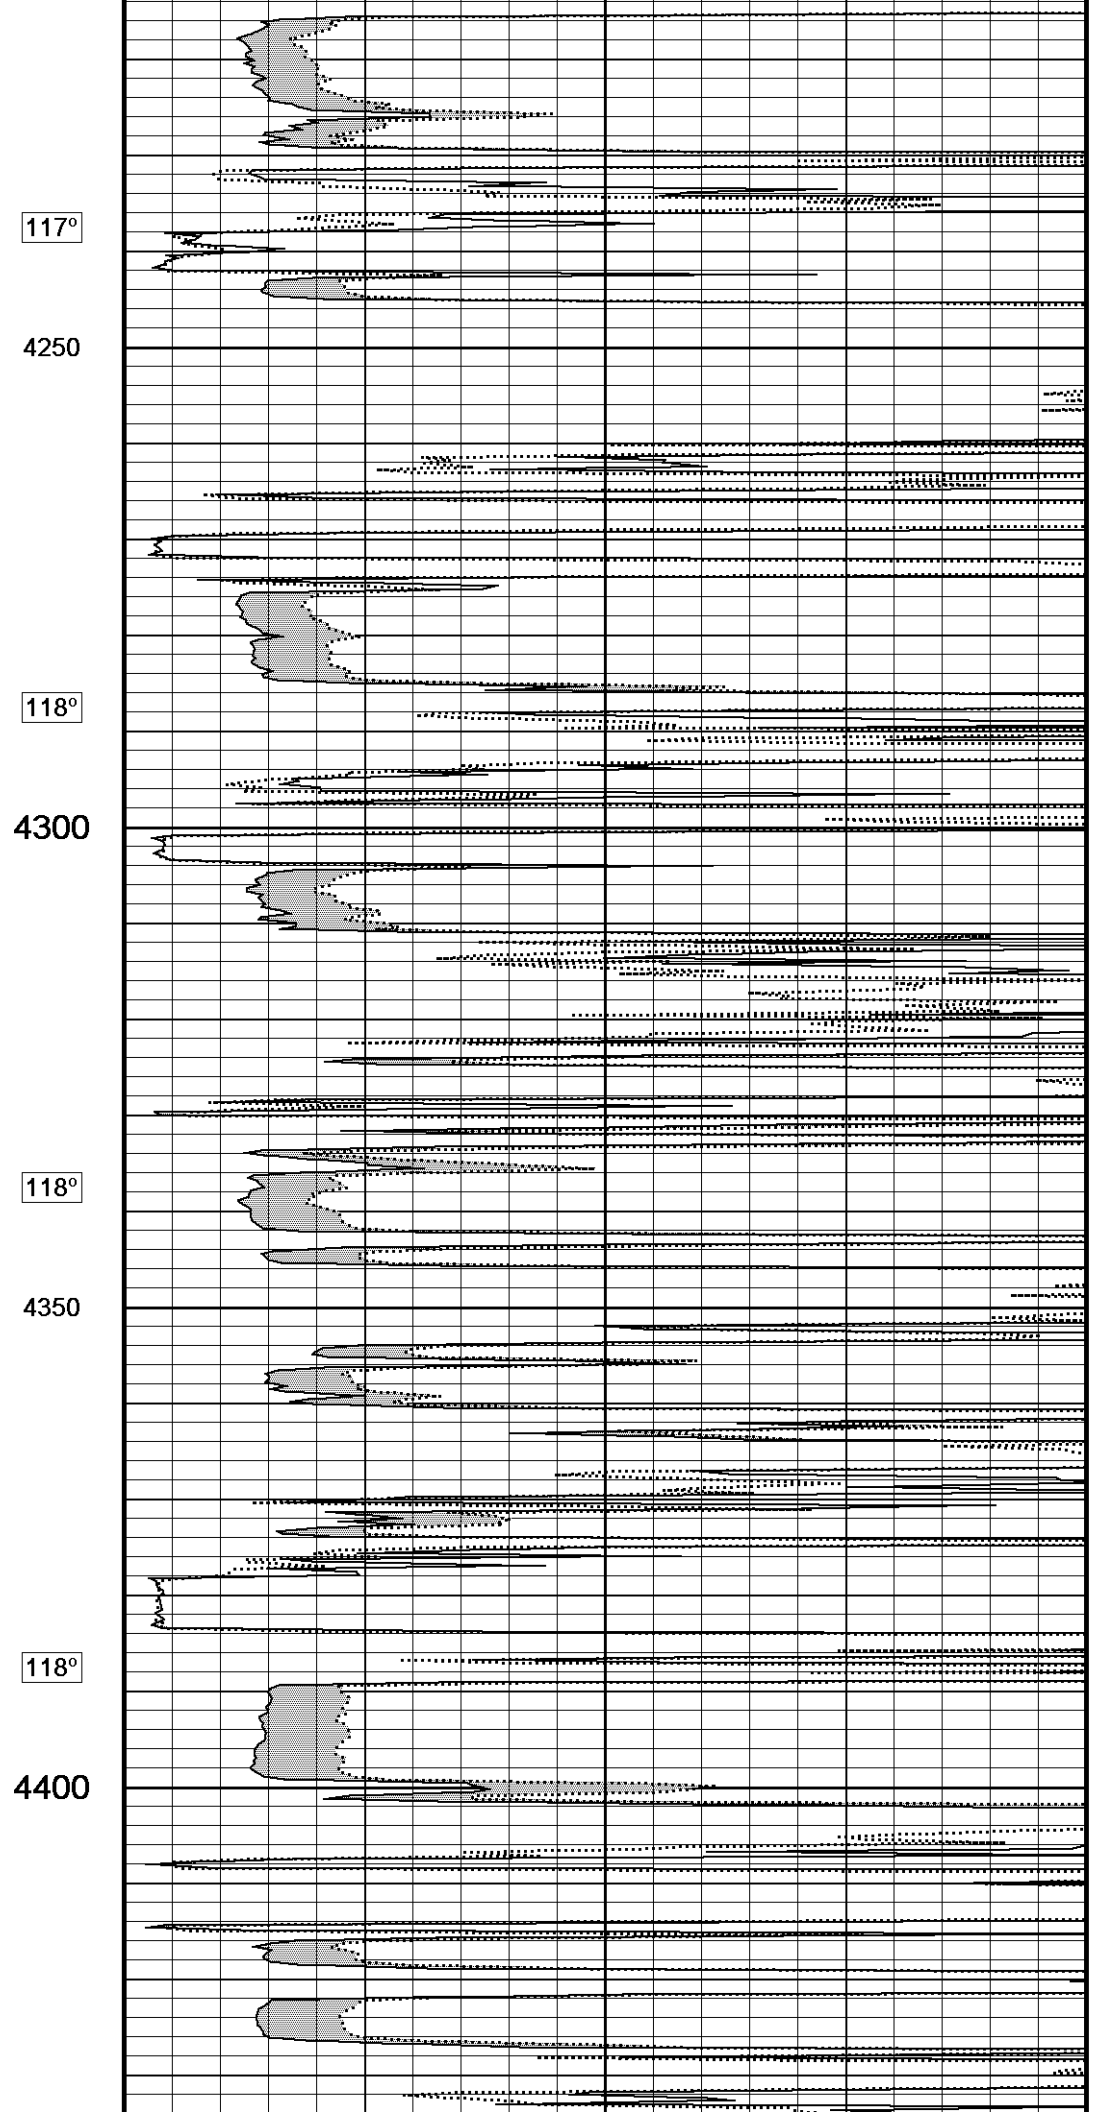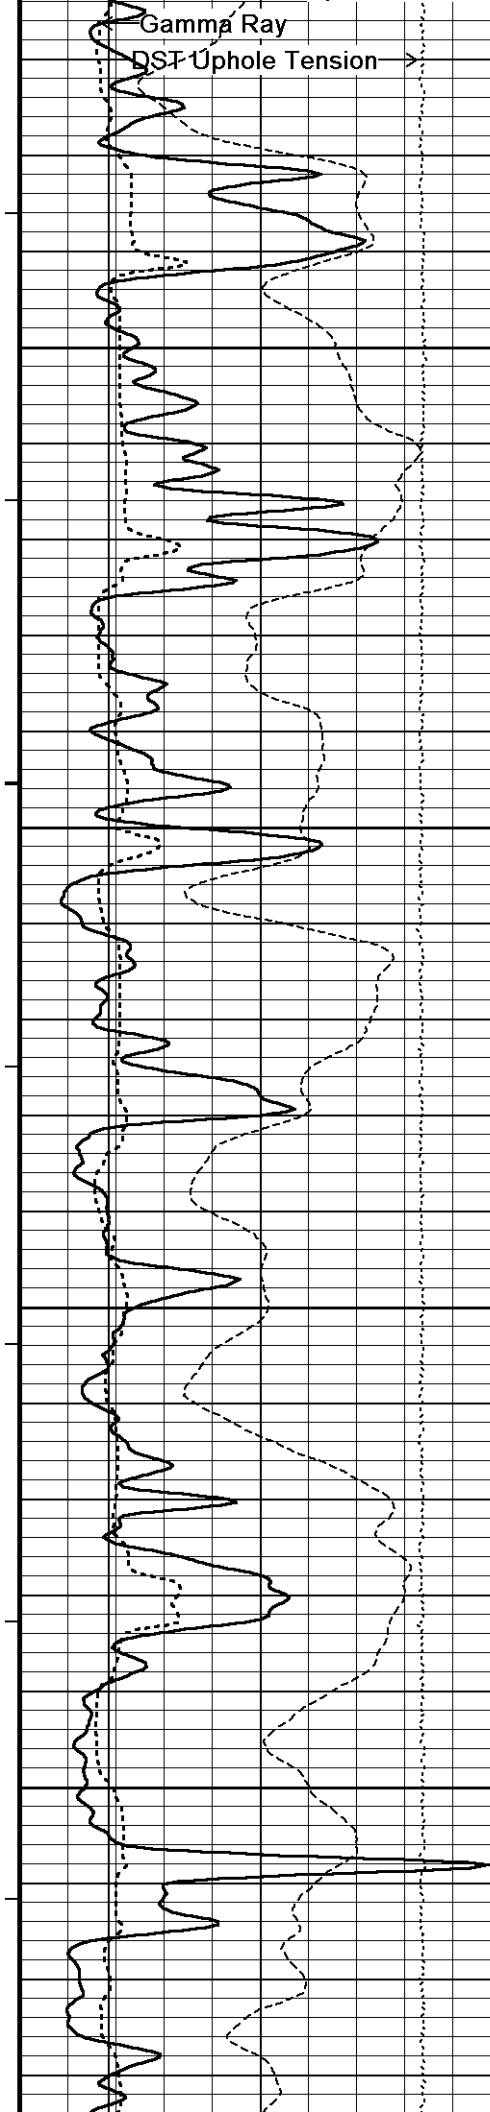




119°
4450
119°
4500
119°
4550
119°
4600
120°
4650

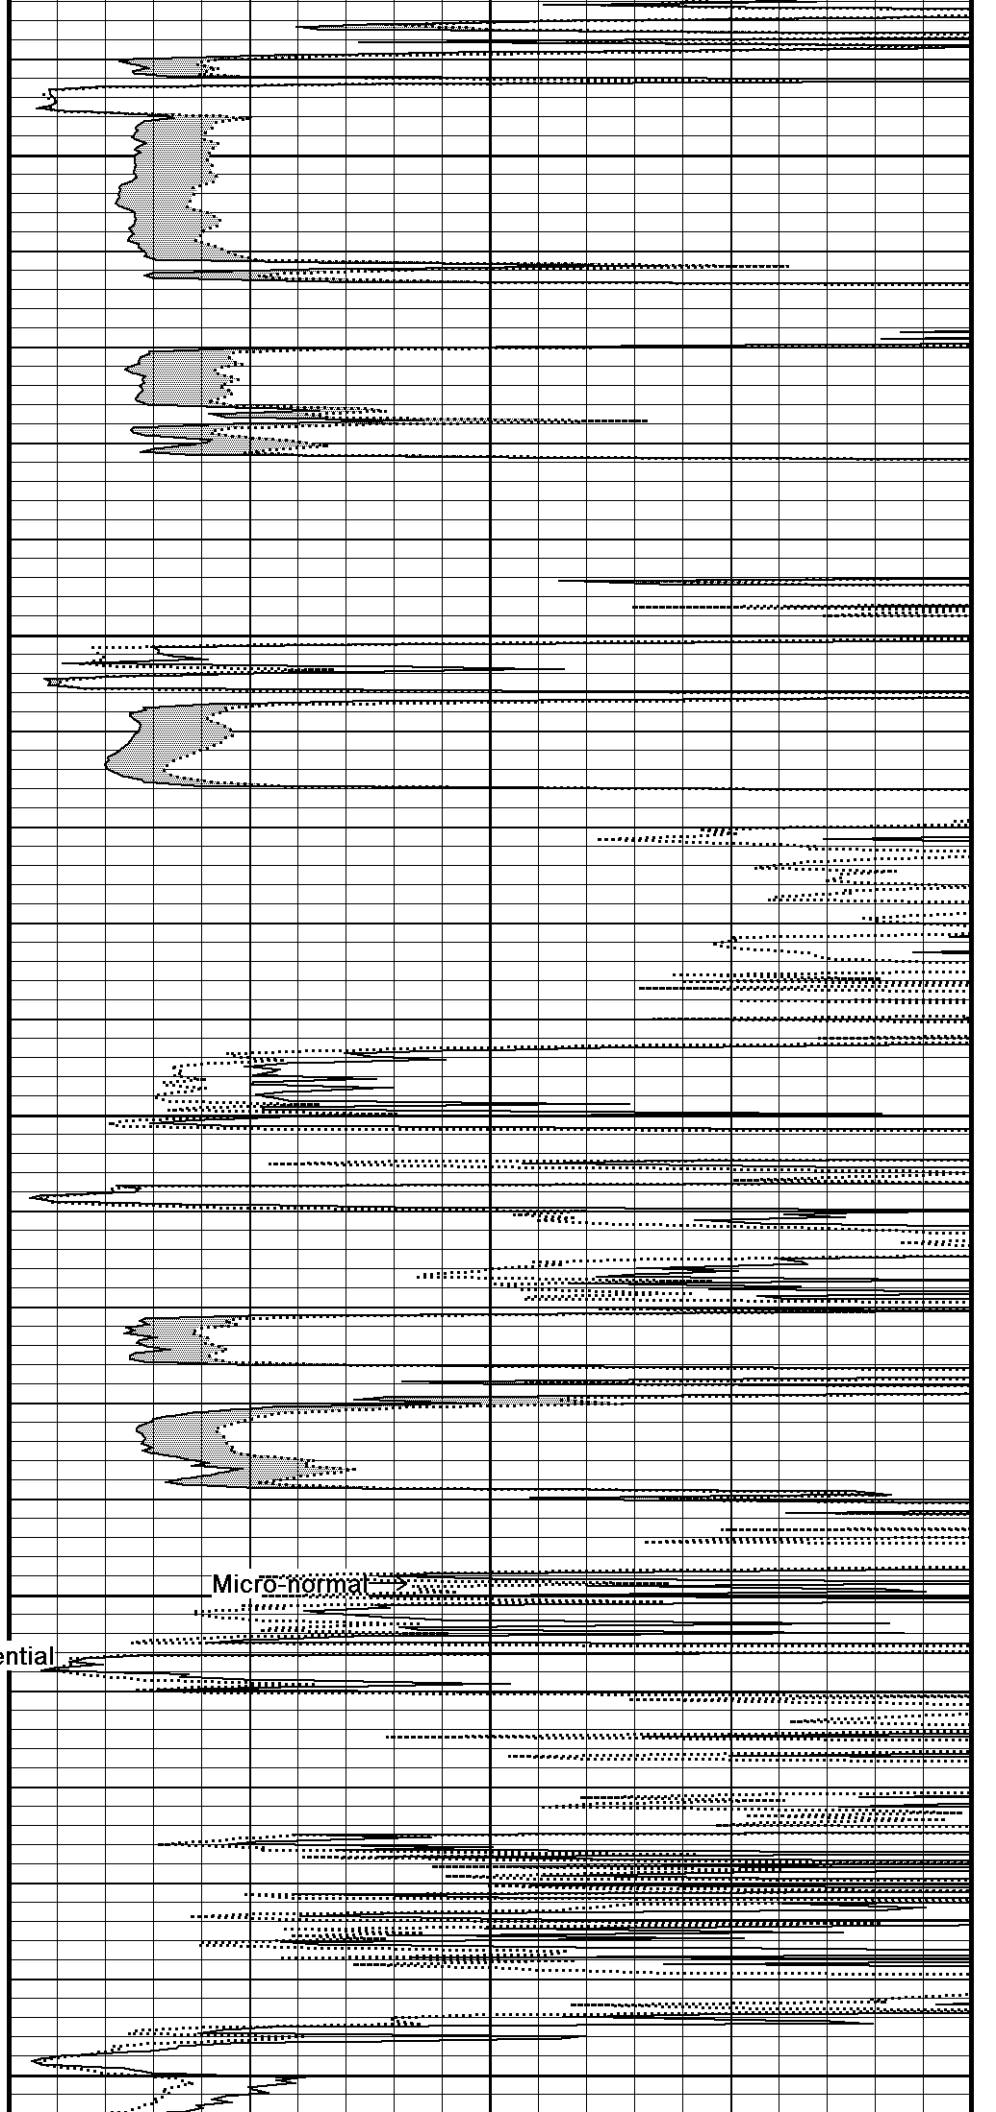

Micro-normal

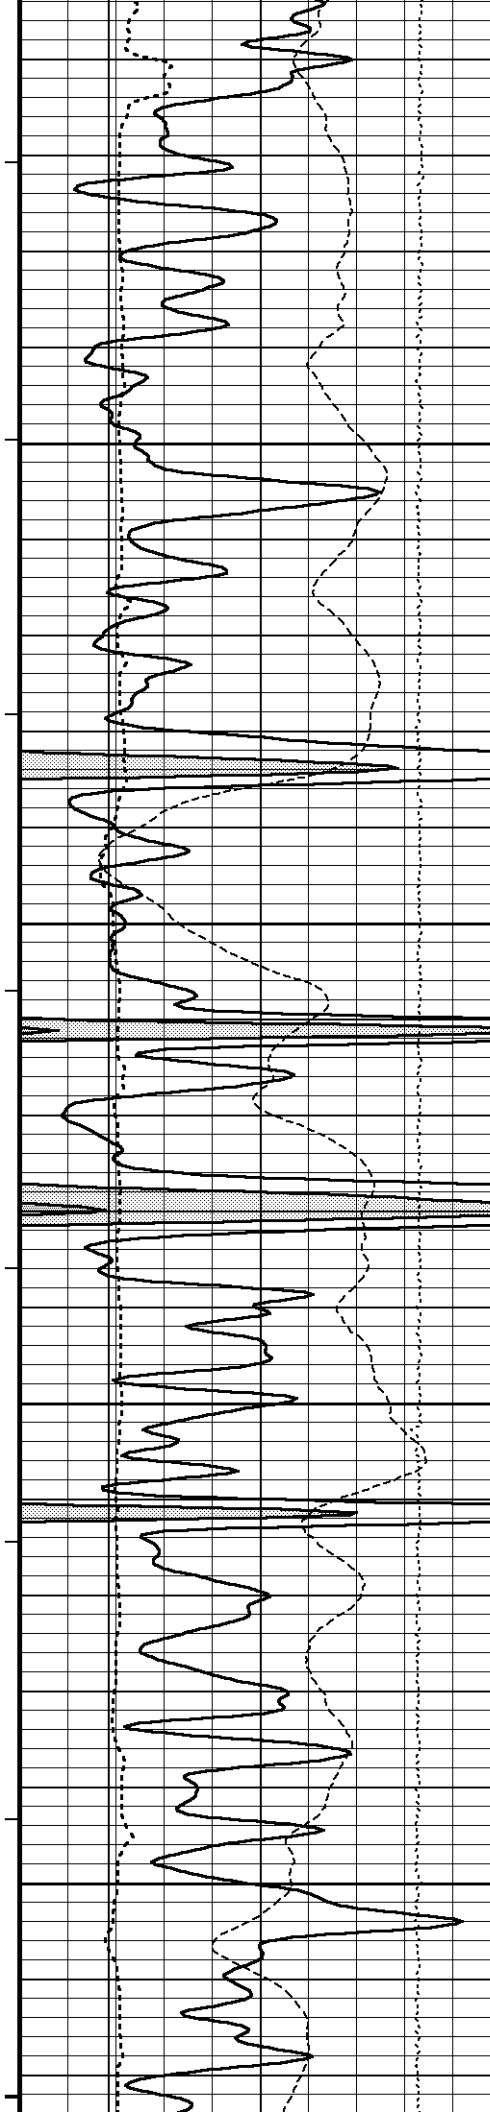

120°

4700

120°


4750


121°

4800

121°

4850

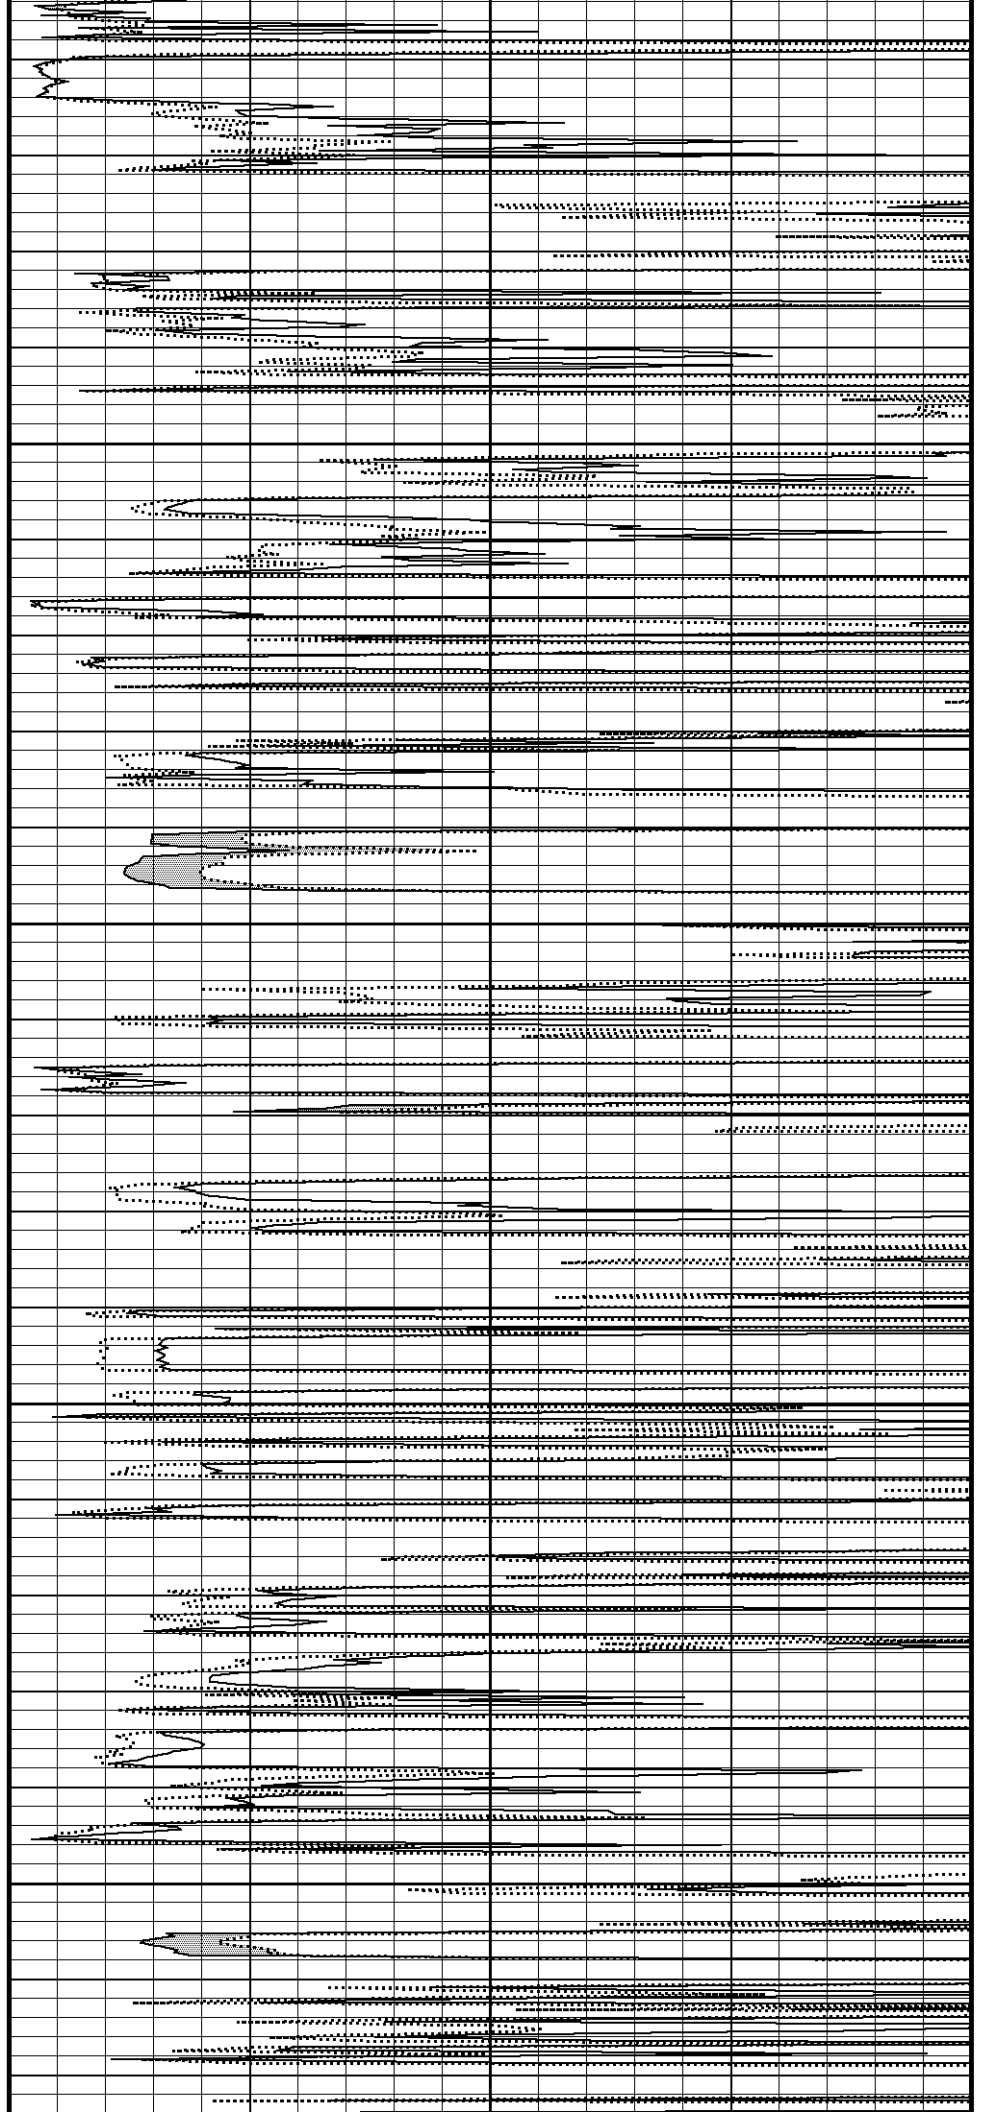

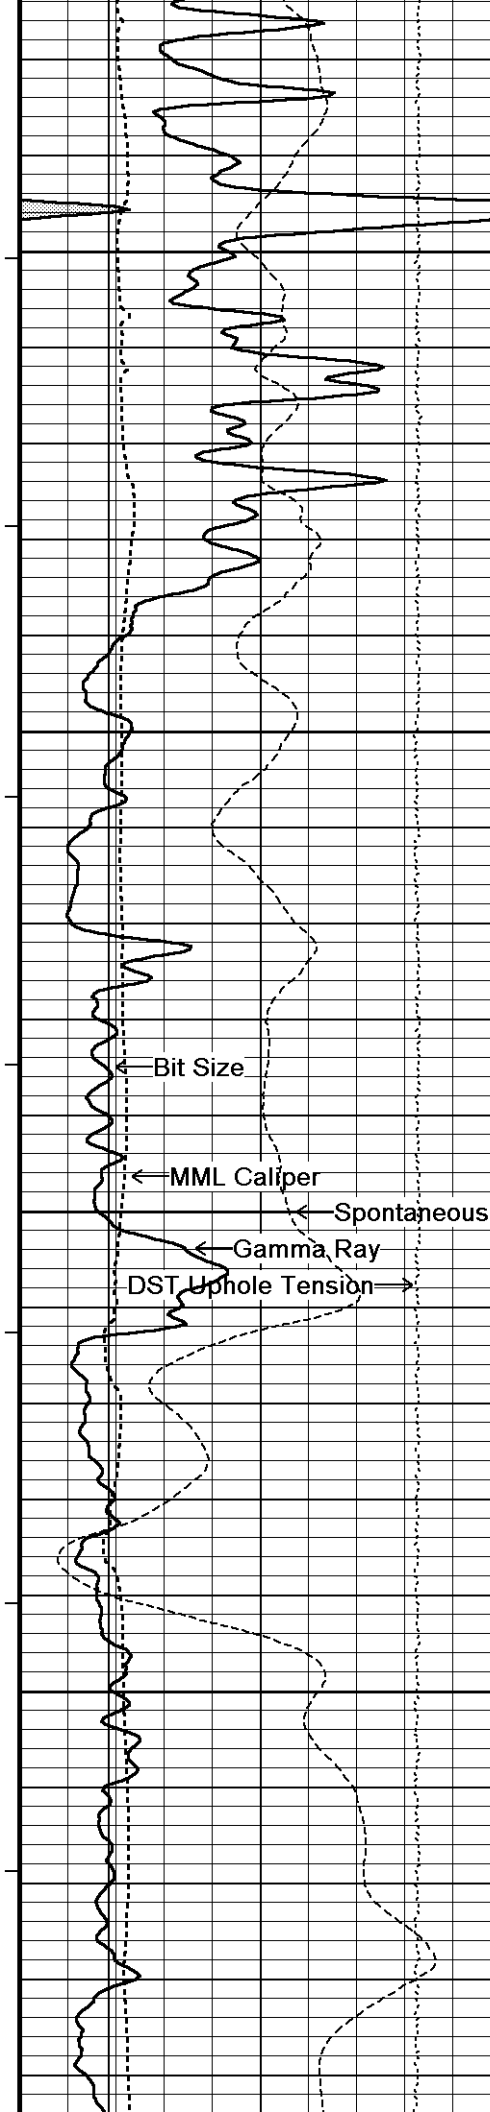

121°

4900

122°

4950


122°


5000

123°

5050

123°

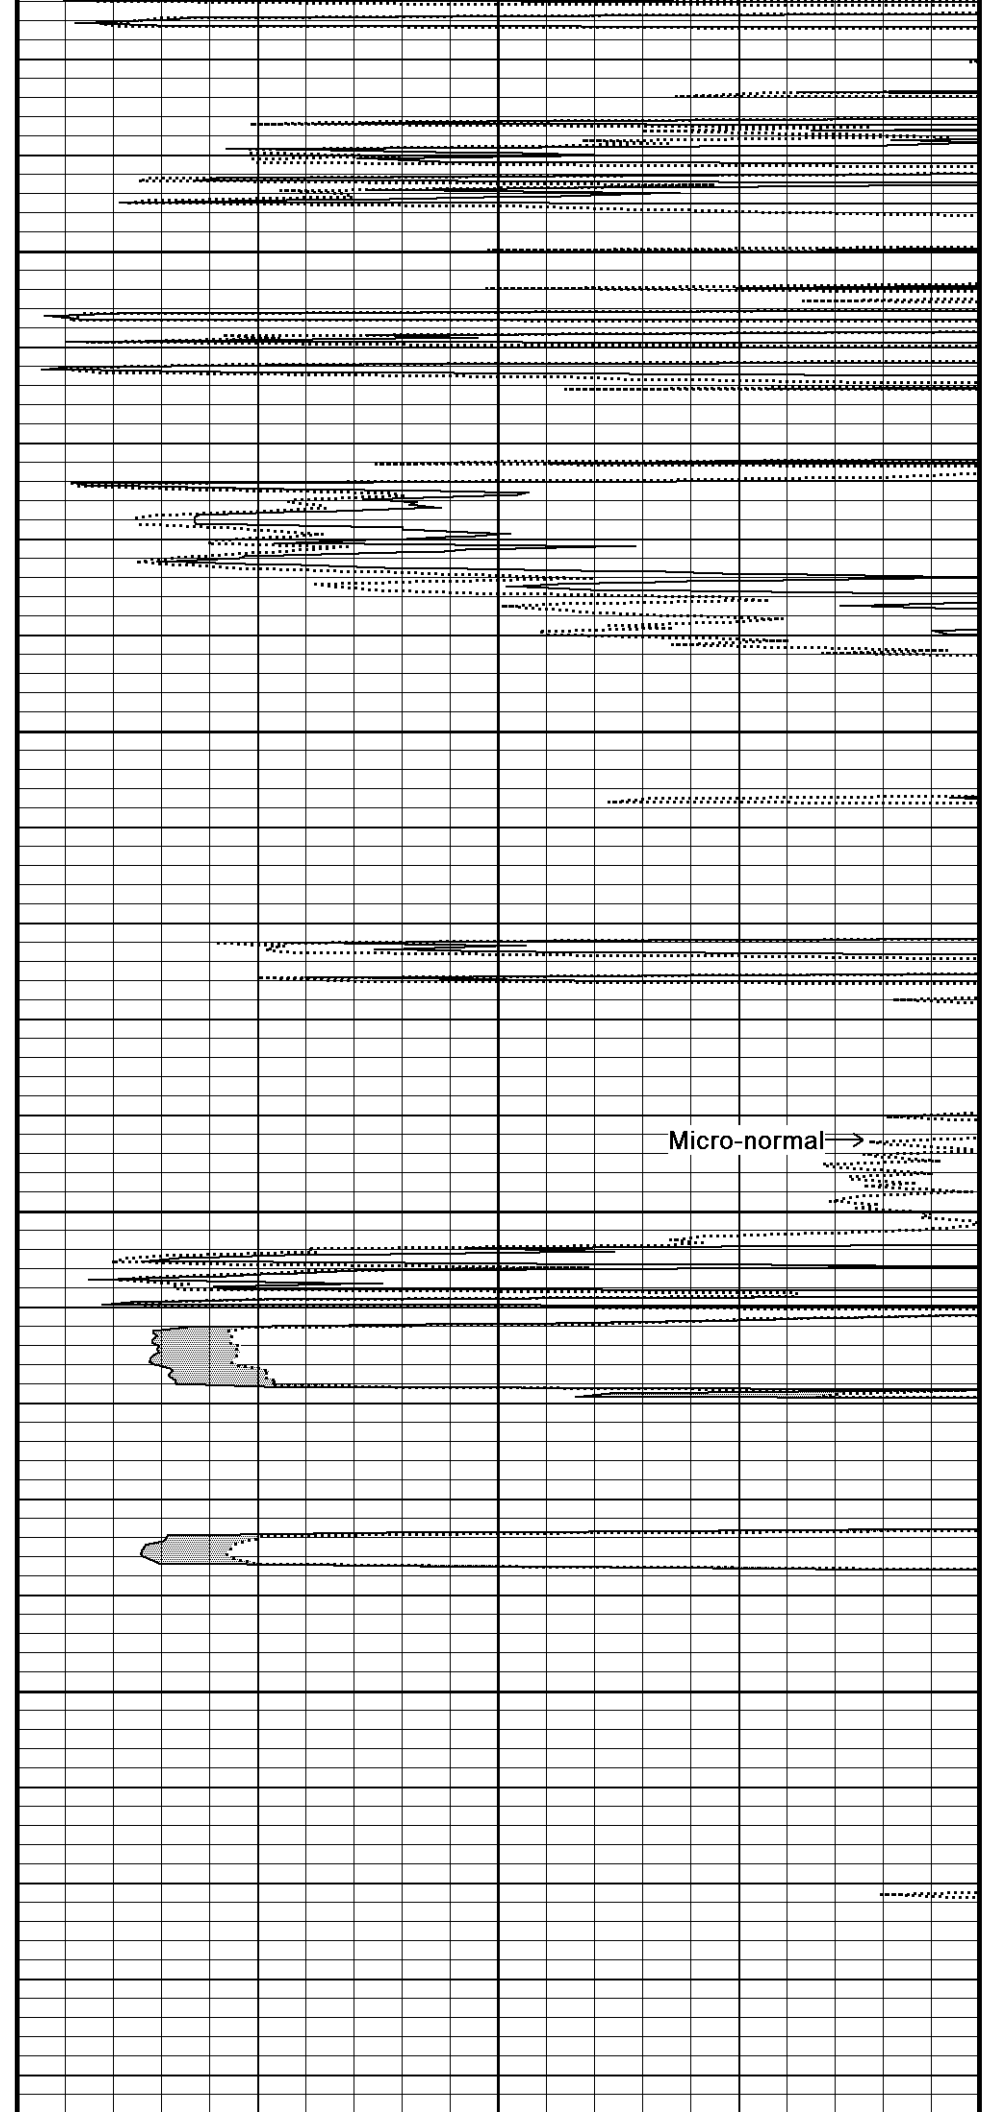

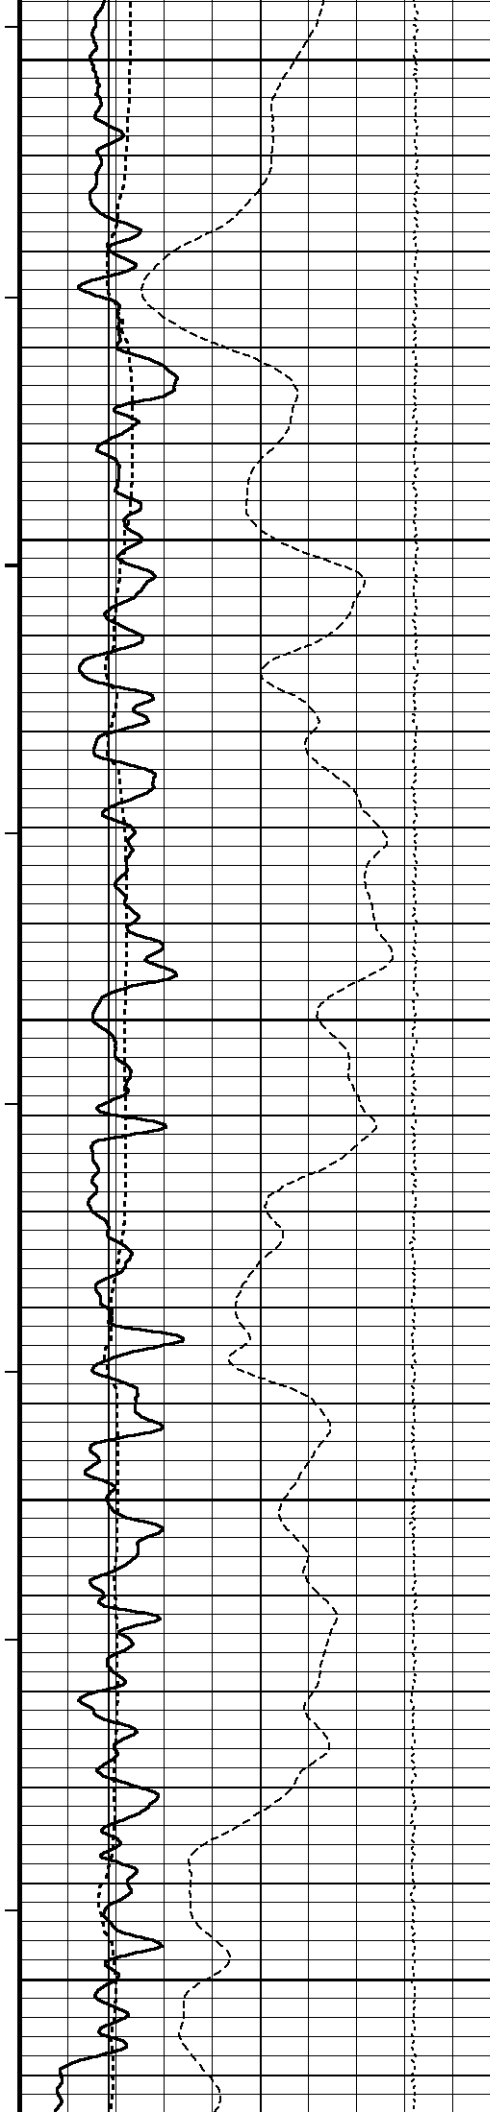

5100

123°

5150

123°


5200


124°

5250

123°

5300

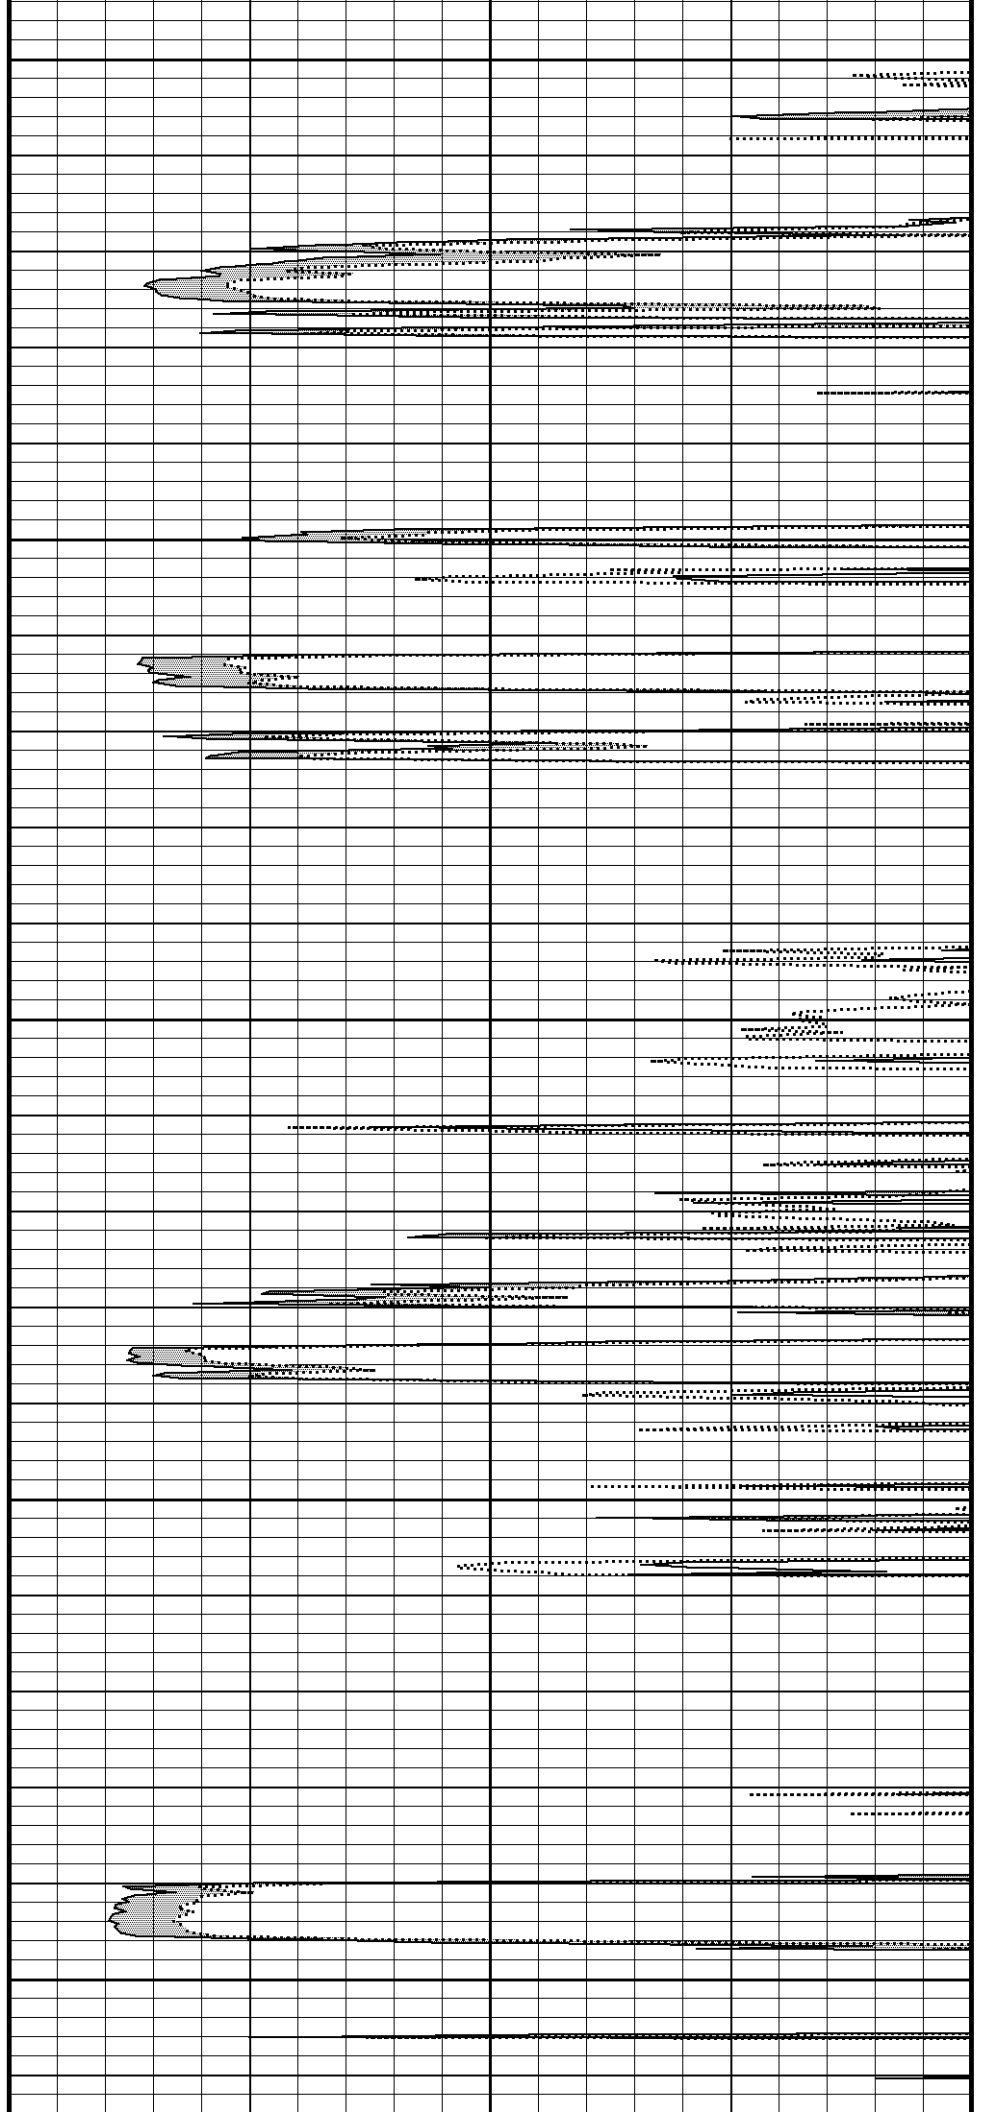

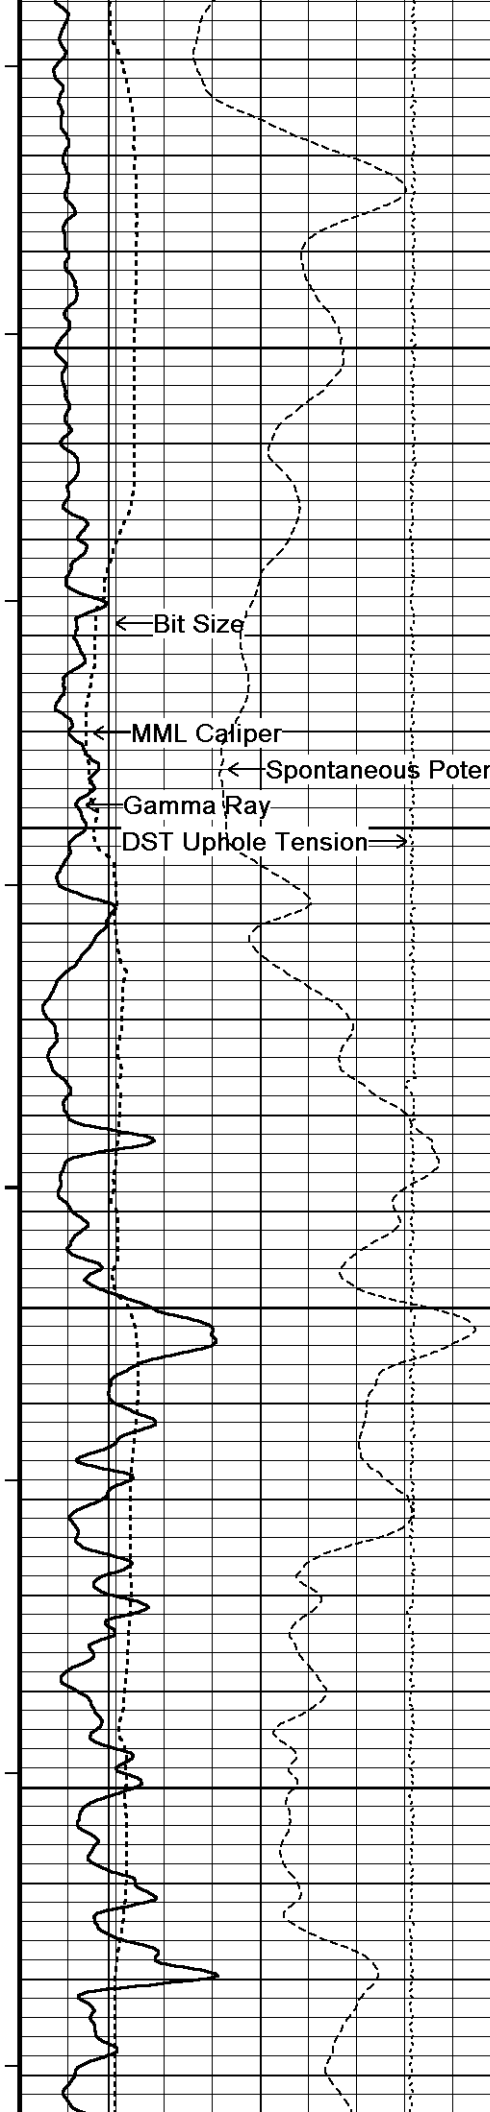

123°

5350

123°


5400


124°

5450

125°

5500

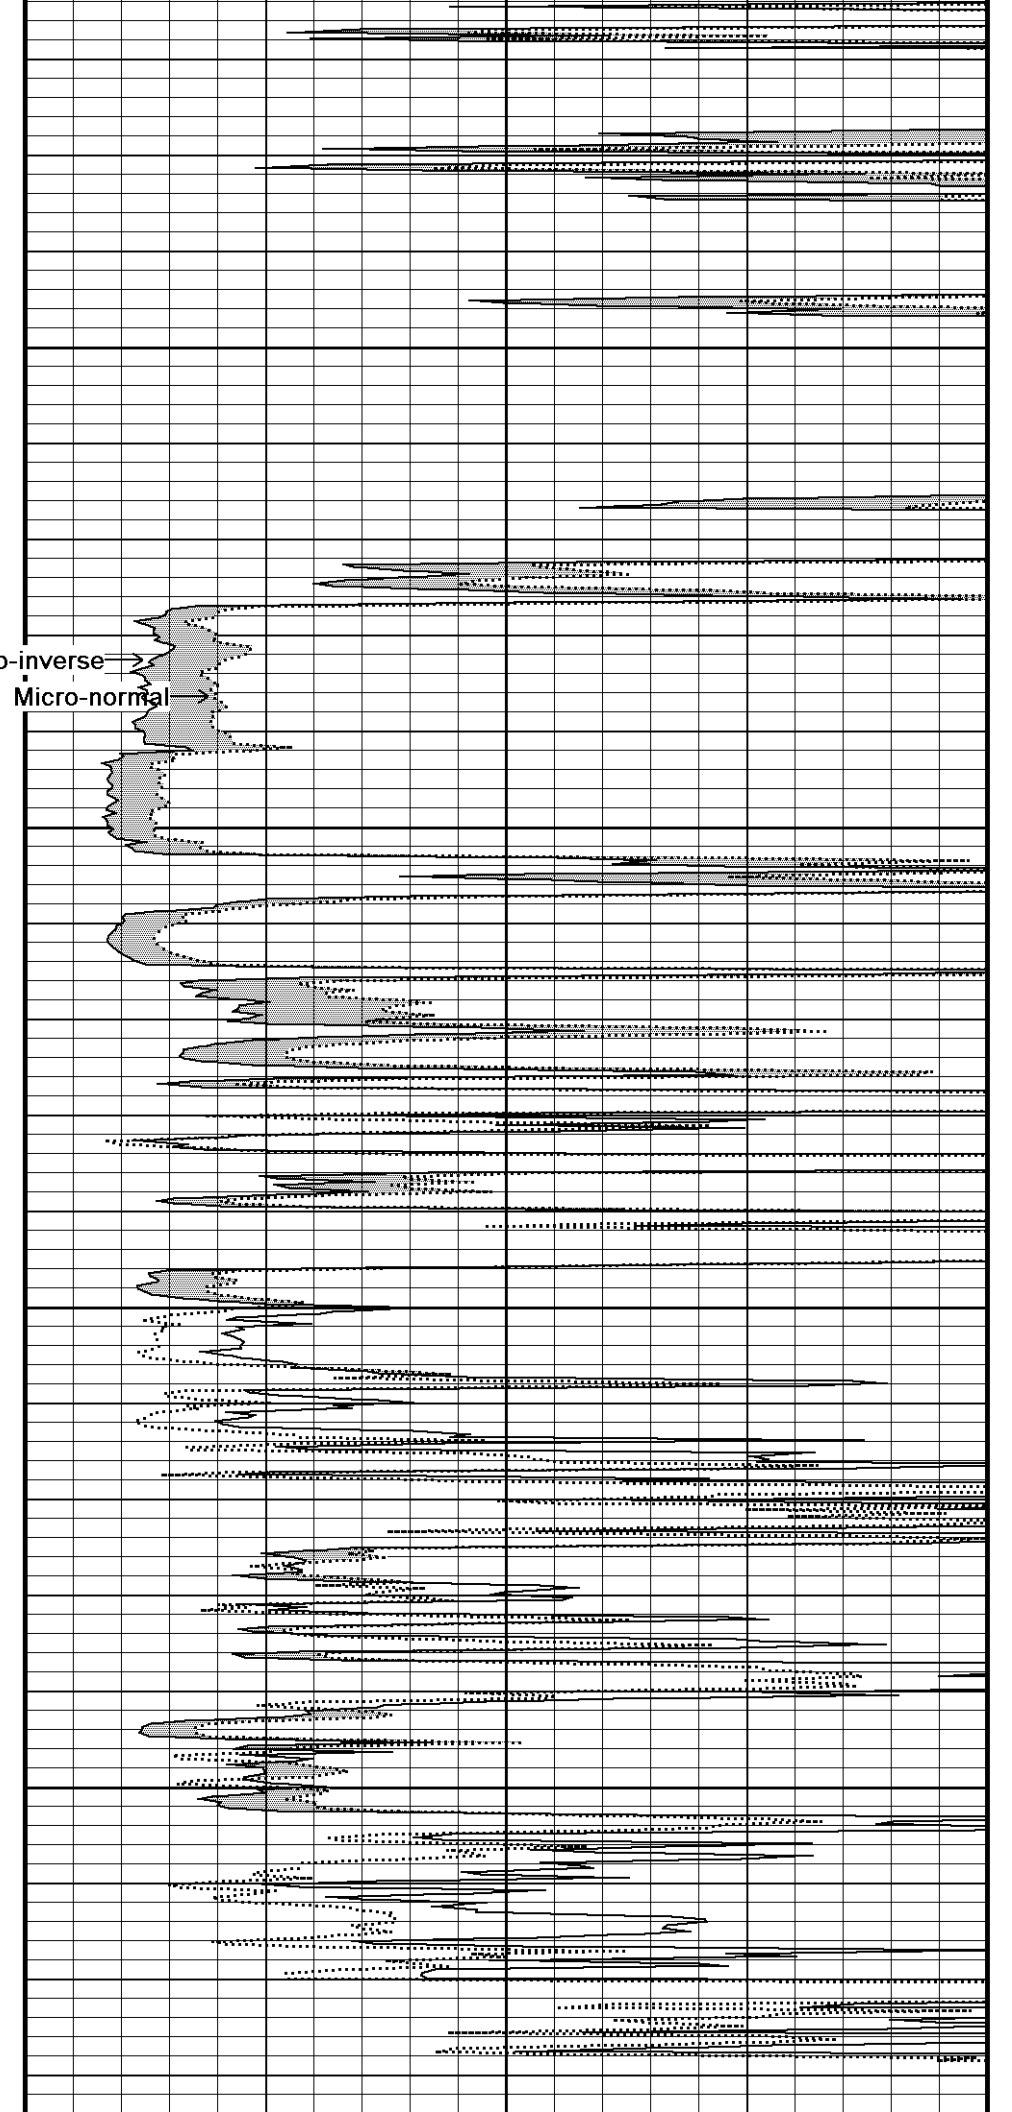

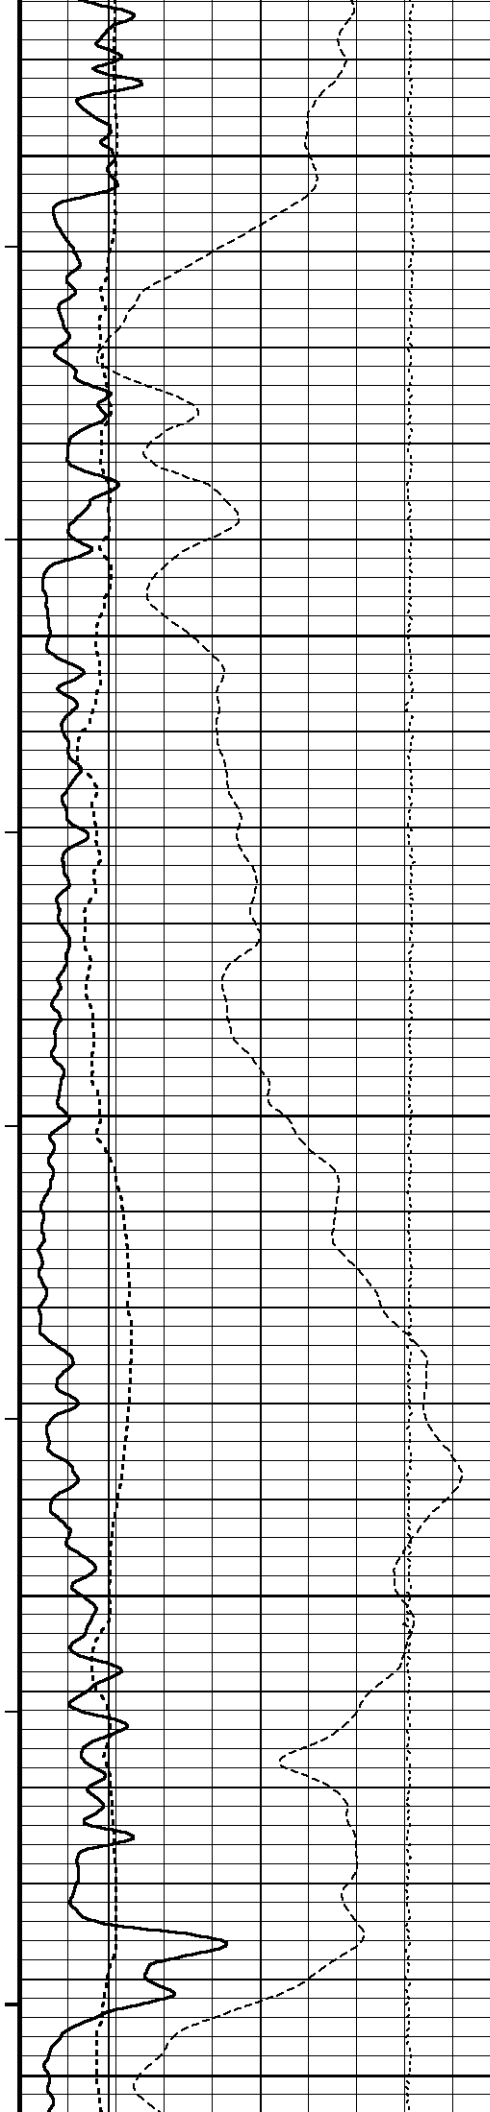

125°

5550

125°

5600

125°


5650


126°

5700

126°

5750

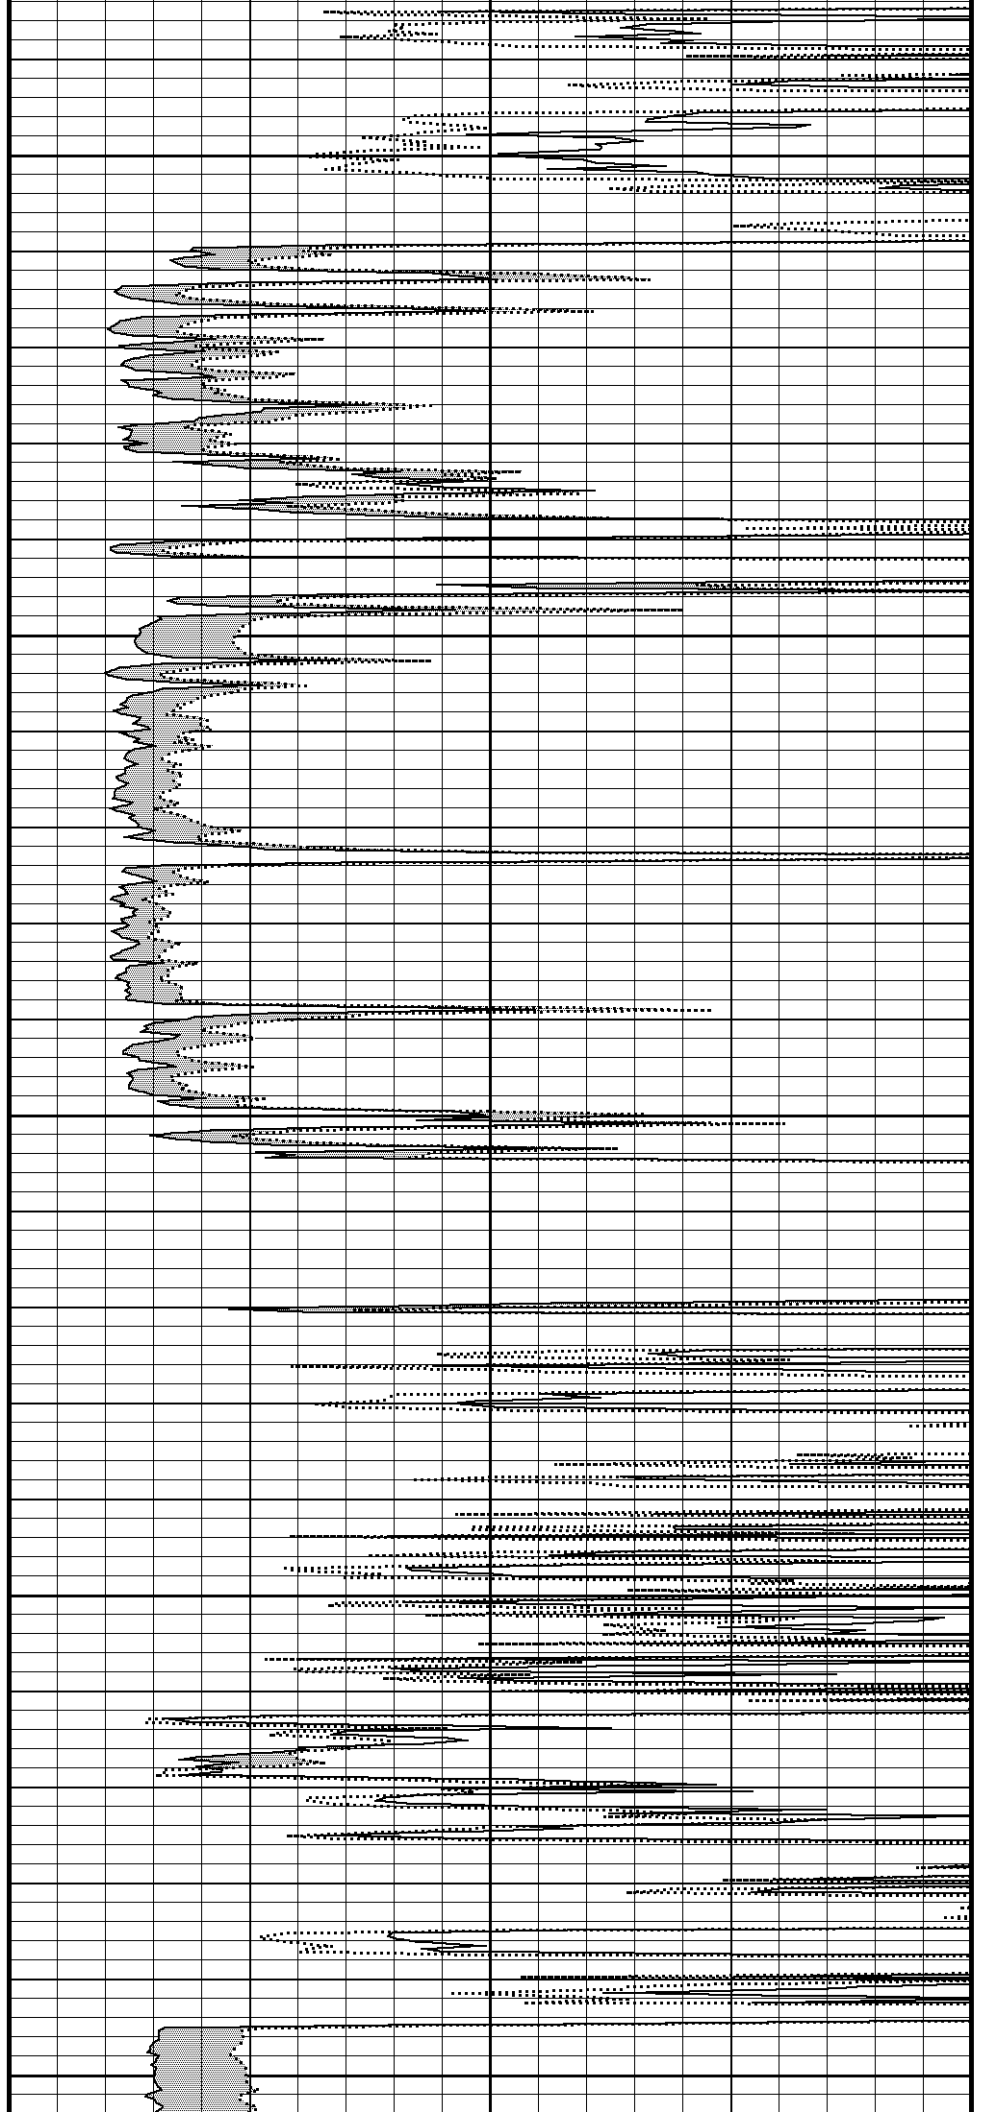

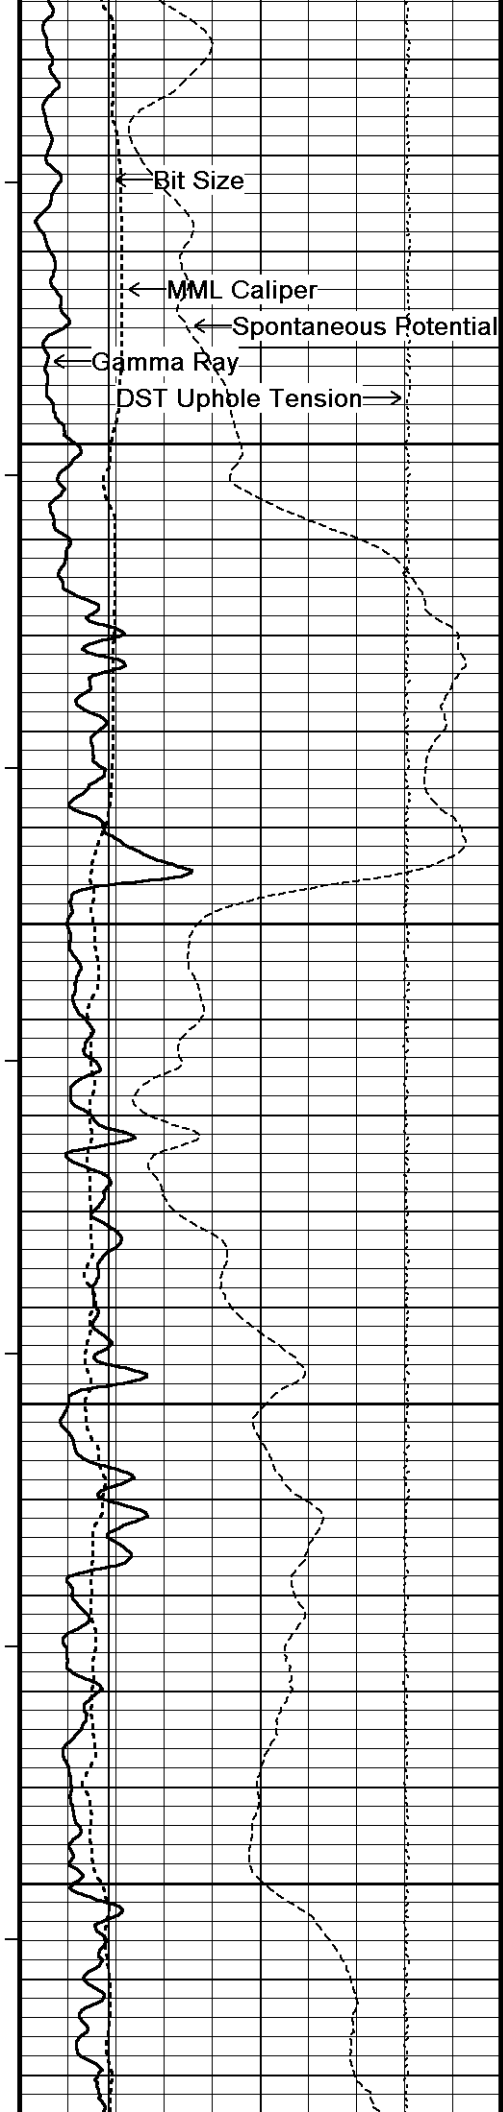

127°

5800

127°


5850



127°


5900

128°

5950

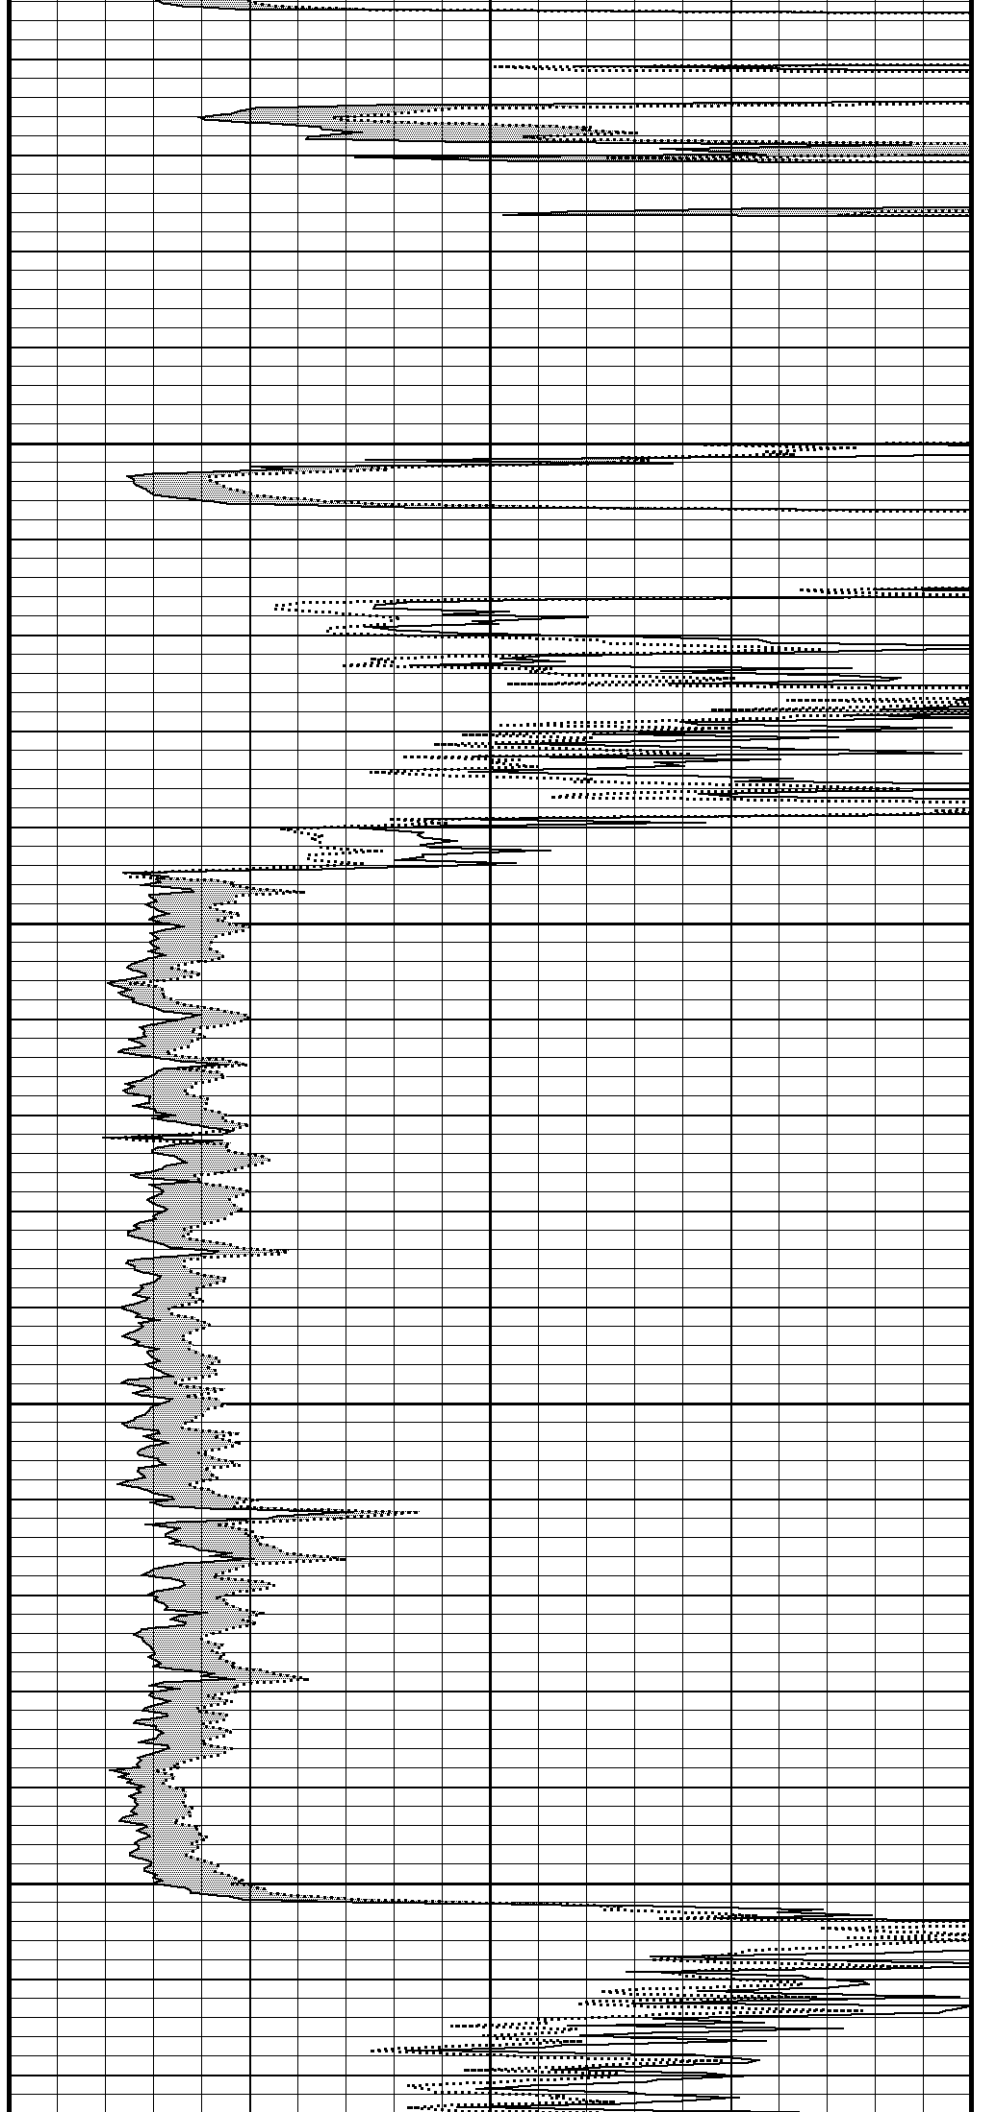

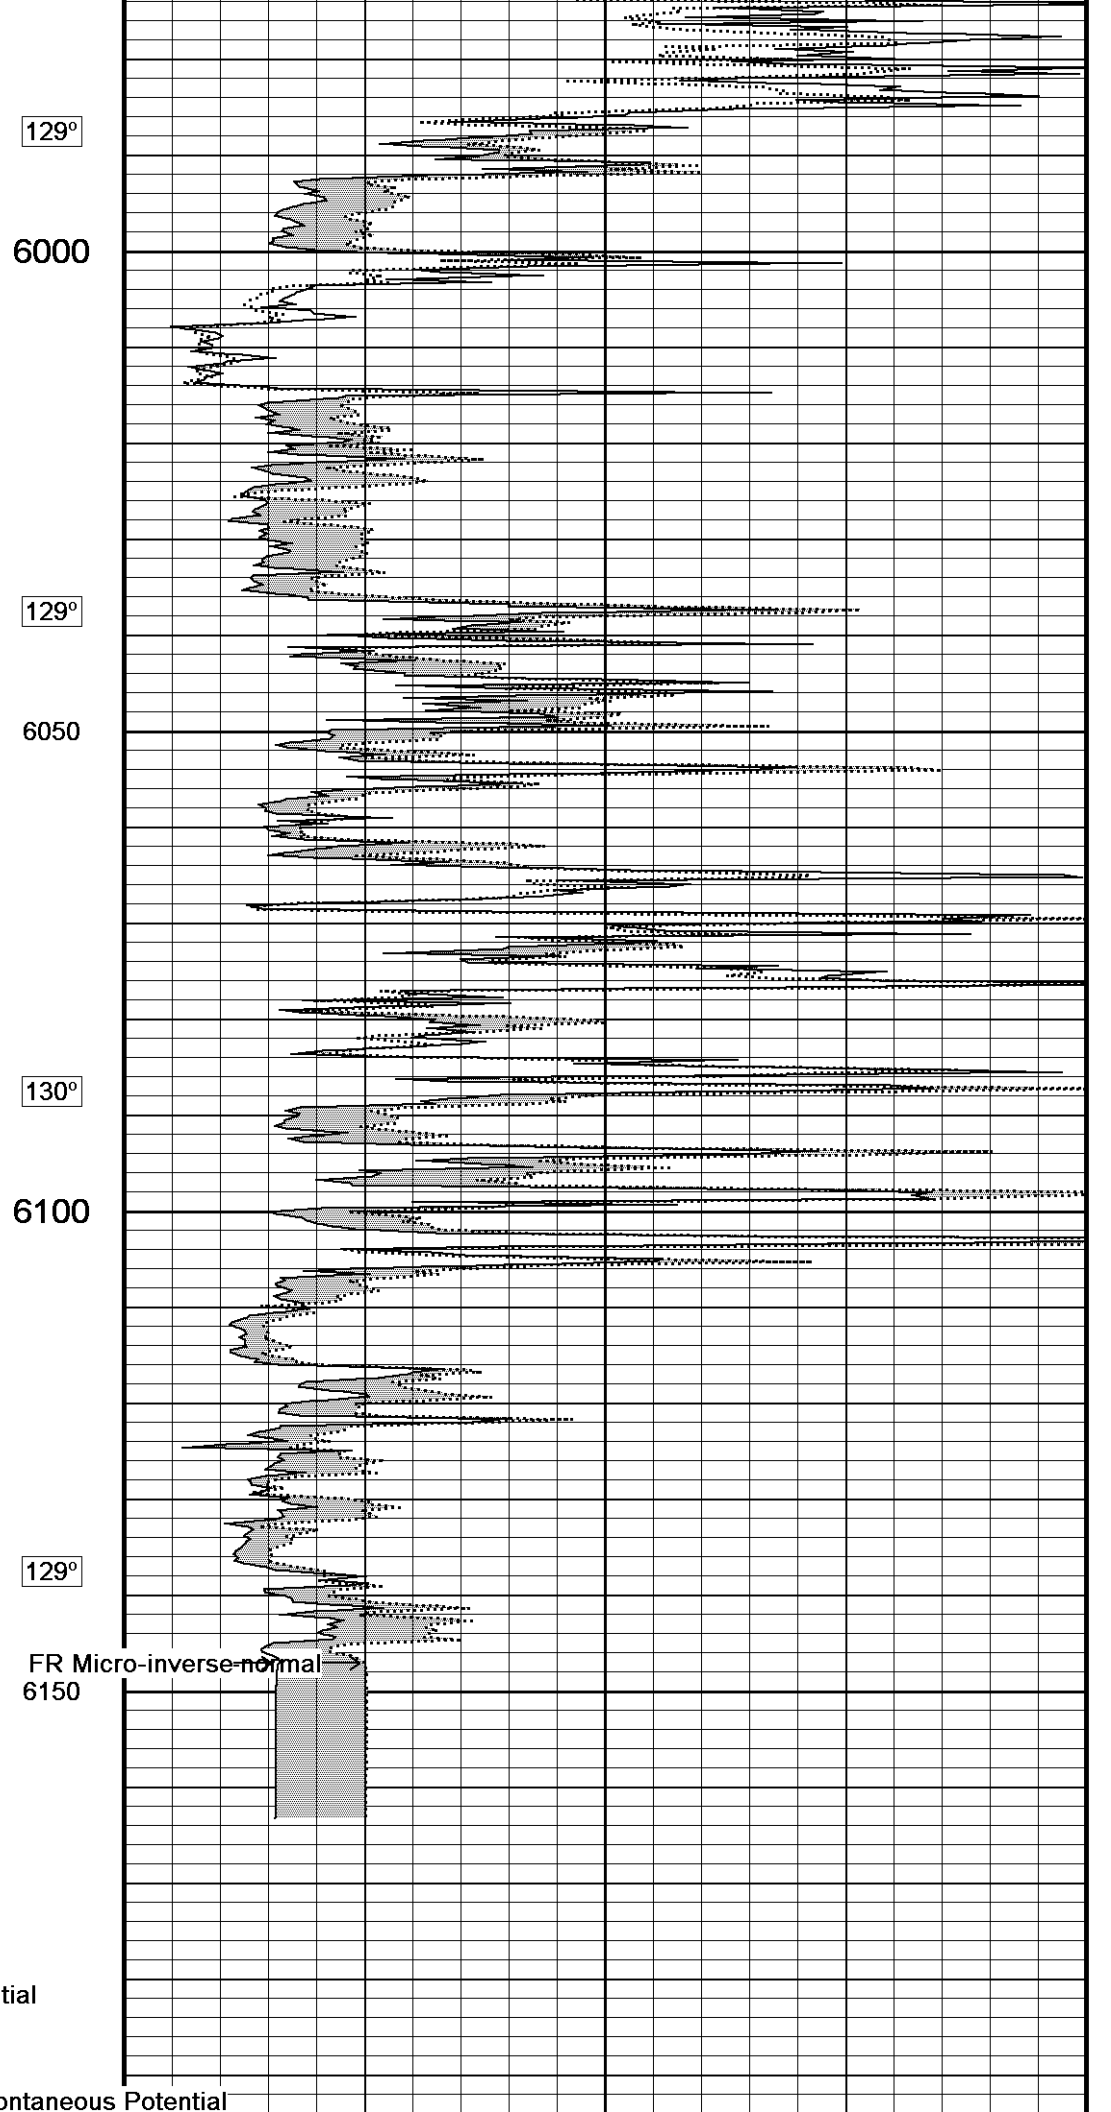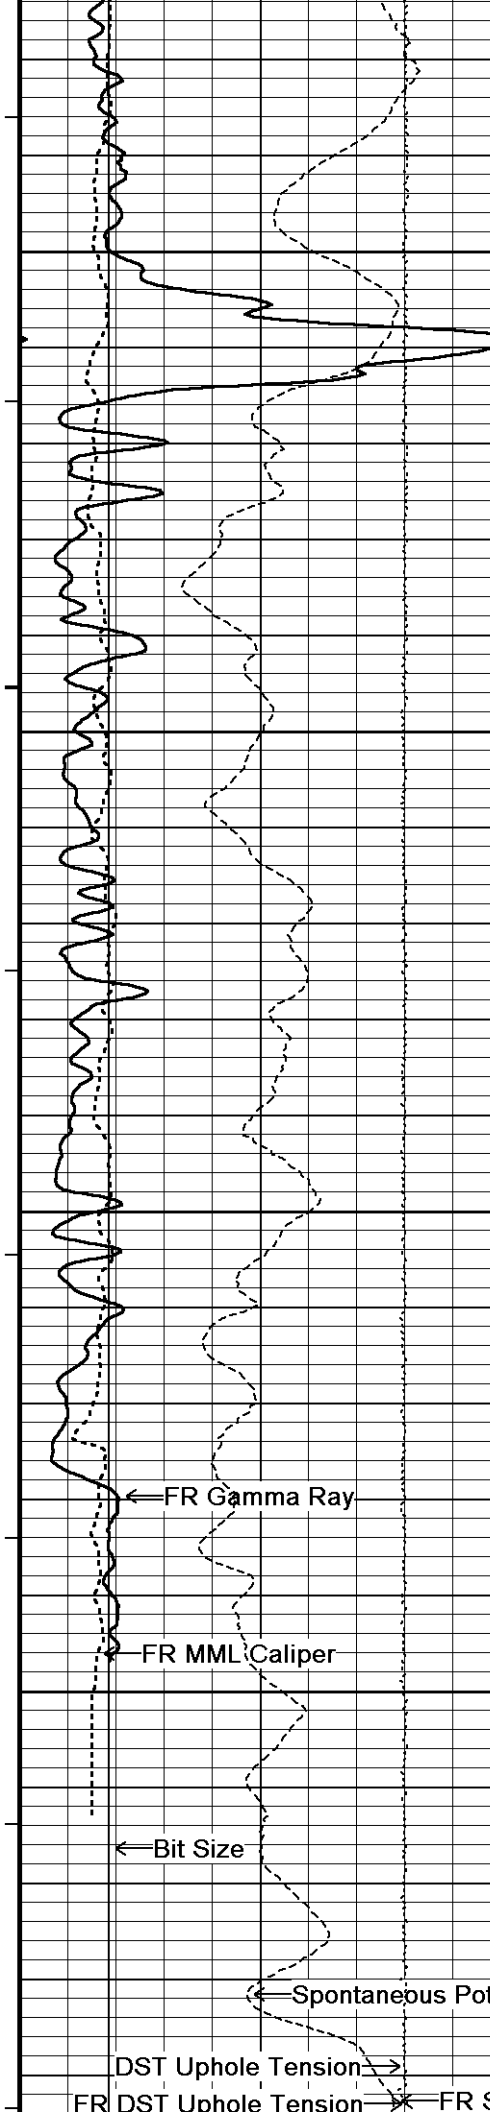

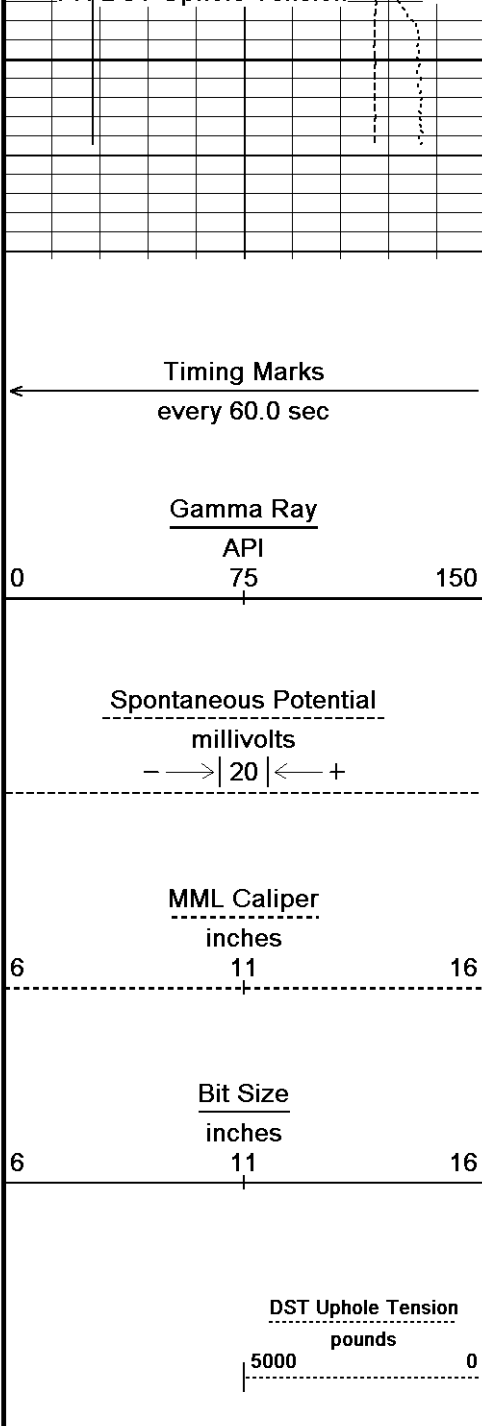


6200

6218

Depth in Feet

Borehole Temp in deg F

Replay Scale 1:240

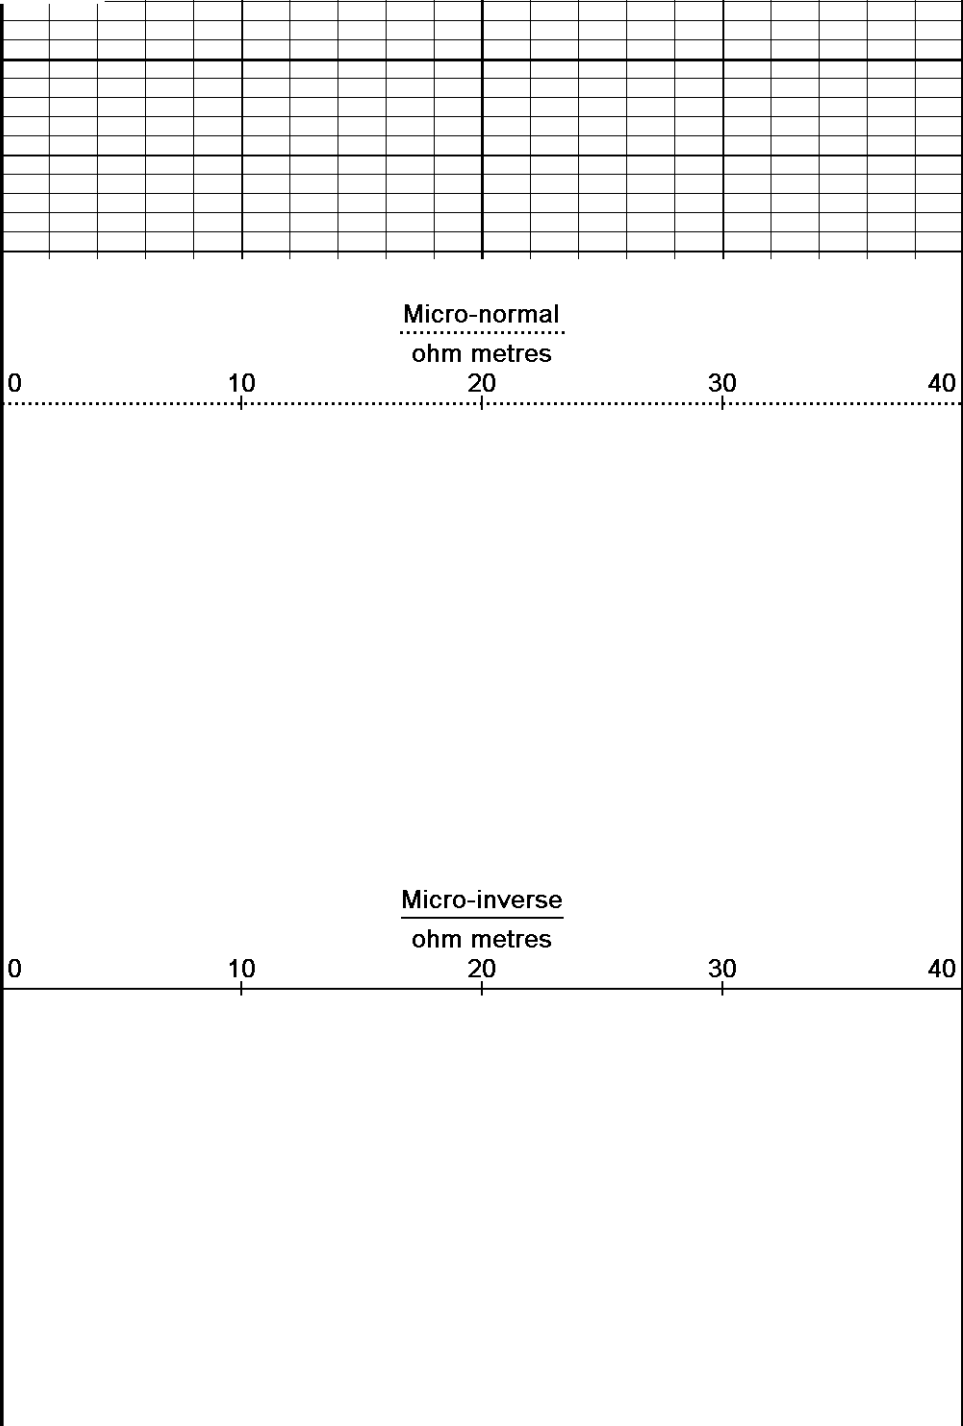

Depth Based Data - Maximum Sampling Increment 10.0cm
 Filename: C:\Minimus 11_03_4044\Data\Mull Dr...Mull Drilling Company, Inc. Bleumer # 1-13 Run 1_001.dta
 System Versions: Logged with 11.03.4044 Plotted with 11.03.4044


Plotted on 07-MAY-2012 08:24
Recorded on 07-MAY-2012 03:49

5 INCH MAIN


REPEAT SECTION


Depth Based Data - Maximum Sampling Increment 10.0cm
 Filename: C:\Minimus 11_03_4044\Data\Mull Dr...Mull Drilling Company, Inc. Bleumer # 1-13 Run 1.dta
 System Versions: Logged with 11.03.4044 Plotted with 11.03.4044

Plotted on 07-MAY-2012 08:24
Recorded on 07-MAY-2012 03:22

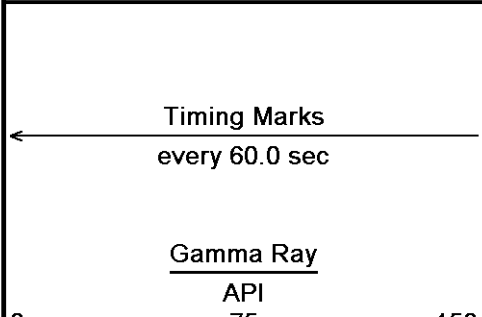

Depth in Feet

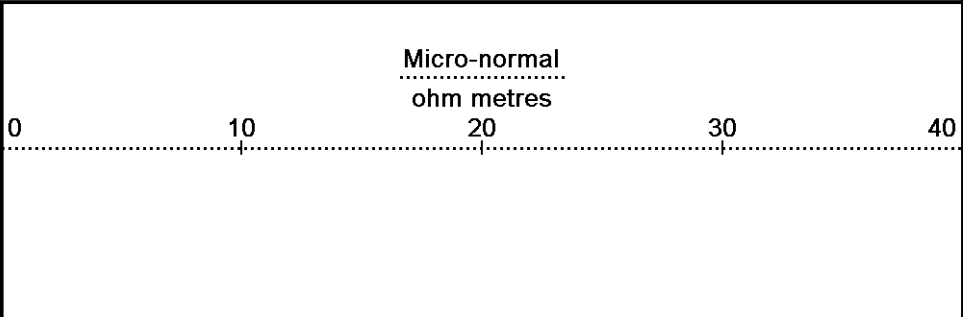

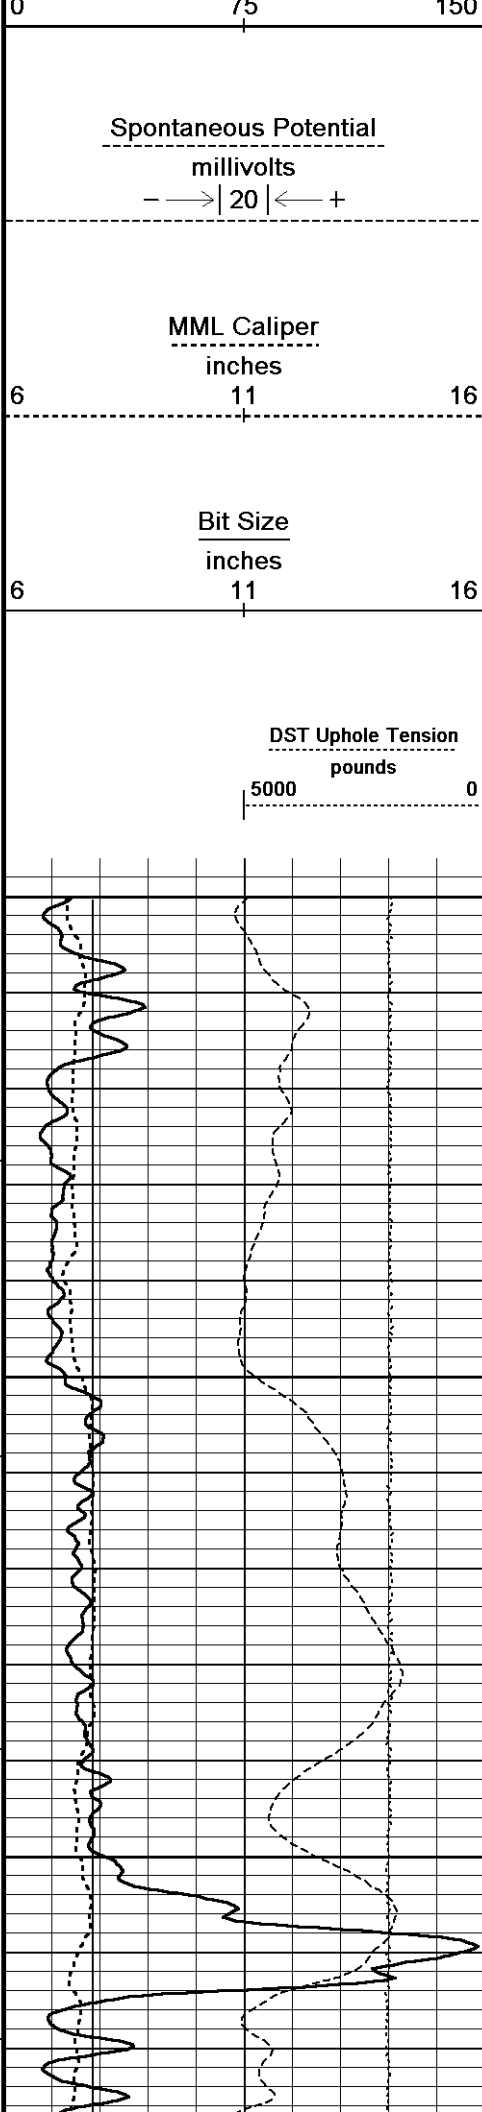

Borehole
Temp in
deg F

Replay
Scale
1:240


5900


127°

5950

128°

6000

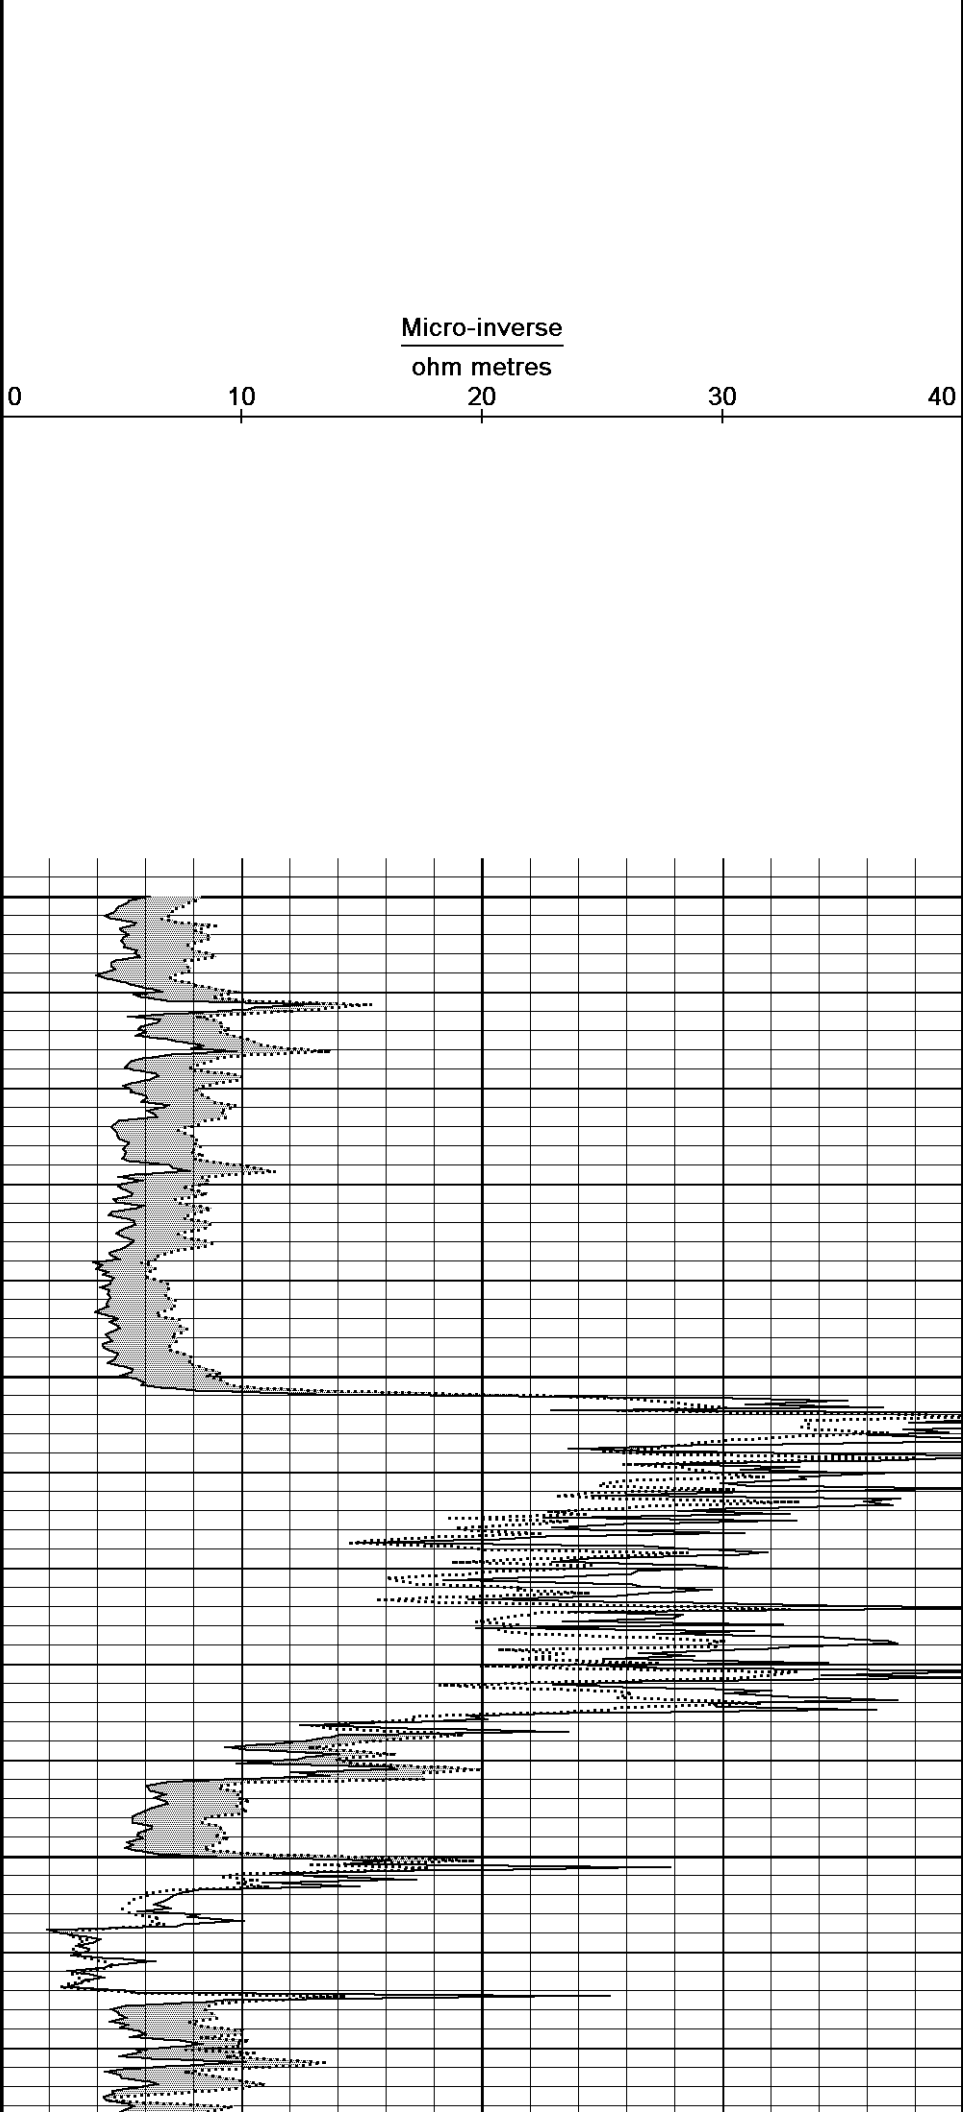

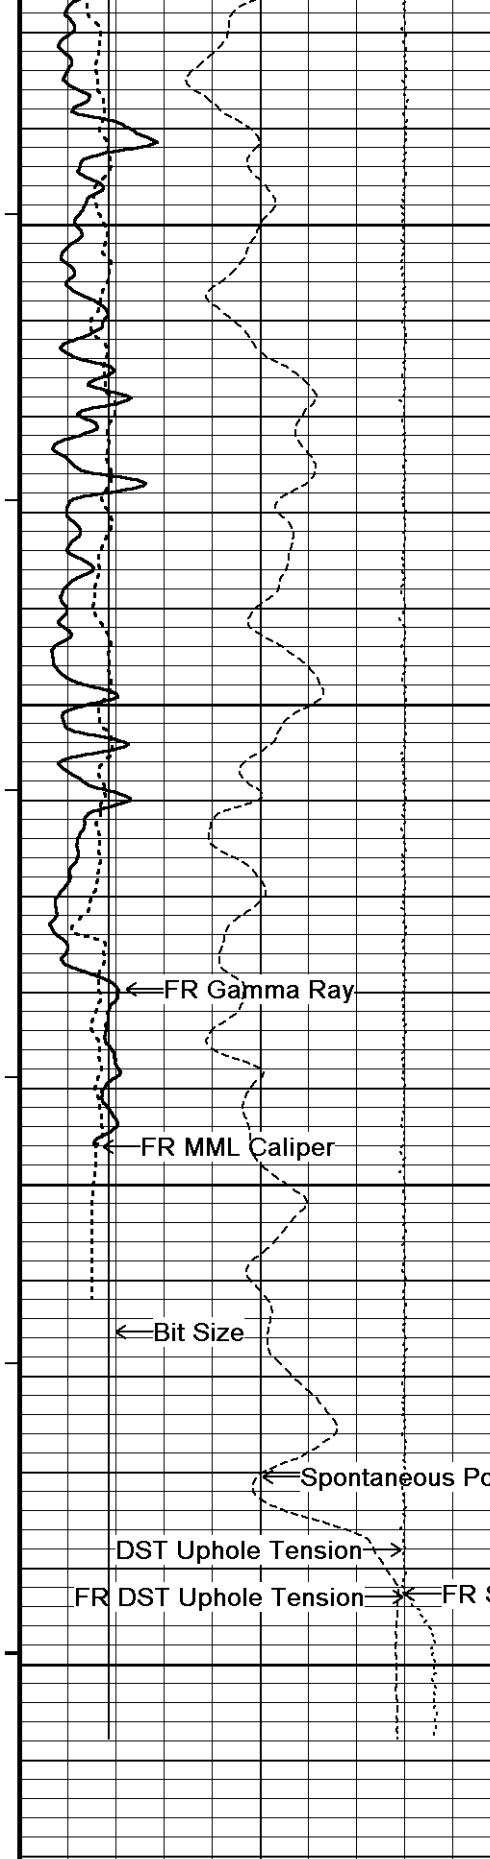

129°

6050

130°

6100


129°

FR Micro-inverse-normal
6150

6200

6220


Depth
in
Feet

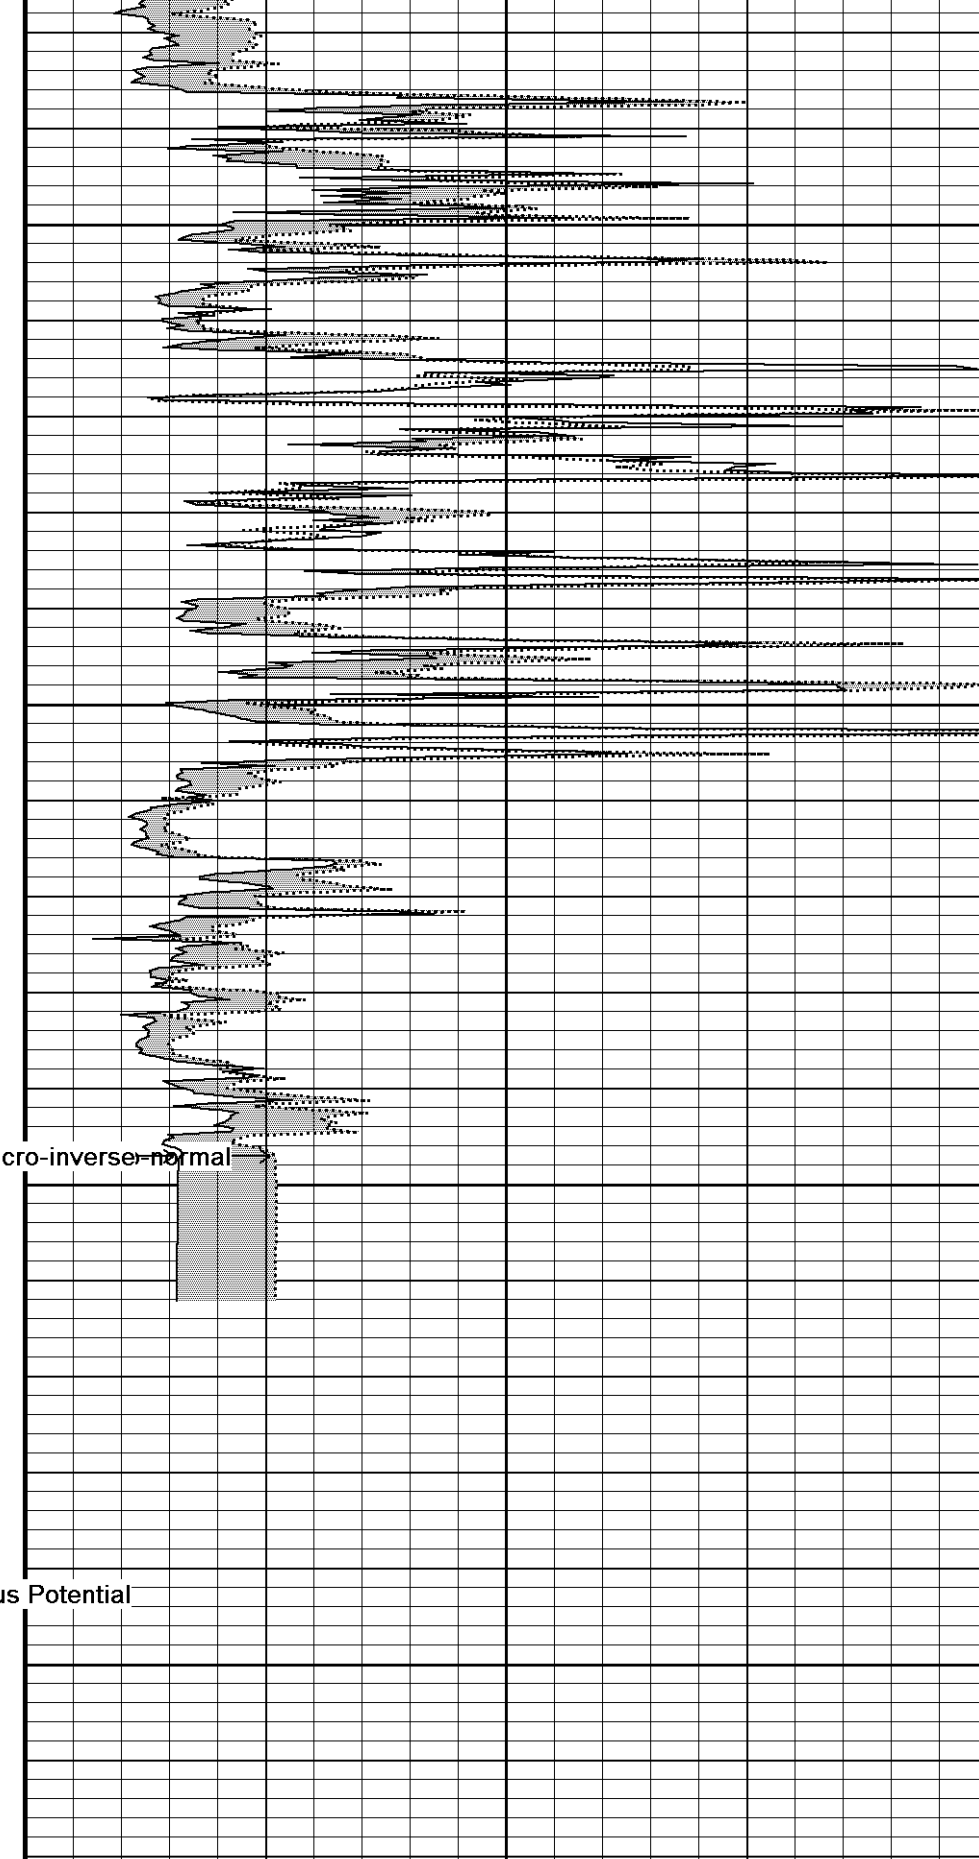

0 10 20 30 40

Micro-normal
ohm metres

Timing Marks
every 60.0 sec

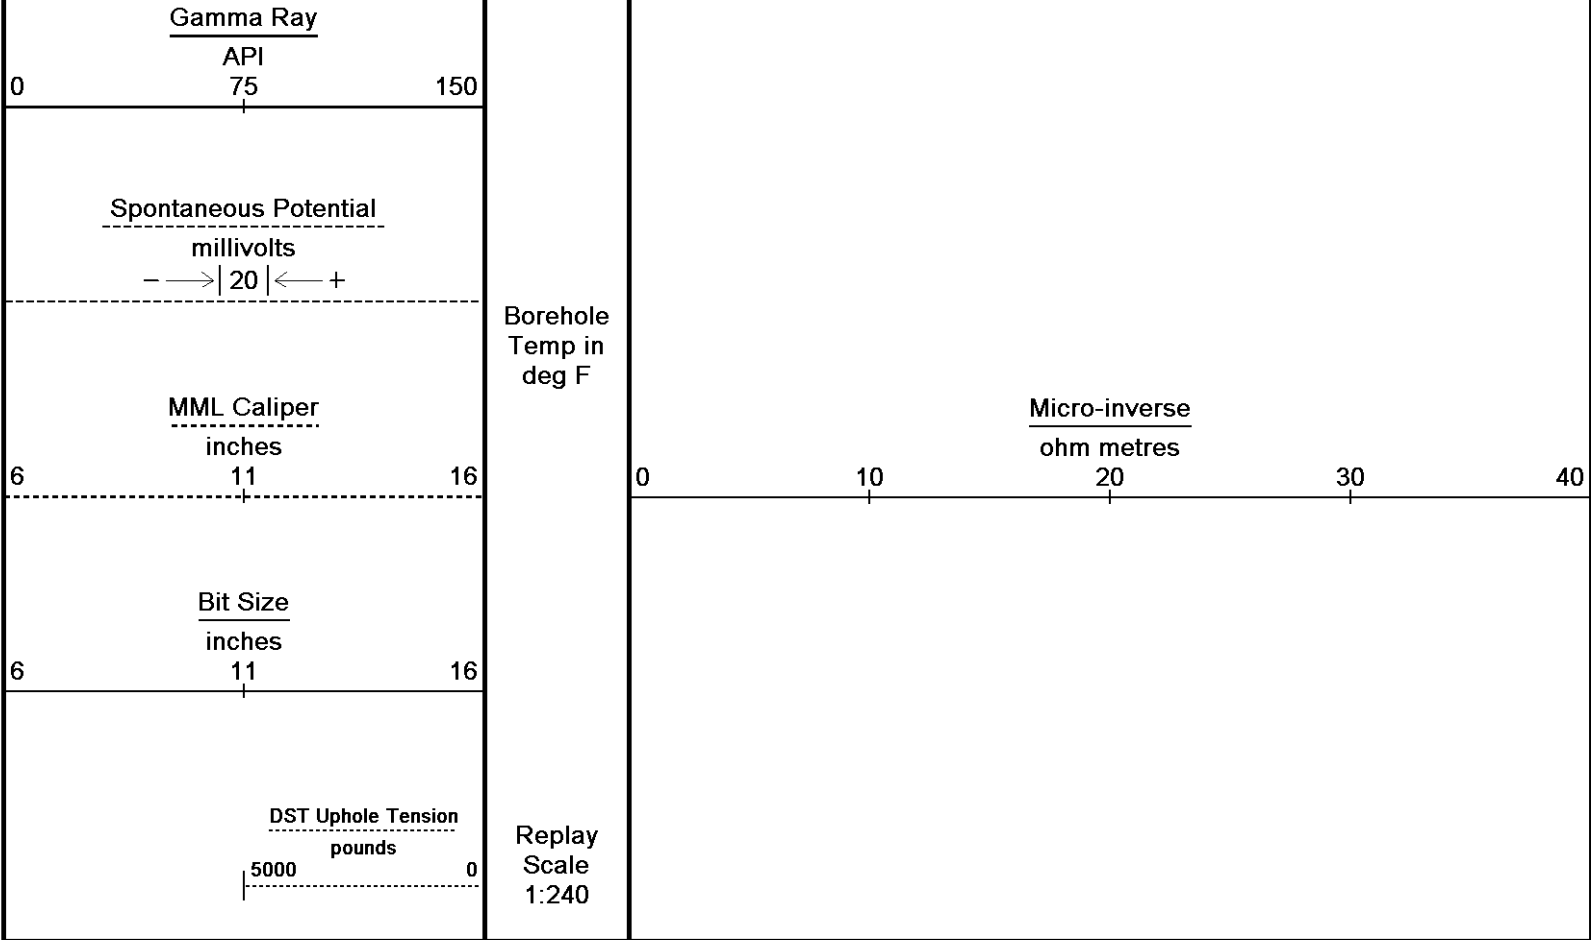

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 07-MAY-2012 08:24
 Filename: C:\Minimus 11_03_4044\Data\Mull Dr...Mull Drilling Company, Inc. Bleumer # 1-13 Run 1.dta Recorded on 07-MAY-2012 03:22
 System Versions: Logged with 11.03.4044 Plotted with 11.03.4044

↑ REPEAT SECTION ↑

BEFORE SURVEY CALIBRATION
 C:\Minimus 11_03_4044\Data\Mull Drilling Company, Inc. Bleumer # 1-13\Mull Drilling Company, Inc. Bleumer # 1-13 Run 1_001.dta

General Constants All 000		Last Edited on 07-MAY-2012,02:08
General Parameters		
Mud Resistivity	0.870	ohm-metres
Mud Resistivity Temperature	70.000	degrees F
Water Level	0.000	feet
Density/Neutron Processing	Wet Hole	
Hole/Annular Volume and Differential Caliper Parameters		
HVOL Method	Single Caliper	
HVOL Caliper 1	Density Caliper	
HVOL Caliper 2	N/A	
Annular Volume Diameter	5.000	inches
Caliper for Differential Caliper	Density Caliper	
Rwa Parameters		
Porosity used	Limestone Density Por.	
Resistivity used	Array Ind. One Res Rt	
RWA Constant A	1.000	
RWA Constant M	2.000	

Down-hole Tension Calibration SMS 0		Field Calibration on 23-FEB-2012 23:25
Reading No	Measured	Calibrated (lbs)
1	13693.36	0.00
2	14387.39	407.90

Gamma Calibration MCG-B 39		Field Calibration on 02-APR-2012 14:02
Measured	Calibrated (API)	

Background	74	49
Calibrator (Gross)	752	505
Calibrator (Net)	678	456

Gamma Constants MCG-B 39

Last Edited on 07-MAY-2012,00:51

Gamma Calibrator Number	GRC141	
Mud Density	1.13	gm/cc
Caliper Source for Processing	Density Caliper	
Tool Position	Eccentred	
Concentration of KCl	0.00	kppm

SP Calibration MCG-B 39

Field Calibration on 02-APR-2012,14:02

	Measured	Calibrated (mV)
Reference 1	100.0	100.0
Reference 2	-100.0	-100.0

High Resolution Temperature Calibration MCG-B 39

Field Calibration on 02-APR-2012,14:03

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	100.00	100.00

High Resolution Temperature Constants MCG-B 39

Last Edited on

Pre-filter Length	11
-------------------	----

Caliper Calibration MML-A 4

Base Calibration on 0C3170021008,
Field Calibration on 0C4060524000

Base Calibration		
Reading No	Measured	Calibrator Size (in)
1	15017	5.98
2	18447	7.97
3	21786	9.86
4	25801	11.92
5	0	0.00
6	N/A	N/A
Field Calibration		
	Measured Caliper (in)	Actual Caliper (in)
	6.08	5.98

Micro Normal and Micro Inverse Calibration MML-A 4

Base Calibration on 0C3170023008,
Field Check on 0C4060525000

Base Calibration					
Channel	Resistor 1	Measured		Calibrated (ohm-m)	
		Resistor 2	Resistor 1	Resistor 2	
Micro Normal	12.2	60.2	5.0	25.0	
Micro Inverse	15.7	78.3	5.0	25.0	
Channel	Base Check (ohm-m)		Field Check (ohm-m)		
Micro Normal		62.9		62.9	
Micro Inverse		48.3		48.3	

Micro Normal and Micro Inverse Constants MML-A 4

Last Edited on 0C4060A13004,

Pad Type	8-12 in Soft Rubber Inflatable 006-9011-159		
Micro Normal K Factor	1.0000		
Micro Inverse K Factor	1.0000		
Standoff Offset	N/A		inches

Neutron Calibration MDN-B.J 387

Base Calibration on 0C31C0938008
Field Check on 0C4060537000

Base Calibration					
Ratio	Near	Measured		Calibrated (cps)	
		Far	Near	Far	
	2956	91	3714	110	
	32.635		33.764		
Field Calibrator at Base			Calibrated (cps)		
Ratio			Near	Far	
			2214	3169	
		0.699			

Field Check

Calibrated (cps)
2202 3182
0.692

Ratio

Neutron Constants MDN-B.J 387

Last Edited on 07-MAY-2012,00:51

Neutron Source Id	P0204NN	
Neutron Jig Number	NEDC117	
Epithermal Neutron	No	
Caliper Source for Processing	Density Caliper	
Stand-off	0.00	inches
Mud Density	1.00	gm/cc
Limestone Sigma	7.10	cu
Sandstone Sigma	4.26	cu
Dolomite Sigma	4.70	cu
Formation Pressure Source	Constant Value	
Formation Pressure	0.00	kpsi
Temperature Source	Constant Value	
Temperature	68.00	degrees F
Mud Salinity	0.00	kppm
Formation Fluid Salinity Source	Constant Value	
Formation Fluid Salinity	0.00	kppm
Barite Mud Correction	Not Applied	

FE Calibration MFE-B.J 352

Base Calibration on 0C31B0831004
Field Check on 0C4060523000

Base Calibration		
	Measured	Calibrated (ohm-m)
Reference 1	0.0	0.0
Reference 2	963.7	126.8
Base Check		281.5
Field Check		281.5

FE Constants MFE-B.J 352

Last Edited on 07-MAY-2012,00:52

Running Mode	No Sleeve	
MFE K Factor	0.1268	
Caliper Source for FE correction	Density Caliper	
Caliper Value for FE correction	N/A	inches
Rm Source for FE correction	Temperature Corr	
Temp. for Rm Corr.	MCG External Temperature	
Stand-off	0.5	inches

Sonic Constants MSS-A.A 126

Last Edited on 07-MAY-2012,00:53

Maximum Boundary Contrast	100.00	micro-sec/ft
Fluid Transit Time	189.00	micro-sec/ft
Limestone Transit Time	47.50	micro-sec/ft
Sandstone Transit Time	55.50	micro-sec/ft
Dolomite Transit Time	43.50	micro-sec/ft
Sonic used for Porosities	3-5' Compensated Sonic	
Correction for Sonde Skew	Applied	
Cycle Stretch Algorithm	Applied	
MN3FT	N/A	micro-sec
MX3FT	N/A	micro-sec
Hunt-Raymer Constant	83.13	micro-sec/ft

Sonde Mode	Compensated
Hole Type	Open Hole

Sonde Parameters

	Measured	Calibrated
Offset	N/A	0.0000
Free Pipe	N/A	N/A
Peak Amplitude Source		N/A

Waveform	Start Time (micro-sec)	Width (micro-sec)	Pre Gain	Start Gain	Discriminator (mV)
3'	N/A	N/A	N/A	N/A	N/A
4'	N/A	N/A	N/A	N/A	N/A

4	N/A	N/A	N/A	N/A	N/A
5	N/A	N/A	N/A	N/A	N/A
6	N/A	N/A	N/A	N/A	N/A

Processed Fixed Gate Parameters

Waveform Used For Processing	N/A				
Start Time (micro-sec)	End Time (micro-sec)	Discriminator (mV)	N/A		
N/A	N/A	N/A	N/A		
N/A	N/A	N/A	N/A		
N/A	N/A	N/A	N/A		
N/A	N/A	N/A	N/A		
N/A	N/A	N/A	N/A		

Full Waveform Parameters

Use 3' Waveform to derive TR	N/A	
Use 4' Waveform to derive TR	N/A	
Use 5' Waveform to derive TR	N/A	
Use 6' Waveform to derive TR	N/A	
3' Waveform Discriminator Level	N/A	mV
4' Waveform Discriminator Level	N/A	mV
5' Waveform Discriminator Level	N/A	mV
6' Waveform Discriminator Level	N/A	mV
3' Waveform Filter	N/A	
4' Waveform Filter	N/A	
5' Waveform Filter	N/A	
6' Waveform Filter	N/A	
Semblance Level	N/A	
Semblance Window Width	N/A	micro-sec
Sonic 1 Despiker	N/A	N/A
Sonic 2 Despiker	N/A	N/A

Induction Calibration MAI-A.A 178

Base Calibration on 0C31B0B06000,
Field Check on 0C4060521000

Base Calibration

Test Loop Calibration Channel	Measured		Calibrated (mmho/m)	
	Low	High	Low	High
1	17.6	484.7	9.3	966.2
2	6.2	391.4	7.6	821.4
3	4.0	264.5	5.2	566.0
4	2.3	135.1	2.6	279.2

Array Temperature 77.0 Deg F

Channel	Base Check (mmho/m)		Field Check (mmho/m)	
	Low	High	Low	High
1	0.0	0.0	12.3	3762.6
2	0.0	0.0	29.6	3466.9
3	0.0	0.0	27.3	3014.1
4	0.0	0.0	18.8	2064.7
Deep	0.0	0.0	15.9	1995.3
Medium	0.0	0.0	40.3	3955.3
Shallow	0.0	0.0	45.3	5081.7

Array Temperature 0.0 72.7 Deg F

Induction Constants MAI-A.A 178

Last Edited on 07-MAY-2012,03:16

Induction Model	RtAP-WBM		
Caliper for Borehole Corr.	Density Caliper		
Hole Size for Borehole Correction	N/A	inches	
Tool Centred	No		
Stand-off Type	Fins		
Stand-off	0.50	inches	
Number of Fins on Stand-off	8.0000		
Stand-off Fin Angle	45.00	degrees	
Stand-off Fin Width	0.5000	inches	
Borehole Corr. Rm Source	Constant Value		
Temp. for Rm Corr.	N/A		
Squasher Start	0.0020	mhos/metre	
Squasher Offset	N/A	mhos/metre	

Borehole Normalisation			
DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000

Calibration Site Corrections			
Channel 1	0.00	mmhos/metre	
Channel 2	0.00	mmhos/metre	
Channel 3	0.00	mmhos/metre	
Channel 4	0.00	mmhos/metre	

Apparent Porosity and Water Saturation Constants			
Archie Constant (A)	1.00		
Cementation Exponent (M)	2.00		
Saturation Exponent (N)	2.00		
Saturation of Water for Apor	100.00	percent	
Resistivity of Water for Apor and Sw	0.05	ohm-m	
Resistivity of Mud Filtrate for Sw	0.00	ohm-m	
Source for Rt	0.00		
Source for Rxo	0.00		

High Resolution Temperature Calibration MAI-A.A 178			Field Calibration on 0C4030110004,
	Measured	Calibrated(Deg F)	
Lower	32.00	32.00	
Upper	68.00	68.00	

High Resolution Temperature Constants MAI-A.A 178		Last Edited on 0C4060522000,
Pre-filter Length	11	

Caliper Calibration MPD-B 35			Base Calibration on 0C31C0A2C008	Field Calibration on 0C4060527000
Base Calibration				
Reading No	Measured	Calibrator Size (in)		
1	20688	3.99		
2	30944	5.98		
3	41312	7.97		
4	50976	9.86		
5	61184	11.92		
6	N/A	N/A		
Field Calibration				
	Measured Caliper (in)	Actual Caliper (in)		
	5.99	5.98		

Photo Density Calibration MPD-B 35				Base Calibration on 0C31C0B00008	Field Check on 0C406052B000
Density Calibration					
Base Calibration		Measured		Calibrated (sdu)	
	Near	Far	Near	Far	
Reference 1	62298	31871	59556	30836	
Reference 2	26887	2863	24941	2541	
Field Check at Base					
	1142.9	1359.1			
Field Check					
	1145.7	1361.2			

PE Calibration				
Base Calibration		Measured		Calibrated
	WS	WH	Ratio	Ratio
Background	204	1008		
Reference 1	23049	62096	0.374	0.371
Reference 2	7079	26739	0.267	0.272

Field Check at Base

Field Check at Base 204.4 1008.1

Field Check 206.4 1011.8

Density Constants MPD-B 35

Last Edited on 07-MAY-2012,00:52

Density Source Id	18235B	
Nylon Calibrator Number	DNCE695	
Aluminium Calibrator Number	DACD698	
Density Shoe Profile	8 inch	
Caliper Source for Processing	Density Caliper	
PE Correction to Density	Not Applied	
Mud Density	1.13	gm/cc
Mud Density Z/A Multiplier	1.11	
Mud Filtrate Density	1.00	gm/cc
Dry Hole Mud Filtrate Density	1.00	gm/cc
DNCT	0.00	gm/cc
CRCT	0.00	gm/cc
Density Z/A Correction	Hybrid	
Matrix Density (gm/cc)	Depth (ft)	
2.71	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	

Spectral Gamma Calibration SGS-E.J 150

Base Calibration on 14-NOV-2011,14:14
Field Calibration on 14-NOV-2011,14:09

Base Calibration

Potassium Calibrator

	Gate 1	Gate 2	Gate 3	Gate 4	Gate 5
Background	79.9	23.1	2.2	0.8	1.4
Calibrator (Gross)	204.7	109.8	22.0	0.9	1.3
Calibrator (Net)	124.8	86.7	19.7	0.2	-0.1

Concentrations	K %	U ppm	Th ppm
	5.8	0.0	0.0

Uranium Calibrator

	Gate 1	Gate 2	Gate 3	Gate 4	Gate 5
Background	79.9	23.1	2.2	0.8	1.4
Calibrator (Gross)	480.7	164.8	14.5	7.2	4.1
Calibrator (Net)	400.8	141.7	12.3	6.5	2.7

Concentrations	K %	U ppm	Th ppm
	0.0	9.8	0.0

Thorium Calibrator

	Gate 1	Gate 2	Gate 3	Gate 4	Gate 5
Background	79.9	23.1	2.2	0.8	1.4
Calibrator (Gross)	397.7	137.8	11.3	6.3	15.0
Calibrator (Net)	317.8	114.7	9.0	5.6	13.6

Concentrations	K %	U ppm	Th ppm
	0.0	0.0	44.3

Mixture Calibrator

	Gate 1	Gate 2	Gate 3	Gate 4	Gate 5
Background	79.9	23.1	2.2	0.8	1.4
Calibrator (Gross)	914.0	361.7	43.2	12.9	17.8
Calibrator (Net)	834.0	338.5	41.0	12.1	16.4

Field Calibration

Gamma Ray

	Measured	Calibrated (API)
Background	112	23

Calibrator (Gross)	1354	273
Calibrator (Net)	1242	250

Mixture Calibrator

	Gate 1	Gate 2	Gate 3	Gate 4	Gate 5
Background	79.9	23.1	2.2	0.8	1.4
Calibrator (Gross)	914.0	361.7	43.2	12.9	17.8
Calibrator (Net)	834.0	338.5	41.0	12.1	16.4

Spectral Gamma Constants SGS-E.J 150

Last Edited on 30-APR-2012,12:03

Mixture Calibrator Number	147-1	
Potassium Calibrator Number	148-1	
Uranium Calibrator Number	150-1	
Thorium Calibrator Number	149-1	
Mud Density	1.13	gm/cc
Caliper Source for Processing	Density Caliper	
Tool Position	Eccentred	
Concentration of KCl	0.00	kppm

DOWNHOLE EQUIPMENT

C:\Minimus 11_03_4044\Data\Mull Drilling Company, Inc. Bleumer # 1-13\Mull Drilling Company, Inc. Bleumer # 1-13 Run 1_001.dta

MCB-A.A 11B Tension Cablehead
 MCB-A.A 161 LG: 2.40 ft WT: 19.8 lb OD: 2.24 in

SHA-F Compact Swivel Head Adaptor
 SHA-F 59 LG: 2.74 ft WT: 26.5 lb OD: 2.24 in

Compact Comms Gamma
 MCG-B 39 LG: 8.70 ft WT: 63.9 lb OD: 2.24 in

Spectral Gamma Ray Sub
 SGS-E.J 150 LG: 7.78 ft WT: 105.8 lb OD: 3.54 in


Compact Micro-log
 MML-A 4 LG: 7.97 ft WT: 81.6 lb OD: 2.24 in

Compact Neutron
 MDN-B.J 387 LG: 5.04 ft WT: 50.7 lb OD: 2.24 in

Compact Density/Caliper
 MPD-B 35 LG: 9.59 ft WT: 90.4 lb OD: 2.45 in


Compact Focussed Electric
 MFE-B.J 352 LG: 6.05 ft WT: 48.5 lb OD: 2.24 in

Compact Sonic
 MSS-A.A 126 LG: 12.52 ft WT: 72.8 lb OD: 2.24 in

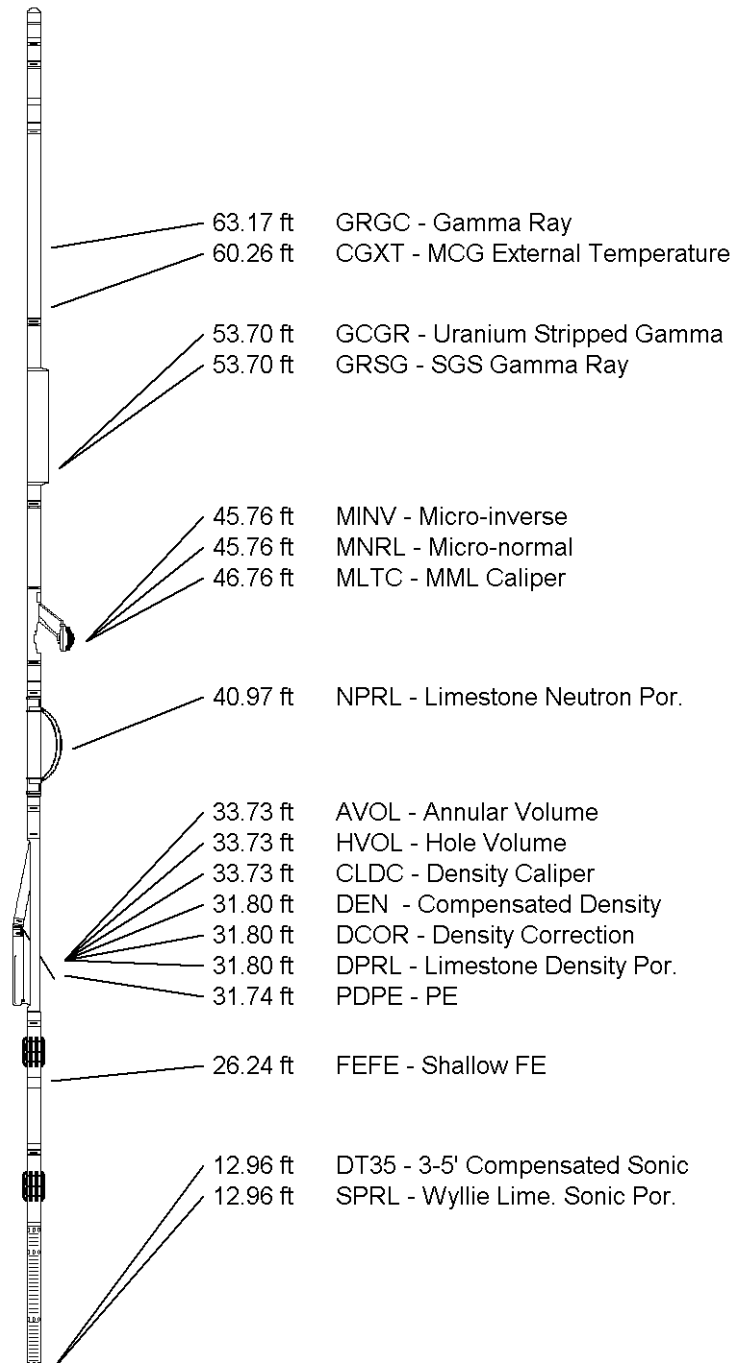

Compact Induction
 MAI-A.A 178 LG: 10.81 ft WT: 48.5 lb OD: 2.24 in

Total Length: 73.59 ft Weight: 608.5 lb



- 3.34 ft R400 - Array Ind. One Res 40
 - 3.34 ft R600 - Array Ind. One Res 60
 - 3.34 ft RTAO - Array Ind. One Res Rt
 - 0.23 ft SPCG - Spontaneous Potential
 - Tool Zero (0.13ft from bottom)
 - 0.13 ft SMTU - DST Uphole Tension
- All measurements relative to tool zero.

COMPANY	MULL DRILLING COMPANY, INC.
WELL	BLEUMER # 1-13
FIELD	WILDCAT
PROVINCE/COUNTY	GRAY COUNTY
COUNTRY/STATE	U.S.A. / KANSAS

Elevation Kelly Bushing	2785.00	feet	First Reading	6146.00	feet
Elevation Drill Floor	2783.00	feet	Depth Driller	6200.00	feet
Elevation Ground Level	2772.00	feet	Depth Logger	6193.00	feet



Weatherford[®]

MICRORESISTIVITY LOG

