



Weatherford[®]

**COMPACT PHOTO DENSITY
COMPENSATED NEUTRON
MICRORESISTIVITY LOG**

COMPANY SHAKESPEARE OIL COMPANY
WELL RUDOLPH #1-22
FIELD WILDCAT
PROVINCE/COUNTY SCOTT
COUNTRY/STATE U.S.A. / KANSAS
LOCATION 1450' FSL & 1350' FEL

SEC 22 TWP 17S RGE 33W Other Services
MAI/MFE
API Number 15-171-20938 MSS
Permit Number

Permanent Datum G.L., Elevation 3025 feet
Log Measured From KB
Drilling Measured From K.B. @ 10 FEET

Elevations: feet
KB 3035.00
DF 3033.00
GL 3025.00

Date	16-APR-2013
Run Number	ONE
Service Order	3539888
Depth Driller	4940.00 feet
Depth Logger	4939.00 feet
First Reading	4907.00 feet
Last Reading	3700.00 feet
Casing Driller	267.00 feet
Casing Logger	264.00 inches
Bit Size	7.875
Hole Fluid Type	CHEMICAL lb/USg
Density / Viscosity	9.30 lb/USg 55.00 CP
PH / Fluid Loss	10.50 10.50
Sample Source	FLOWLINE
Rm @ Measured Temp	0.62 @ 74.0 ohm-m
Rmf @ Measured Temp	0.50 @ 74.0 ohm-m
Rmc @ Measured Temp	0.74 @ 74.0 ohm-m
Source Rmf / Rmc	CALC CLAC
Rm @ BHT	0.39 @ 119.0 ohm-m
Time Since Circulation	3 HOURS
Max Recorded Temp	119.00 deg F
Equipment / Base	13057 LIB
Recorded By	J. LAPPOINT
Witnessed By	TIM PRIEST
W. STAMBAUGH	
JOB#	LB13-104

BOREHOLE RECORD

Last Edited: 16-APR-2013 15:06

Bit Size inches	Depth From feet	Depth To feet
7.875	264.00	4939.00

CASING RECORD

Type	Size inches	Depth From feet	Shoe Depth feet	Weight pounds/ft
SURFACE	8.625	0.00	264.00	24.00

REMARKS

Tools Used: MCG, MML, MDN, MPD, MFE, MSS, MAI ran in combination.
Hardware: MPD: 8 inch profile plate used. MAI, MSS, MFE: 0.5 Inch standoffs used. MDN: Dual Bowspring used.
2.71 G/CC Limestone density matrix used to calculate porosity.
Sonic porosity calculated using a Limestone scale (47.5 usec/ft).
Borehole rugosity, tight pulls, and washouts will affect data quality.
All intervals logged and scaled per customer's request.
Total hole volume from TD to Surface casing= 2325 cubic feet
Annular volume with 4.5 inch production casing TD to 3700ft = 375 cubic feet
Service order #3539888
Rig: H-D Drilling #2
Engineer: W. Stambaugh, J. LaPoint
Operator(s): B. Reeves


**** Software issue changed fluid loss to match Ph. Fluid Loss should be 8.8 ml/30min.****


All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not, guarantee the accuracy

or correctness of any interpretations, and we warrant, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions in our price schedule.

5 INCH MAIN

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 28-APR-2013 15:42
 Filename: C:\Minimus\Archive 2013\LB13-104\Minimus 13.04.8...\Shakespeare Rudolph #1-22_002.dta Recorded on 16-APR-2013 12:30
 System Versions: Logged with 13.04.8492 Plotted with 13.04.8492

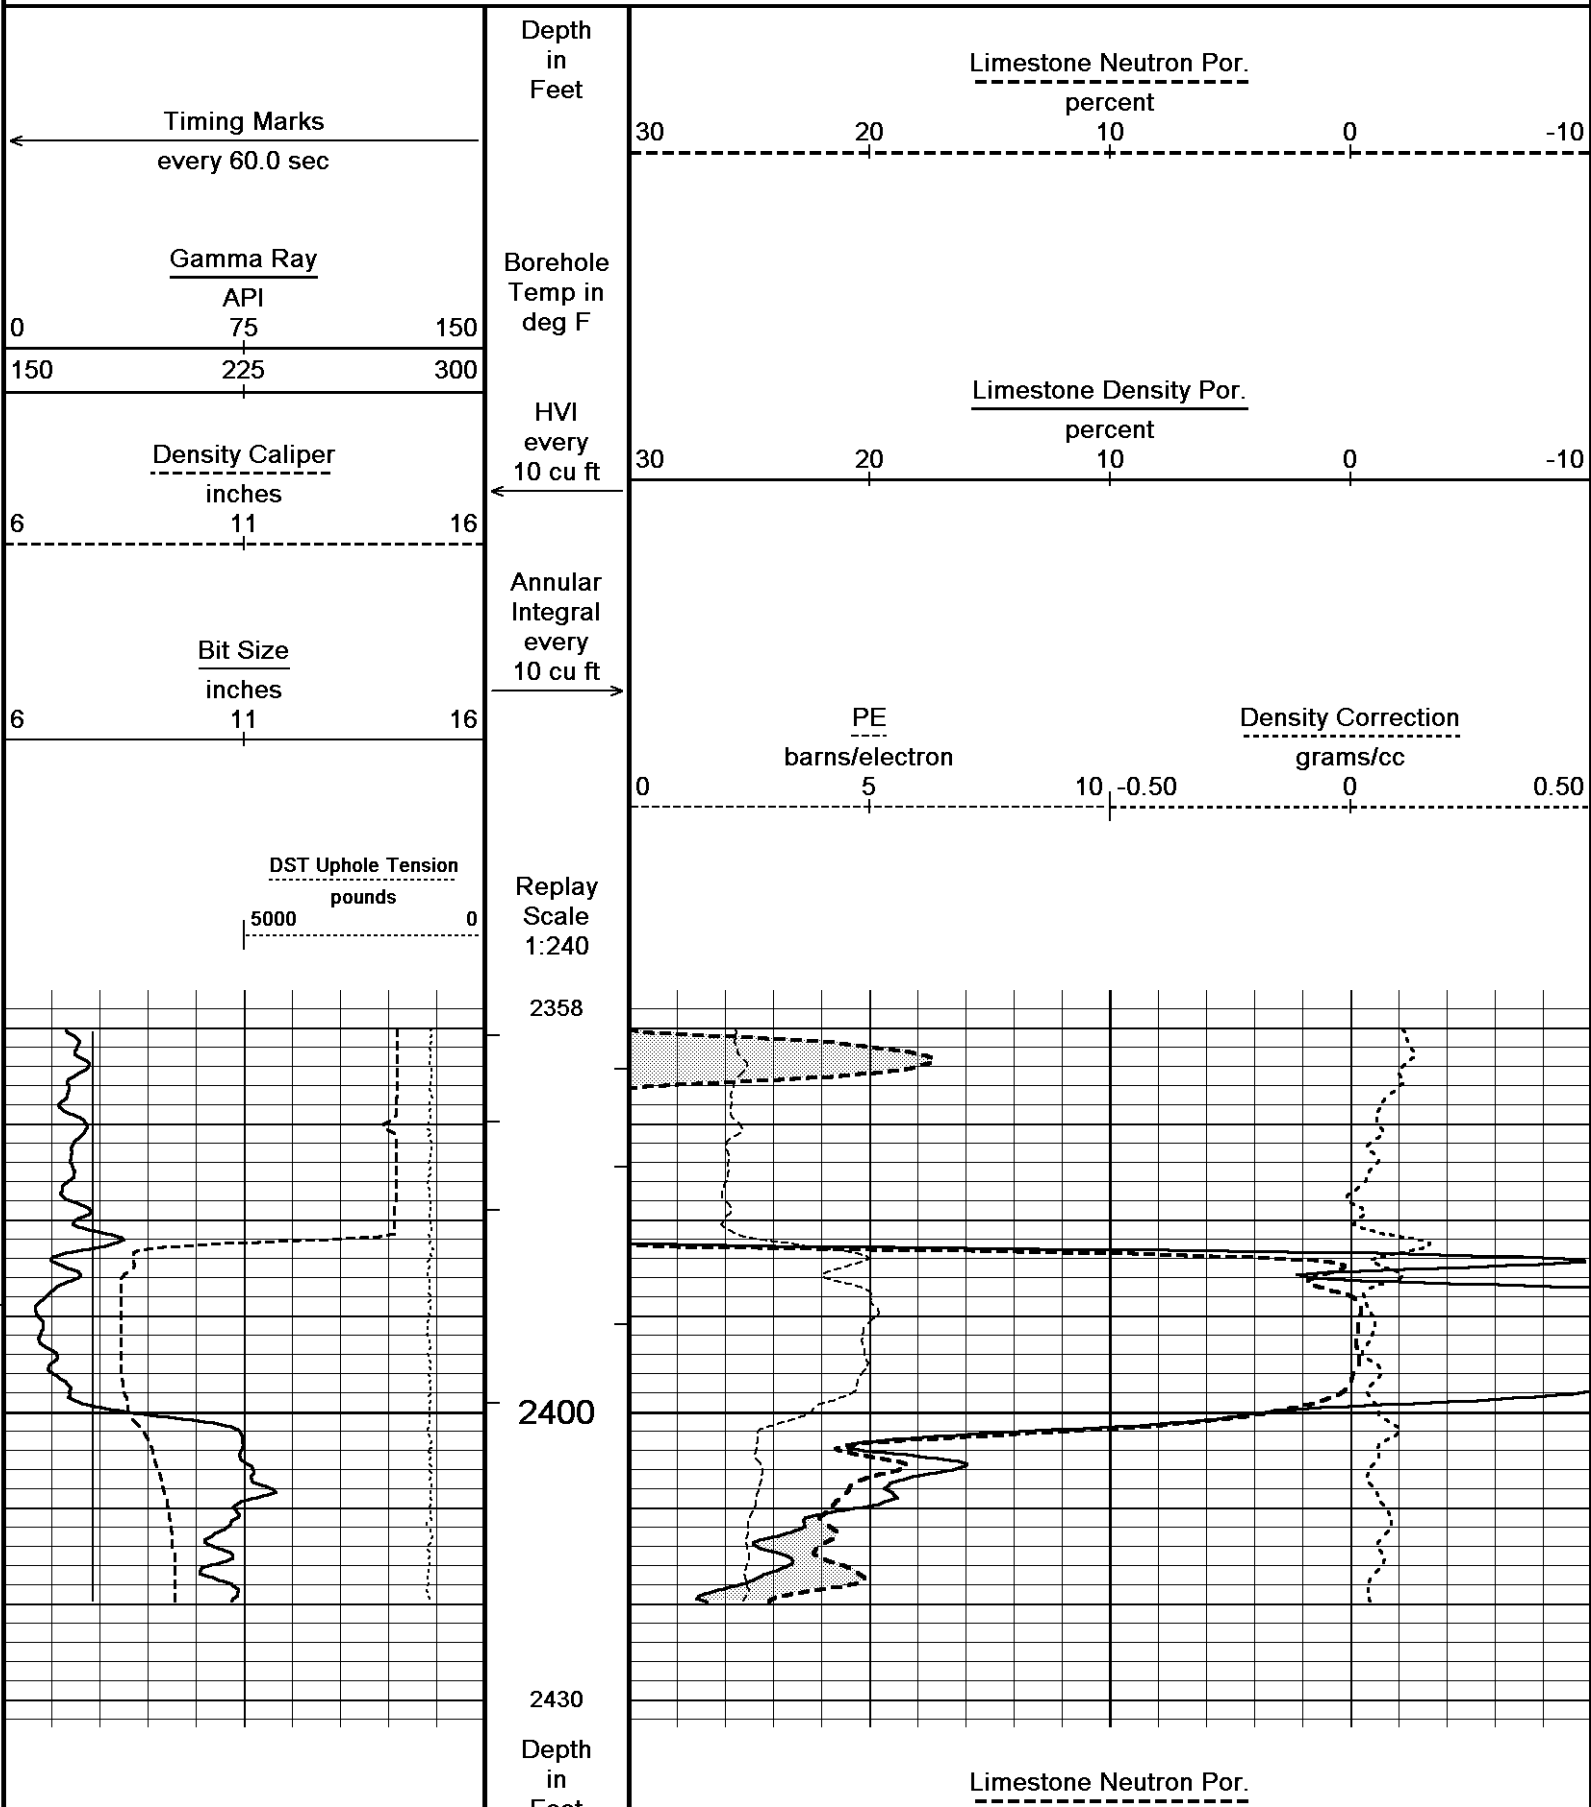

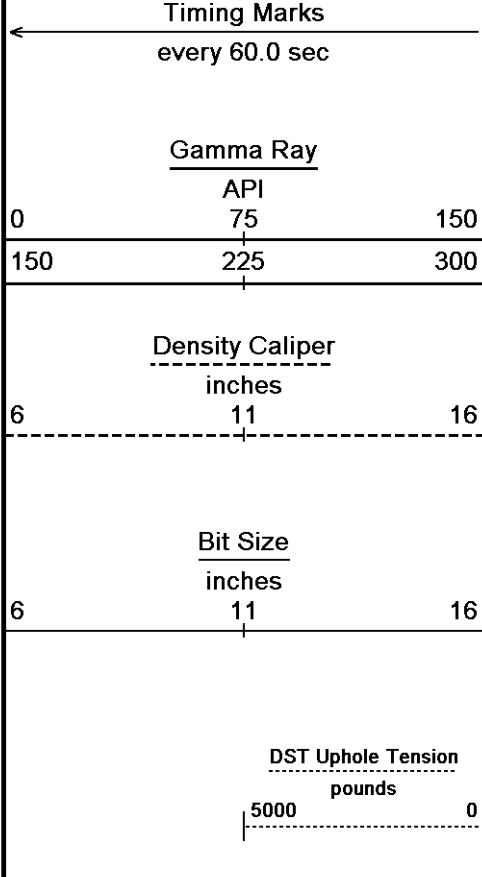


Feet

Borehole Temp in deg F

HVI every 10 cu ft

Annular Integral every 10 cu ft

Replay Scale 1:240

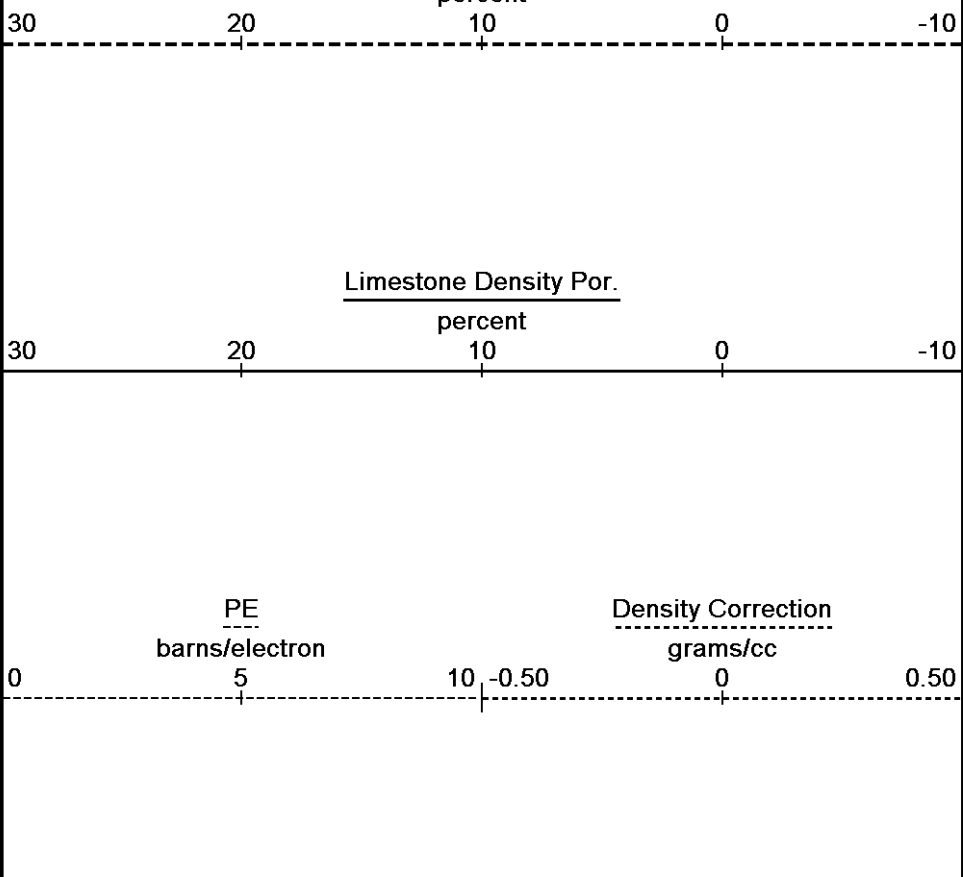


Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 28-APR-2013 15:42
 Filename: C:\Minimus\Archive 2013\LB13-104\Minimus 13.04.8...\Shakespeare Rudolph #1-22_002.dta Recorded on 16-APR-2013 12:30
 System Versions: Logged with 13.04.8492 Plotted with 13.04.8492

↑ 5 INCH MAIN ↑

↓ 5 INCH MAIN ↓

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 28-APR-2013 15:42
 Filename: C:\Minimus\Archive 2013\LB13-104\Minimus 13.04.8...\Shakespeare Rudolph #1-22_002.dta Recorded on 16-APR-2013 12:30
 System Versions: Logged with 13.04.8492 Plotted with 13.04.8492

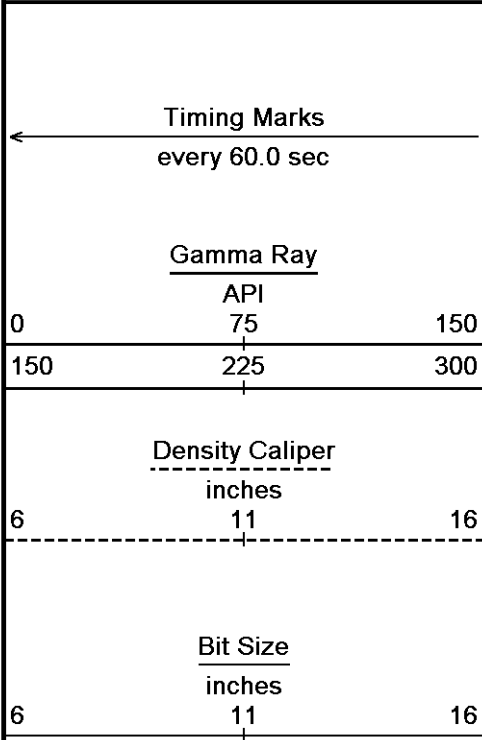


Depth in Feet

Borehole Temp in deg F

HVI every 10 cu ft

Annular Integral every 10 cu ft

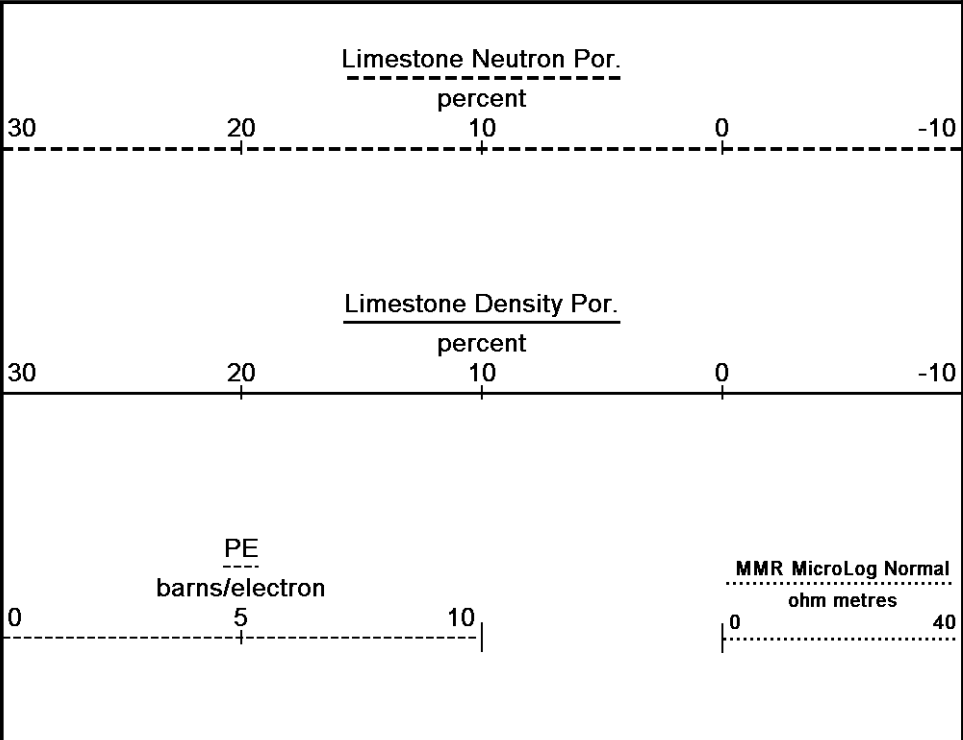


DST Uphole Tension
pounds

5000 0

Replay
Scale
1:240

0 40
inches

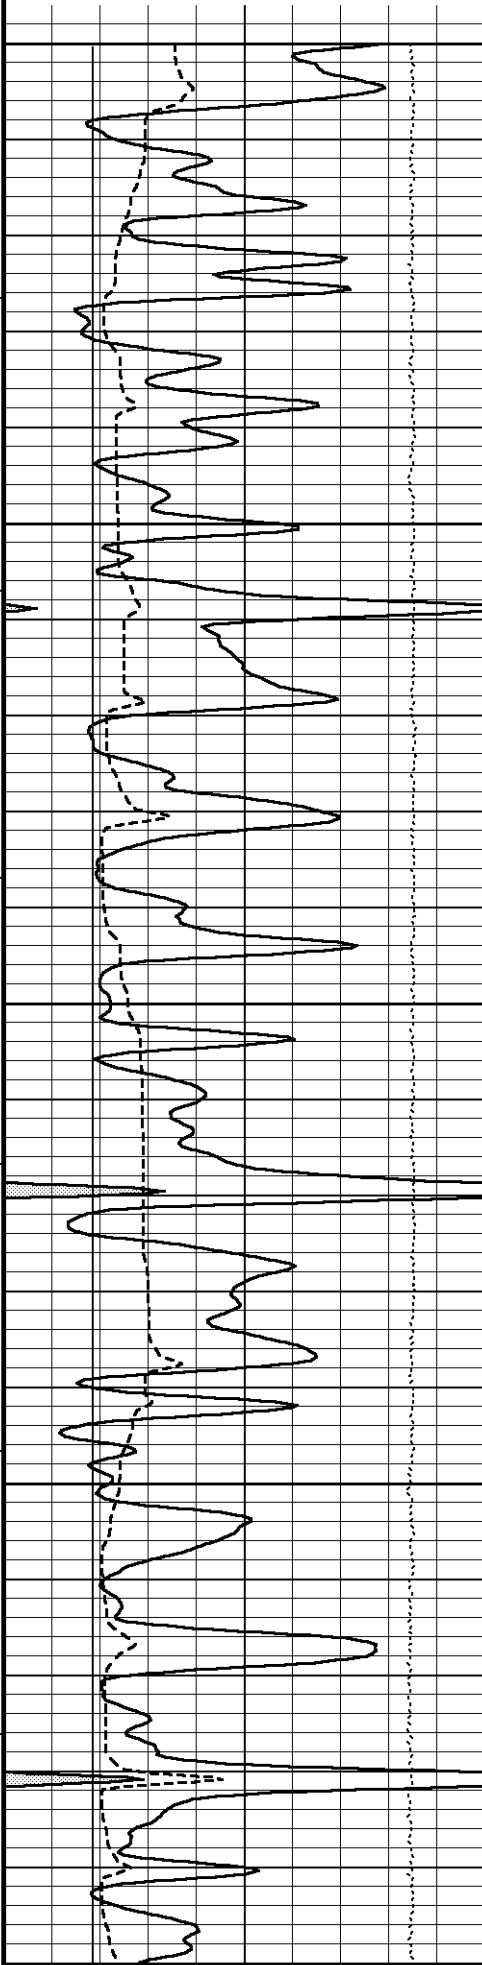

3700

109°

3750

109°


3800

109°

3850

110°

3900

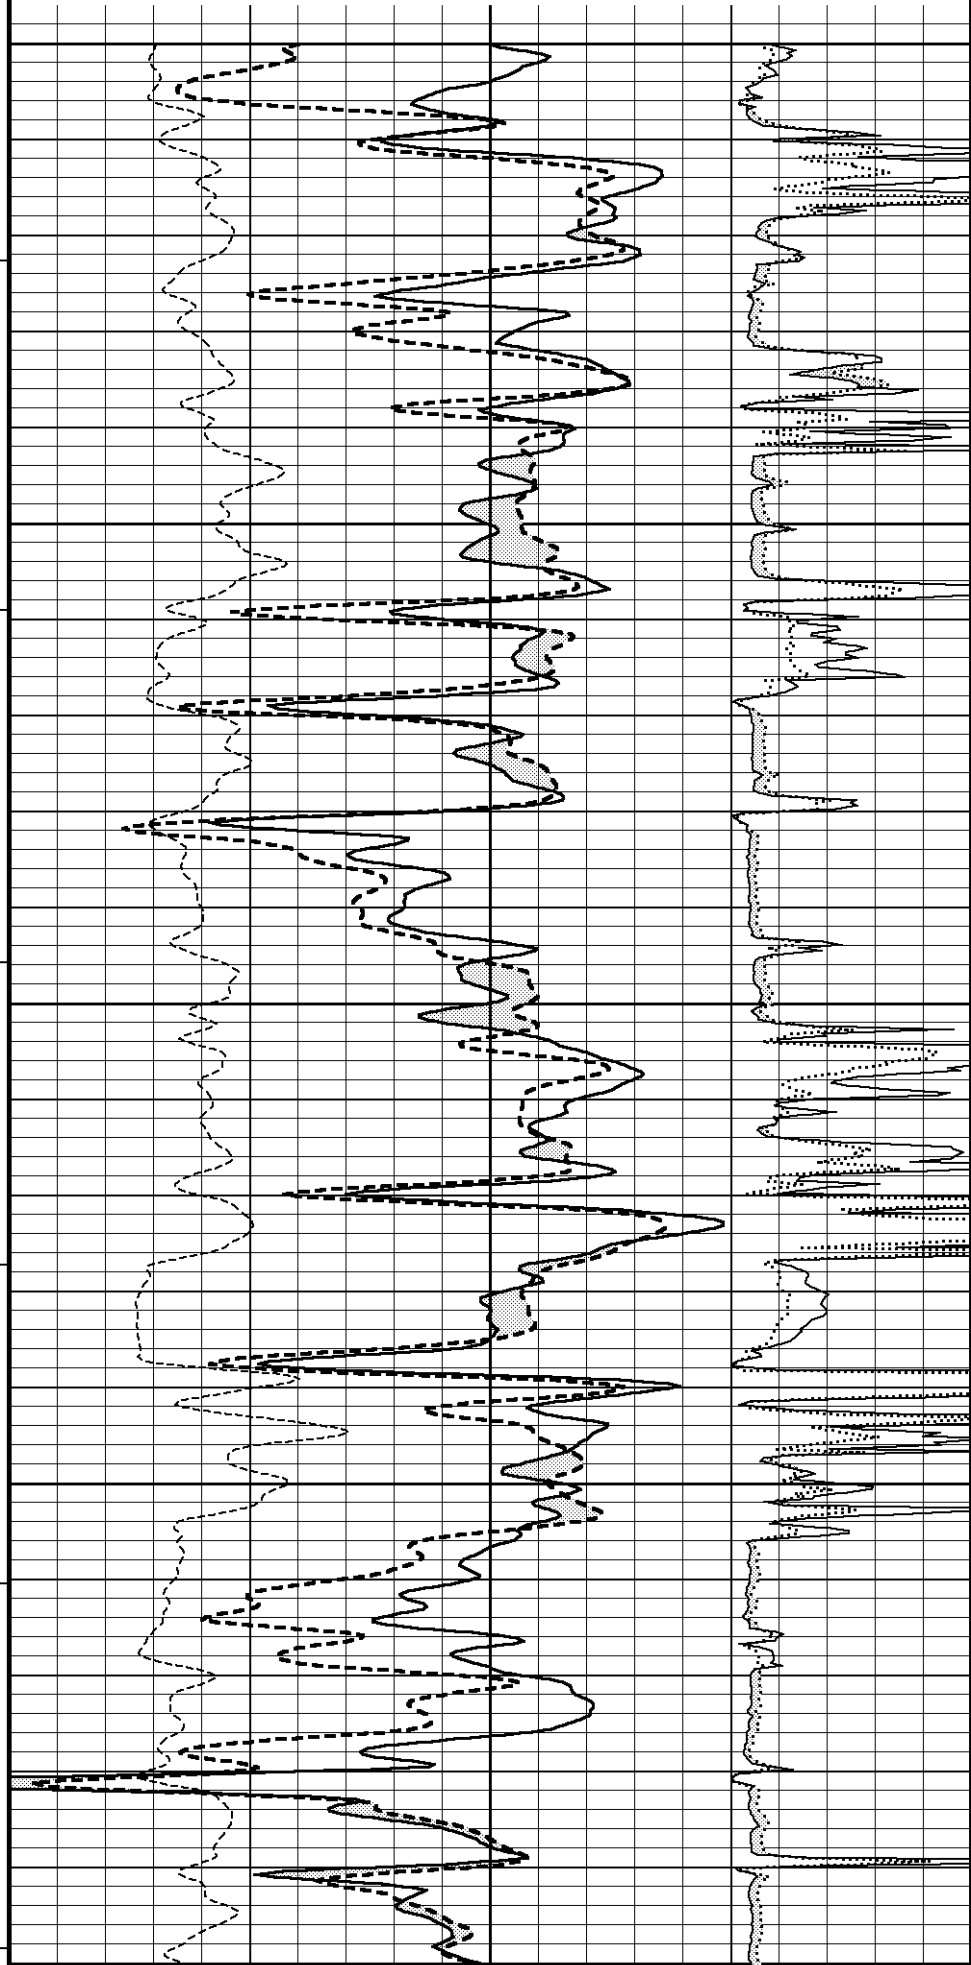

500


109°


109°


109°


110°





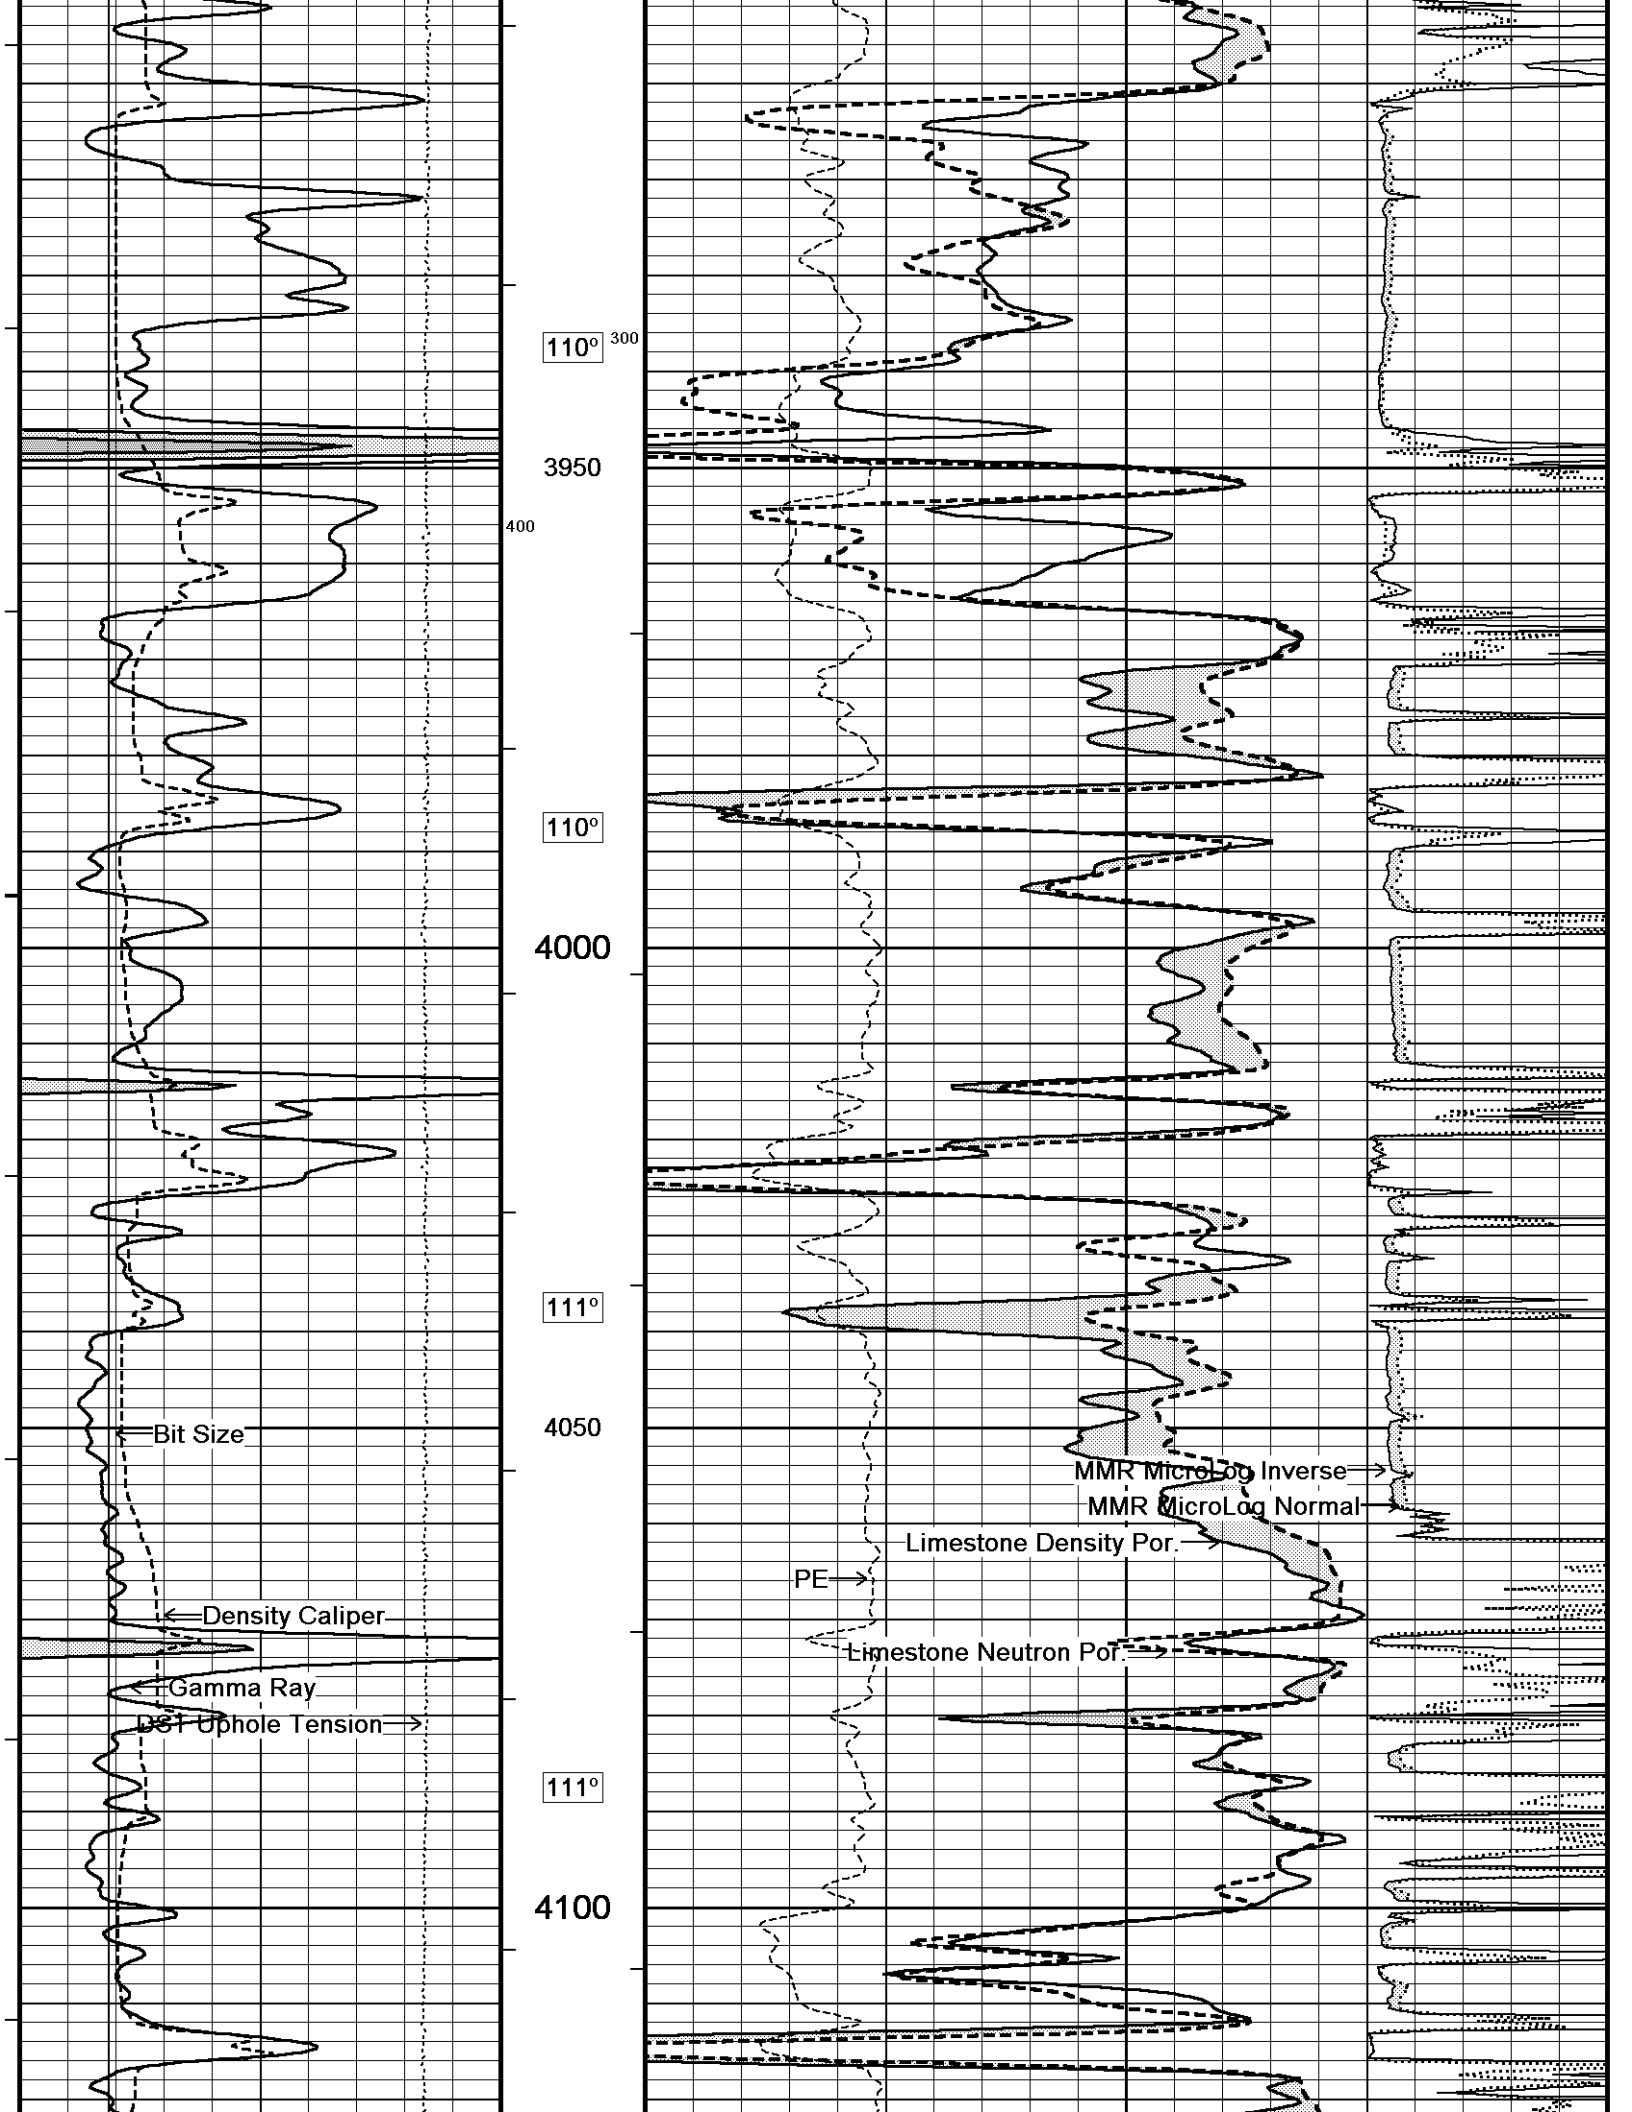

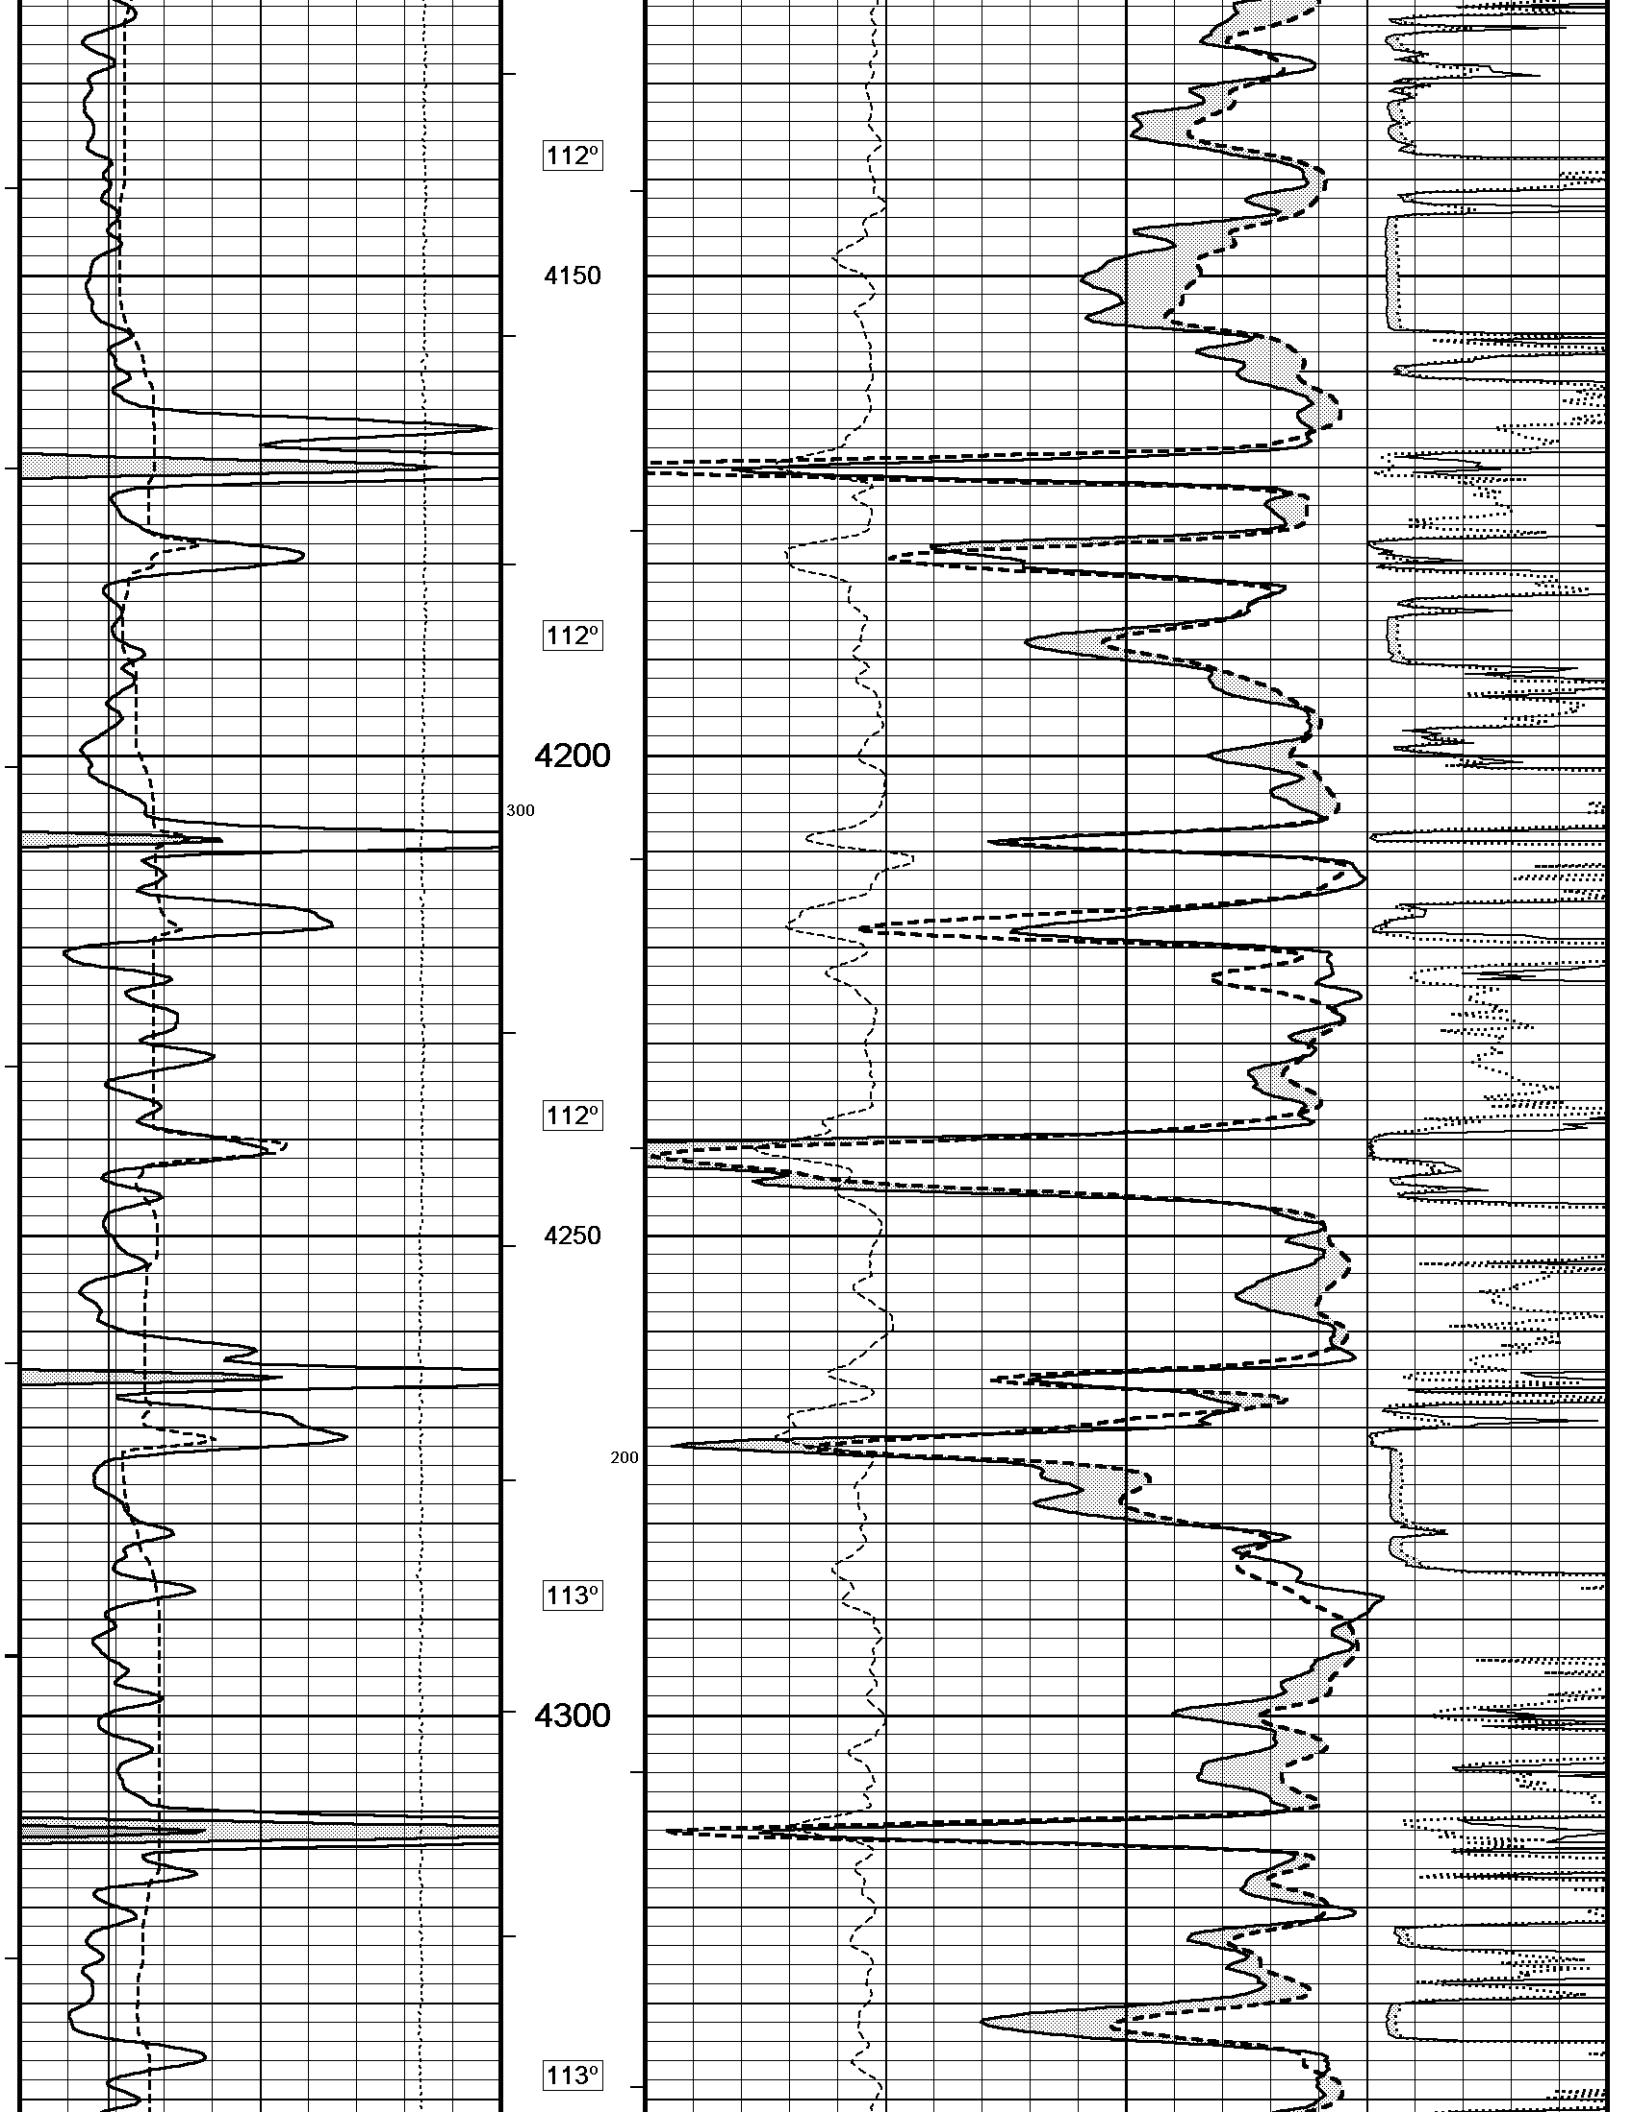

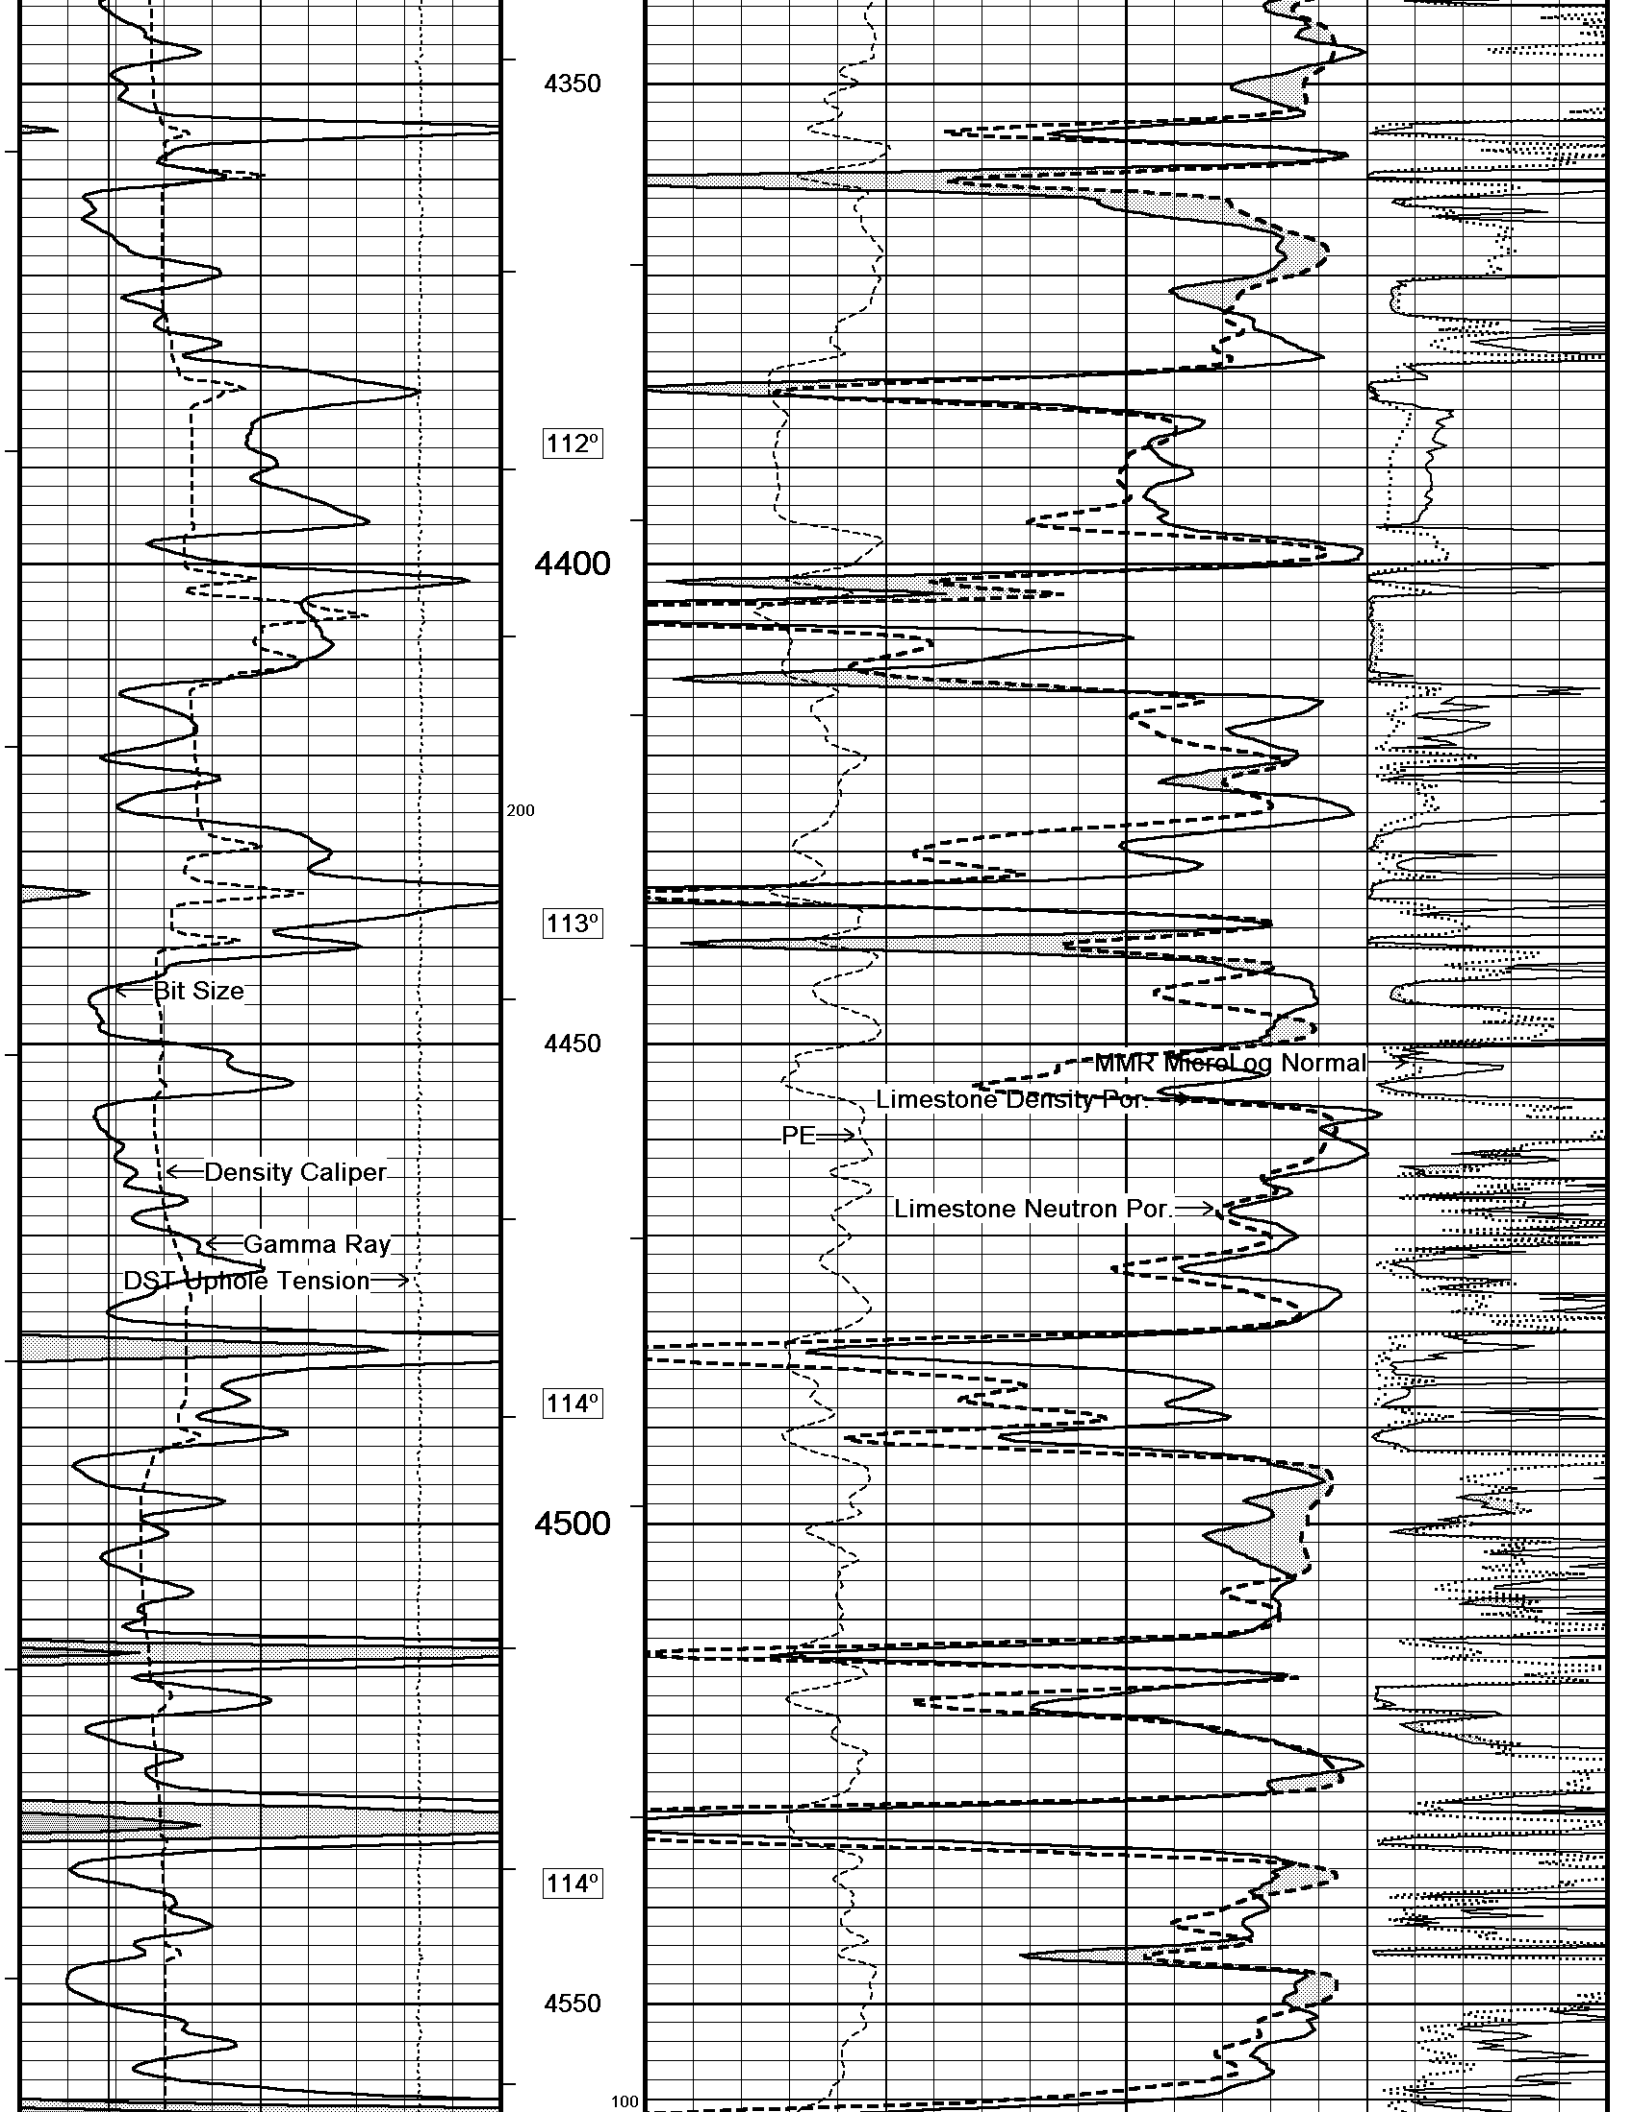


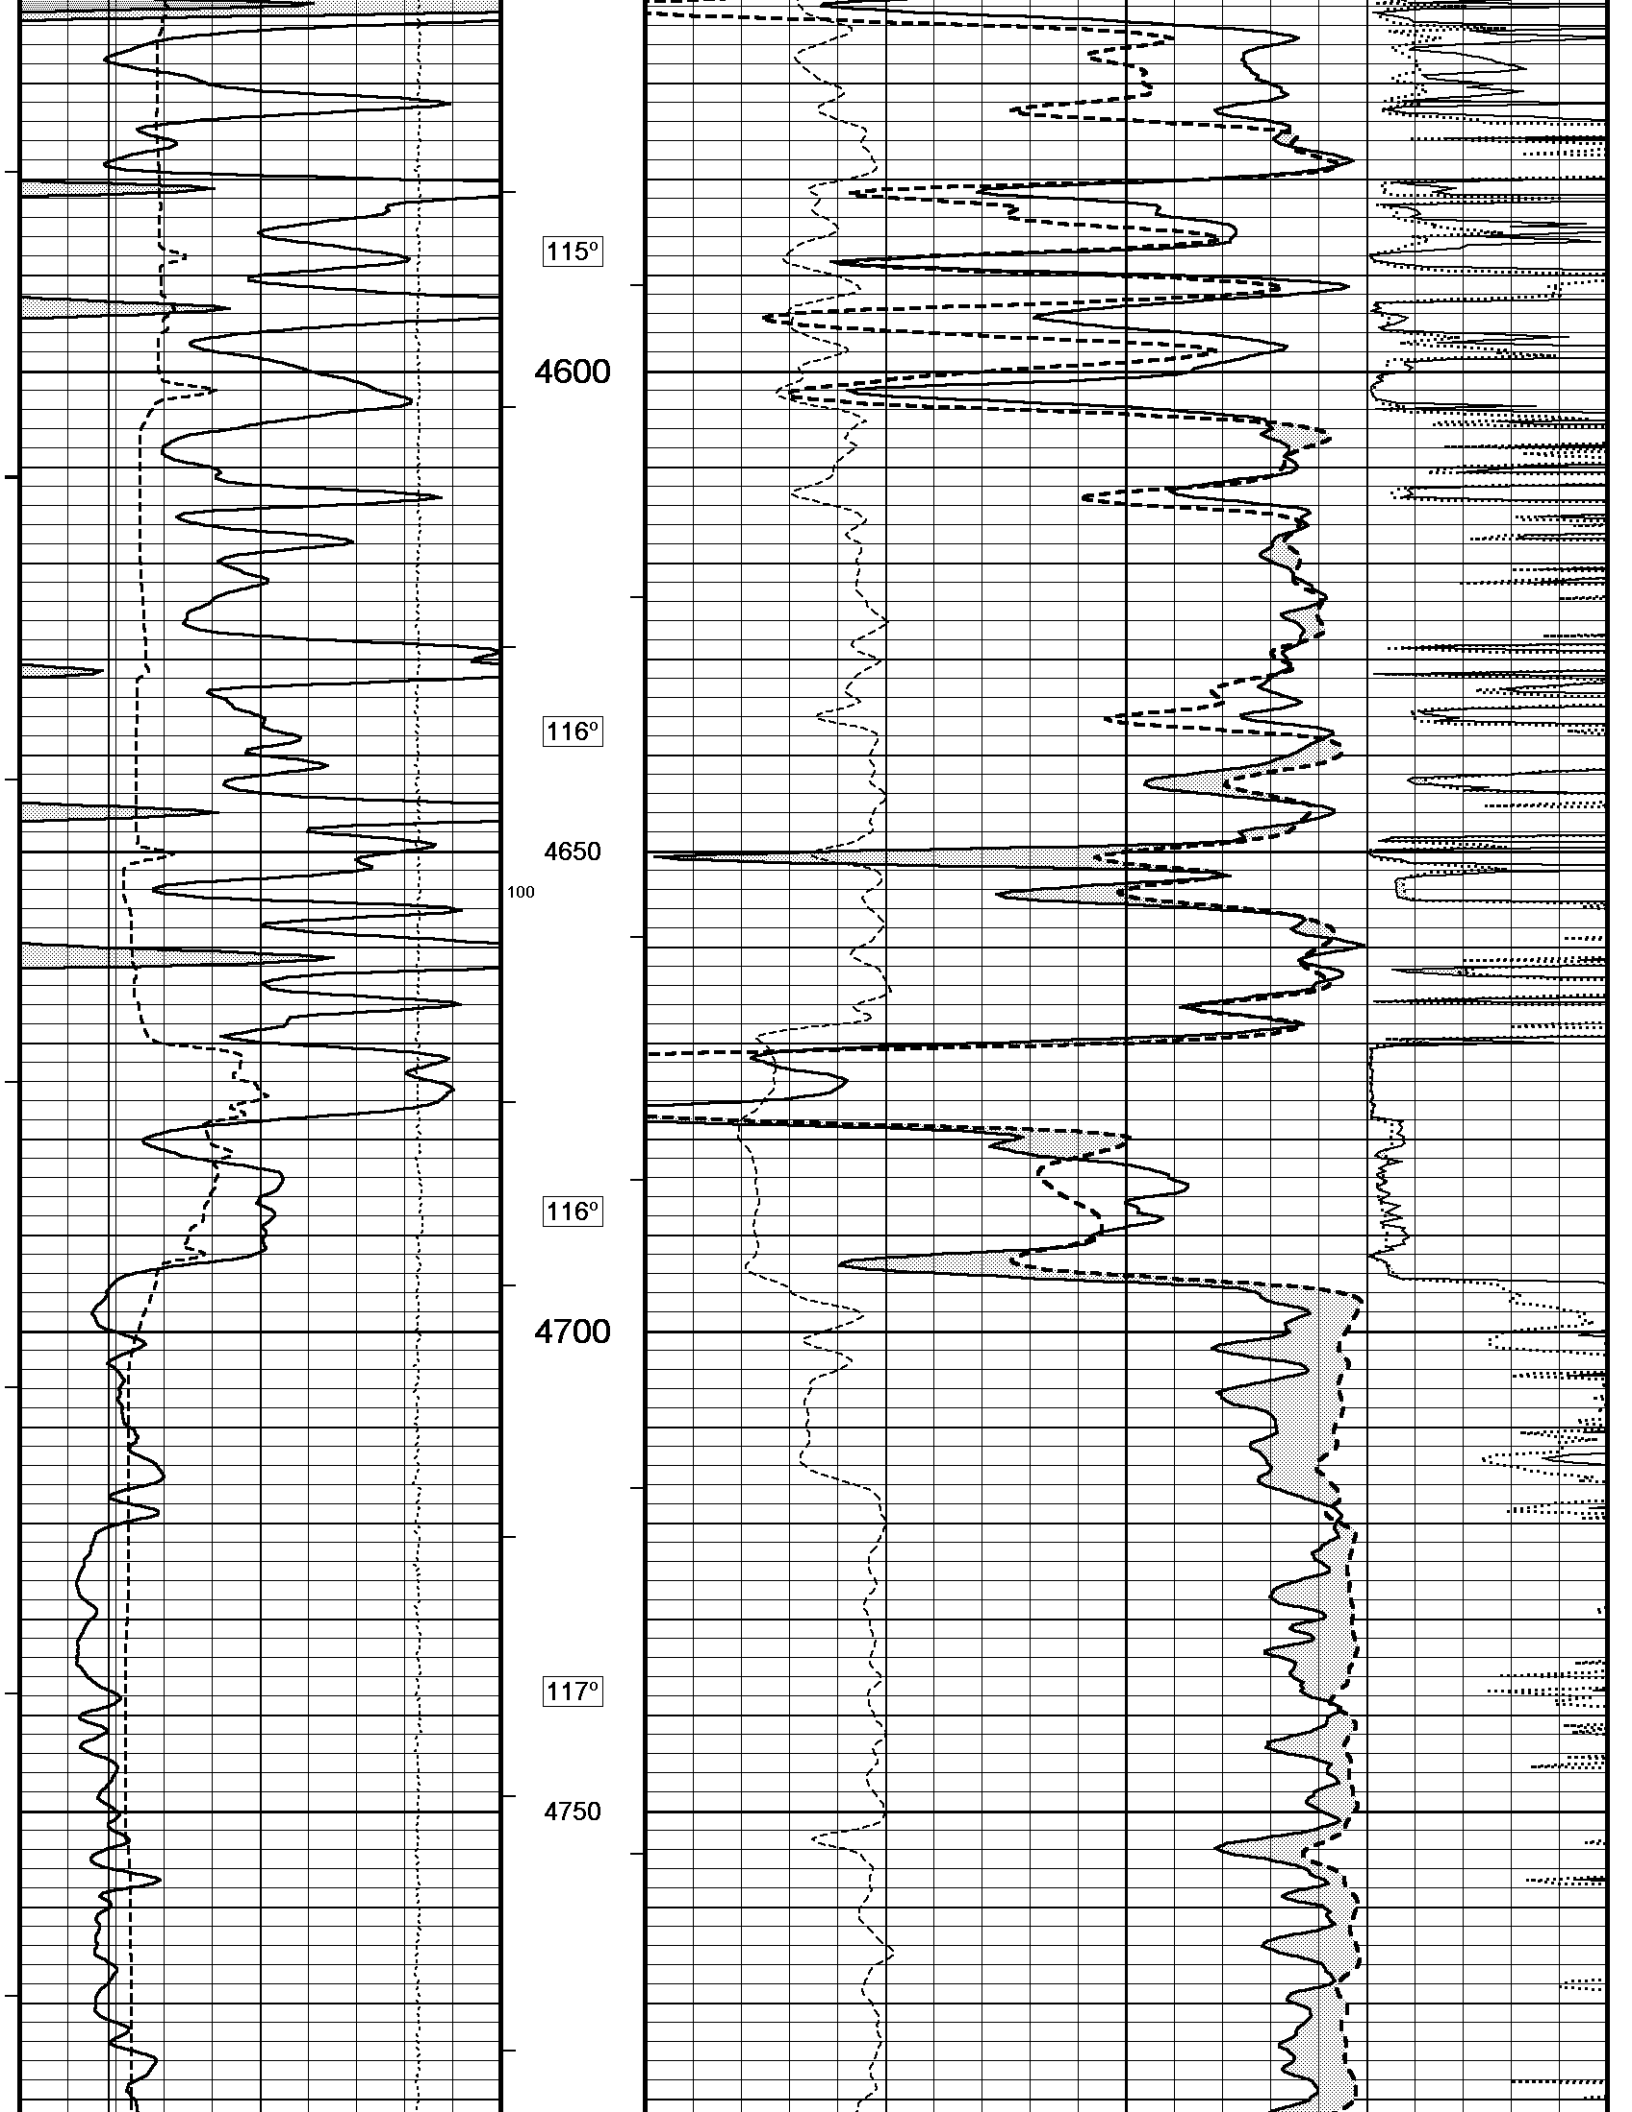

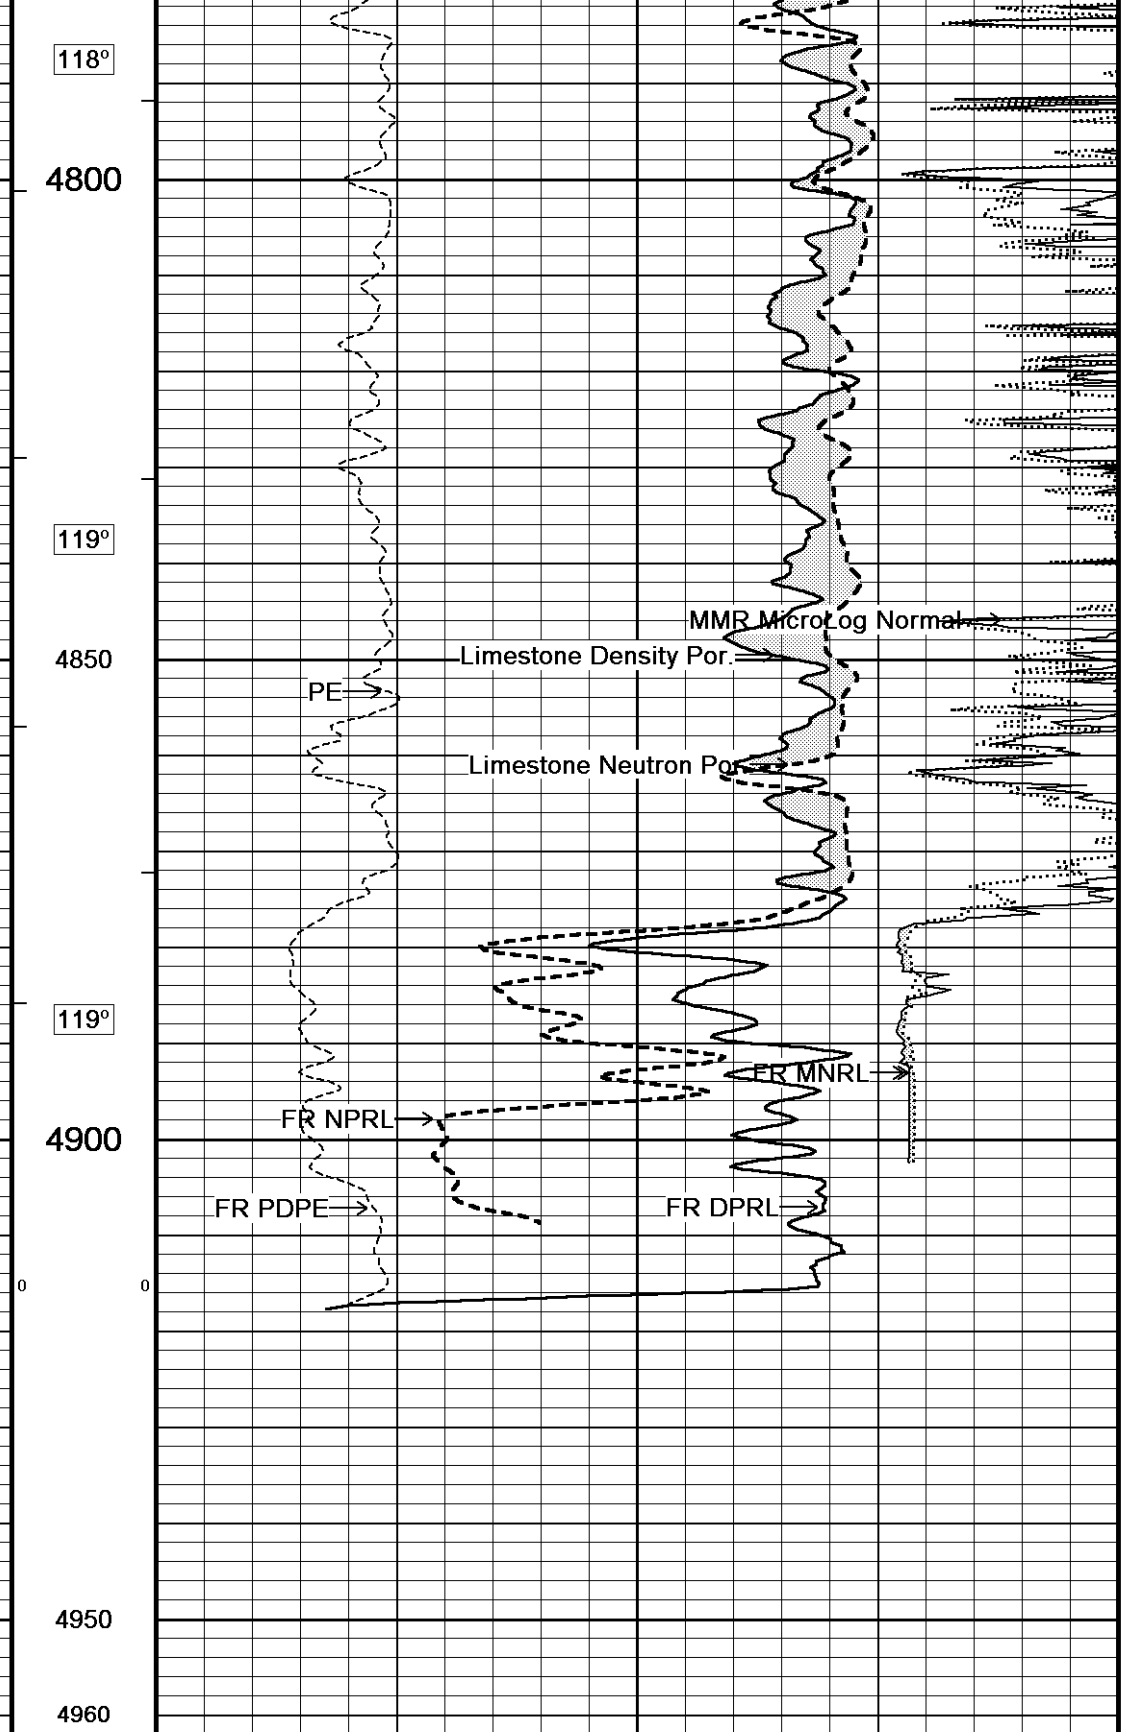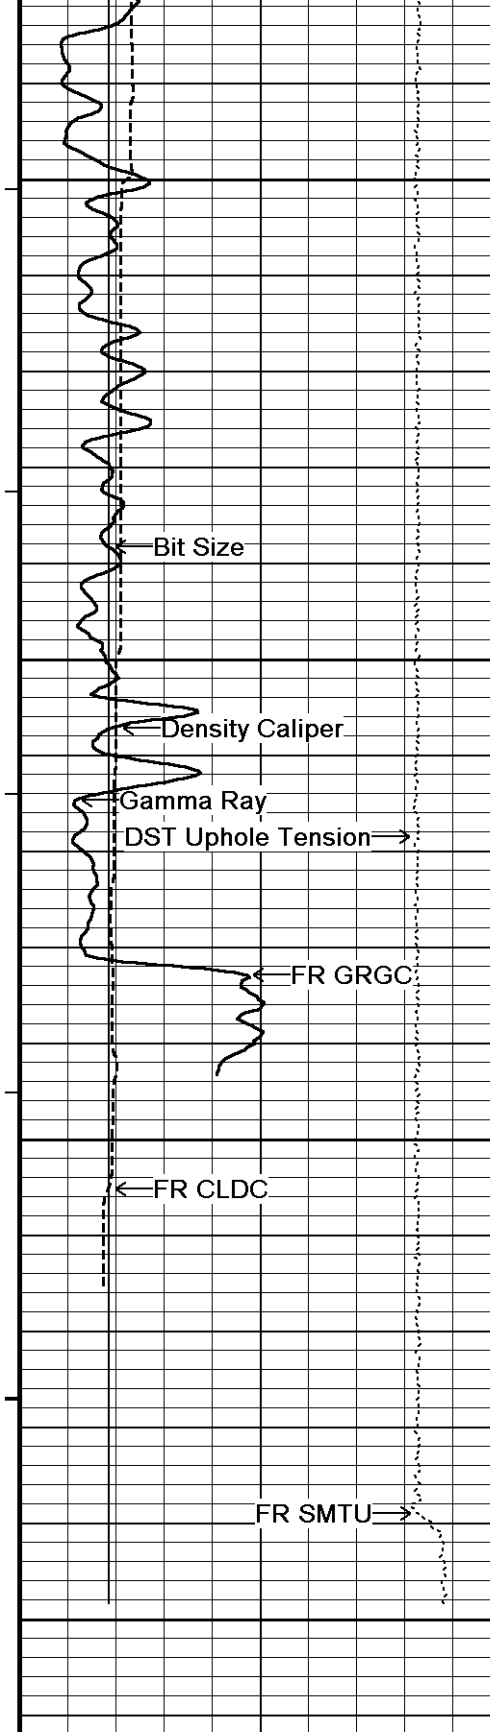

Depth
in
Feet

Limestone Neutron Por.
percent




Limestone Density Por.
percent




Timing Marks
every 60.0 sec

Gamma Ray





Borehole
Temp in
deg F

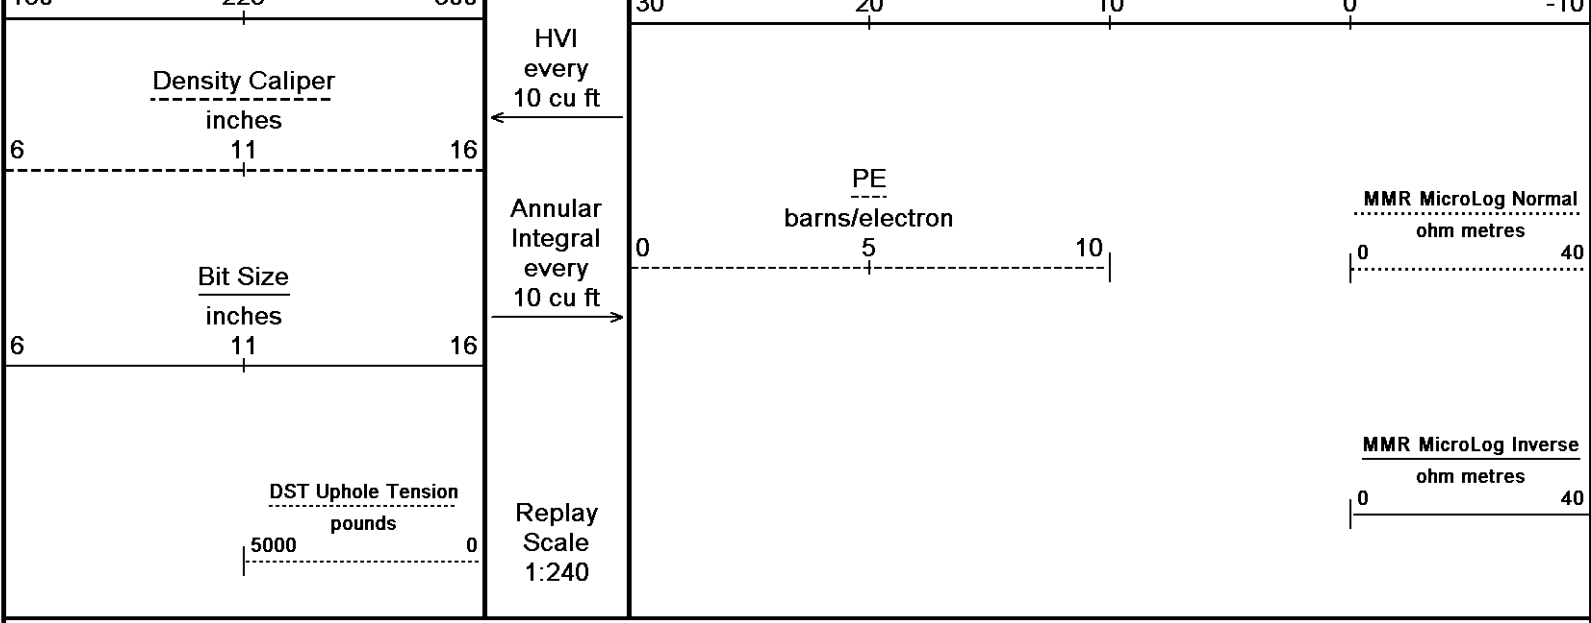


REPEAT SECTION


Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 28-APR-2013 15:42
 Filename: C:\Minimus\Archive 2013\LB13-104\Minimus 13.04.8...\Shakespeare Rudolph #1-22_001.dta
 Recorded on 16-APR-2013 12:04
 System Versions: Logged with 13.04.8492 Plotted with 13.04.8492

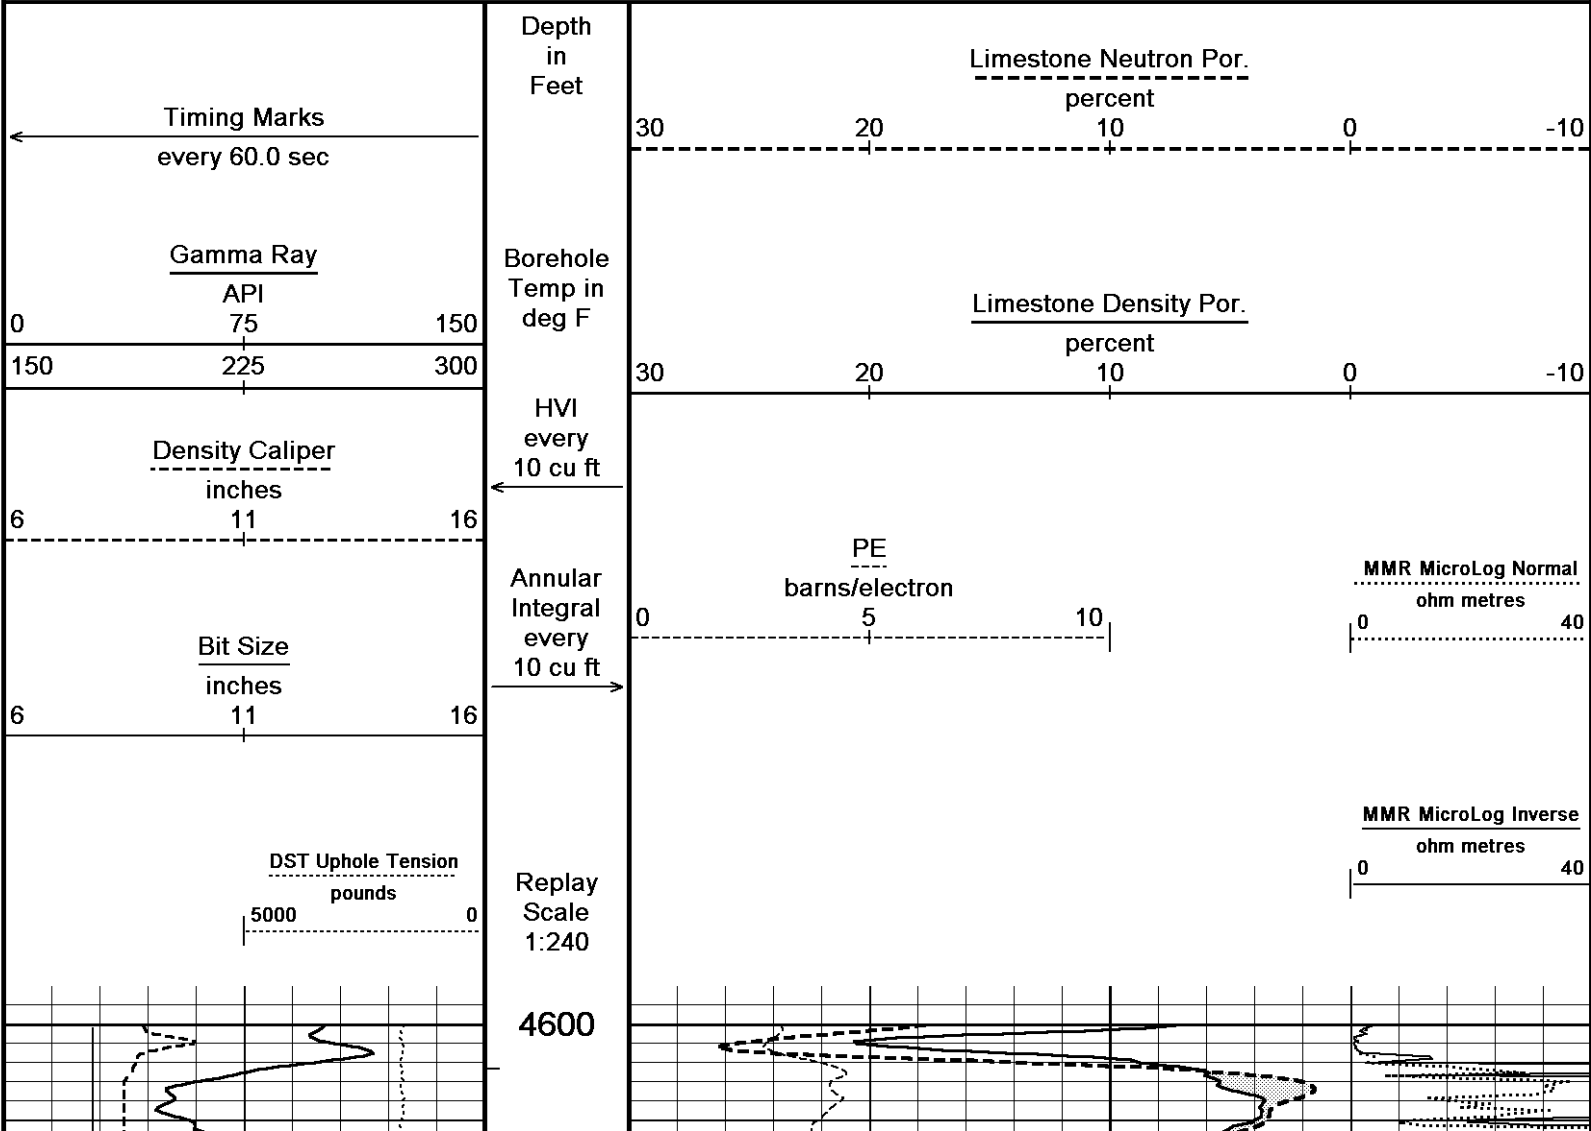

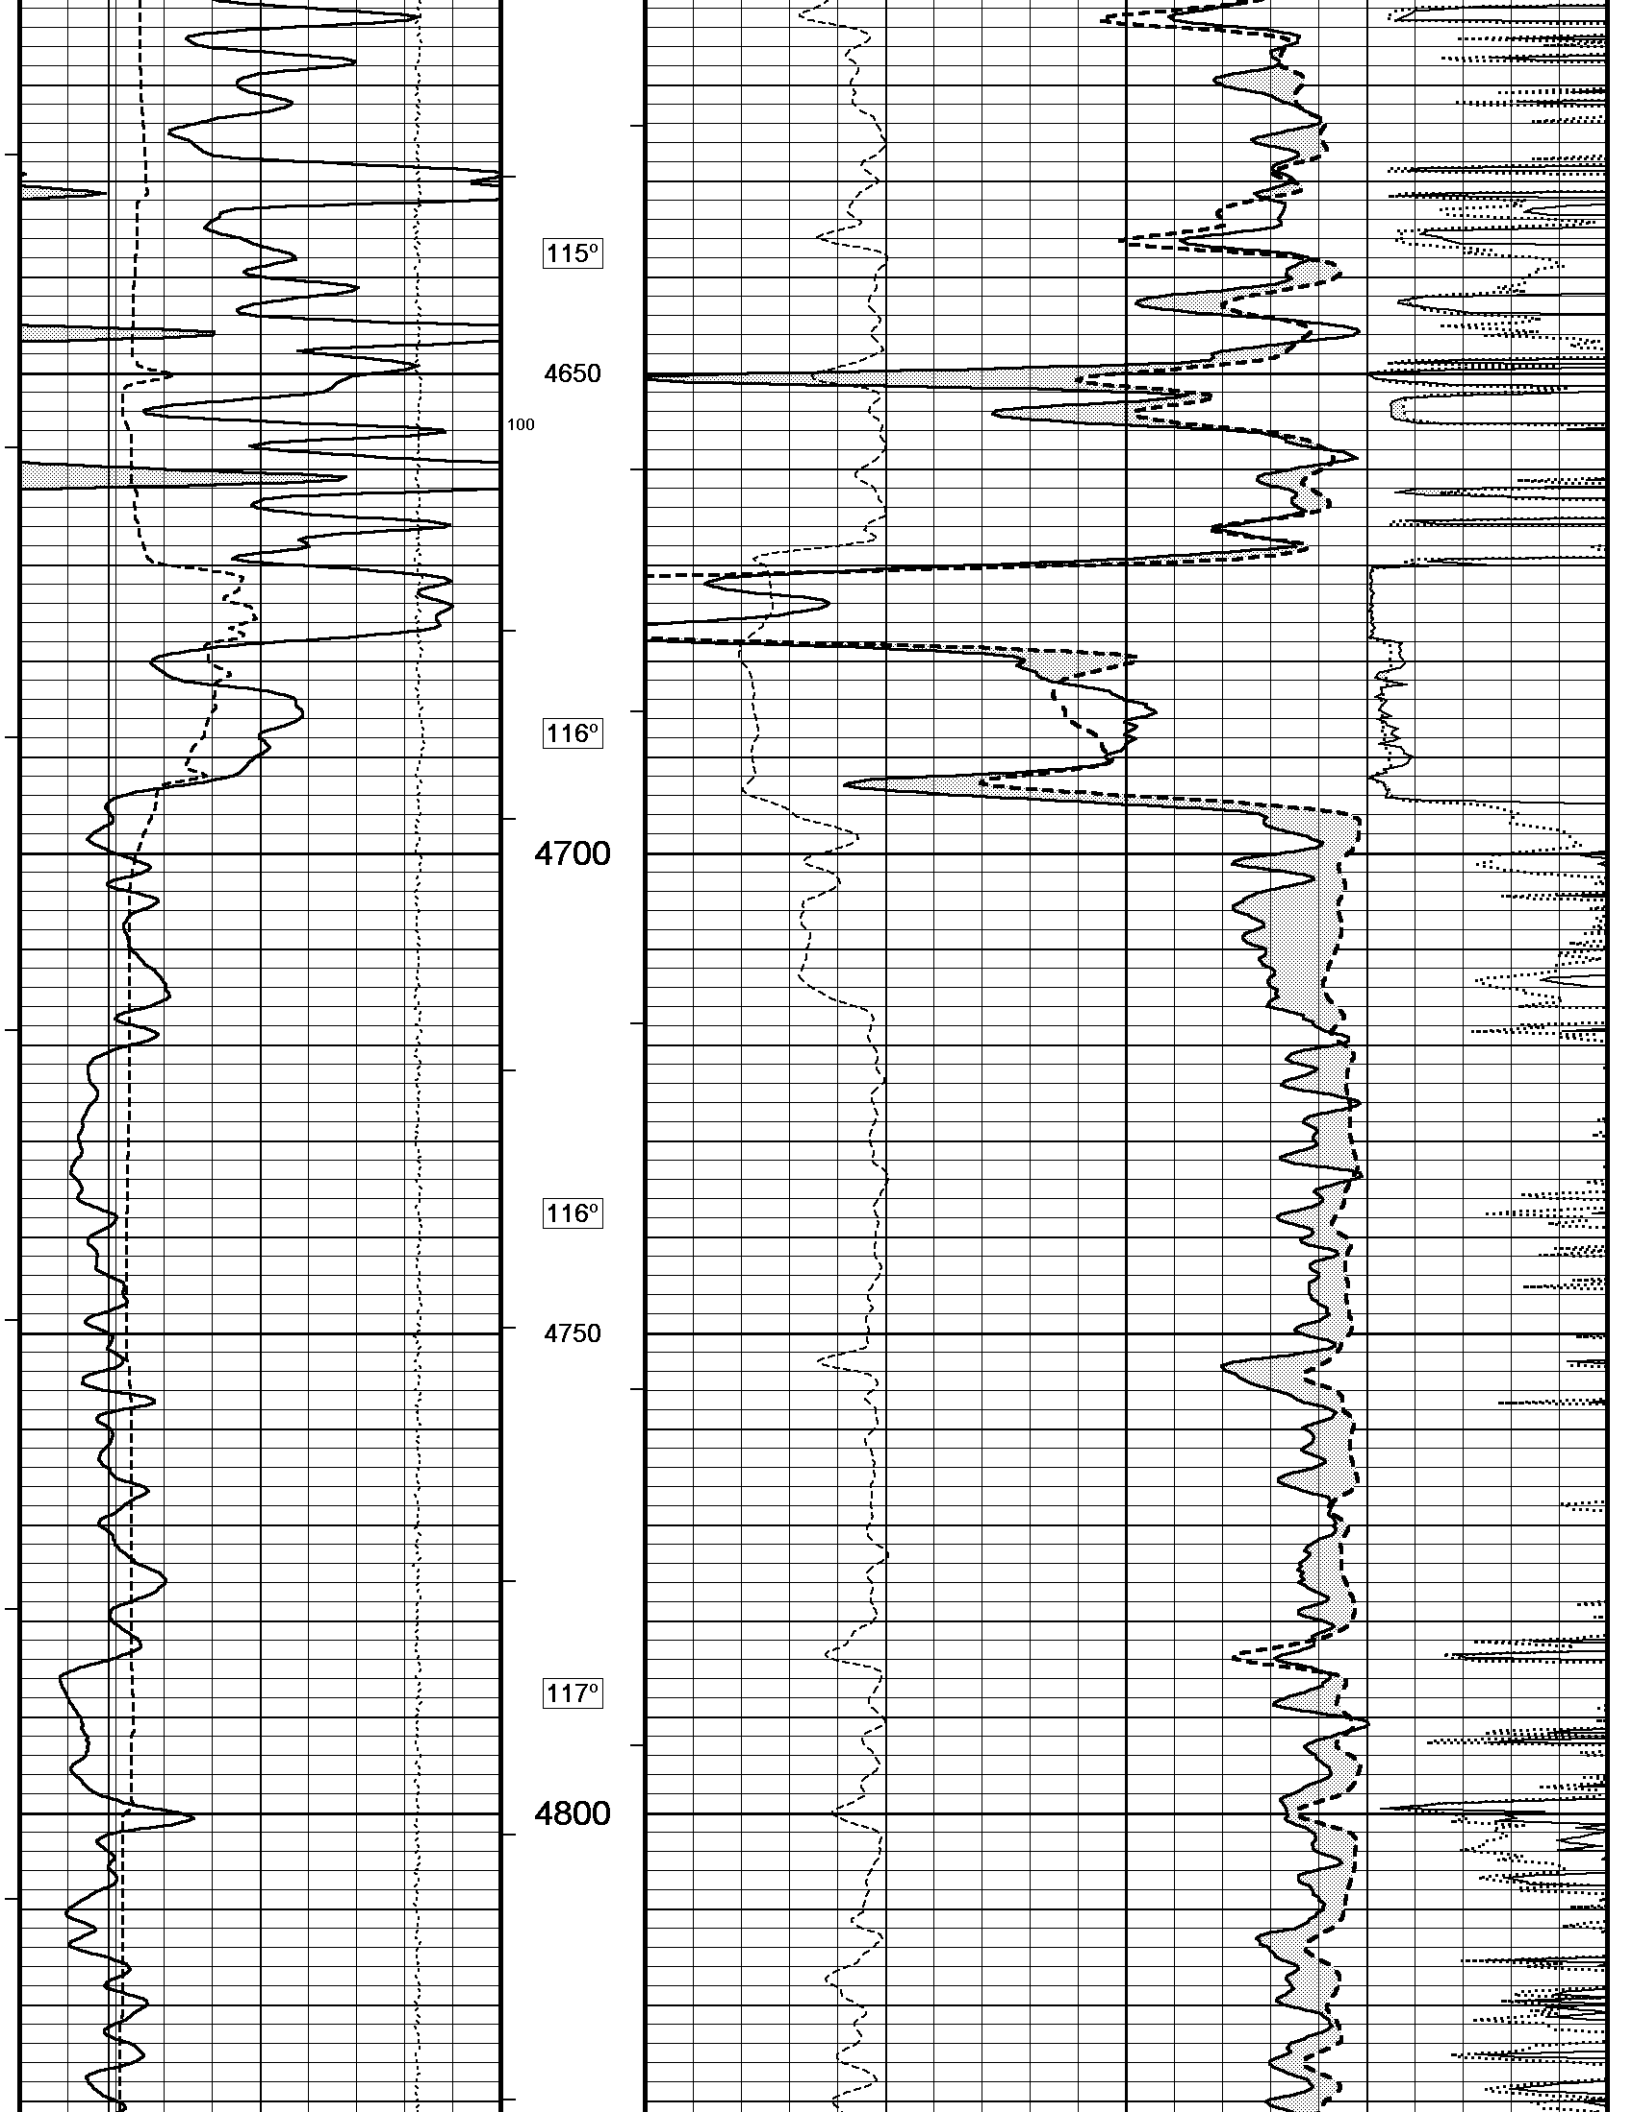

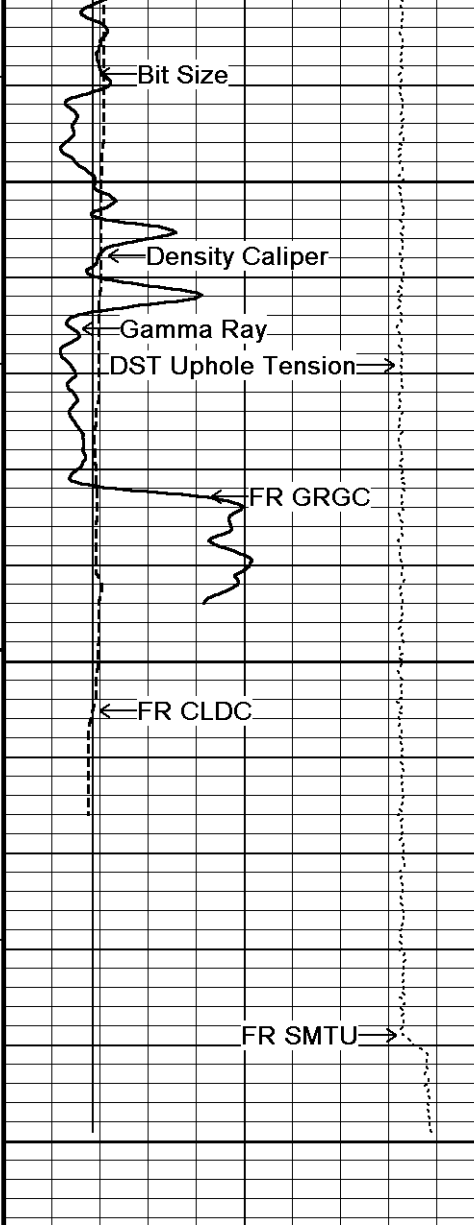

117°
4850
116°
4900
0
4950
4958
Depth in Feet

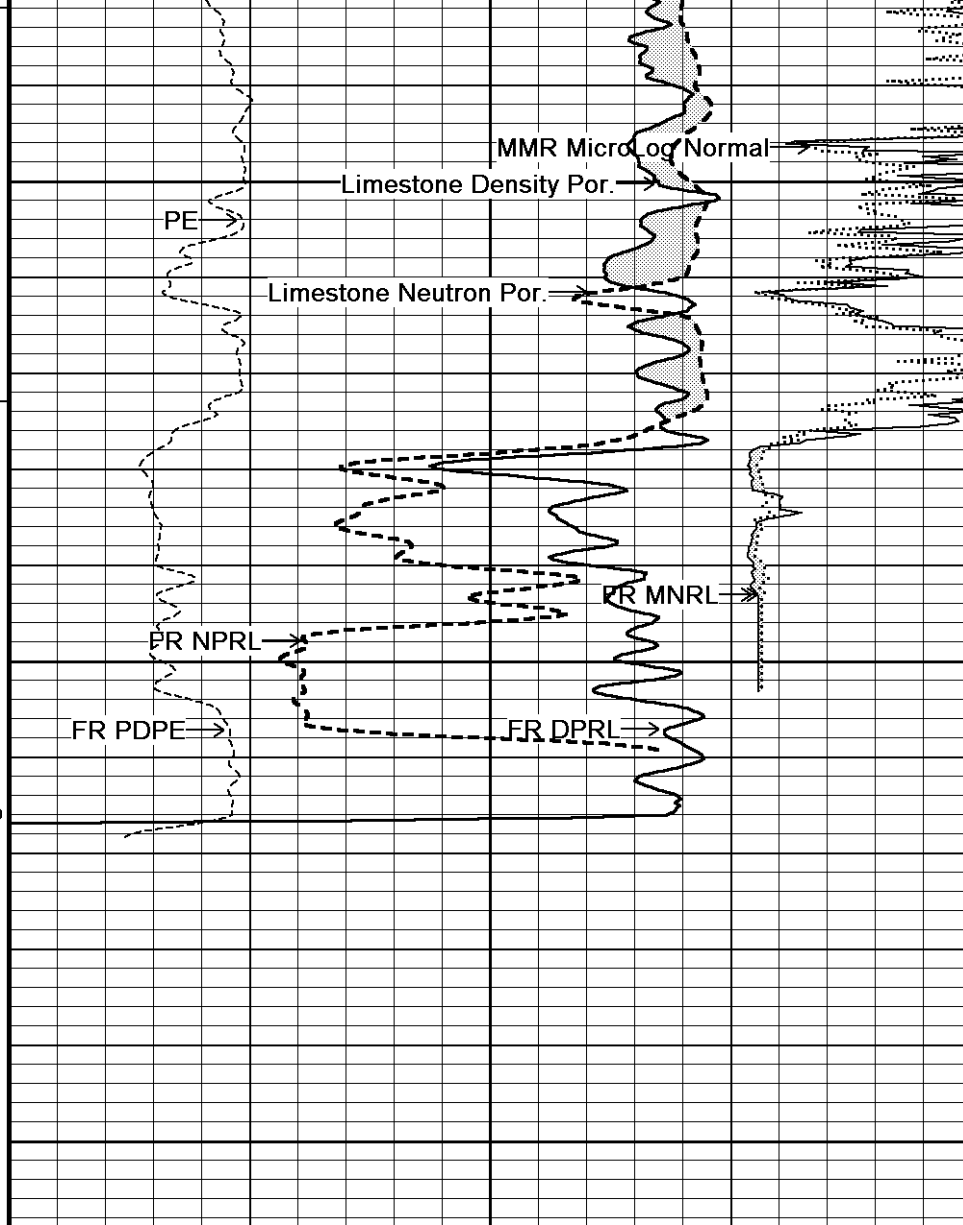

Timing Marks every 60.0 sec

Gamma Ray
API
0 75 150
150 225 300

Density Caliper inches
6 11 16

Bit Size inches
6 11 16

DST Uphole Tension

Borehole Temp in deg F

HVI every 10 cu ft

Annular Integral every 10 cu ft


Limestone Neutron Por. percent
30 20 10 0 -10

Limestone Density Por. percent
30 20 10 0 -10

PE barns/electron
0 5 10

MMR MicroLog Normal ohm metres
0 40

MMR MicroLog Inverse ohm metres
0 40






Replay
Scale
1:240


Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 28-APR-2013 15:42
 Filename: C:\Minimus\Archive 2013\LB13-104\Minimus 13.04.8...\Shakespeare Rudolph #1-22_001.dta
 Recorded on 16-APR-2013 12:04
 System Versions: Logged with 13.04.8492 Plotted with 13.04.8492



↑ REPEAT SECTION ↑

↓ 5 INCH MAIN ↓

Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 28-APR-2013 15:42
 Filename: C:\Minimus\Archive 2013\LB13-104\Minimus 13.04.8...\Shakespeare Rudolph #1-22_002.dta
 Recorded on 16-APR-2013 12:30
 System Versions: Logged with 13.04.8492 Plotted with 13.04.8492

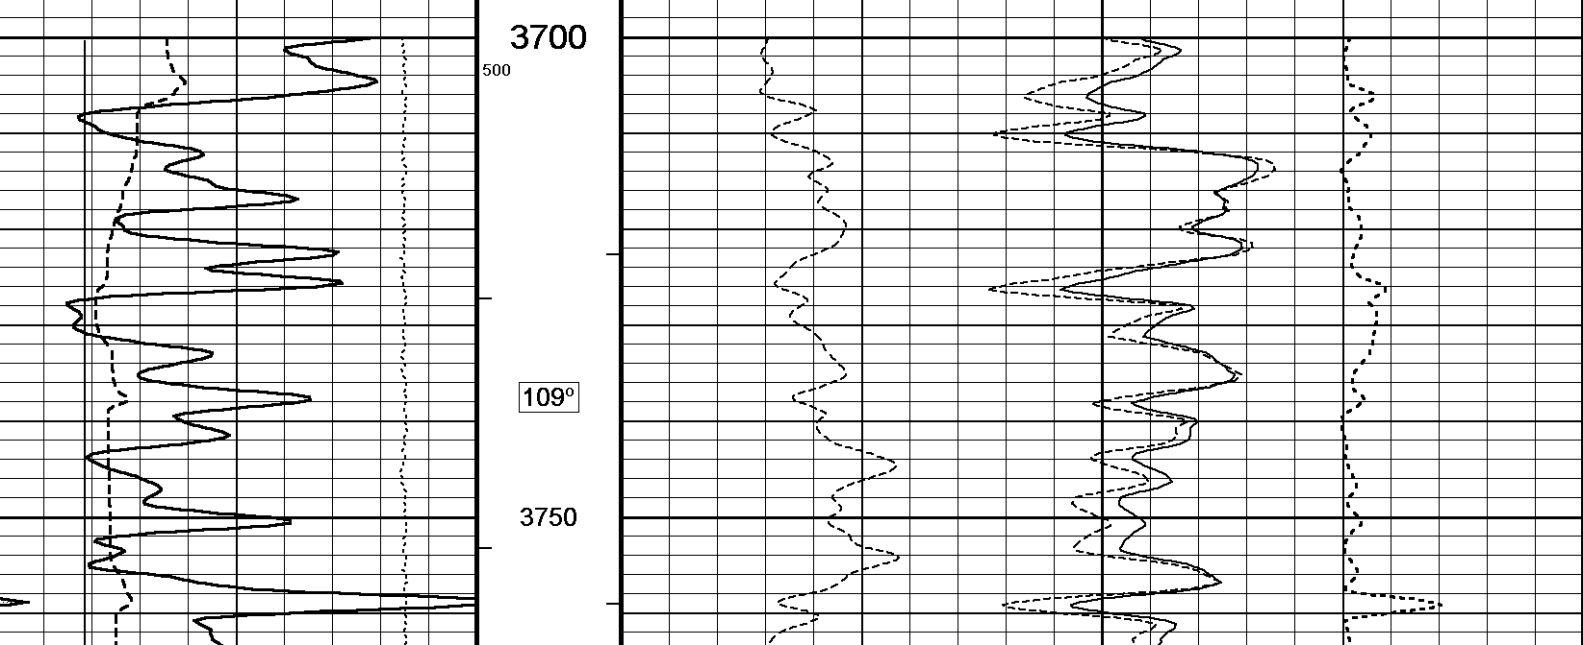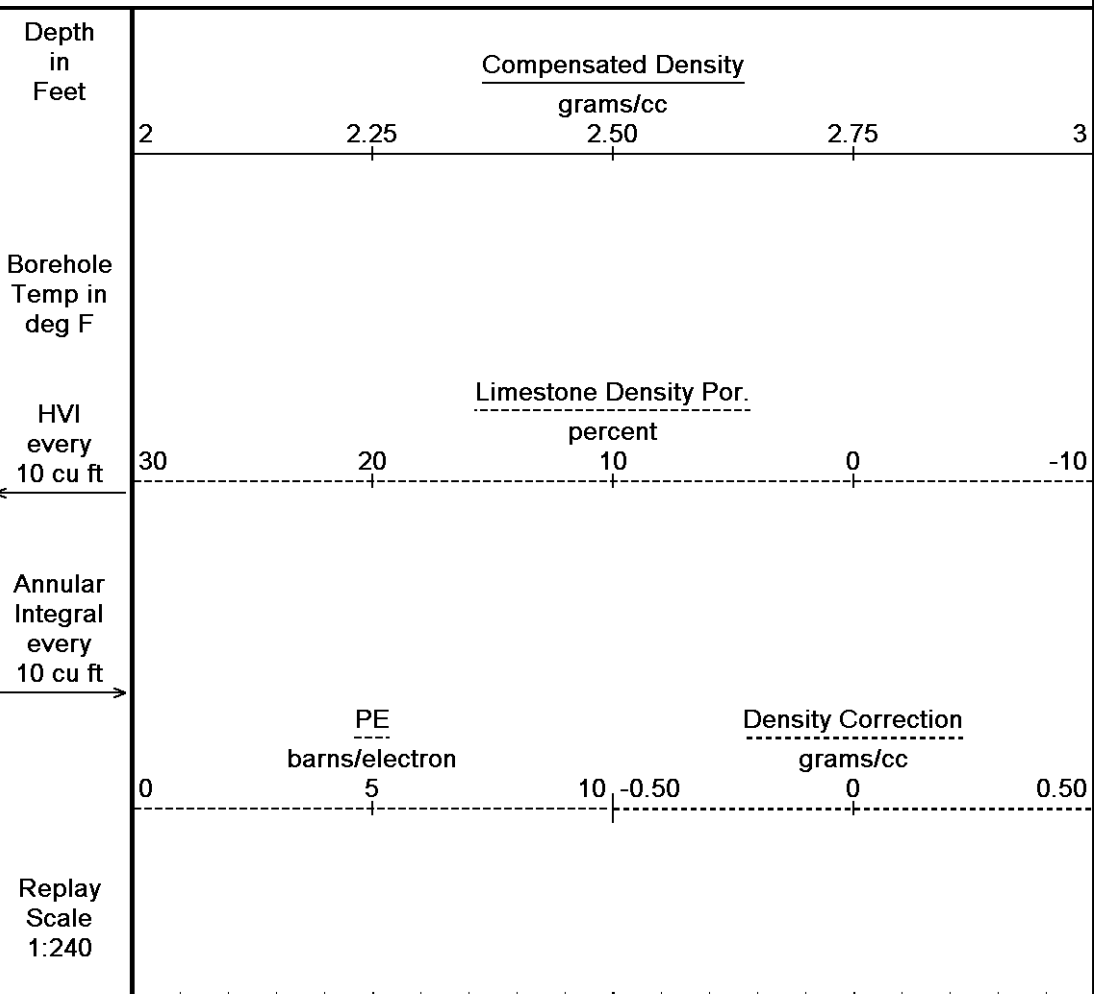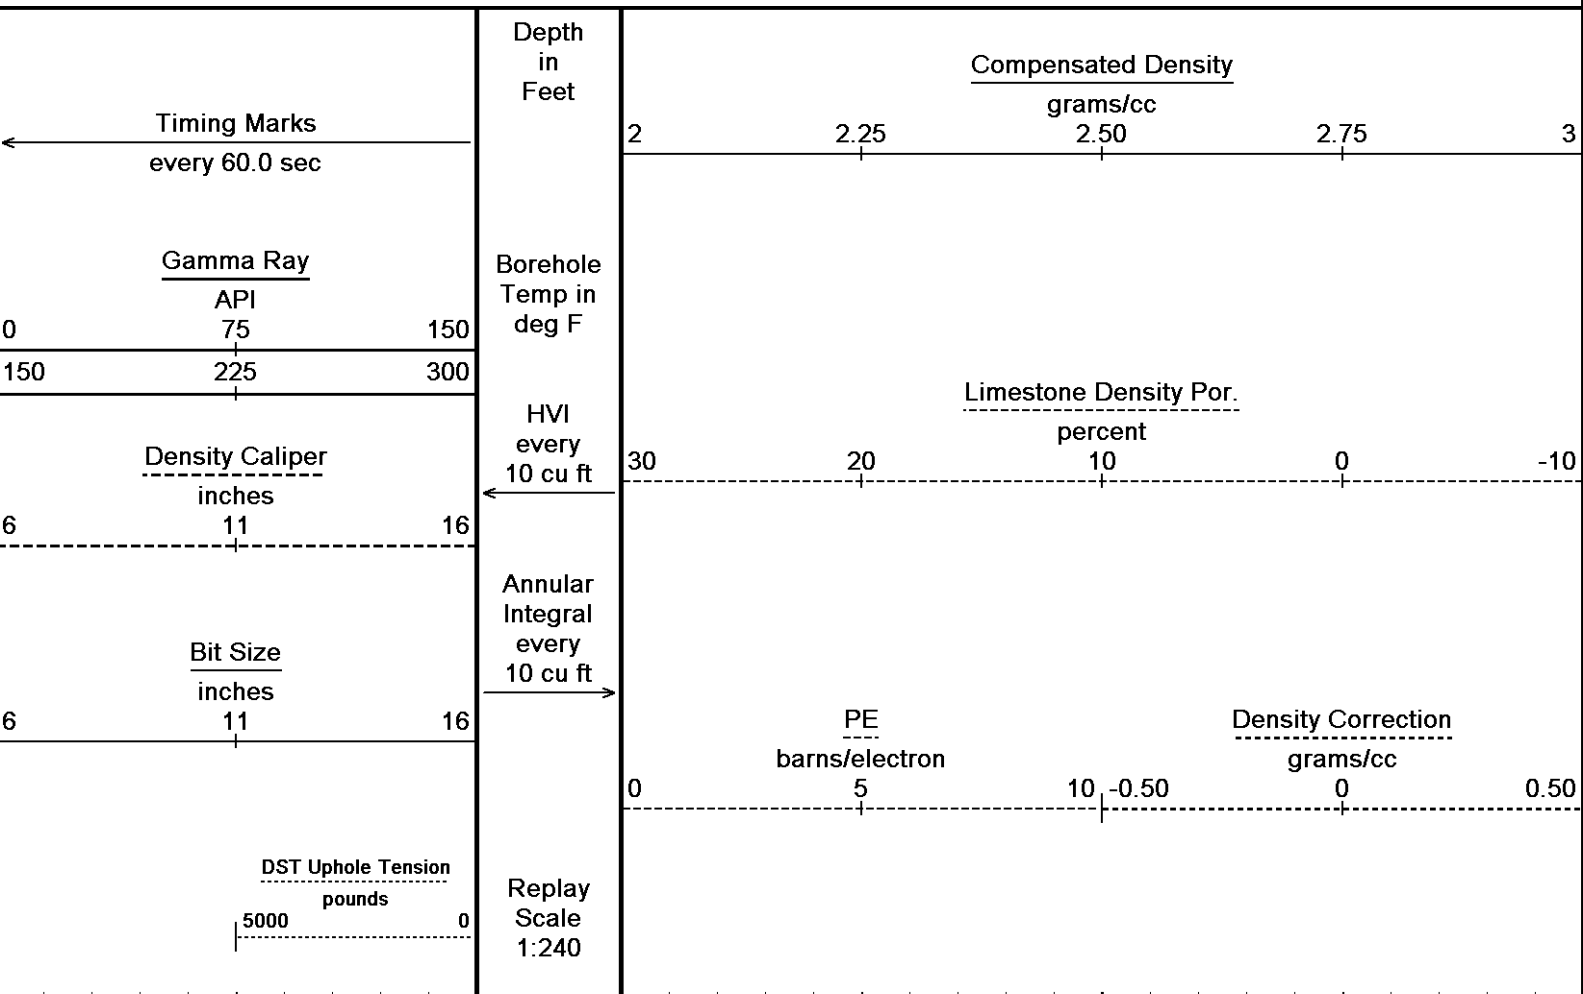

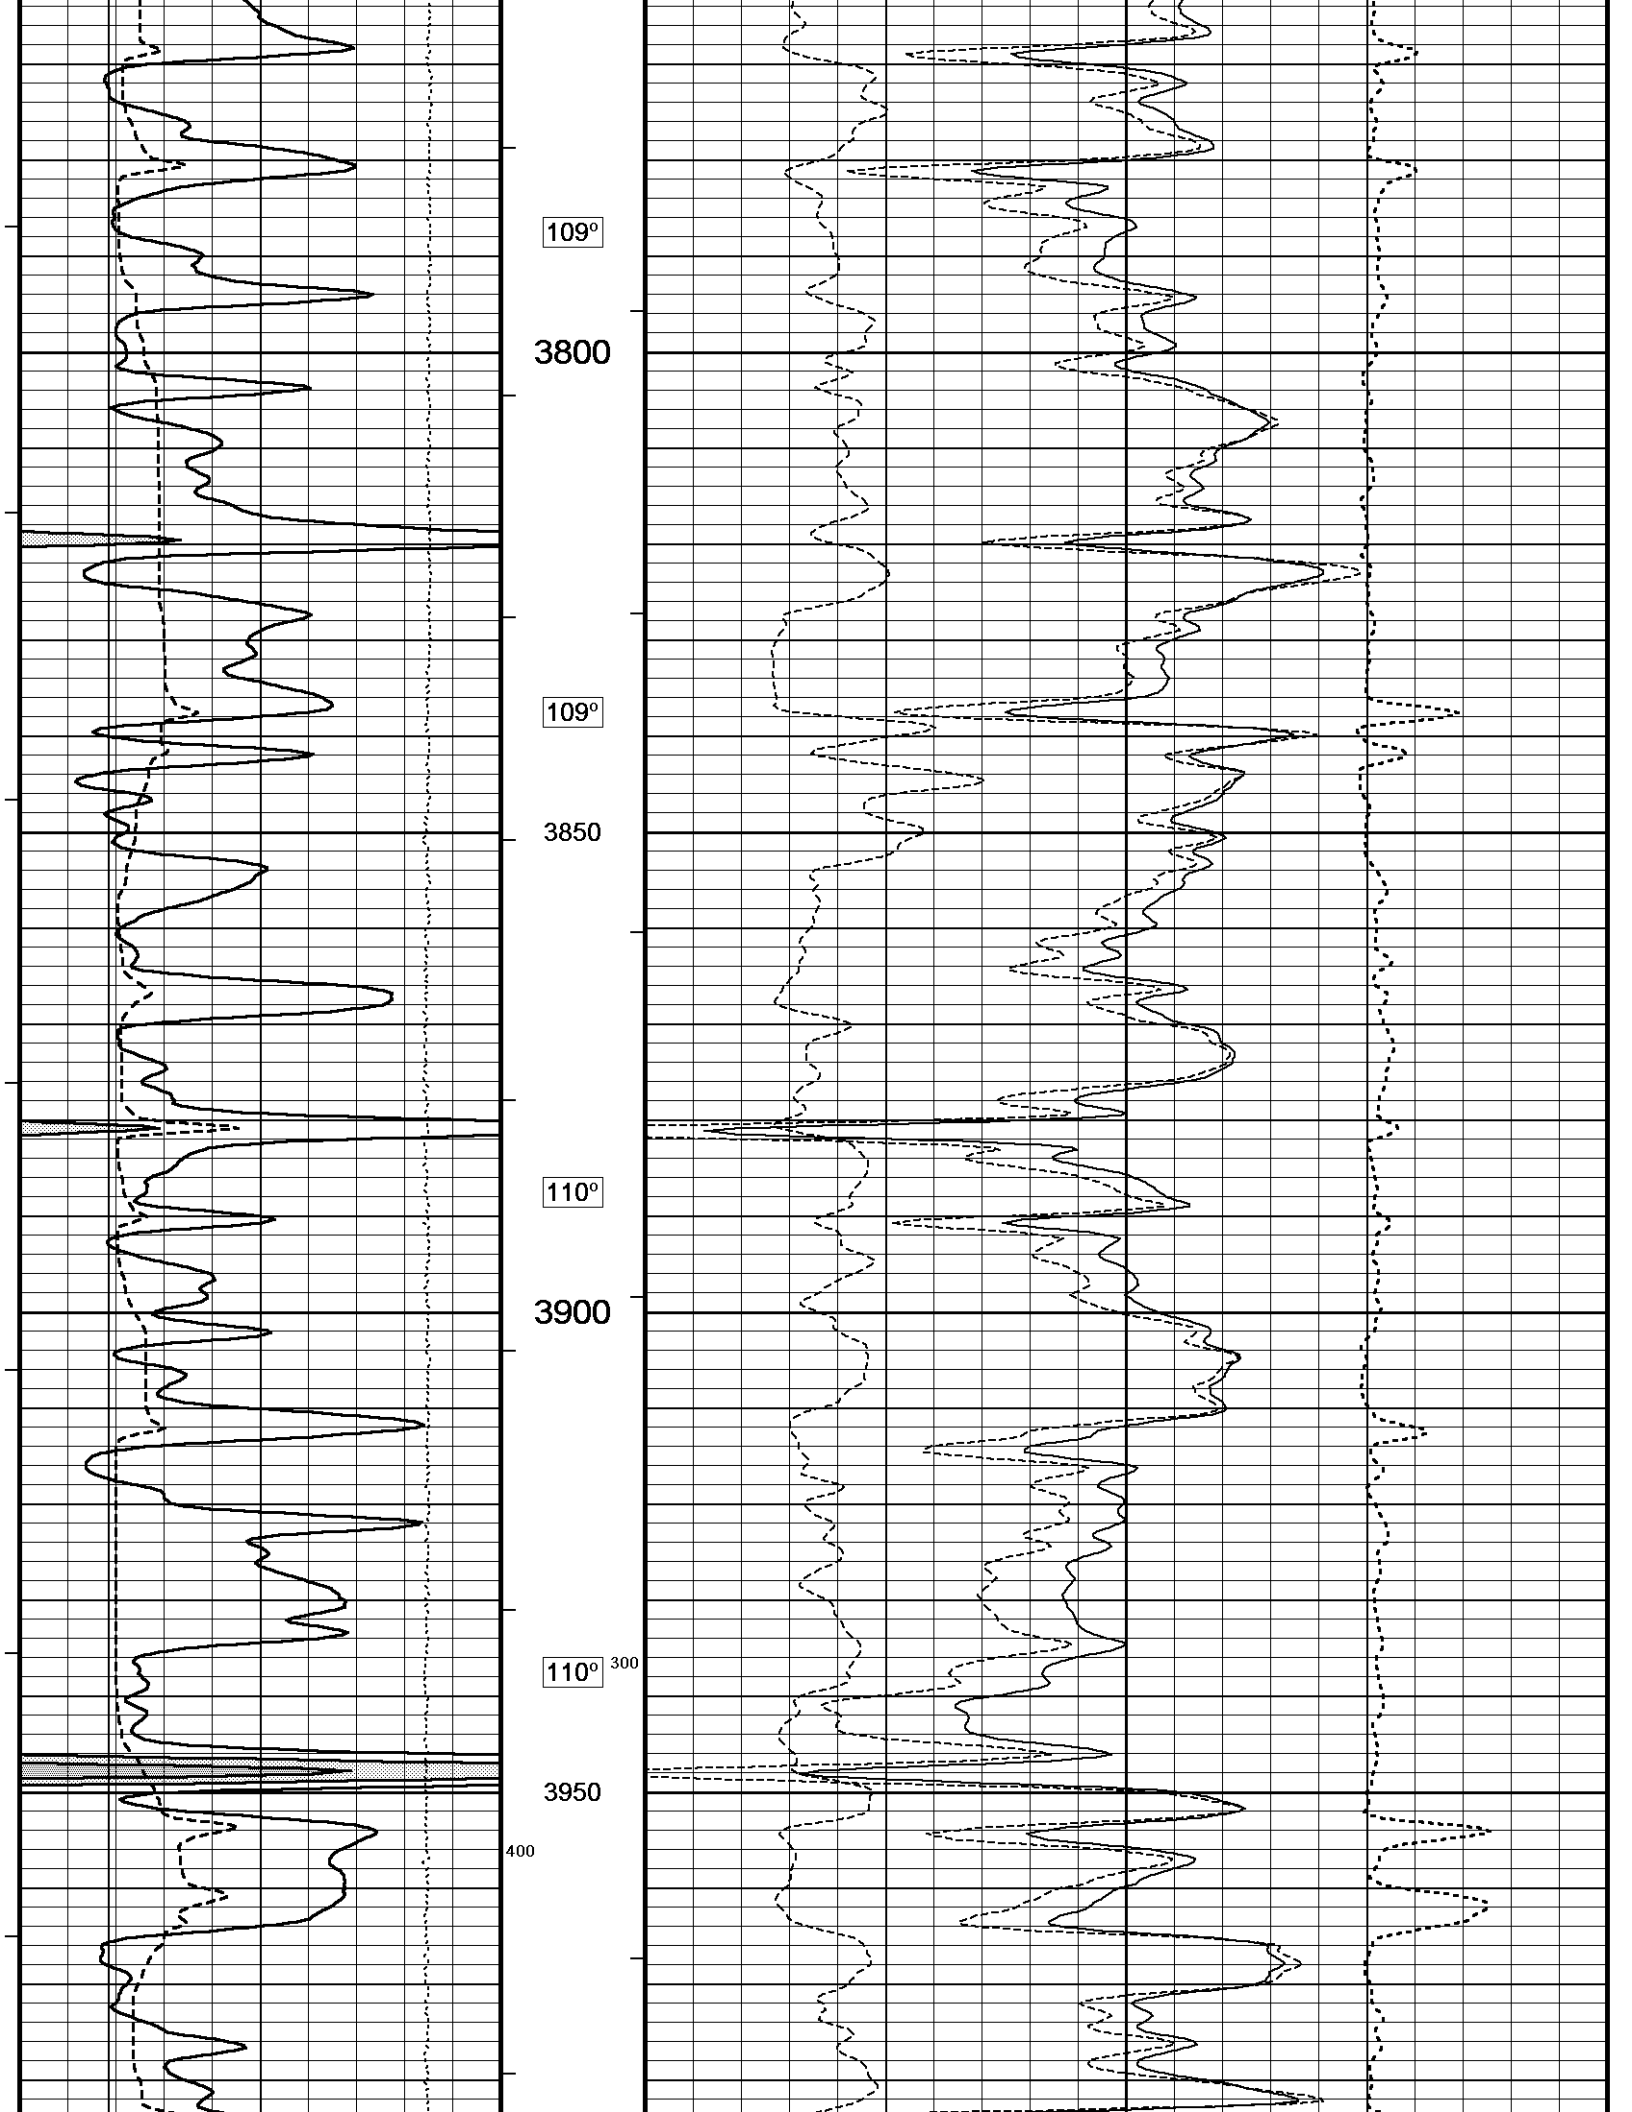

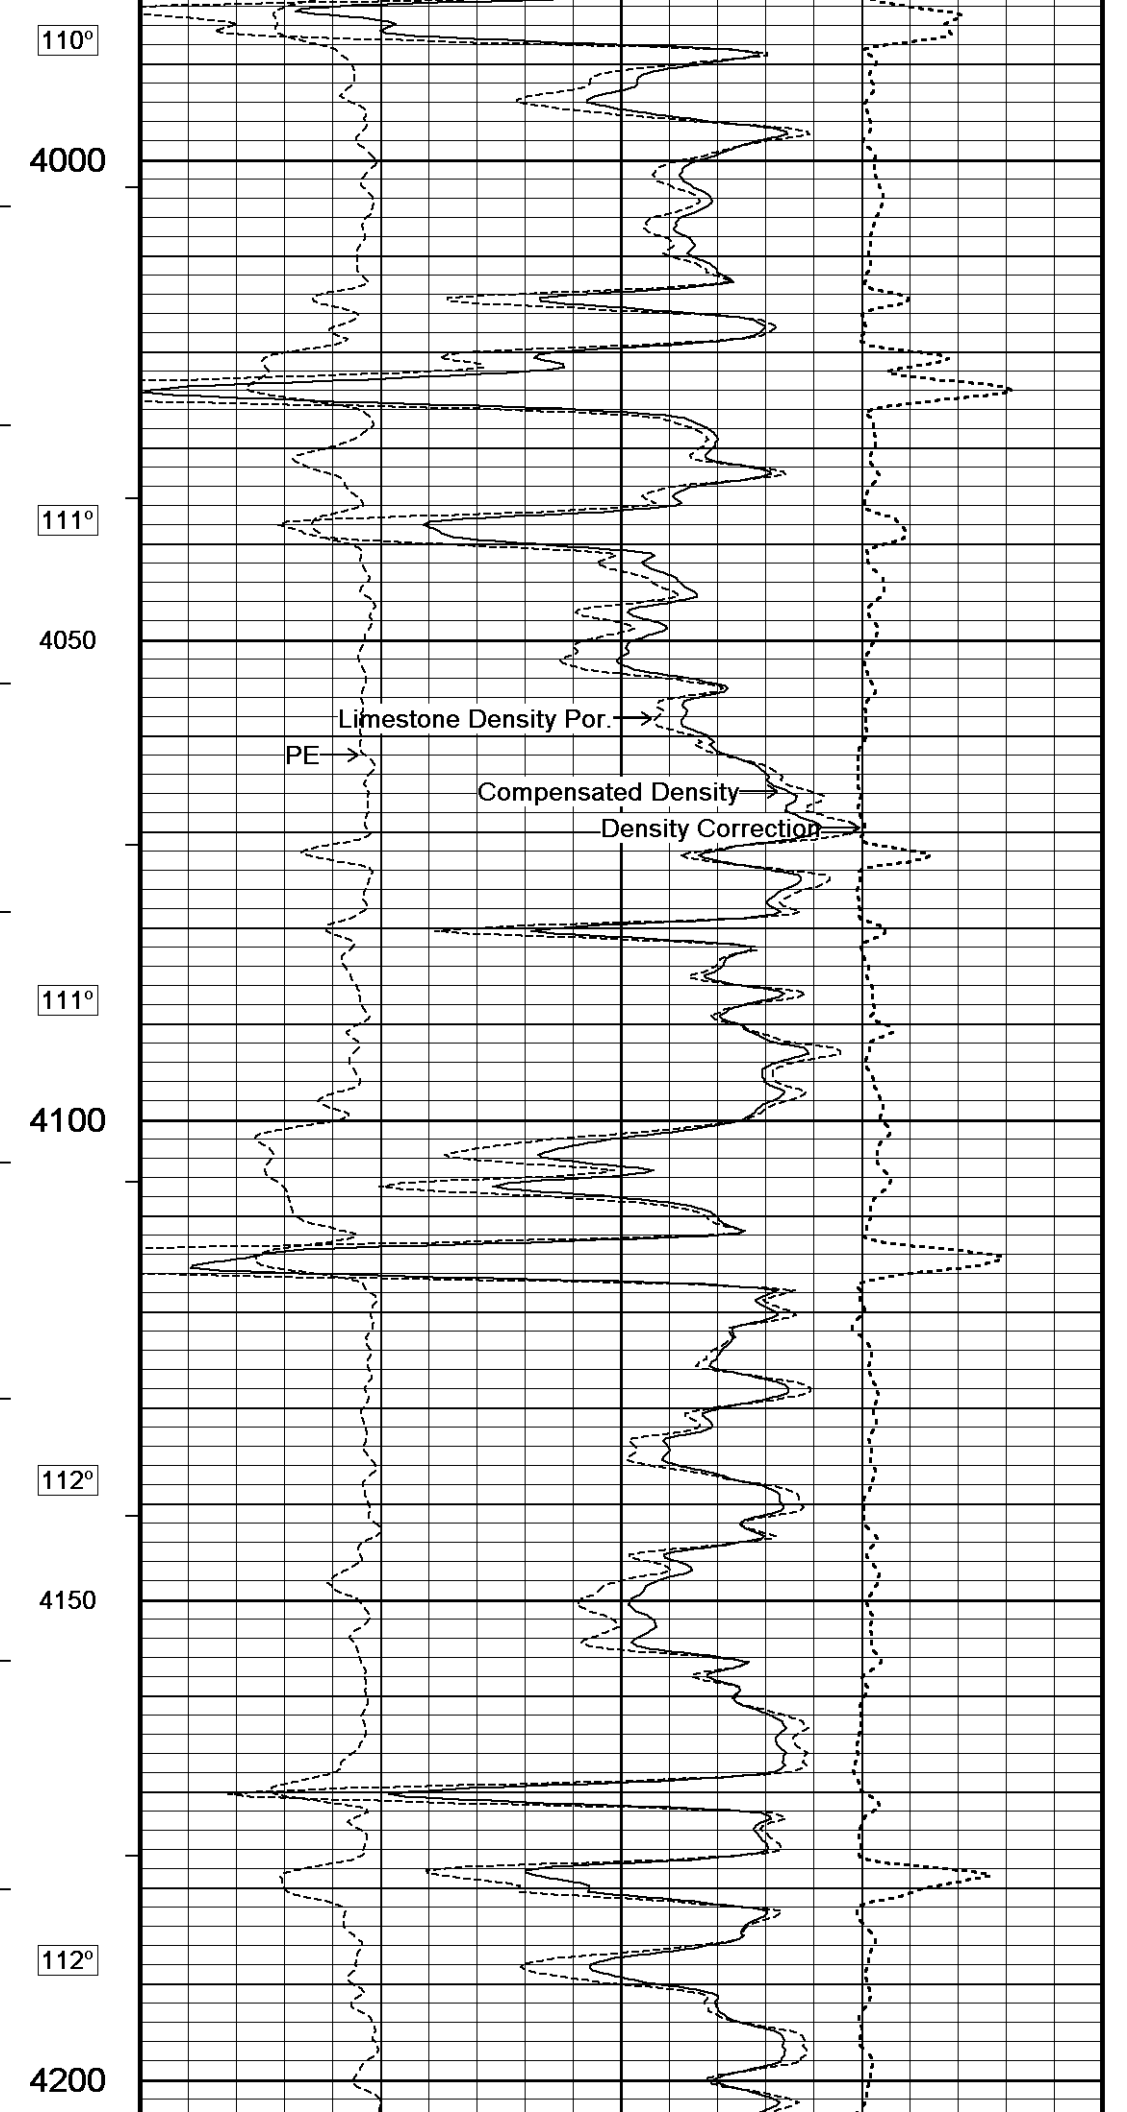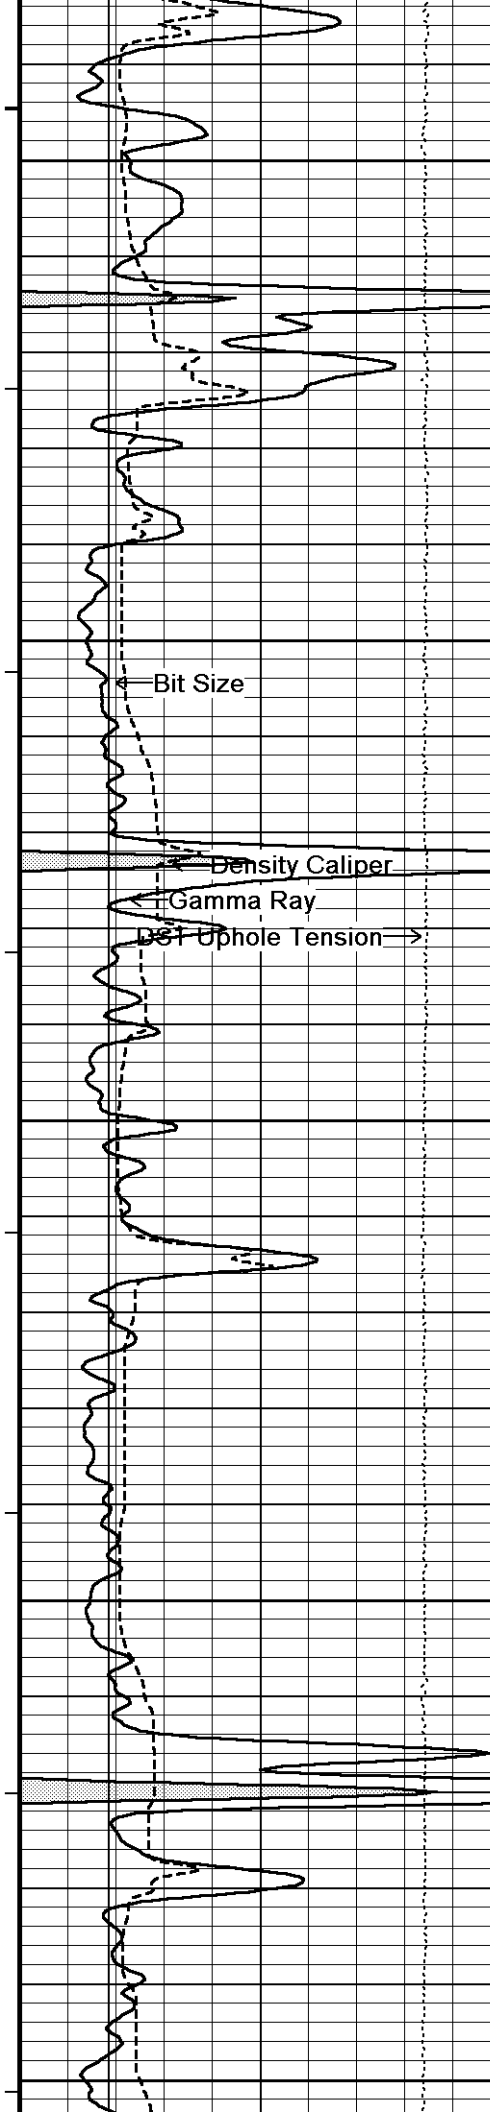

110°

4000

111°

4050

Bit Size

Limestone Density Por.

PE

Compensated Density

Density Correction

Density Caliper

Gamma Ray

DST Uphole Tension

111°


4100


112°

4150


112°


4200

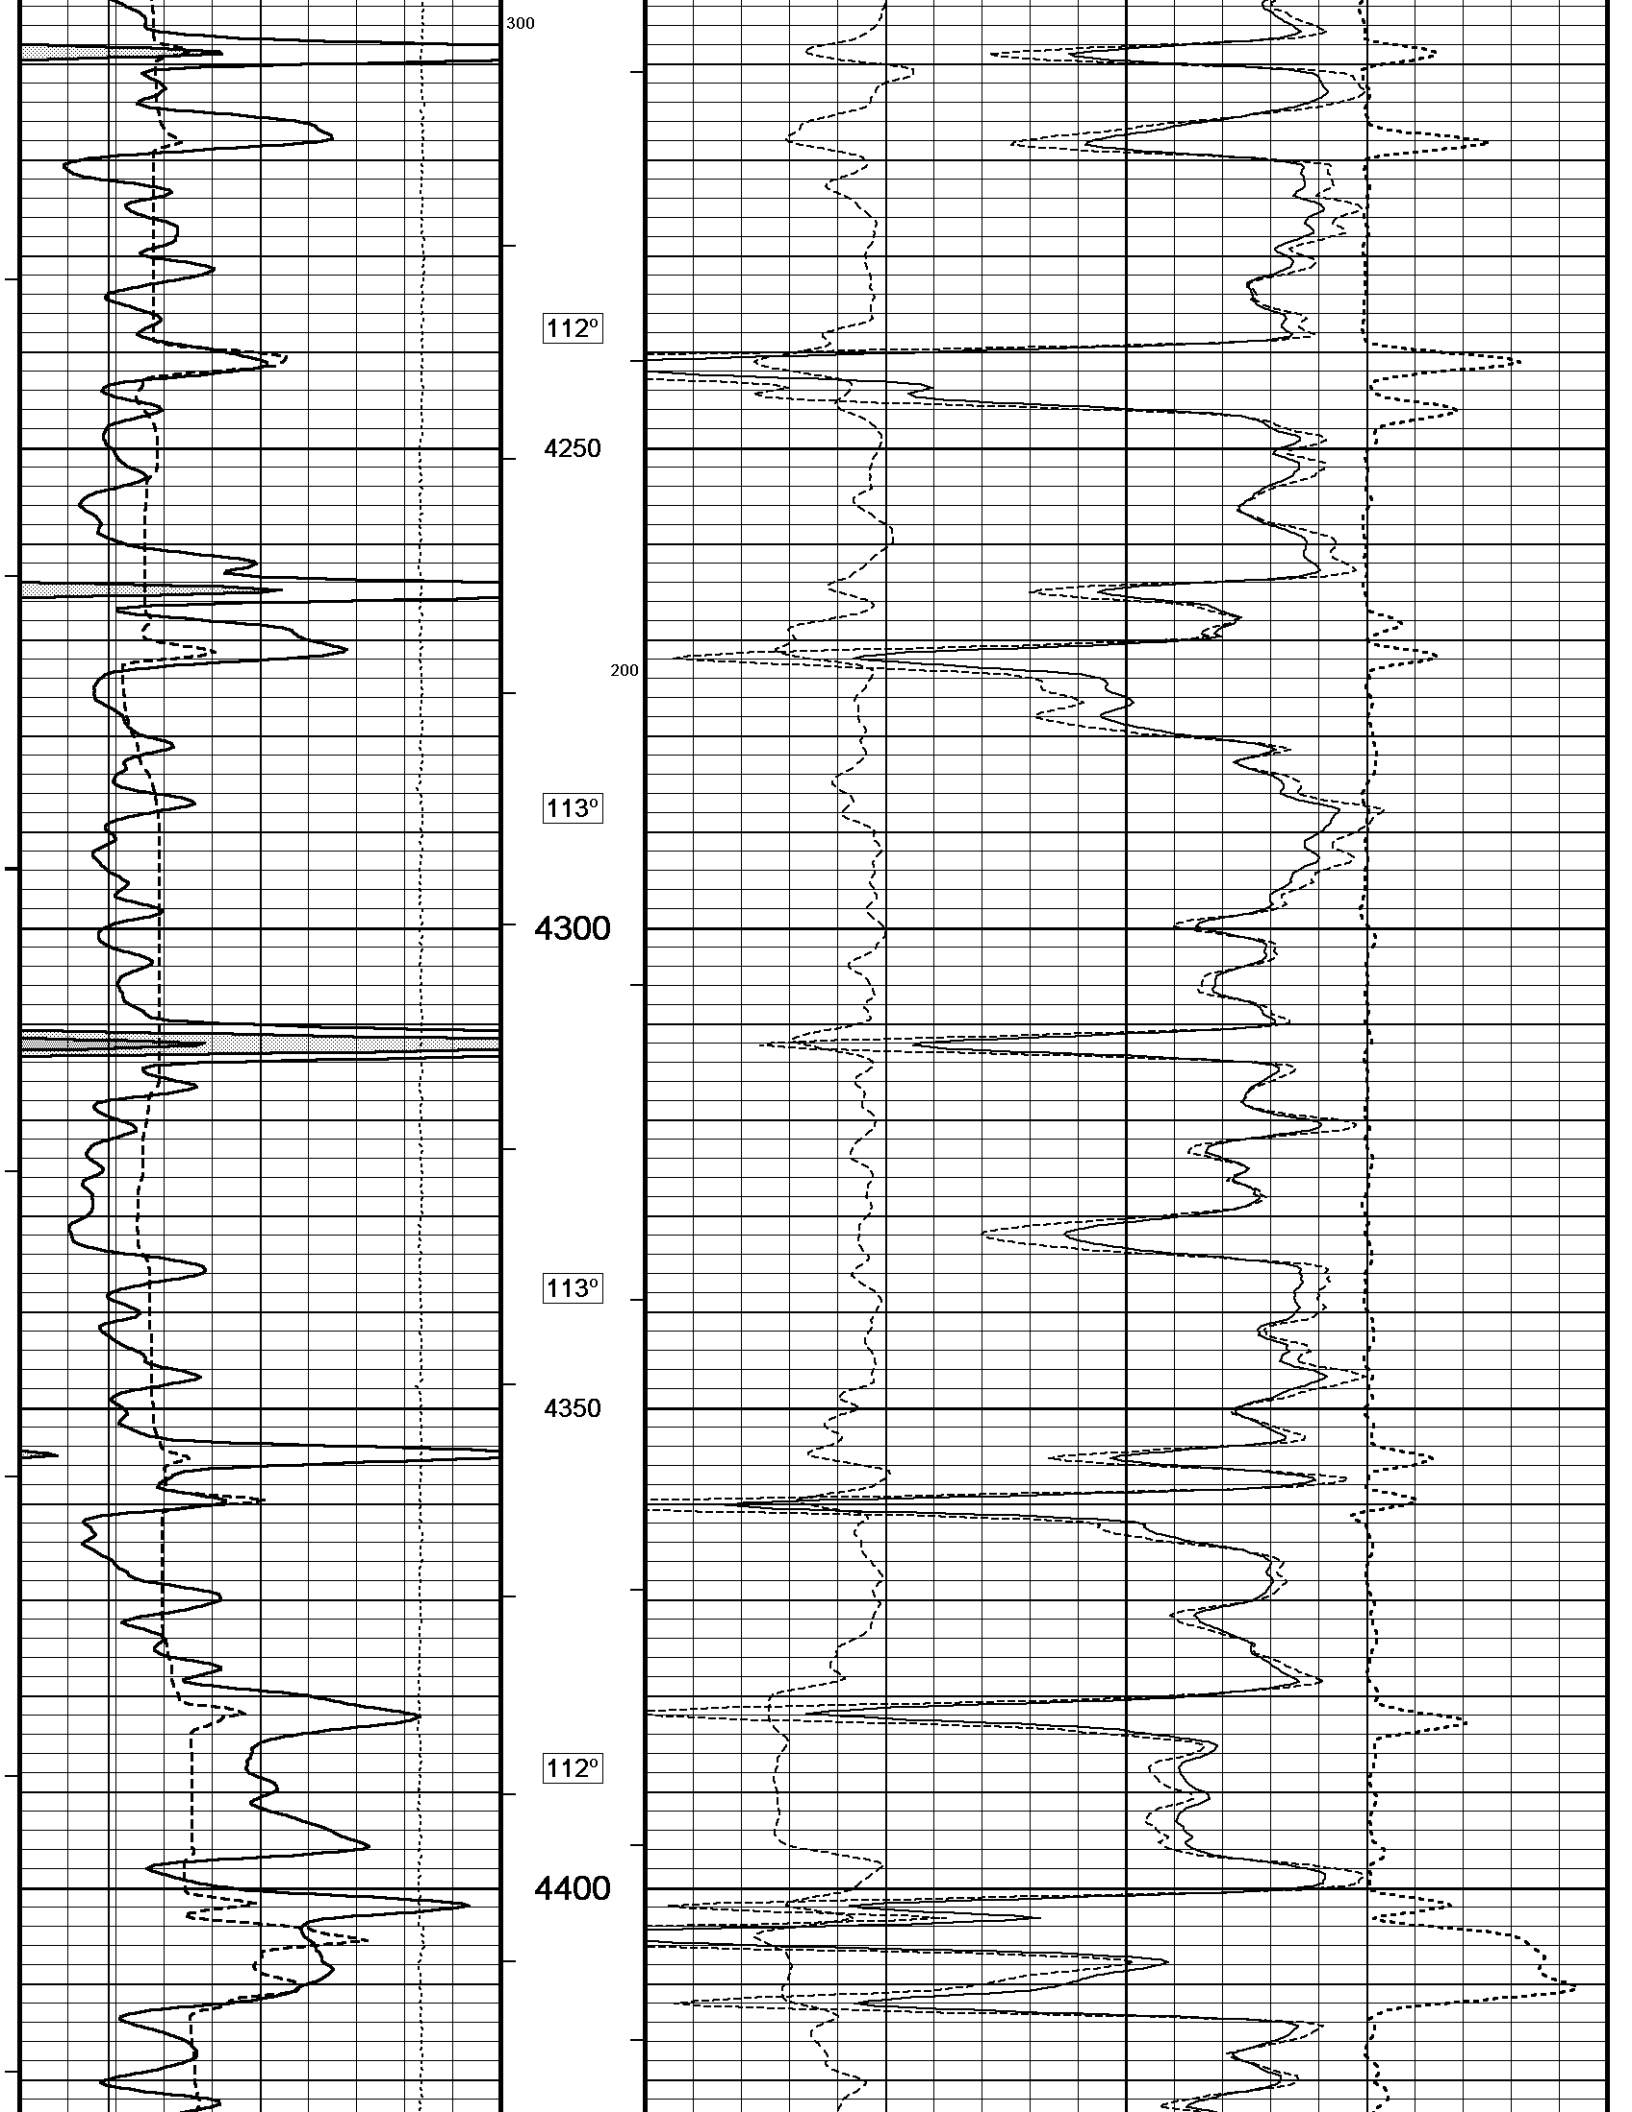


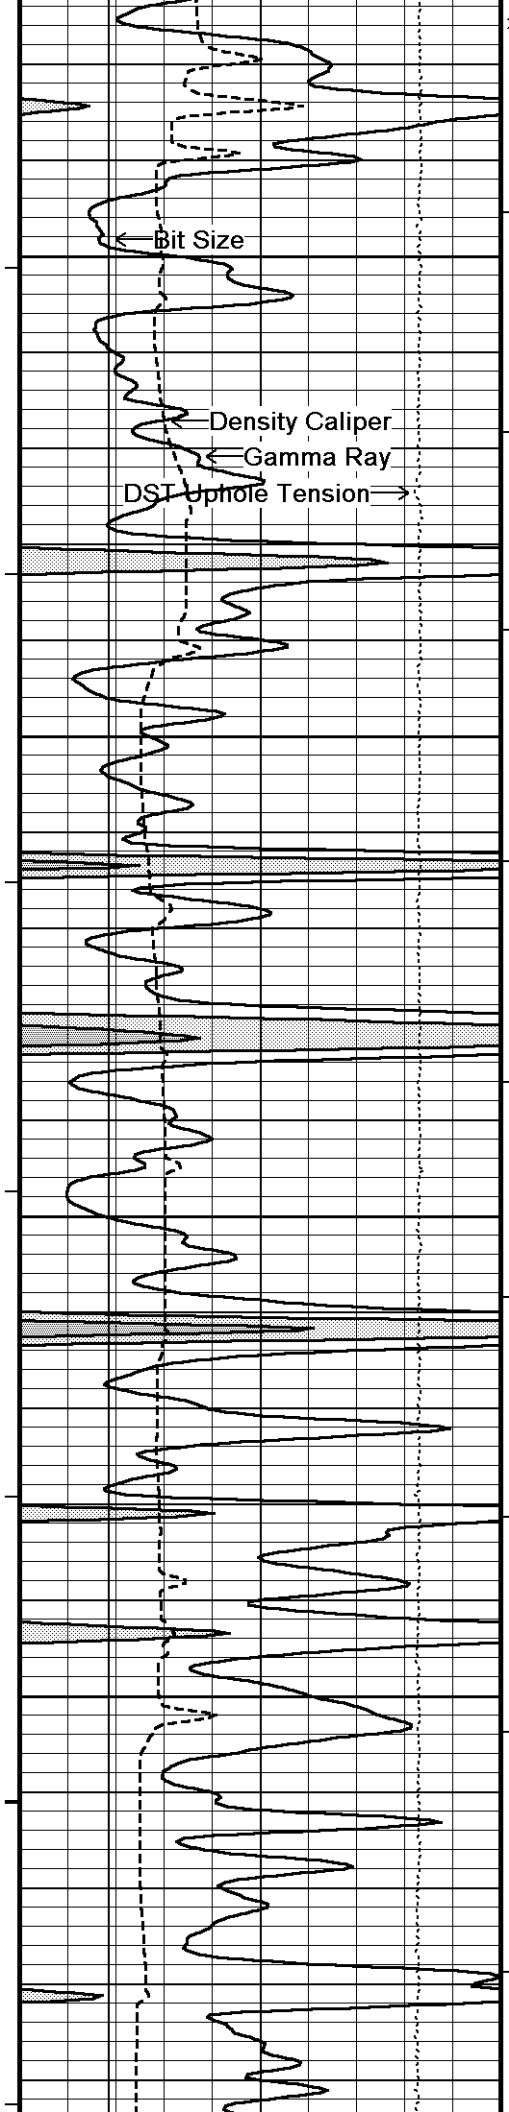

200
113°
4450
114°
4500
114°
4550
100
115°
4600
116°

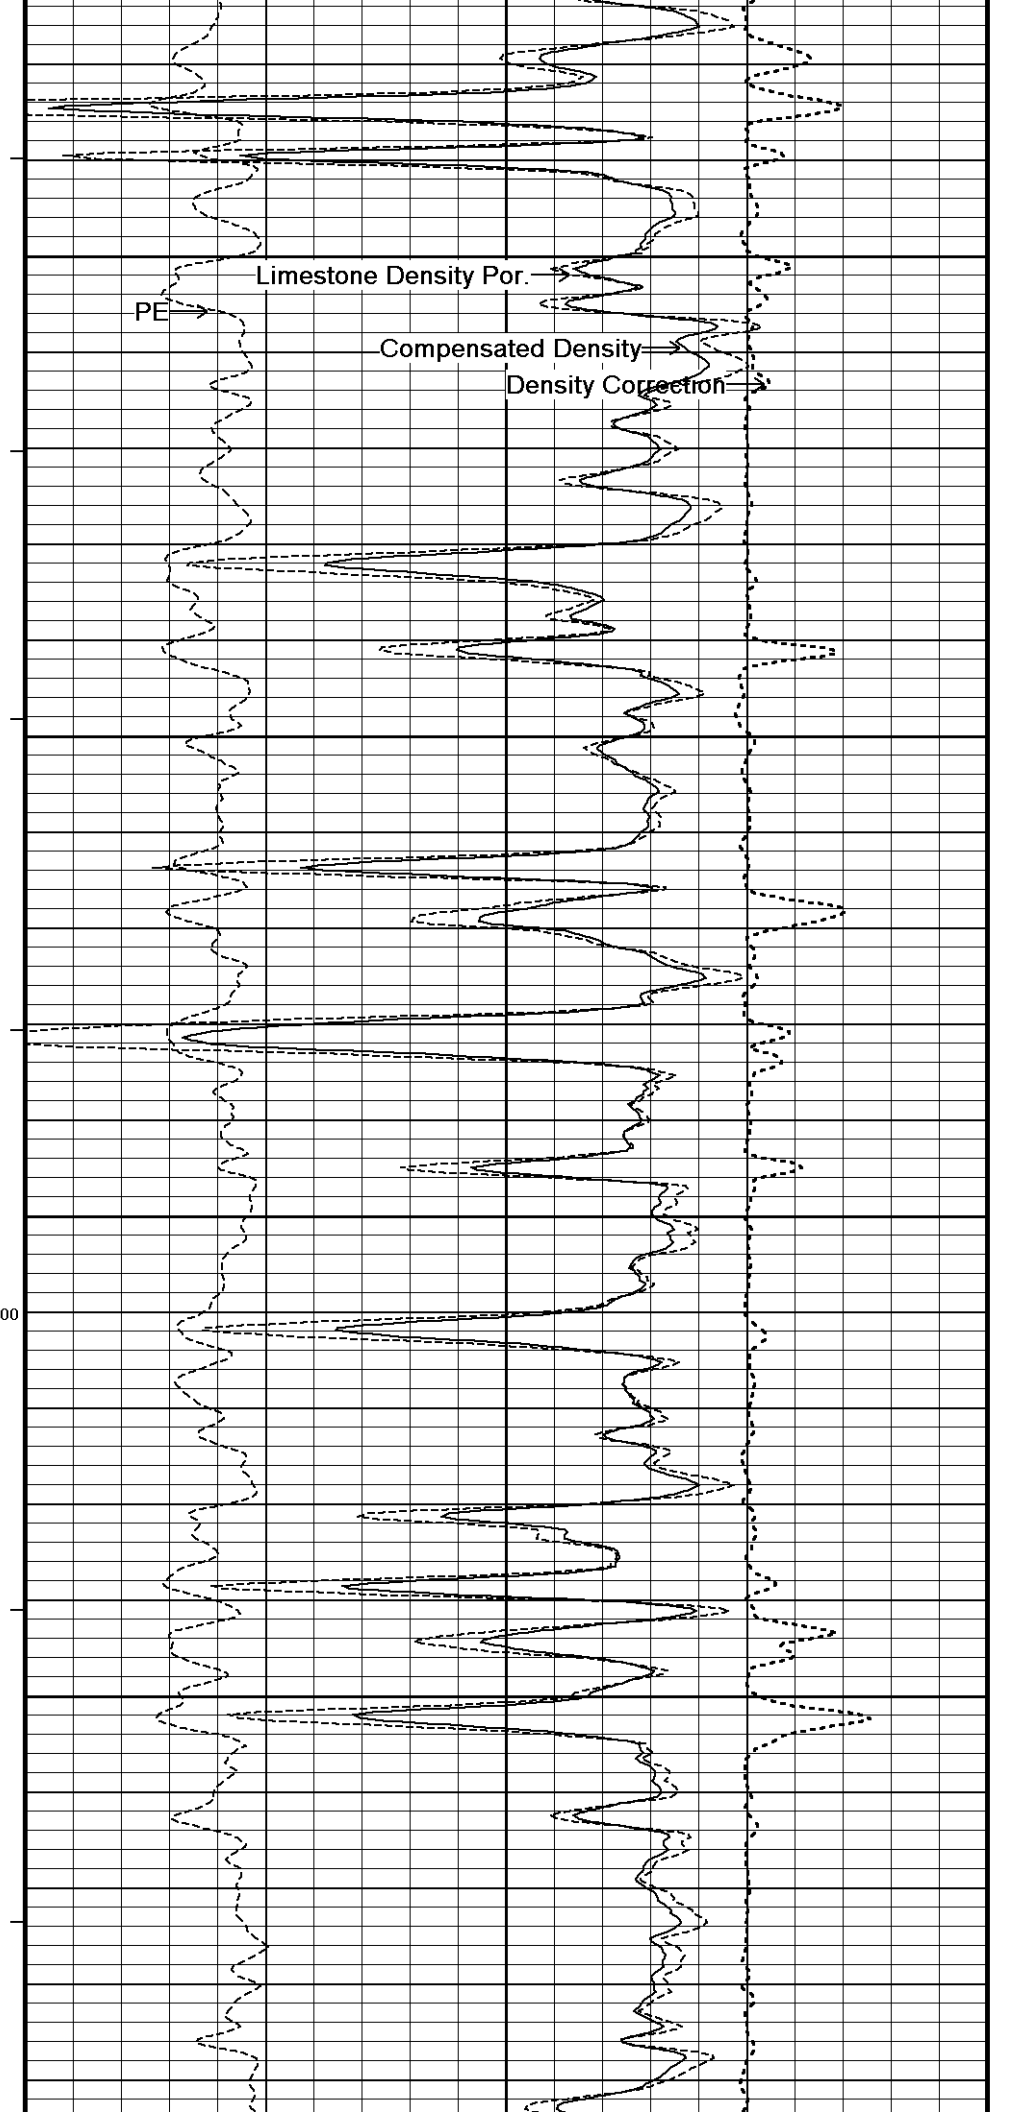

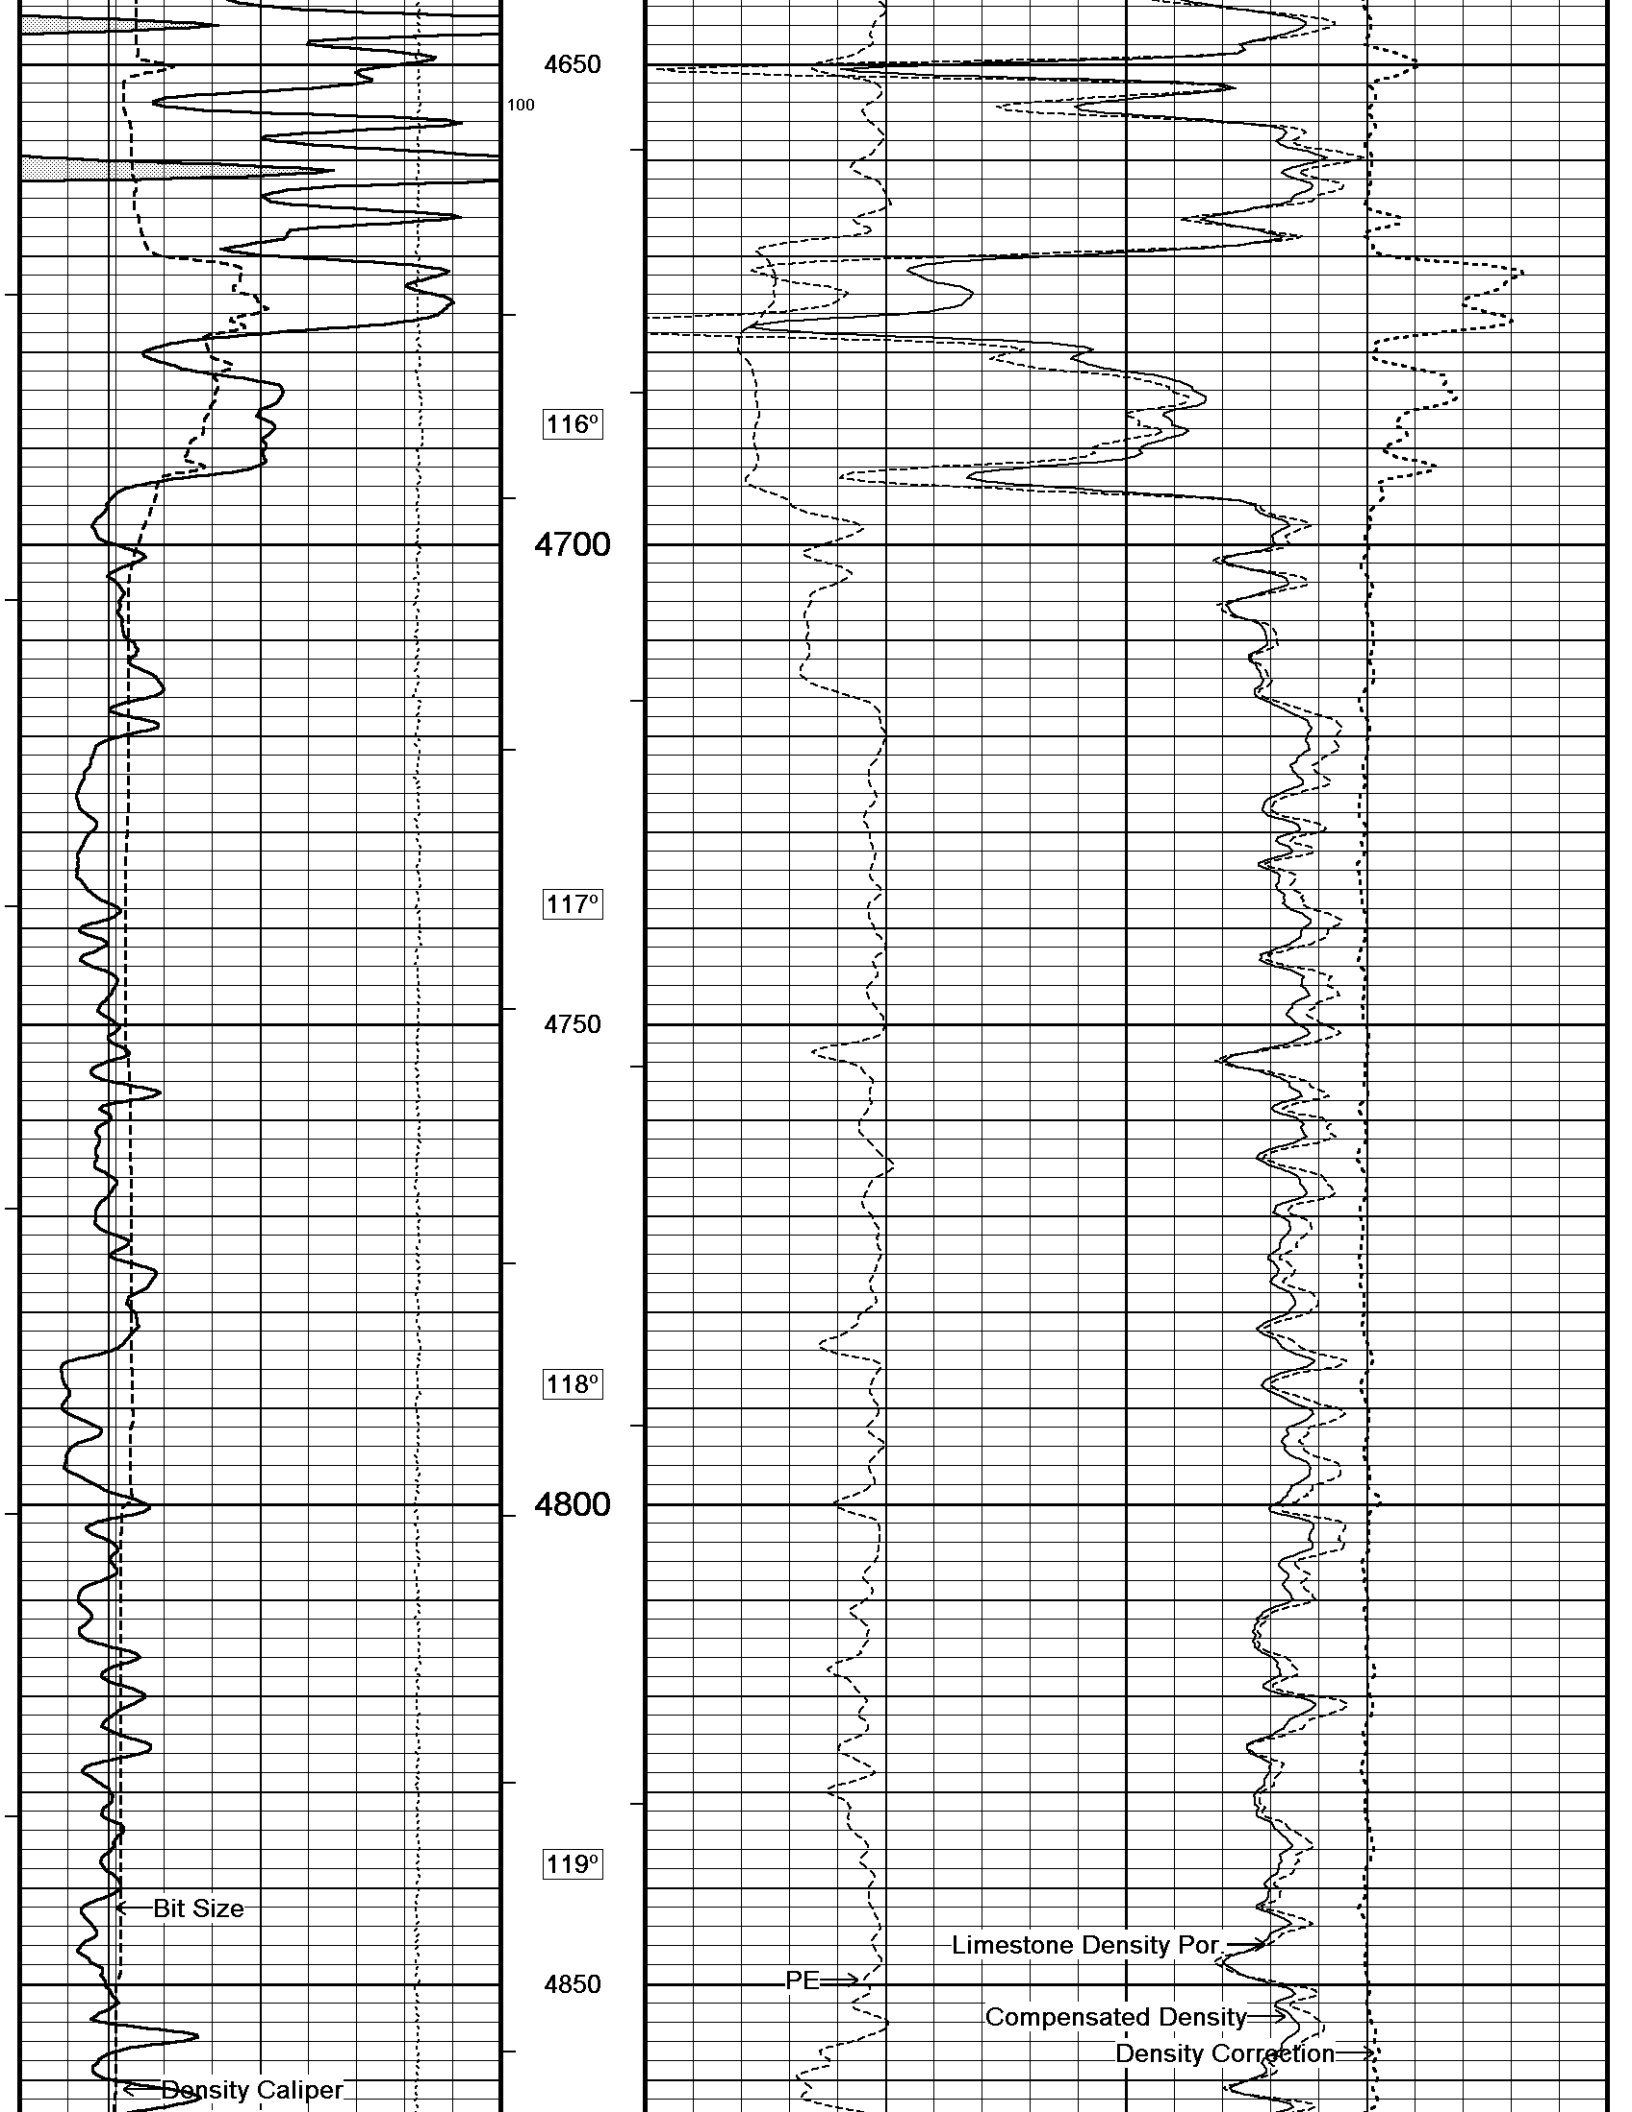

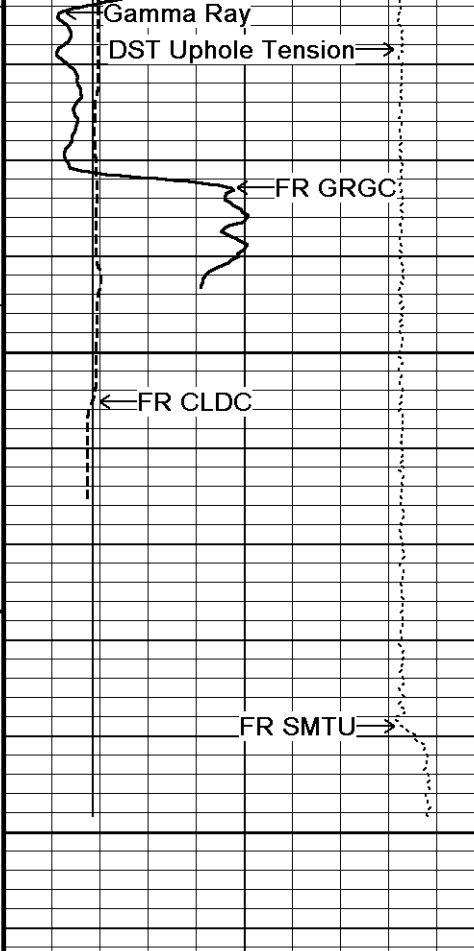

119°




4900

0

4950

4960

Depth in Feet

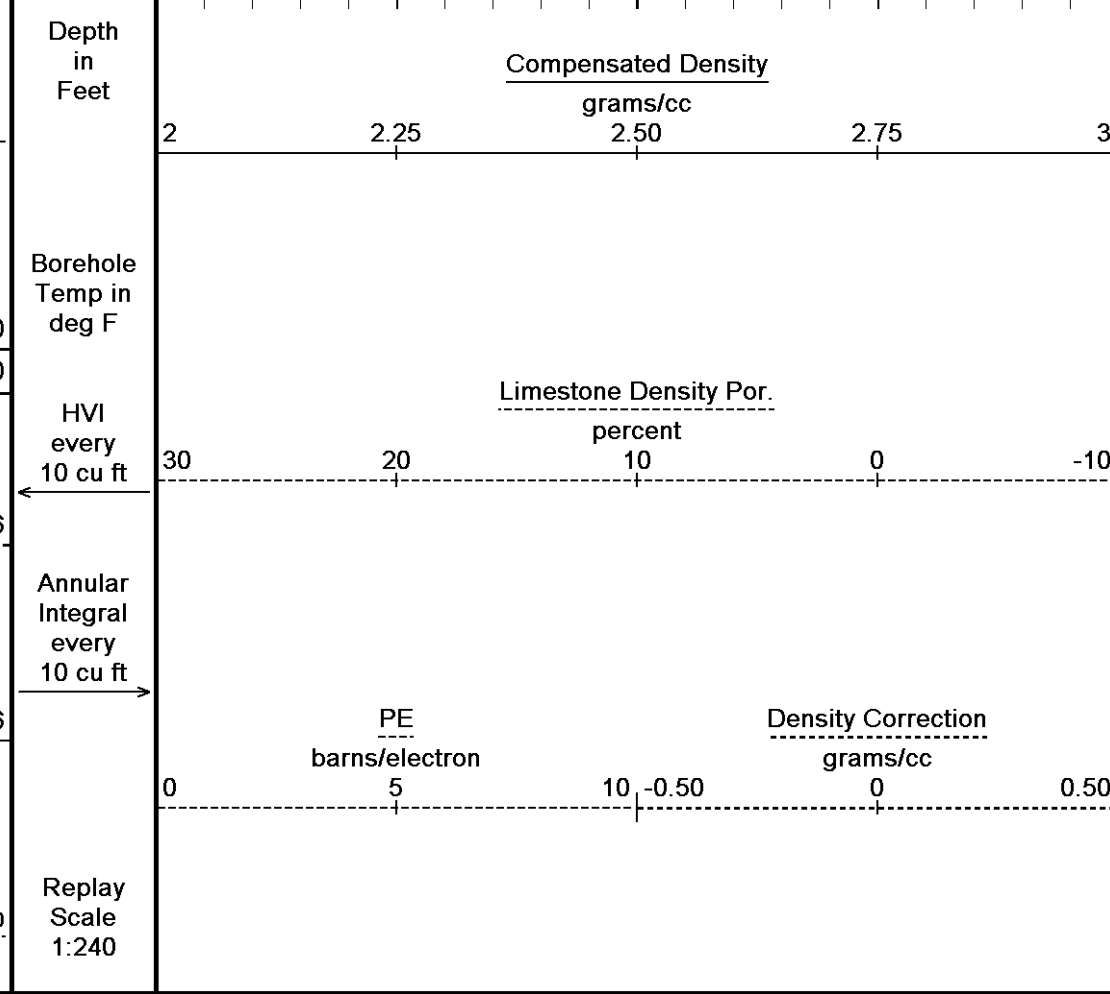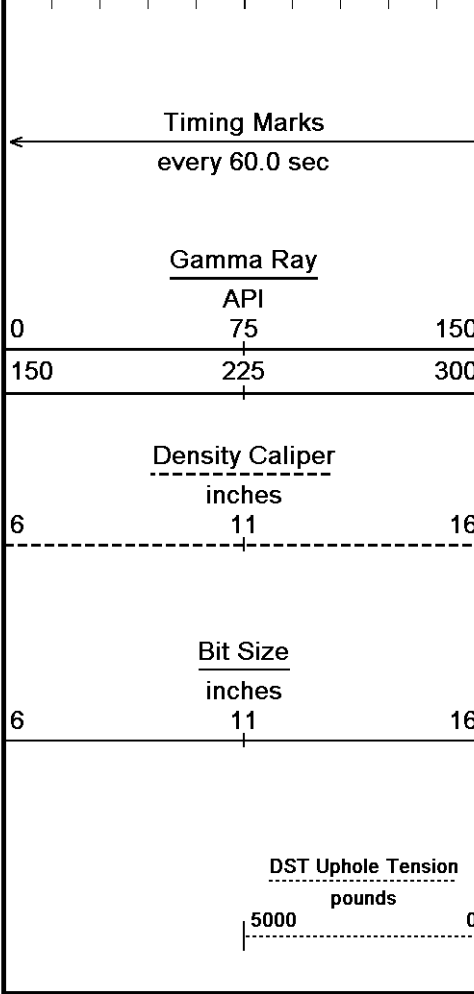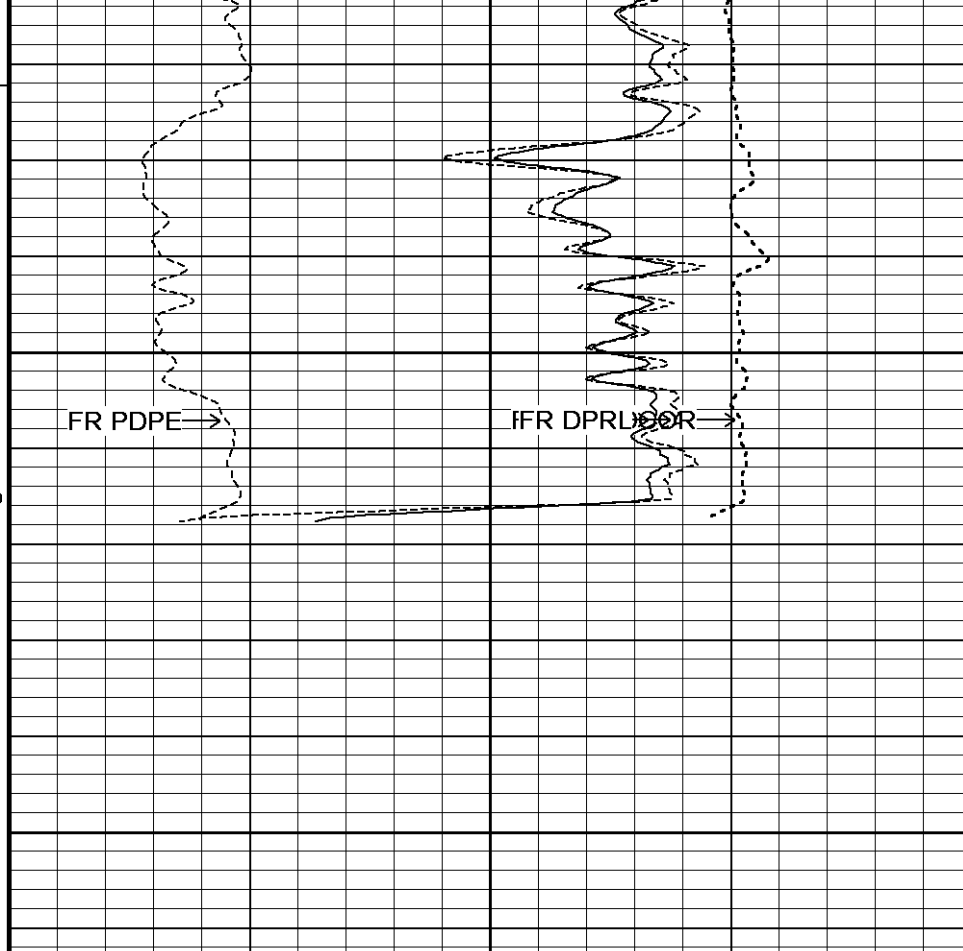

Depth Based Data - Maximum Sampling Increment 10.0cm

Filename: C:\Minimus\Archive 2013\LB13-104\Minimus 13.04.8...\Shakespeare Rudolph #1-22_002.dta

System Versions: Logged with 13.04.8492 Plotted with 13.04.8492

Plotted on 28-APR-2013 15:42

Recorded on 16-APR-2013 12:30



REPEAT SECTION




Depth Based Data - Maximum Sampling Increment 10.0cm


Plotted on 28-APR-2013 15:42


Filename: C:\Minimus\Archive 2013\LB13-104\Minimus 13.04.8...\Shakespeare Rudolph #1-22_001.dta

Recorded on 16-APR-2013 12:04

System Versions: Logged with 13.04.8492 Plotted with 13.04.8492

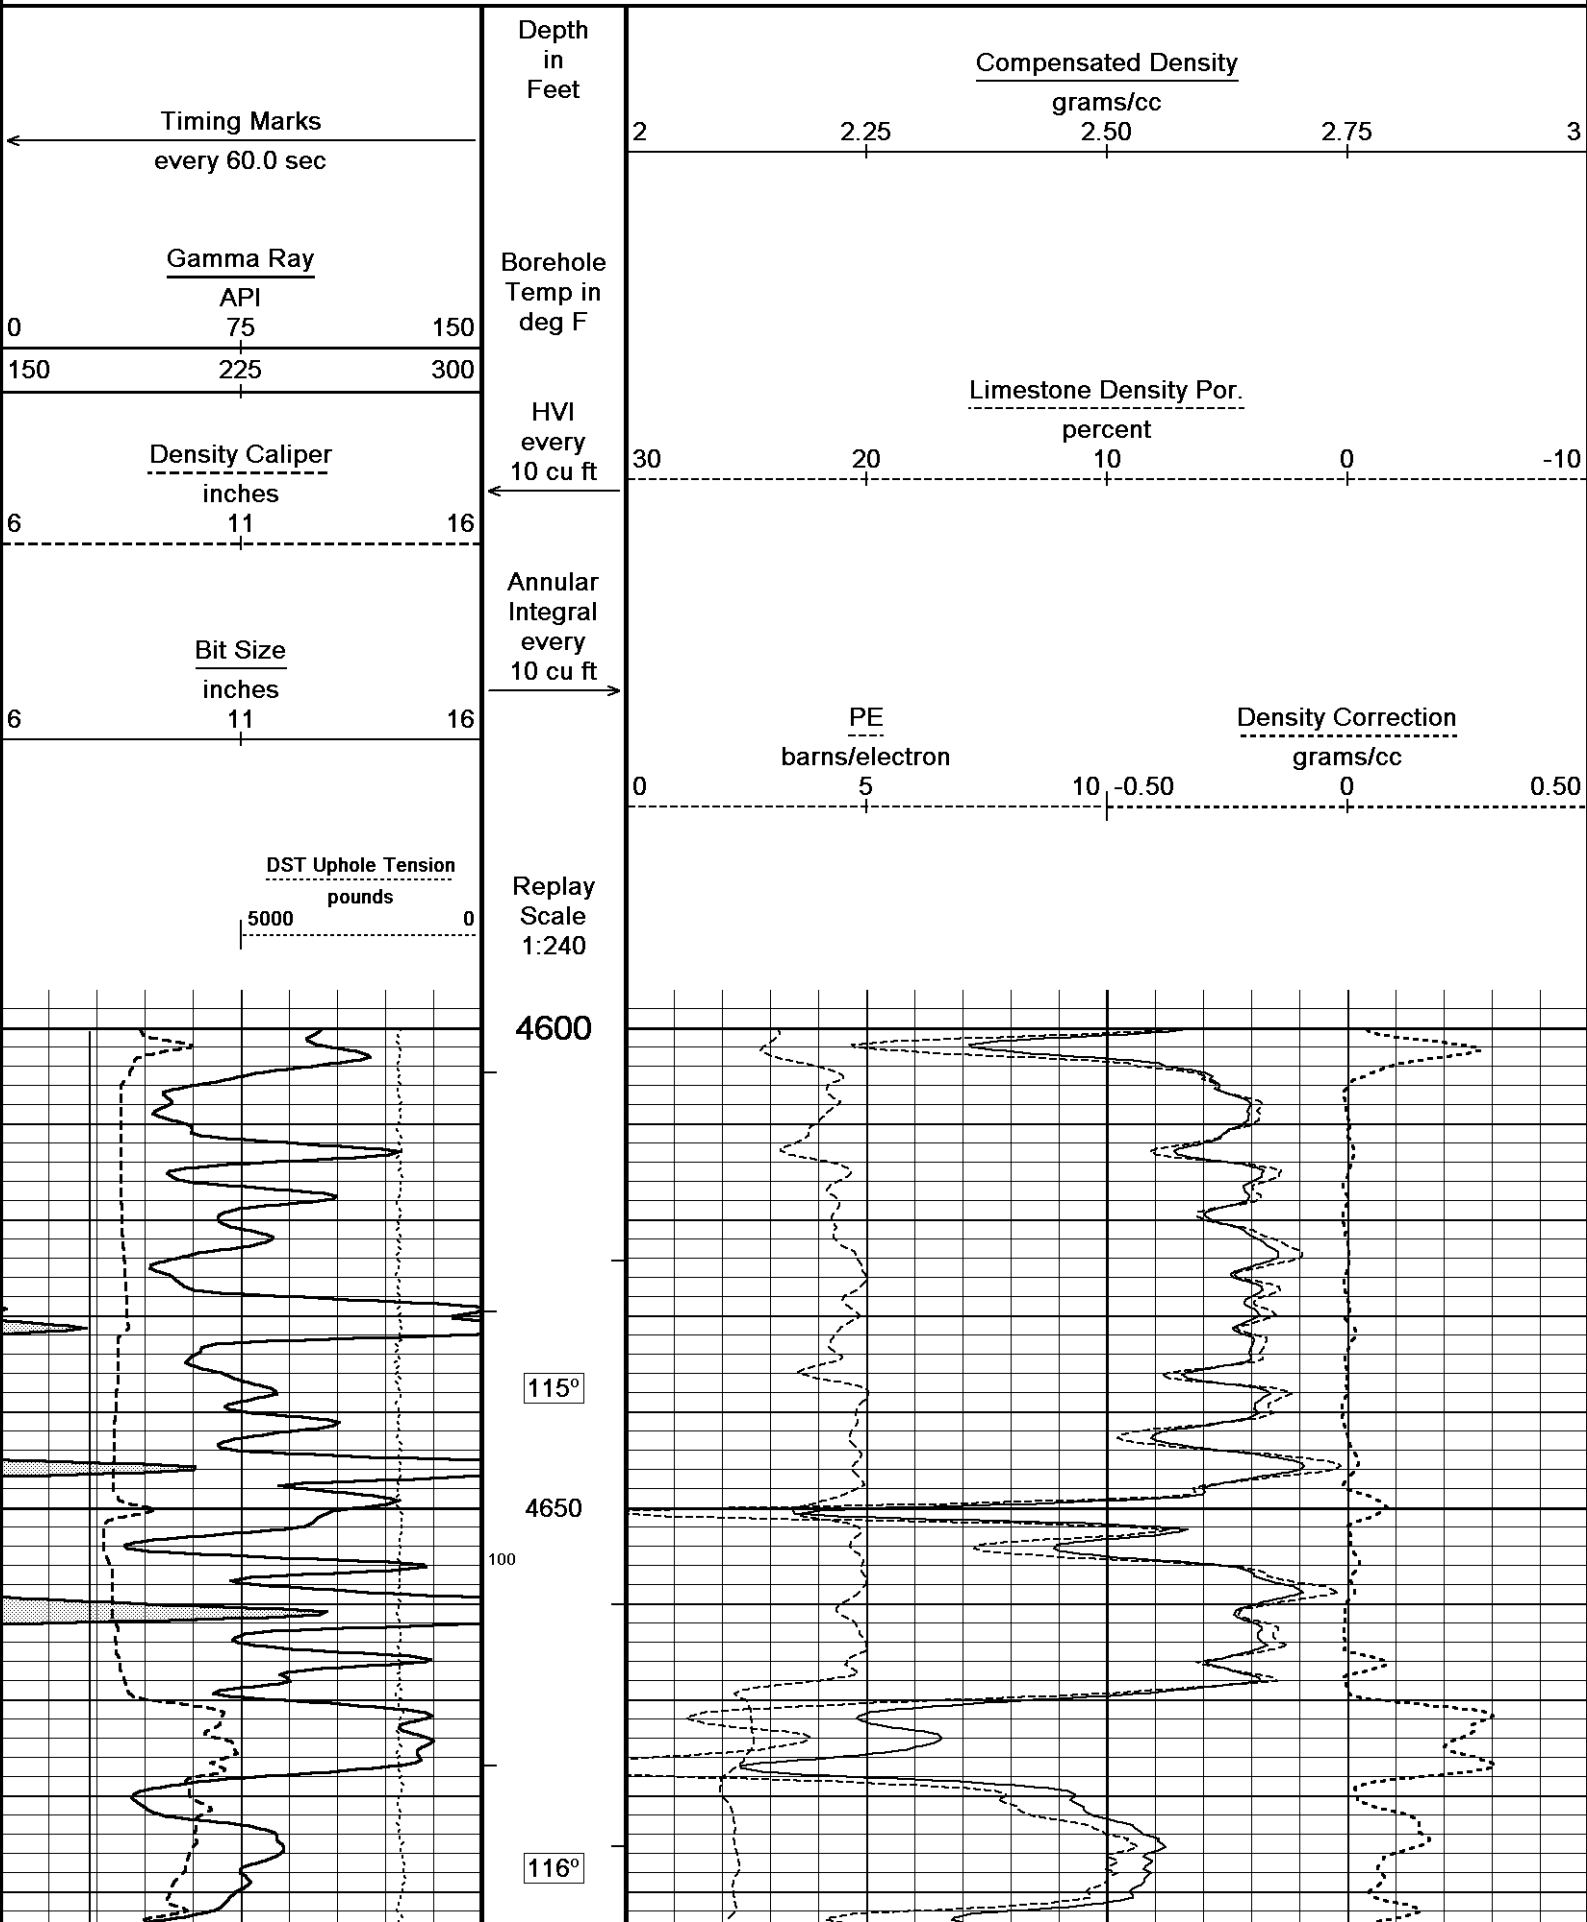

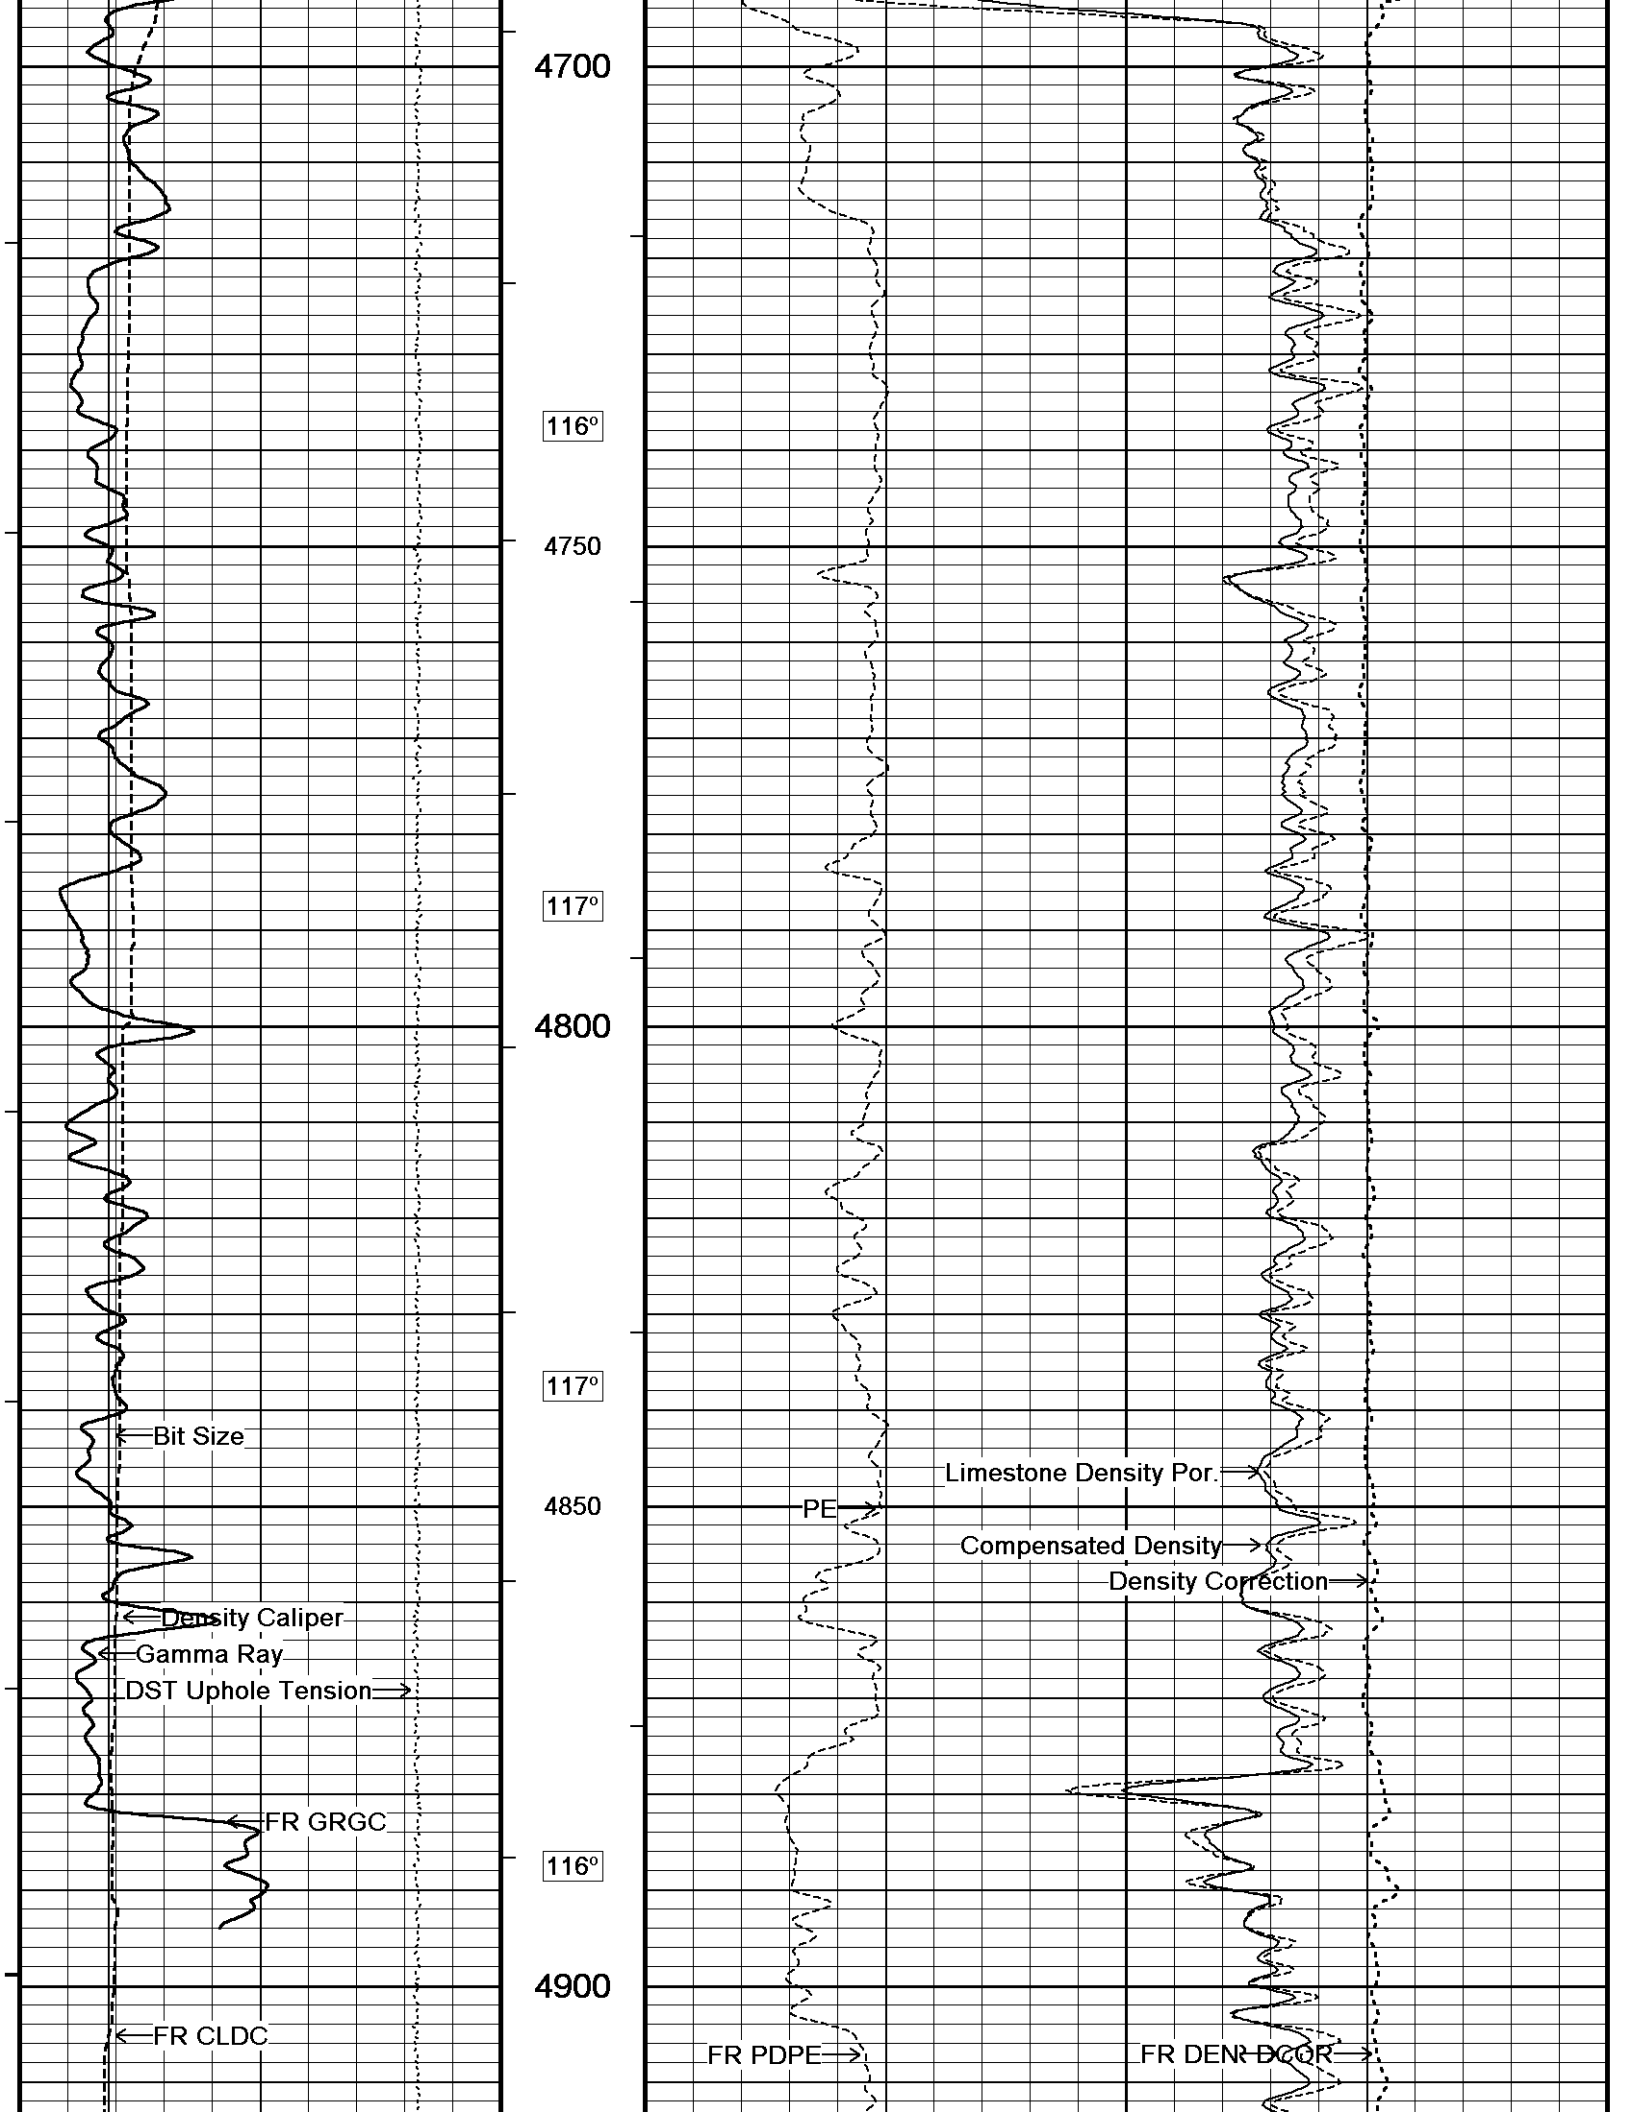

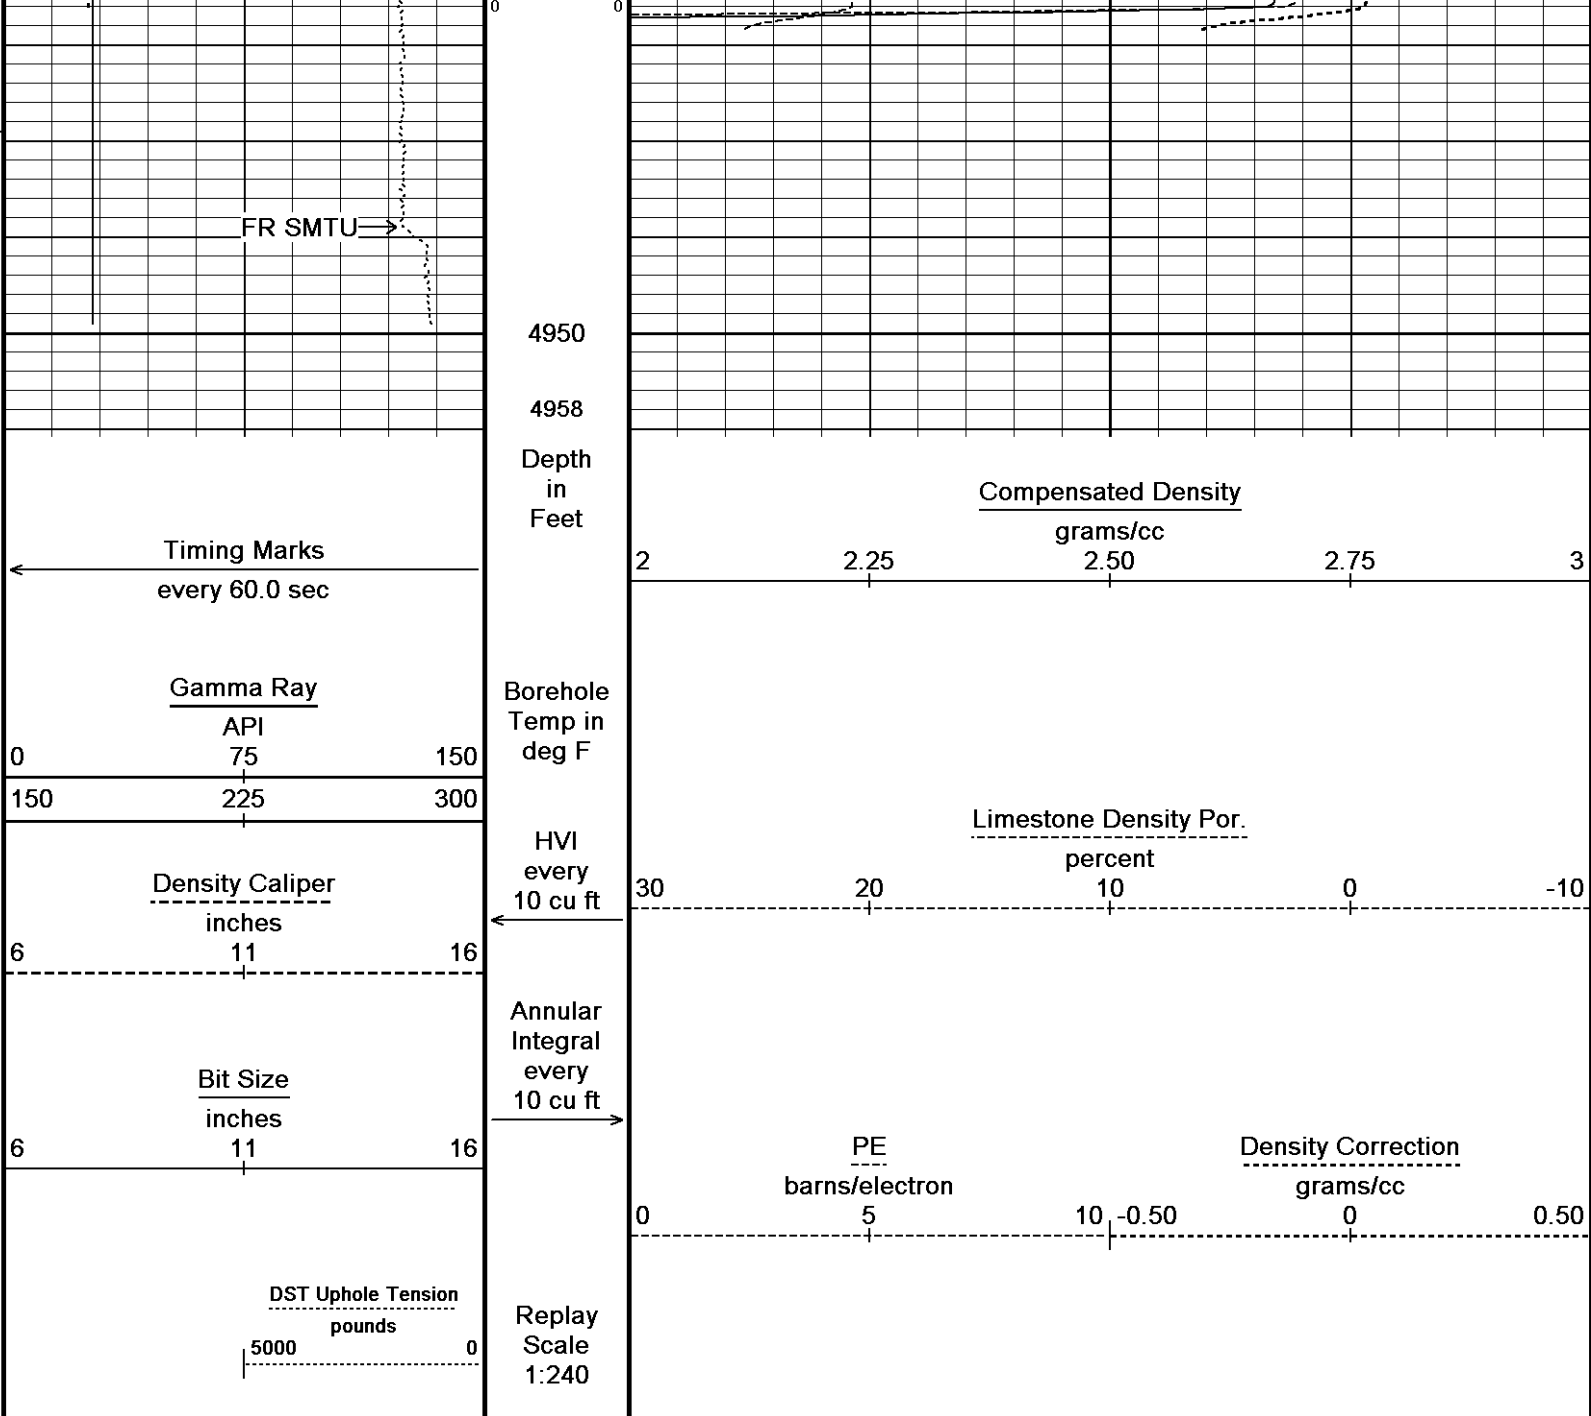

Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 28-APR-2013 15:42
 Filename: C:\Minimus\Archive 2013\LB13-104\Minimus 13.04.8...\Shakespeare Rudolph #1-22_001.dta
 Recorded on 16-APR-2013 12:04
 System Versions: Logged with 13.04.8492 Plotted with 13.04.8492

↑ REPEAT SECTION ↑

BEFORE SURVEY CALIBRATION

C:\Minimus\Archive 2013\LB13-104\Minimus 13.04.8492_Data_Shakespeare Rudolph #1-22\Shakespeare Rudolph #1-22_001.dta

General Constants All 000 Last Edited on 16-APR-2013,10:51

General Parameters

Mud Resistivity	0.620	ohm-metres
Mud Resistivity Temperature	74.000	degrees F
Water Level	0.000	feet
Borehole Fluid Processing	Wet Hole	

Hole/Annular Volume and Differential Caliper Parameters

HVOL Method	Single Caliper
HVOL Caliper 1	Density Caliper
HVOL Caliper 2	N/A

Annular Volume Diameter	4.500	inches
Caliper for Differential Caliper	Density Caliper	
Rwa Parameters		
Porosity used	Base Density Porosity	
Resistivity used	Array Ind. Six Res Rt	
RWA Constant A	0.610	
RWA Constant M	2.150	

Down-hole Tension Calibration SMS 0			Field Calibration on 13-APR-2013 20:15
Reading No	Measured	Calibrated (lbs)	
1	14794.45	2.00	
2	15339.36	383.60	

Gamma Calibration MCG-B 34			Field Calibration on 10-APR-2013 10:25
	Measured	Calibrated (API)	
Background	60	40	
Calibrator (Gross)	1154	765	
Calibrator (Net)	1095	725	

Gamma Constants MCG-B 34			Last Edited on 16-APR-2013,10:46
Gamma Calibrator Number	GR38		
Mud Density	1.12	gm/cc	
Caliper Source for Processing	Density Caliper		
Tool Position	Eccentred		
Concentration of KCl	0.00	kppm	

SP Calibration MCG-B 34			Field Calibration on 29-MAR-2013,12:58
	Measured	Calibrated (mV)	
Reference 1	101.0	100.0	
Reference 2	-99.0	-100.0	

High Resolution Temperature Calibration MCG-B 34			Field Calibration on 29-MAR-2013,12:58
	Measured	Calibrated(Deg F)	
Lower	50.00	50.00	
Upper	75.00	75.00	

High Resolution Temperature Constants MCG-B 34			Last Edited on 29-MAR-2013,12:58
Pre-filter Length	11		

Micro Laterolog Calibration MMR-A 11			Base Calibration on 31-DEC-1999 00:00	Field Check on 31-DEC-1999 00:00
Base Calibration				
	Measured		Calibrated (ohm-m)	
	Ref 1	Ref 2	Ref 1	Ref 2
	0.0	0.0	0.0	0.0
	Base Check (ohm-m)		Field Check (ohm-m)	
	0.0		0.0	

Micro Laterolog Constants MMR-A 11			Last Edited on
Pad Type	6 in Solid Nylon B23059		
Micro Laterolog K Factor	0.0128		
Standoff Offset	0.0000	inches	
Mudcake Thickness Correction Constants			
Mud Cake Source	Constant Value		
Mud Cake Thickness	0.4000	inches	
Mud Cake Thickness Caliper			
Mud Cake Resistivity	0.1500	ohm-m	
Mud Cake Resistivity Temp.	20.00	Degrees C	
Mud Cake Resistivity Source	Constant Value		
Temp. Source Rmc Correc.	MCG External Temperature		

Micro Normal and Micro Inverse Calibration MMR-A 11			Base Calibration on 08-MAR-2013 17:36	Field Check on 10-APR-2013 10:27
Base Calibration				

Channel	Measured		Calibrated (ohm-m)	
	Resistor 1	Resistor 2	Resistor 1	Resistor 2
Micro Normal	12.4	60.0	5.0	25.0
Micro Inverse	15.5	77.5	5.0	25.0
Channel	Base Check (ohm-m)		Field Check (ohm-m)	
Micro Normal	76.3		76.3	
Micro Inverse	58.7		58.7	

Micro Normal and Micro Inverse Constants MMR-A 11

Last Edited on 05-NOV-2012,13:54

Pad Type	8-12 in Soft Rubber Inflatable 006-9011-159		
Micro Normal K Factor	1.0000		
Micro Inverse K Factor	1.0000		
Standoff Offset	0.0000	inches	

Caliper Calibration MMR-A 11

Base Calibration on 08-APR-2013 09:09
Field Calibration on 10-APR-2013 10:30

Base Calibration		Measured	Calibrator Size (in)
Reading No			
1		13932	5.98
2		17063	7.97
3		20236	9.86
4		24170	11.92
5		0	0.00
6		N/A	N/A
Field Calibration		Measured Caliper (in)	Actual Caliper (in)
		5.93	5.98

Neutron Calibration MDN-A.B 65

Base Calibration on 13-MAR-2013 16:17
Field Check on 10-APR-2013 10:41

	Measured		Calibrated (cps)	
	Near	Far	Near	Far
Ratio	2980	92	3714	110
	32.499		33.764	
Field Calibrator at Base		Calibrated (cps)		
Ratio	1736		2464	
	0.705			
Field Check		Calibrated (cps)		
Ratio	1736		2470	
	0.680			

Neutron Constants MDN-A.B 65

Last Edited on 16-APR-2013,10:46

Neutron Source Id	PN-521		
Neutron Jig Number	5824NE		
Epithermal Neutron	No		
Caliper Source for Processing	Density Caliper		
Stand-off	0.00	inches	
Mud Density	1.00	gm/cc	
Limestone Sigma	7.10	cu	
Sandstone Sigma	4.26	cu	
Dolomite Sigma	4.70	cu	
Formation Pressure Source	None		
Formation Pressure	N/A	kpsi	
Temperature Source	None		
Temperature	N/A	degrees F	
Mud Salinity	0.00	kppm	
Salinity Correction	Not Applied		
Formation Fluid Salinity Source	None		
Formation Fluid Salinity	N/A	kppm	
Barite Mud Correction	Not Applied		

FE Calibration MFE-B.J 352

Base Calibration on 16-JAN-2013 10:20
Field Check on 10-APR-2013 10:50

Base Calibration		Measured	Calibrated (ohm-m)
Reference 1			
		0.0	0.0

Reference 1	0.0	0.0
Reference 2	964.3	126.8
Base Check		281.2
Field Check		281.3

FE Constants MFE-B.J 352

Last Edited on 16-APR-2013,10:45

Running Mode	No Sleeve	
MFE K Factor	0.1268	
Caliper Source for FE correction	Density Caliper	
Caliper Value for FE correction	N/A	inches
Rm Source for FE correction	Temperature Corr	
Temp. for Rm Corr.	MCG External Temperature	
Stand-off	0.5	inches

Sonic Constants MSS-C.K 330

Last Edited on 16-APR-2013,10:45

Maximum Boundary Contrast	100.00	micro-sec/ft
Fluid Transit Time	189.00	micro-sec/ft
Limestone Transit Time	47.50	micro-sec/ft
Sandstone Transit Time	55.50	micro-sec/ft
Dolomite Transit Time	43.50	micro-sec/ft
Sonic used for Porosities	3-5' Compensated Sonic	
Correction for Sonde Skew	Applied	
Cycle Stretch Algorithm	Applied	
MN3FT	N/A	micro-sec
MX3FT	N/A	micro-sec
Hunt-Raymer Constant	83.13	micro-sec/ft

Sonde Mode	Compensated
Hole Type	Open Hole

Sonde Parameters

	Measured	Calibrated
Offset	N/A	0.0000
Free Pipe	N/A	N/A
Peak Amplitude Source		N/A

Waveform	Start Time (micro-sec)	Width (micro-sec)	Pre Gain	Start Gain	Discriminator (mV)
3'	N/A	N/A	N/A	N/A	N/A
4'	N/A	N/A	N/A	N/A	N/A
5'	N/A	N/A	N/A	N/A	N/A
6'	N/A	N/A	N/A	N/A	N/A

Processed Fixed Gate Parameters

Waveform Used For Processing	N/A			
Start Time (micro-sec)	End Time (micro-sec)	Discriminator (mV)	N/A	
N/A	N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A	N/A

Full Waveform Parameters

Use 3' Waveform to derive TR	N/A
Use 4' Waveform to derive TR	N/A
Use 5' Waveform to derive TR	N/A
Use 6' Waveform to derive TR	N/A
3' Waveform Discriminator Level	N/A mV
4' Waveform Discriminator Level	N/A mV
5' Waveform Discriminator Level	N/A mV
6' Waveform Discriminator Level	N/A mV
3' Waveform Filter	N/A
4' Waveform Filter	N/A
5' Waveform Filter	N/A
6' Waveform Filter	N/A

Semblance Level	N/A
-----------------	-----

Semblance Level:	N/A	micro-sec
Semblance Window Width	N/A	N/A
Sonic 1 Despiker	N/A	N/A
Sonic 2 Despiker	N/A	N/A

High Resolution Temperature Calibration MAI-A.A 45

Field Calibration on 13-DEC-2012,10:54

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	75.00	75.00

High Resolution Temperature Constants MAI-A.A 45

Last Edited on 10-APR-2013,10:31

Pre-filter Length 11

Induction Calibration MAI-A.A 45

Base Calibration on 26-JUL-2012,09:22
Field Check on 10-APR-2013 10:52

Base Calibration

Test Loop Calibration

Channel	Measured		Calibrated (mmho/m)	
	Low	High	Low	High
1	14.4	472.6	9.3	966.2
2	5.7	374.0	7.6	821.4
3	3.4	261.2	5.2	566.0
4	2.5	133.9	2.6	279.2

Array Temperature 78.4 Deg F

Channel	Base Check (mmho/m)		Field Check (mmho/m)	
	Low	High	Low	High
1			18.4	3850.4
2			31.7	3628.8
3			28.7	3049.3
4			18.3	2079.1
Deep			16.1	1911.4
Medium			42.5	4060.4
Shallow			49.5	5481.9

Array Temperature 60.4 Deg F

Induction Constants MAI-A.A 45

Last Edited on 16-APR-2013,10:45

Induction Model	RtAP-WBM		
Caliper for Borehole Corr.	Density Caliper		
Hole Size for Borehole Correction	N/A	inches	
Tool Centred	No		
Stand-off Type	Fins		
Stand-off	0.50	inches	
Number of Fins on Stand-off	8.0000		
Stand-off Fin Angle	45.00	degrees	
Stand-off Fin Width	0.5000	inches	
Borehole Corr. Rm Source	Temperature Corr		
Temp. for Rm Corr.	MCG External Temperature		
Squasher Start	0.0020	mhos/metre	
Squasher Offset	N/A	mhos/metre	

Borehole Normalisation

DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000

Calibration Site Corrections

Channel 1	0.00	mmhos/metre
Channel 2	0.00	mmhos/metre
Channel 3	0.00	mmhos/metre
Channel 4	0.00	mmhos/metre

Apparent Porosity and Water Saturation Constants

Archie Constant (A)	1.00
Cementation Exponent (M)	2.00
Saturation Exponent (N)	2.00

DOWNHOLE EQUIPMENT

C:\Minimus\Archive 2013\LB13-104\Minimus 13.04.8492_Data_Shakespeare Rudolph #1-22\Shakespeare Rudolph #1-22_001.dta

Compact Comms Gamma
MCG-B 34 LG: 8.70 ft WT: 63.9 lb OD: 2.24 in

Compact Micro-Resistivity
MMR-A 11 LG: 8.59 ft WT: 81.6 lb OD: 4.88 in

Compact Neutron
MDN-A.B 65 LG: 5.04 ft WT: 50.7 lb OD: 2.24 in


Compact Density/Caliper
MPD-B 31 LG: 9.59 ft WT: 90.4 lb OD: 2.45 in

Compact Focussed Electric
MFE-B.J 352 LG: 6.05 ft WT: 48.5 lb OD: 2.24 in

Compact Sonic
MSS-C.K 330 LG: 12.52 ft WT: 72.8 lb OD: 2.24 in

Compact Induction
MAI-A.A 45 LG: 10.81 ft WT: 48.5 lb OD: 2.24 in

Total Length: 61.30 ft Weight: 456.4 lb

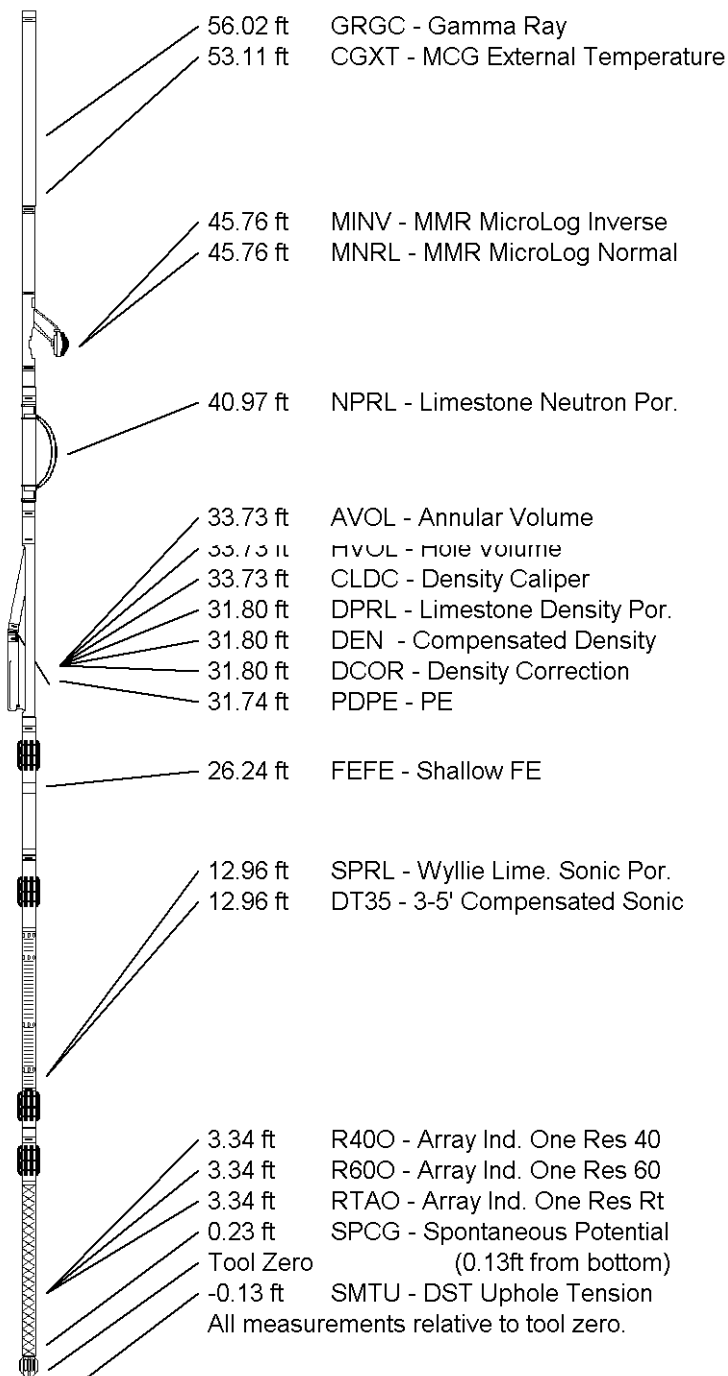

COMPANY	SHAKESPEARE OIL COMPANY
WELL	RUDOLPH #1-22
FIELD	WILDCAT
PROVINCE/COUNTY	SCOTT
COUNTRY/STATE	U.S.A. / KANSAS

Elevation Kelly Bushing	3035.00	feet	First Reading	4907.00	feet
Elevation Drill Floor	3033.00	feet	Depth Driller	4940.00	feet
Elevation Ground Level	3025.00	feet	Depth Logger	4939.00	feet



Weatherford[®]

COMPACT LOGS DENSITY
COMPENSATED NEUTRON
MICRORESISTIVITY LOG