



**Weatherford**

**COMPENSATED SONIC  
WITH INTEGRATED TRANSIT TIME**

COMPANY SHAKESPEARE OIL COMPANY  
 WELL RUDOLPH #1-22  
 FIELD WILDCAT  
 PROVINCE/COUNTY SCOTT  
 COUNTRY/STATE U.S.A. / KANSAS  
 LOCATION 1450' FSL & 1350' FEL

SEC	TWP	RGE	Other Services	Elevations:
22	17S	33W	MPD/MDN	KB 3035.00
API Number	15-171-20938		MAI/MFE	DF 3033.00
Permit Number			MML	GL 3025.00
Permanent Datum G.L., Elevation 3025 feet				
Log Measured From KB				
Drilling Measured From K.B. @ 10 FEET				
Date	16-APR-2013			
Run Number	ONE			
Service Order	3539888			
Depth Driller	4940.00 feet			
Depth Logger	4939.00 feet			
First Reading	4926.00 feet			
Last Reading	3700.00 feet			
Casing Driller	267.00 feet			
Casing Logger	264.00 inches			
Bit Size	7.875			
Hole Fluid Type	CHEMICAL		lb/USg	
Density / Viscosity	9.30	lb/USg	55.00	CP
PH / Fluid Loss	10.50		10.50	
Sample Source	FLOWLINE			
Rm @ Measured Temp	0.62 @ 74.0		ohm-m	
Rmf @ Measured Temp	0.50 @ 74.0		ohm-m	
Rmc @ Measured Temp	0.74 @ 74.0		ohm-m	
Source Rmf / Rmc	CALC		CLAC	
Rm @ BHT	0.39 @ 119.0		ohm-m	
Time Since Circulation	3 HOURS			
Max Recorded Temp	119.00		deg F	
Equipment / Base	13057		LIB	
Recorded By	J. LAPPOINT			
Witnessed By	TIM PRIEST			W. STAMBAUGH
JOB#	LB13-104			

BOREHOLE RECORD			Last Edited: 16-APR-2013 15:06
Bit Size inches	Depth From feet	Depth To feet	
7.875	264.00	4939.00	
CASING RECORD			
Type	Size inches	Depth From feet	Shoe Depth feet
SURFACE	8.625	0.00	264.00
			Weight pounds/ft
			24.00

**REMARKS**

Tools Used: MCG, MML, MDN, MPD, MFE, MSS, MAI ran in combination.  
 Hardware: MPD: 8 inch profile plate used. MAI, MSS, MFE: 0.5 Inch standoffs used. MDN: Dual Bowspring used.  
 2.71 G/CC Limestone density matrix used to calculate porosity.  
 Sonic porosity calculated using a Limestone scale (47.5 usec/ft).  
 Borehole rugosity, tight pulls, and washouts will affect data quality.  
 All intervals logged and scaled per customer's request.  
 Total hole volume from TD to Surface casing= 2325 cubic feet  
 Annular volume with 4.5 inch production casing TD to 3700ft = 375 cubic feet  
 Service order #3539888  
 Rig: H-D Drilling #2  
 Engineer: W. Stambaugh, J. LaPoint  
 Operator(s): B. Reeves


\*\*\*\* Software issue changed fluid loss to match Ph. Fluid Loss should be 8.8 ml/30min.\*\*\*\*


All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not, guarantee the accuracy


or correctness of any interpretations, and we shall not, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions in our price schedule.

**5 INCH MAIN**

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 28-APR-2013 15:44  
 Filename: C:\Minimus\Archive 2013\LB13-104\Minimus 13.04.8...\Shakespeare Rudolph #1-22\_002.dta Recorded on 16-APR-2013 12:30  
 System Versions: Logged with 13.04.8492 Plotted with 13.04.8492

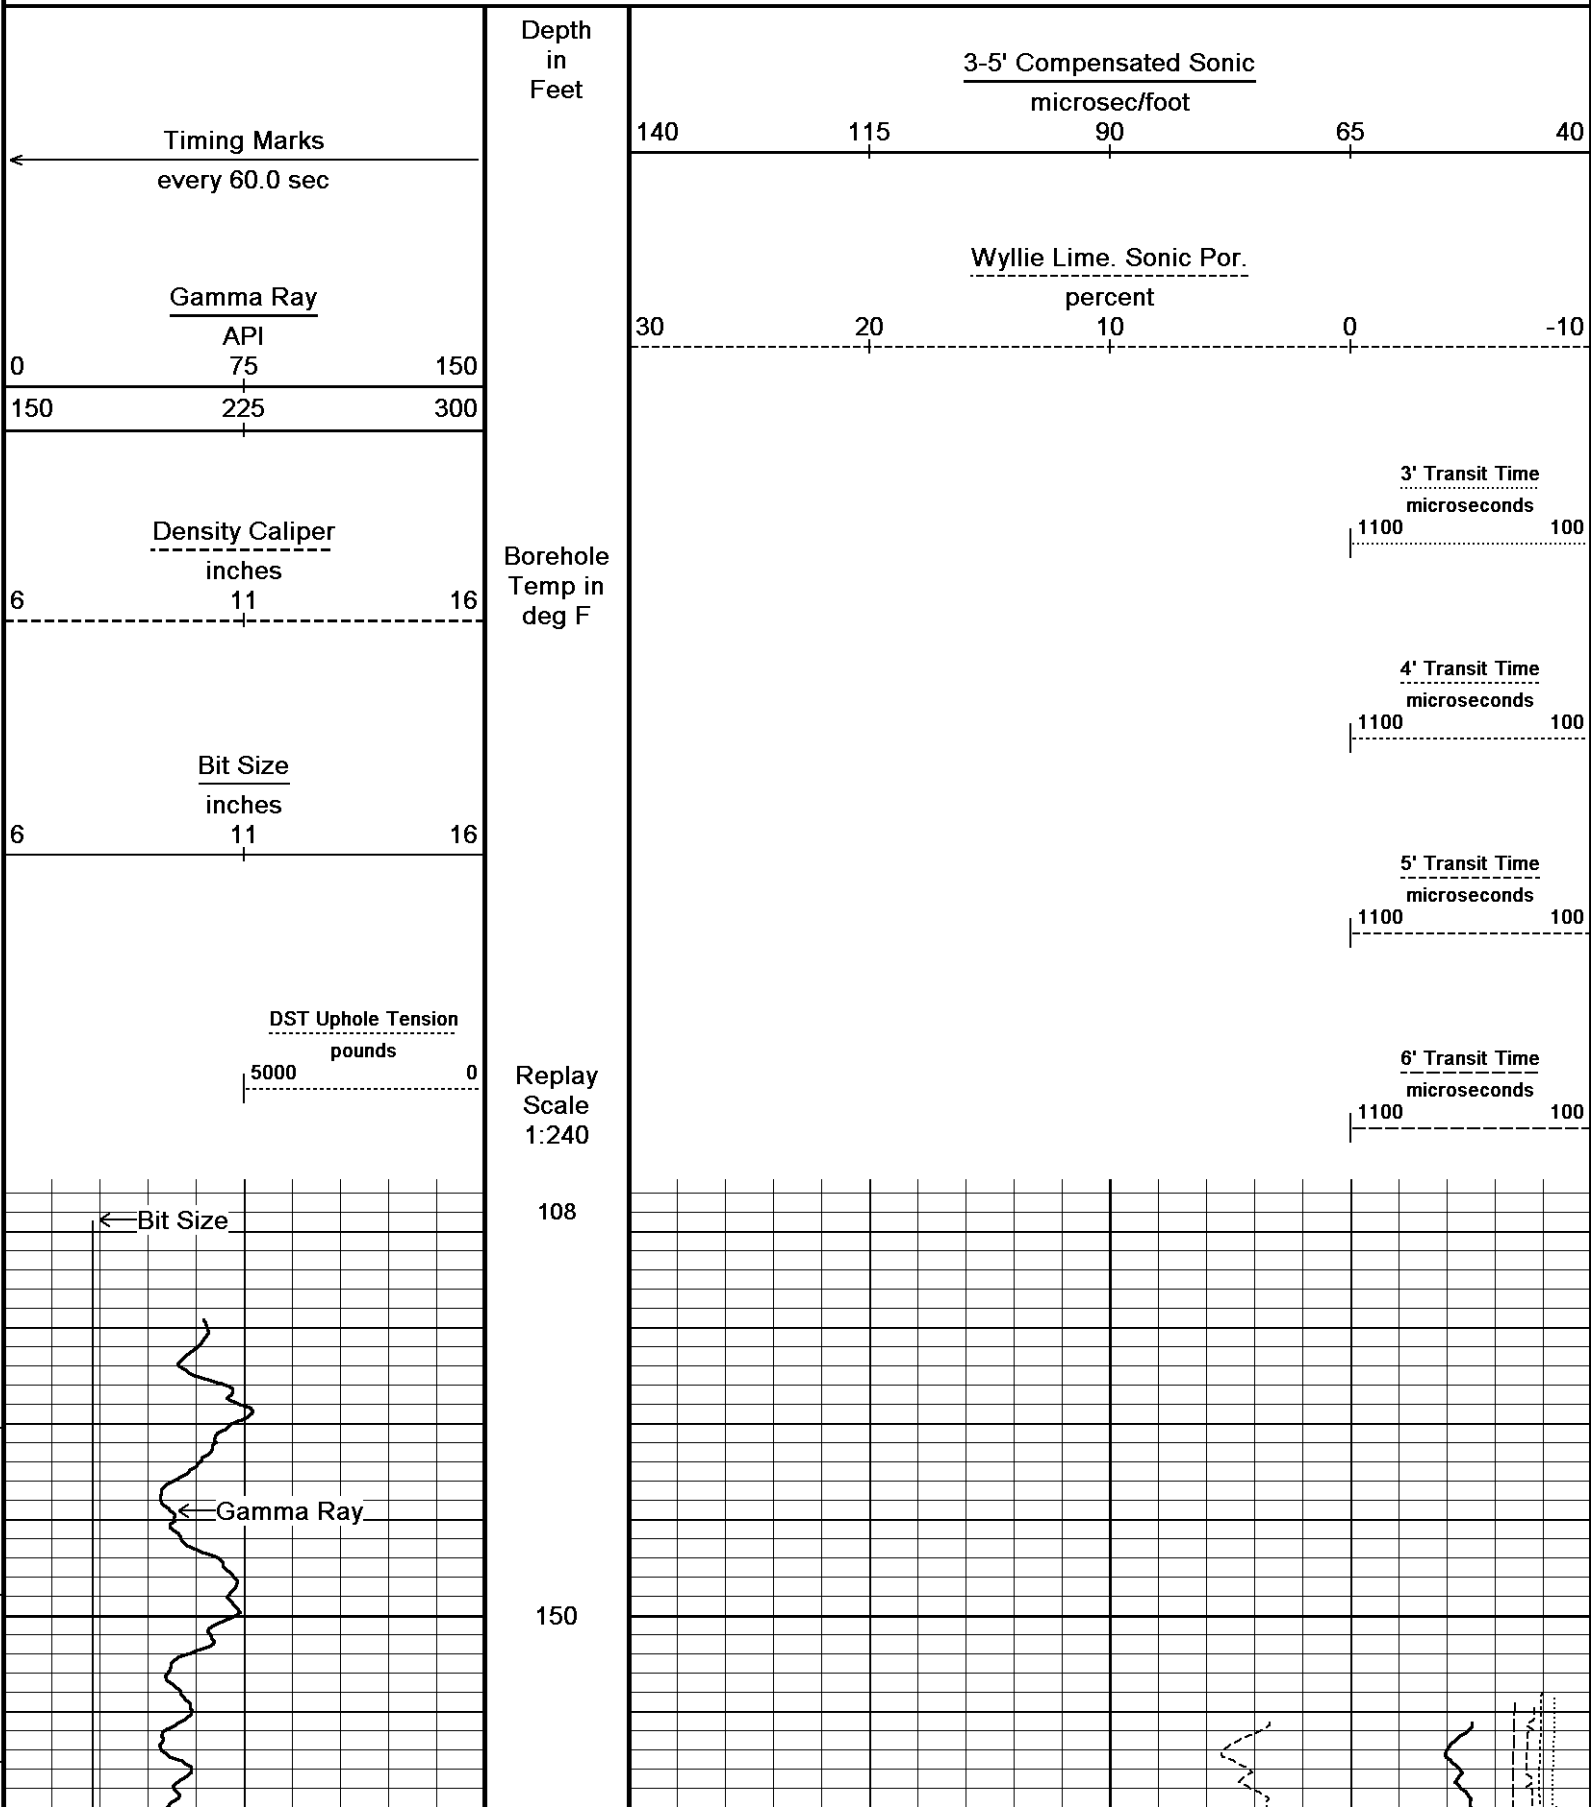

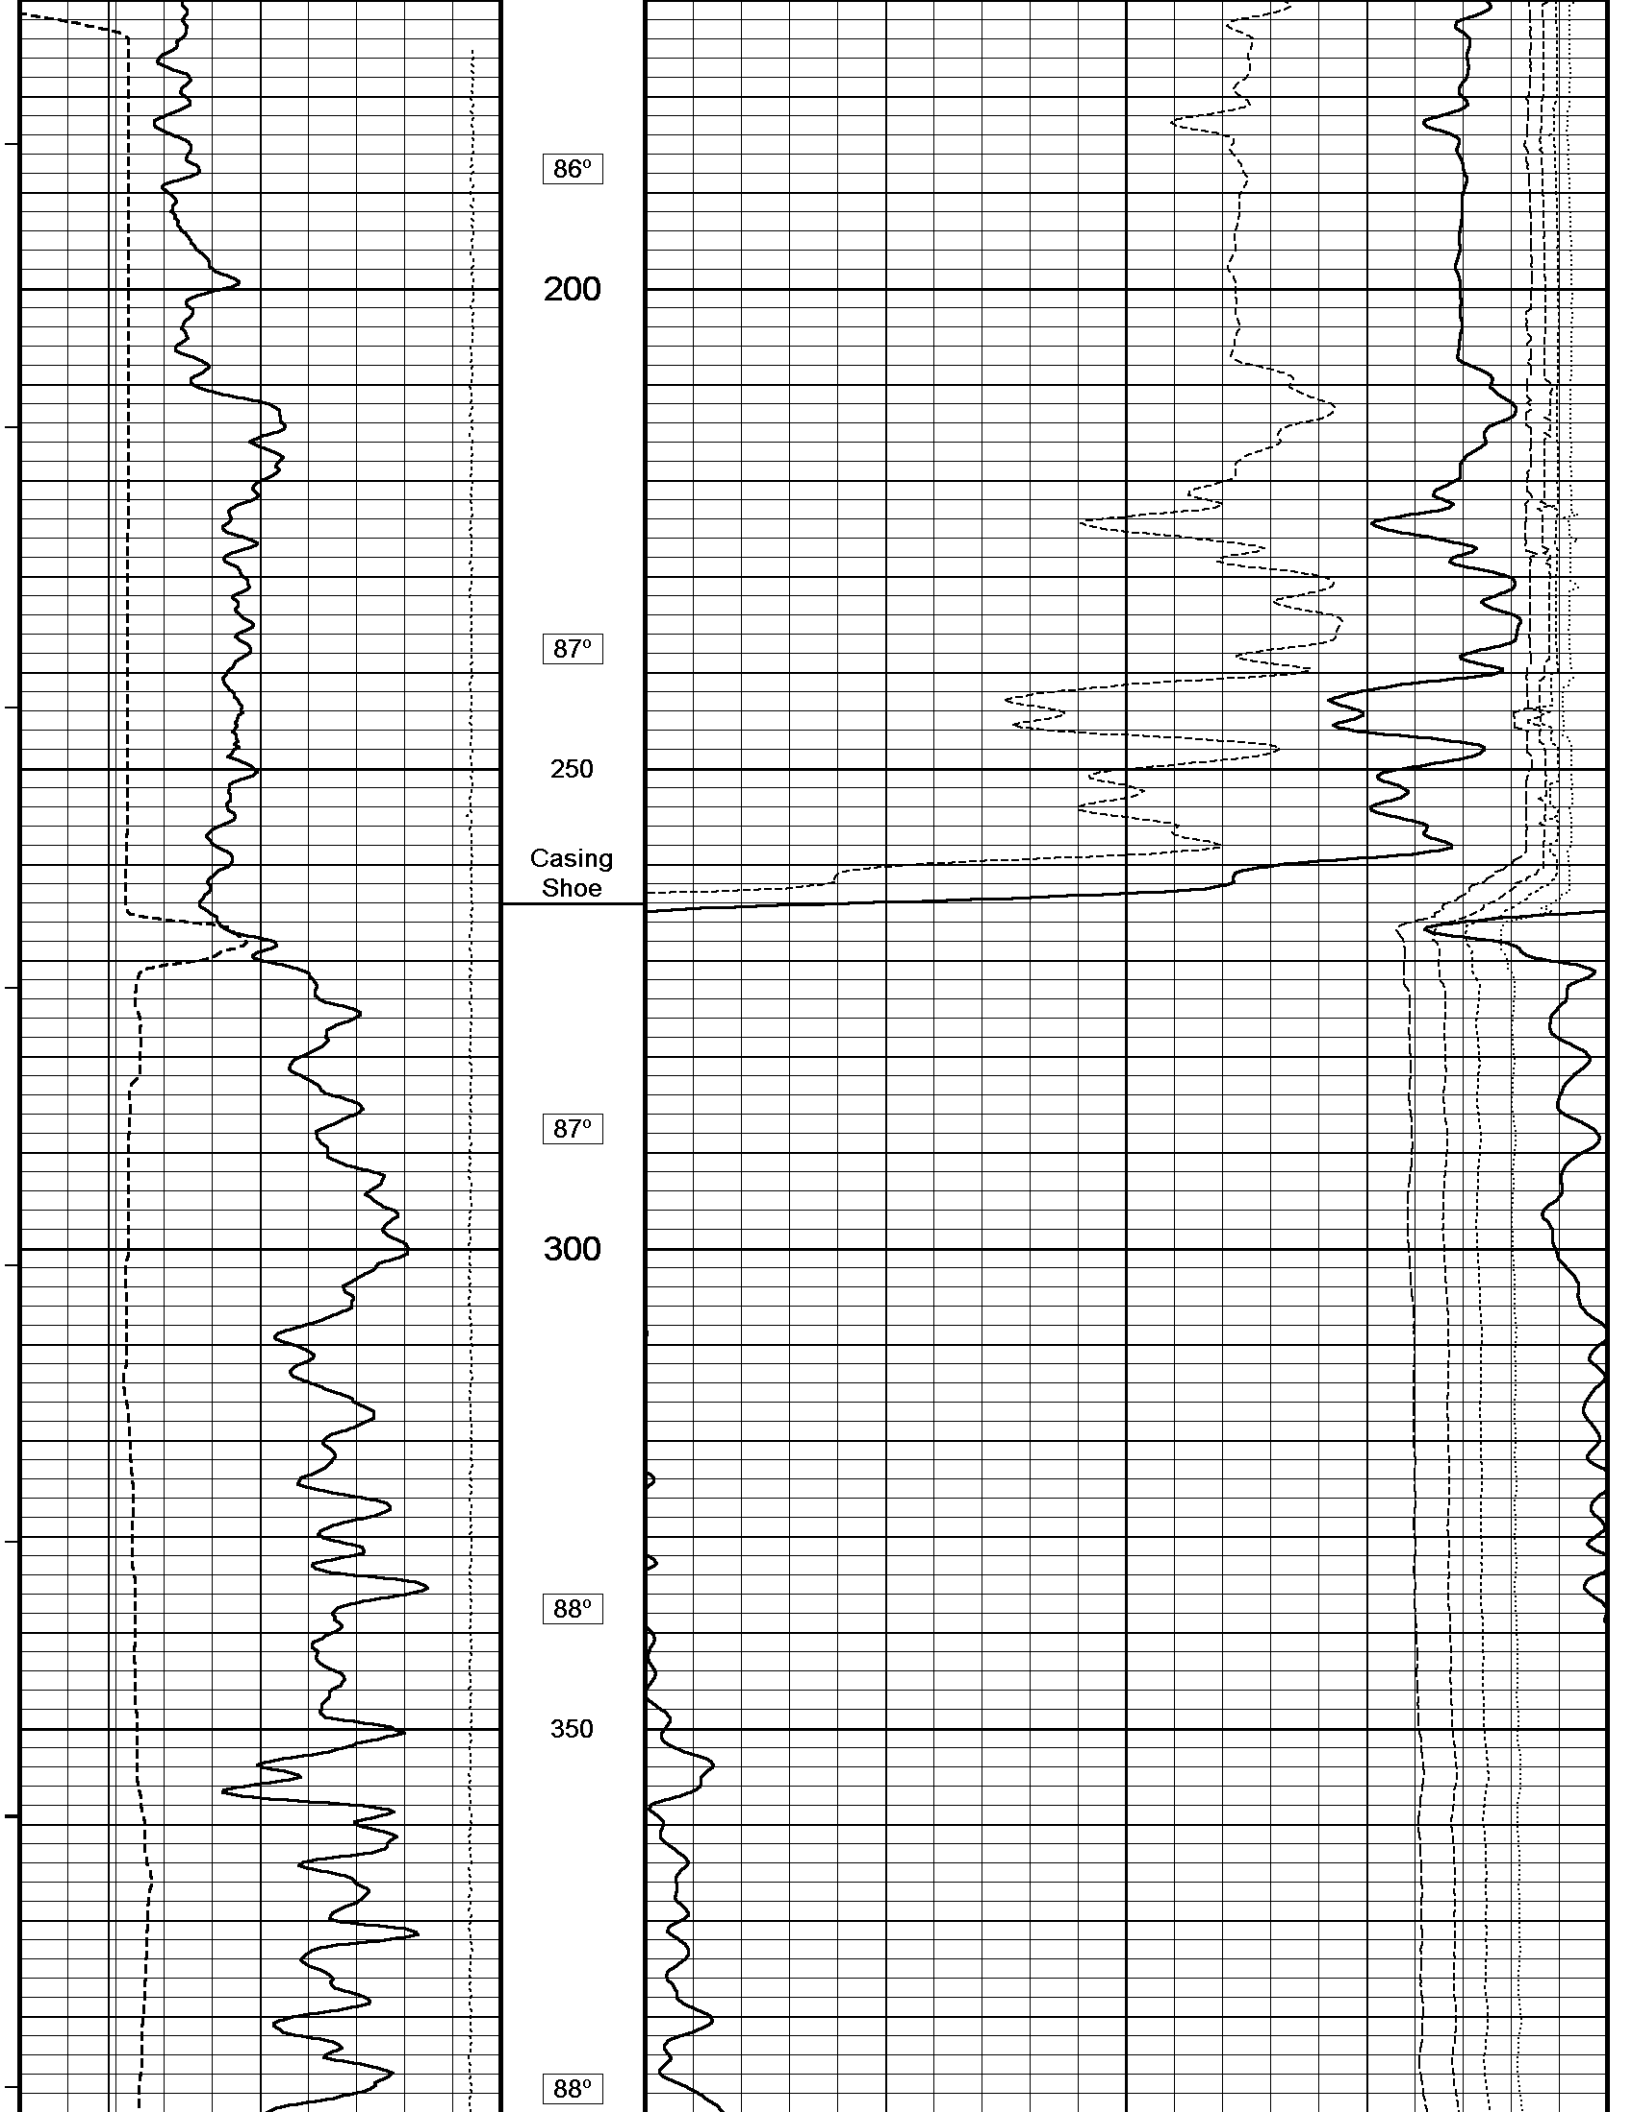

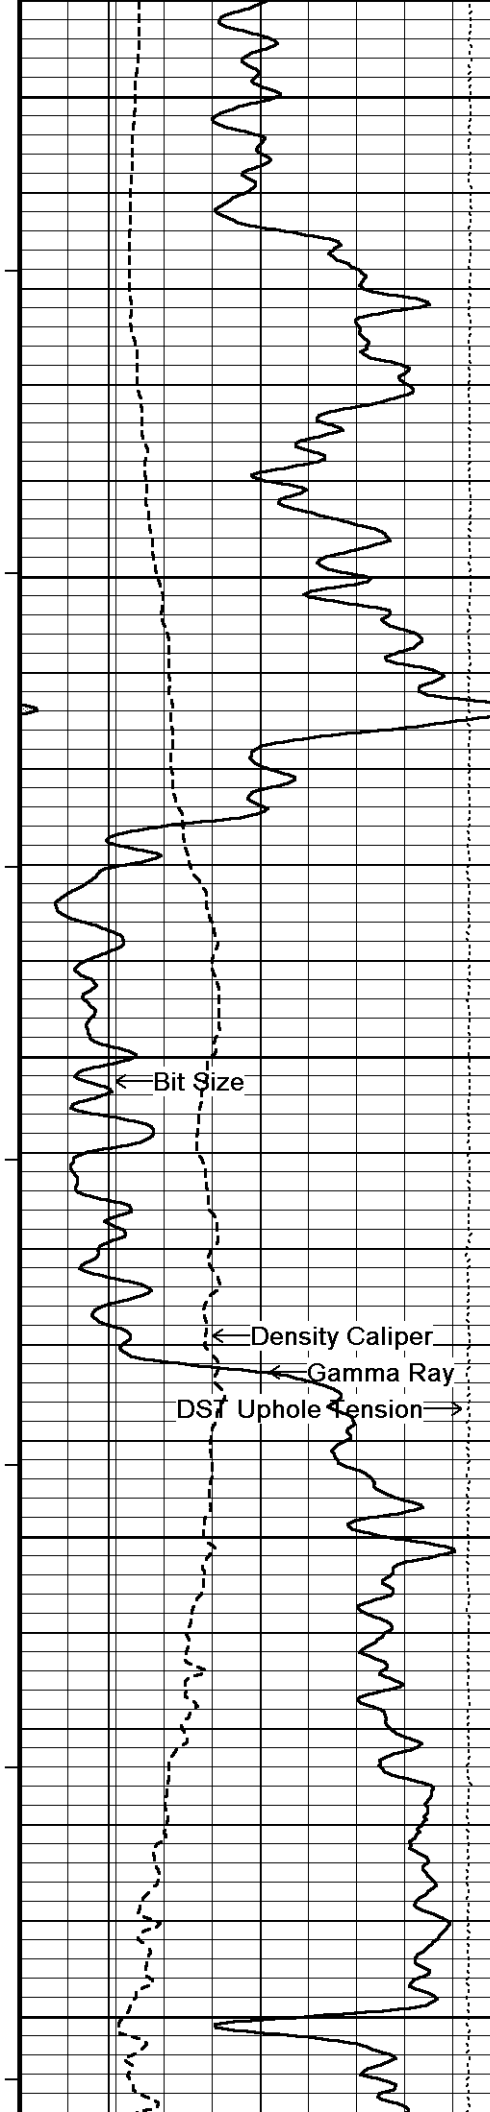


400  
89°  
450  
89°  
500  
91°  
550  
92°  
600


← Bit Size

← Density Caliper  
← Gamma Ray  
DST Uphole Tension →

3-5' Compensated Sonic

6' Transit Time →  
5' Transit Time →  
4' Transit Time →  
3' Transit Time →

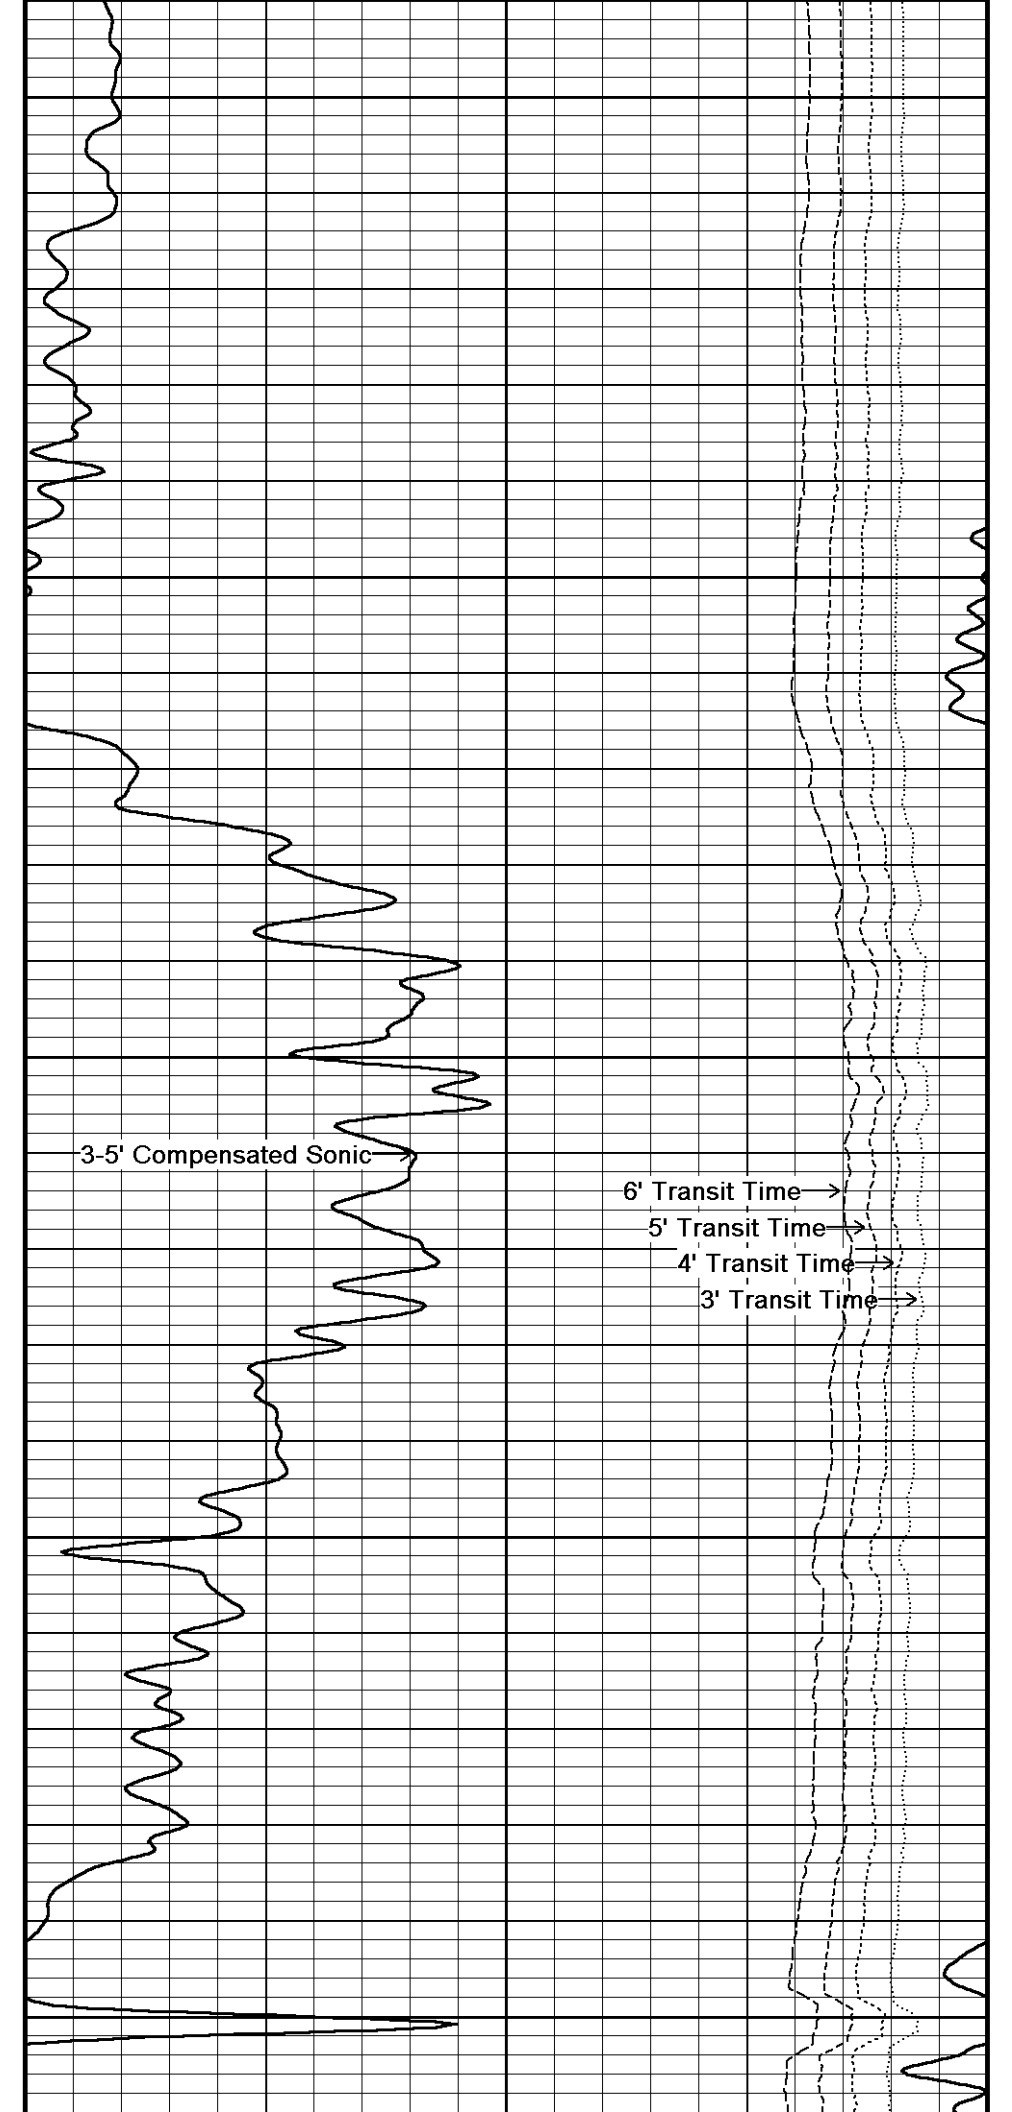

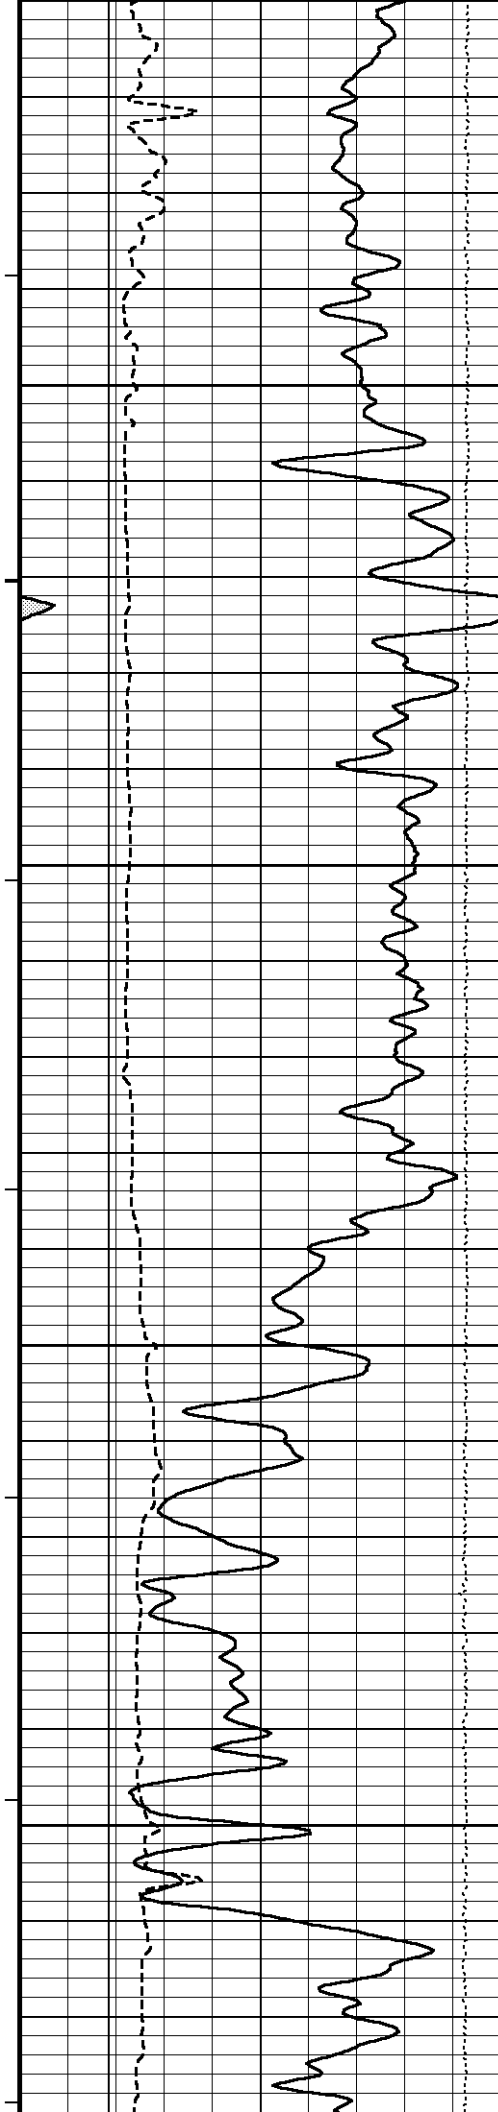

92°

650

93°


700


93°

750


93°

800

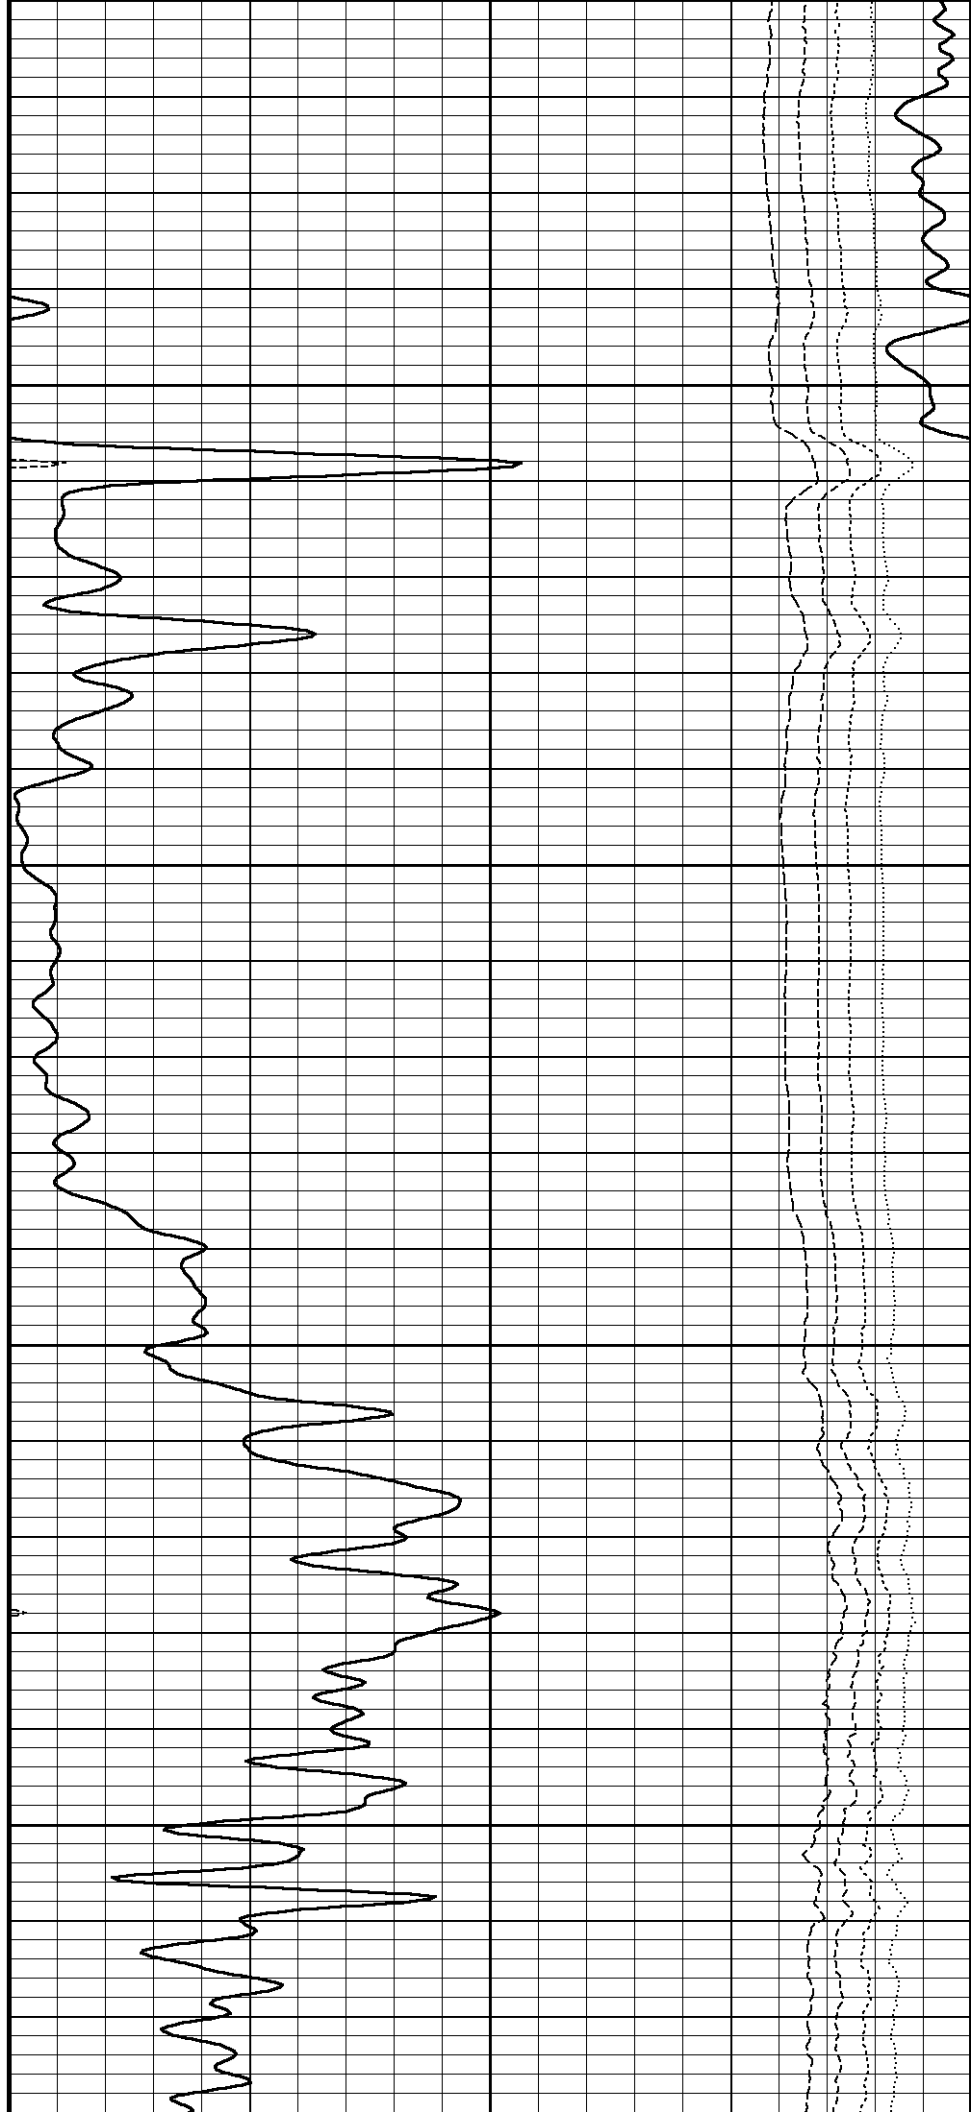

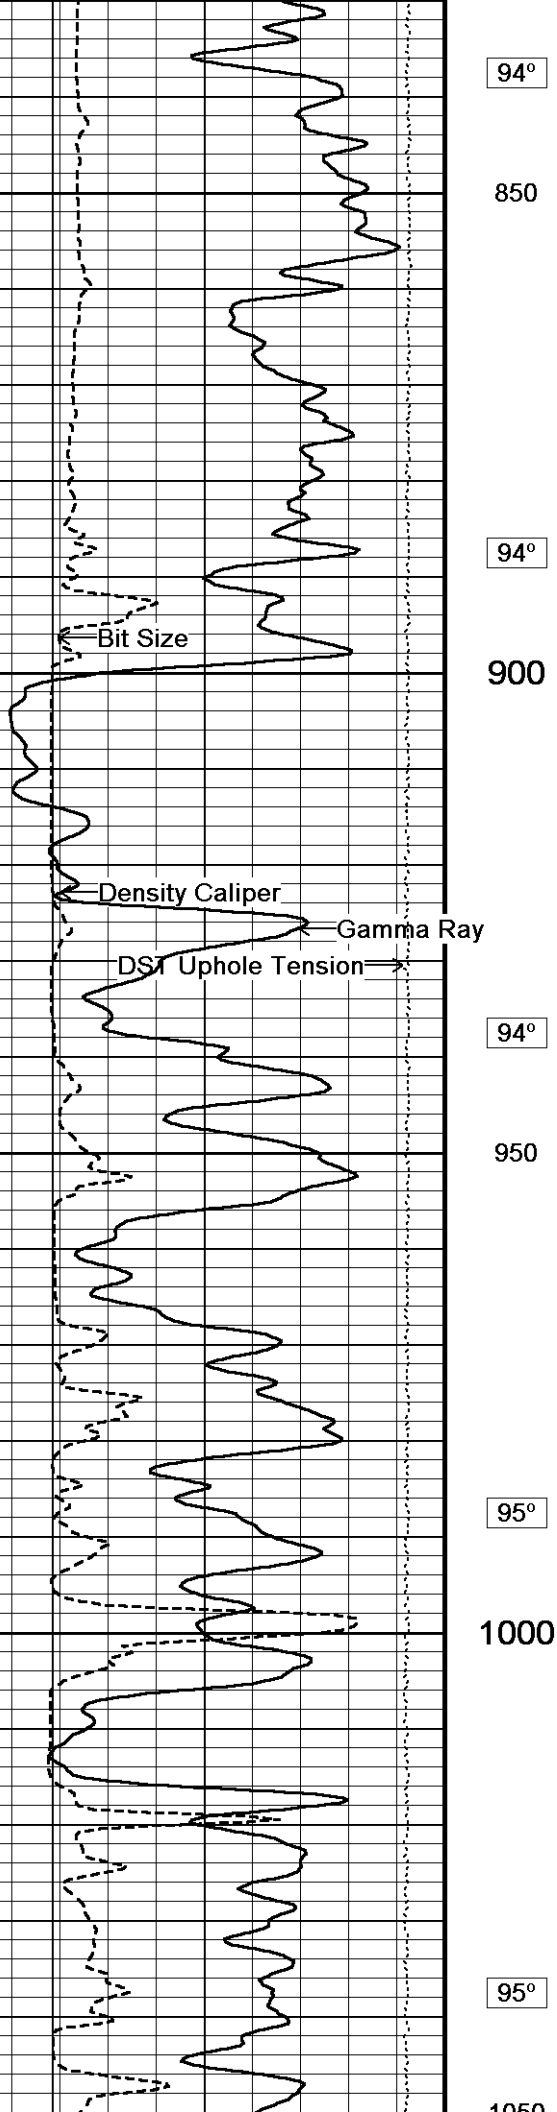


94°  
850  
94°  
900  
94°  
950  
95°  
1000  
95°  
1050


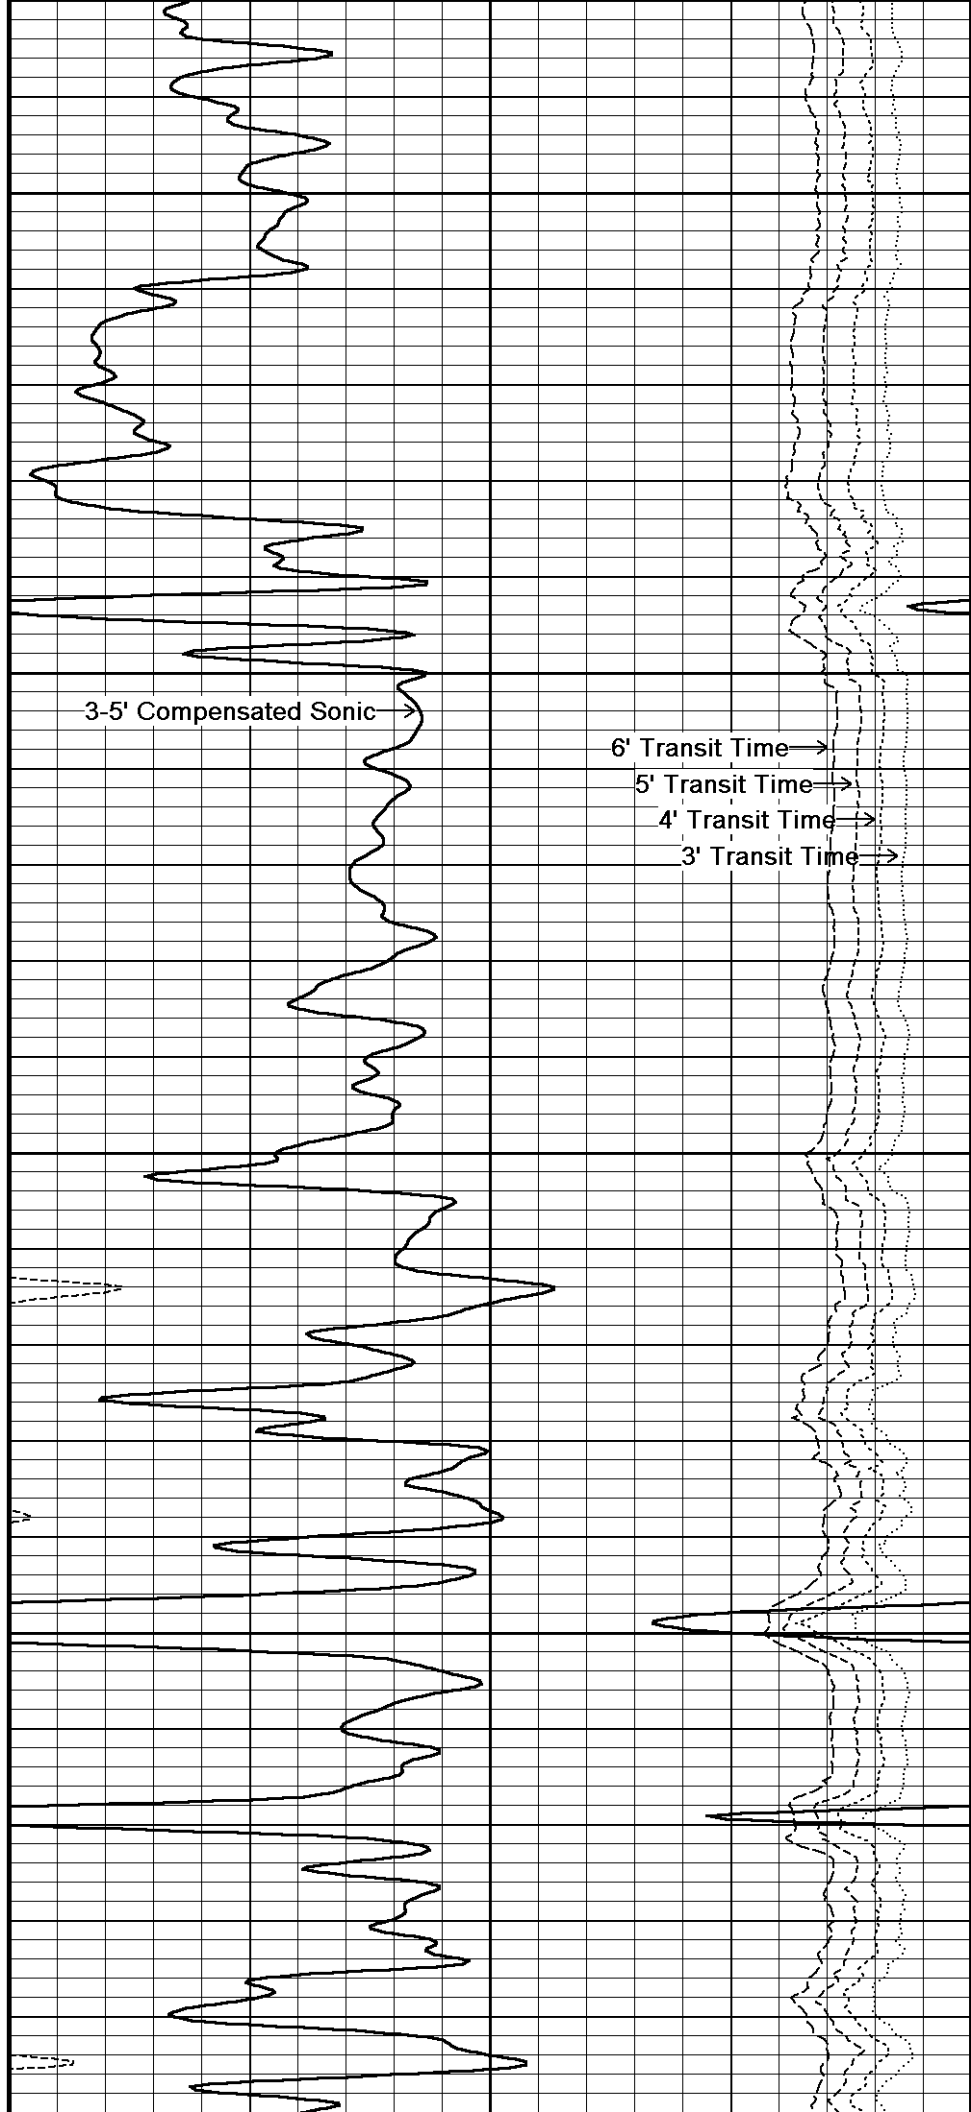



3-5' Compensated Sonic

6' Transit Time →  
5' Transit Time →  
4' Transit Time →  
3' Transit Time →

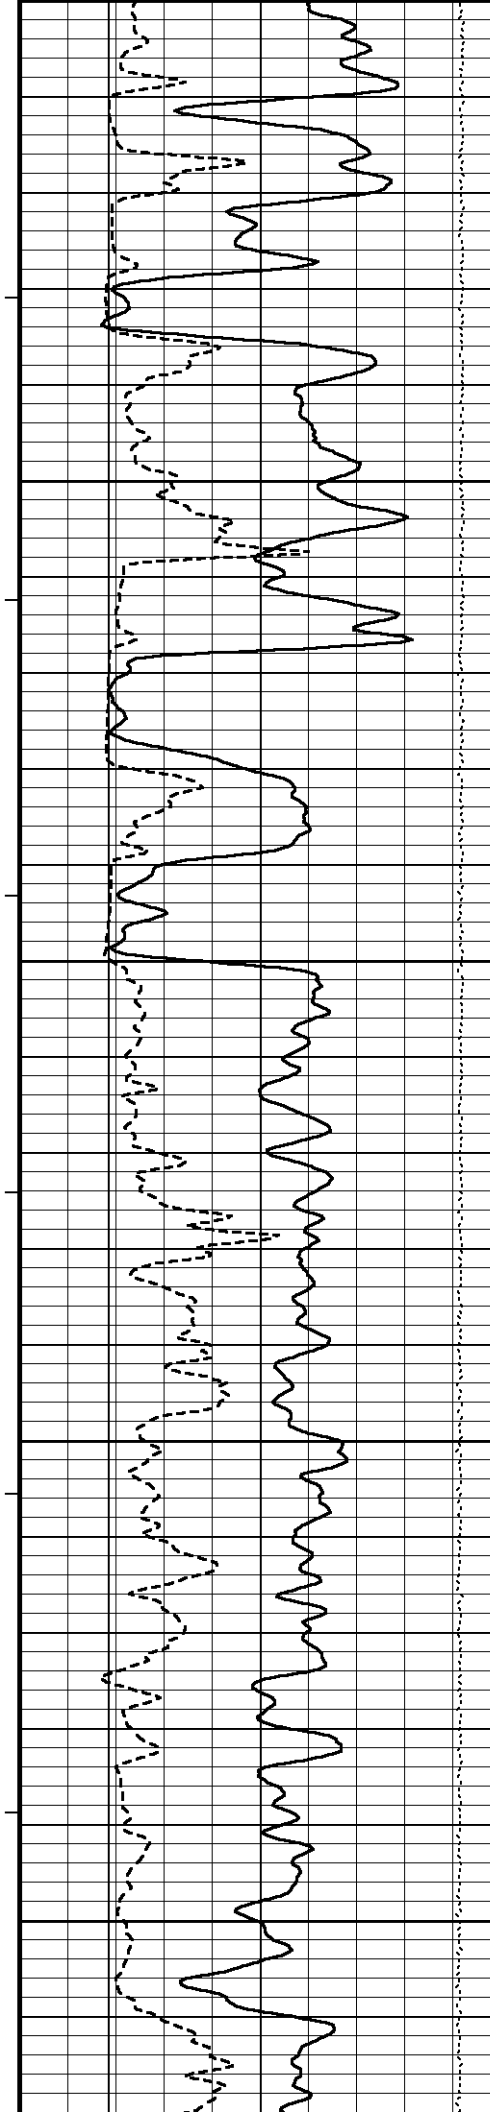

1030  
95°  
1100  
96°  
1150  
96°  
1200  
96°  
1250

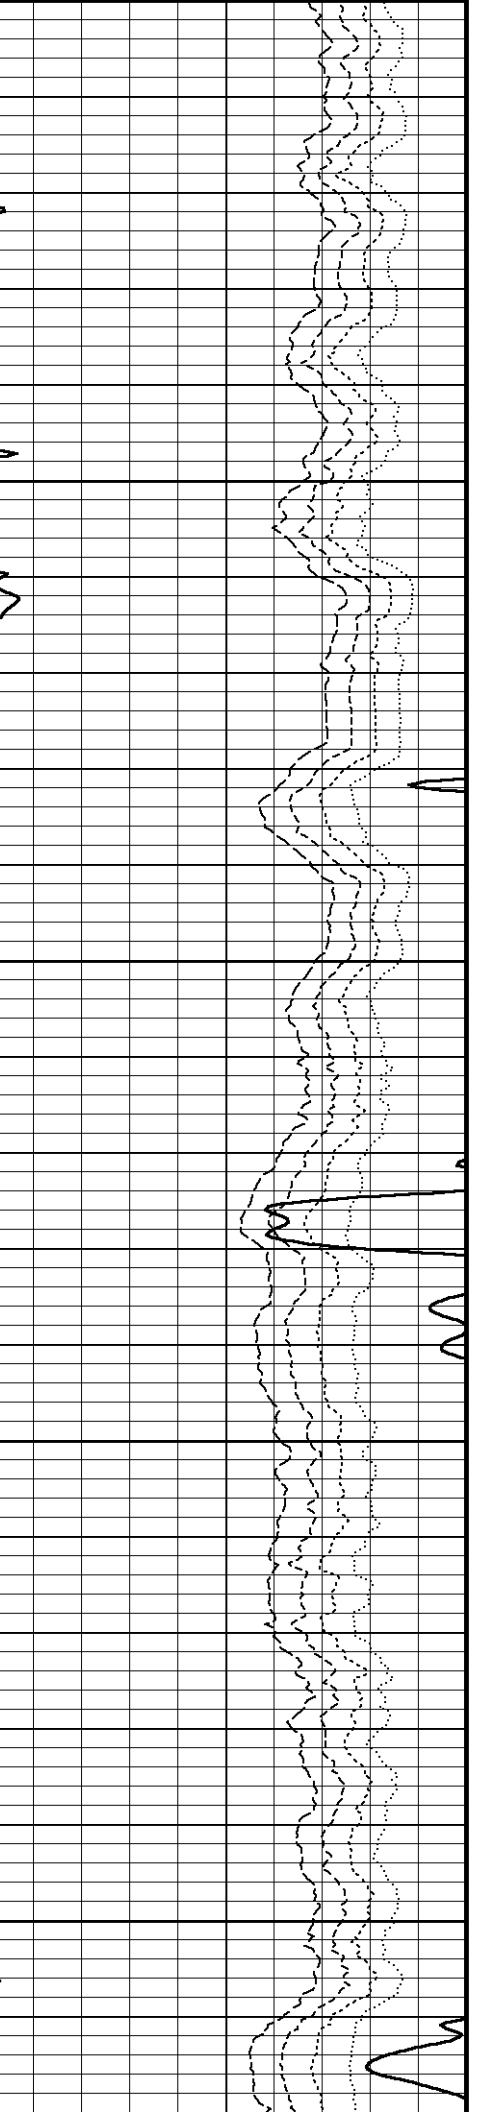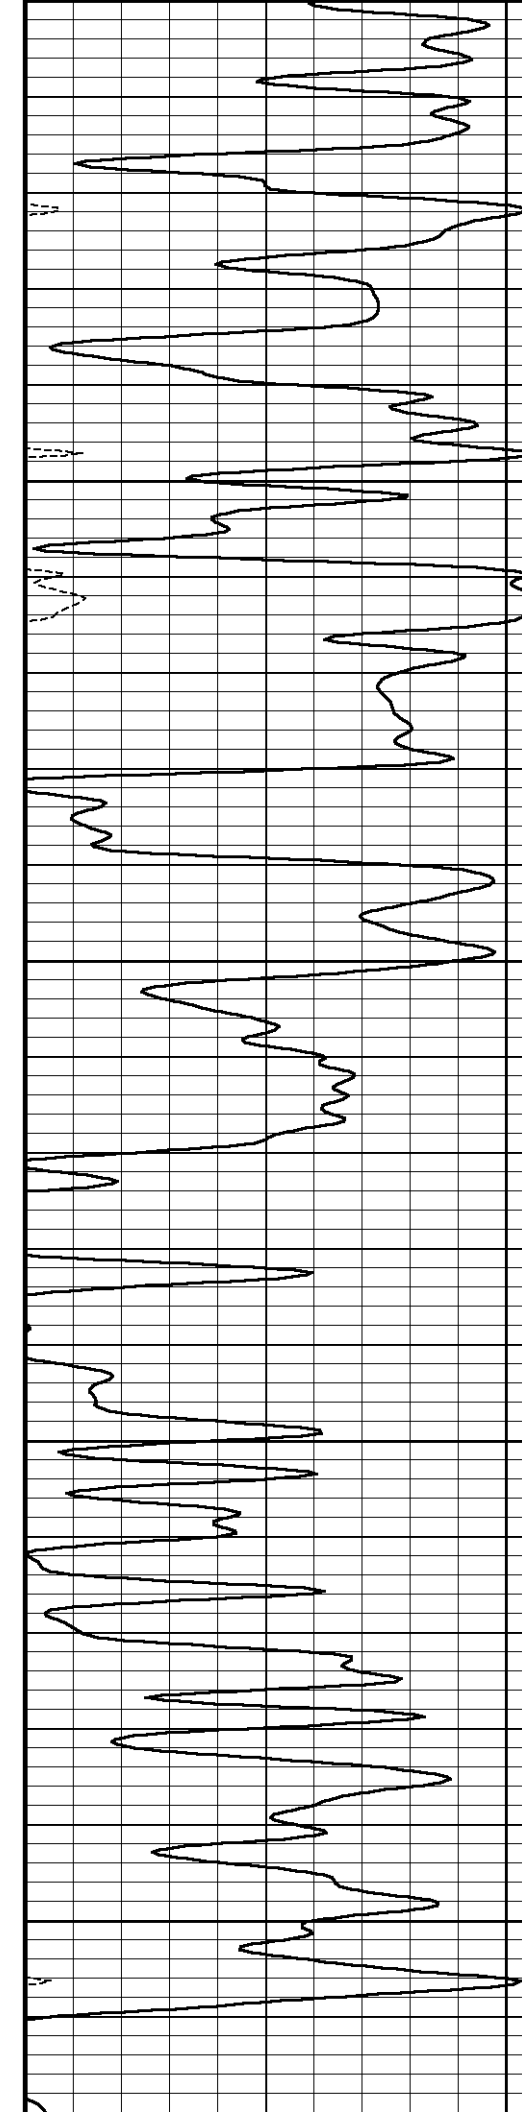

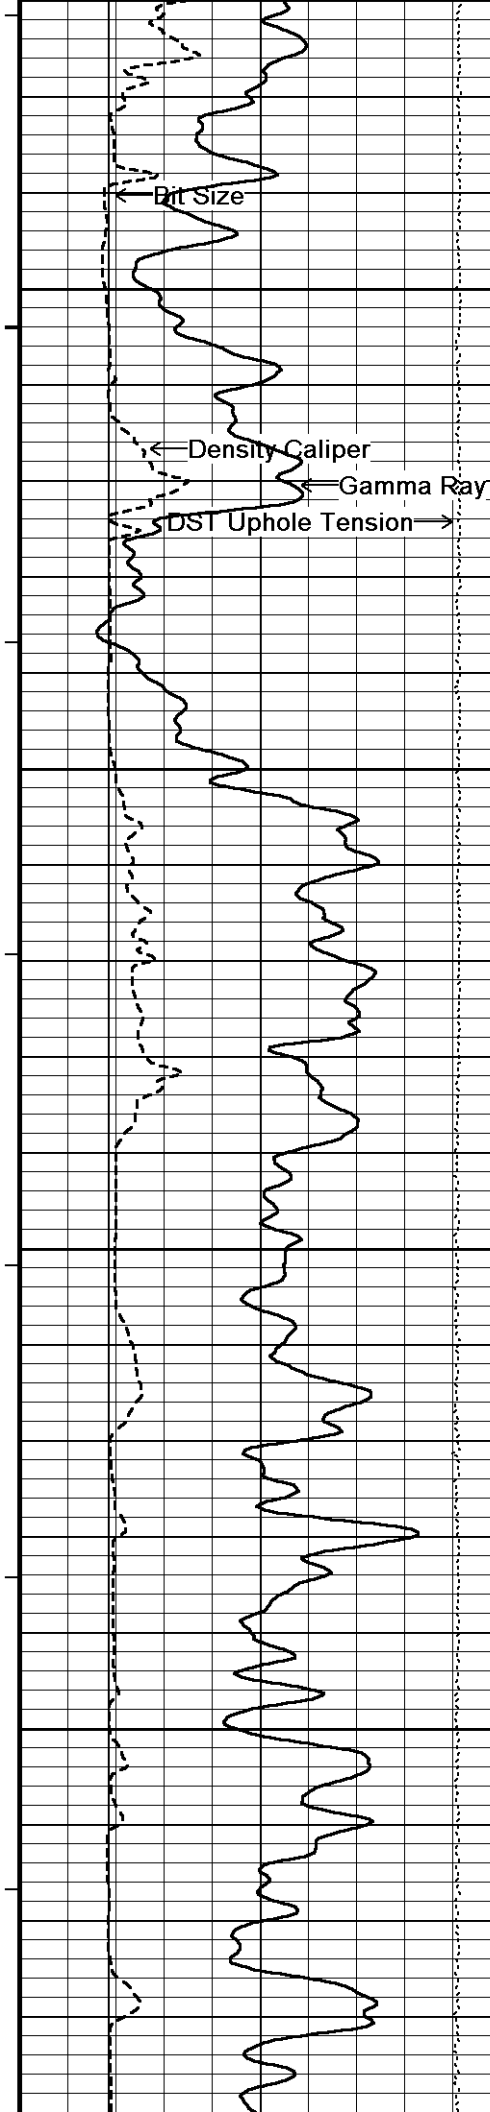

97°

1300

97°

1350


97°

1400

98°

1450

98°

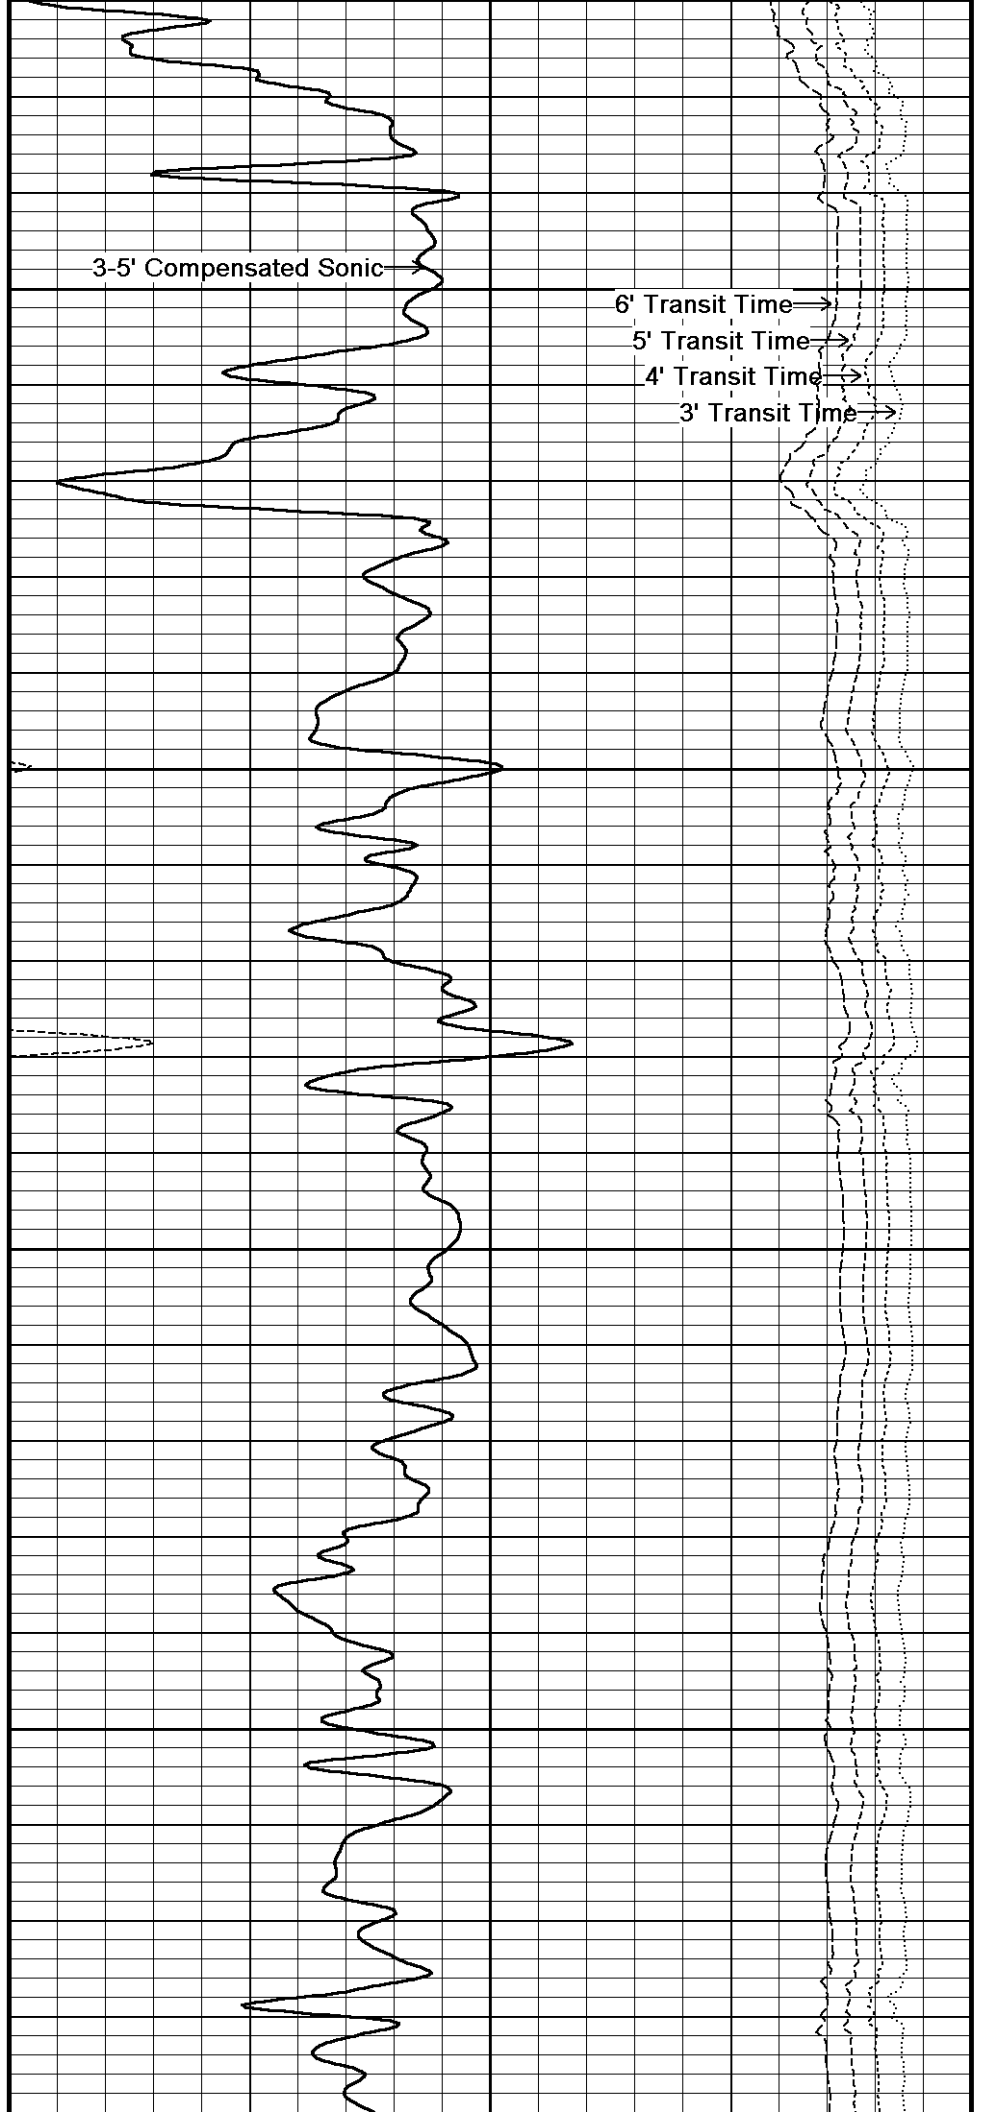

3-5' Compensated Sonic



6' Transit Time



5' Transit Time



4' Transit Time



3' Transit Time




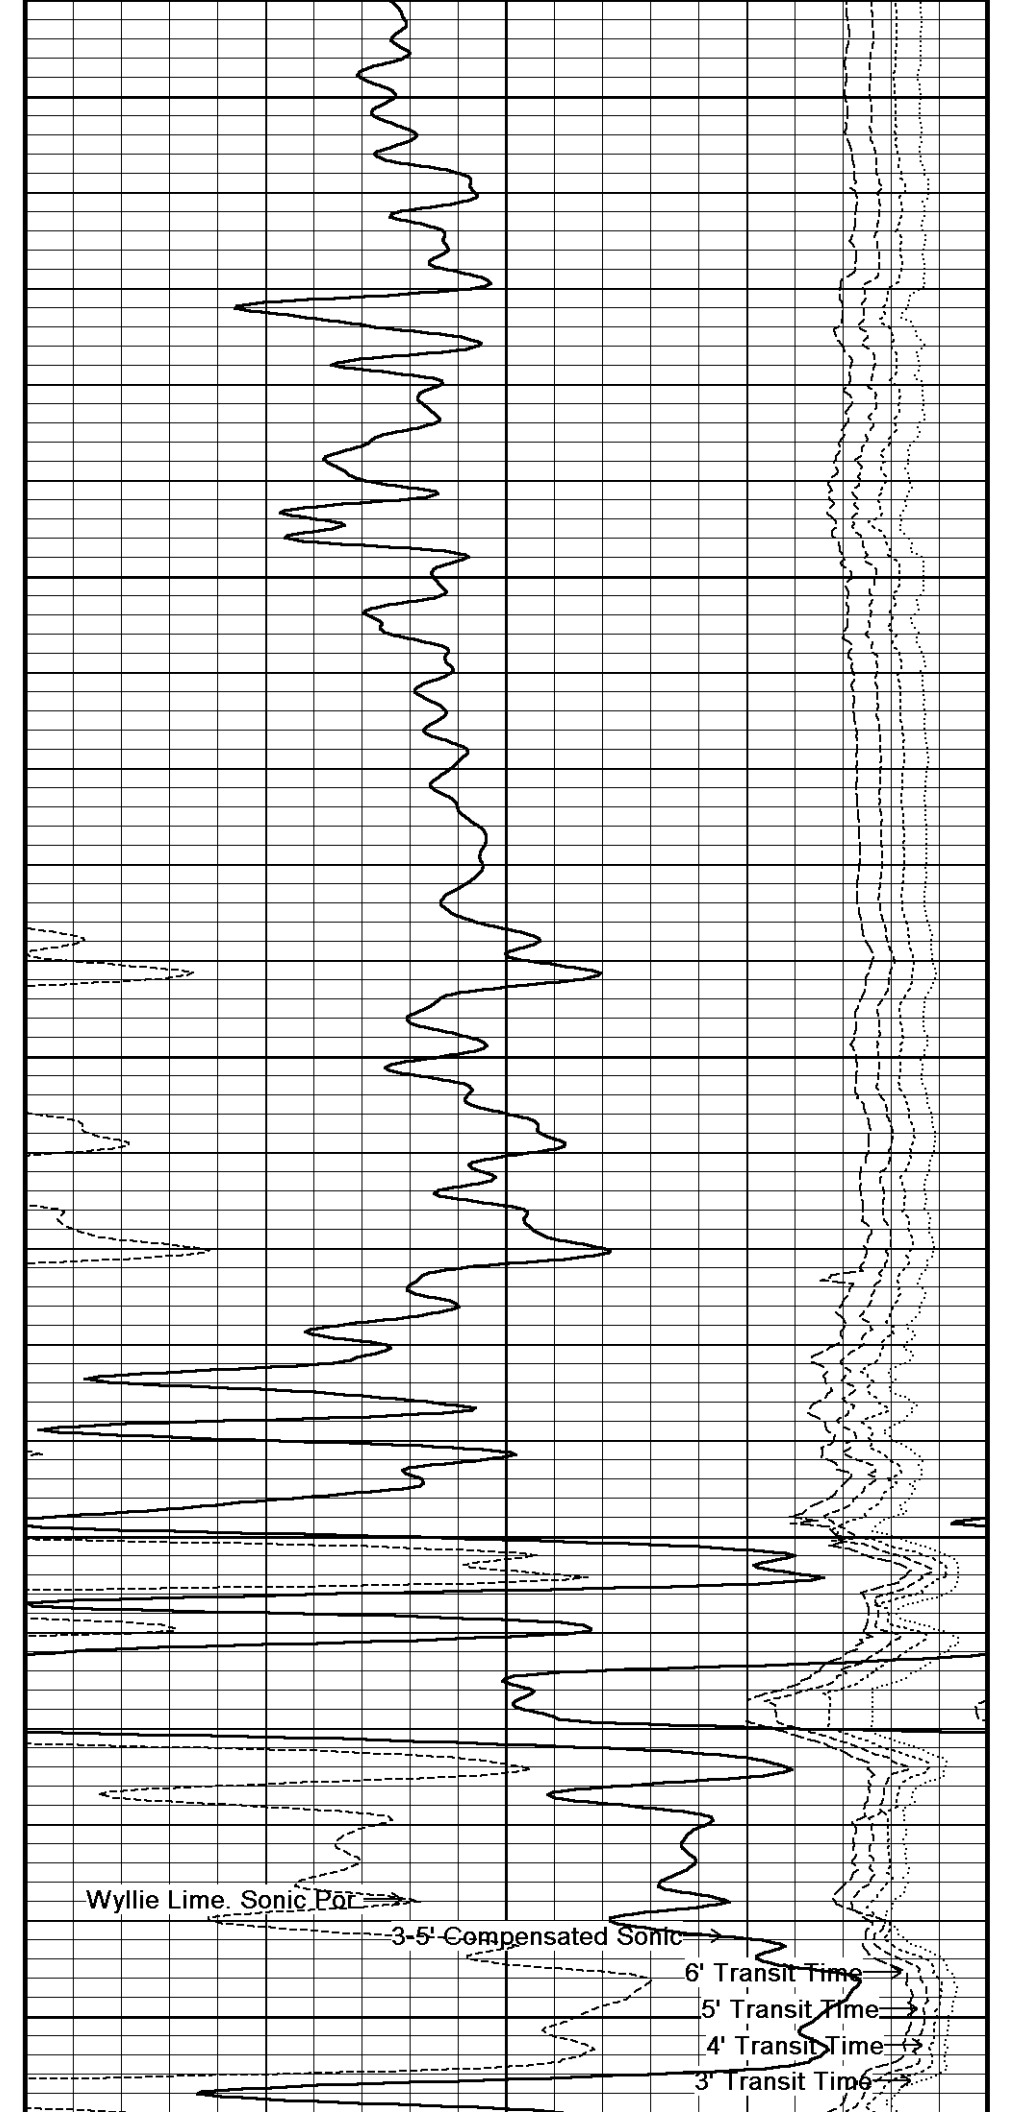
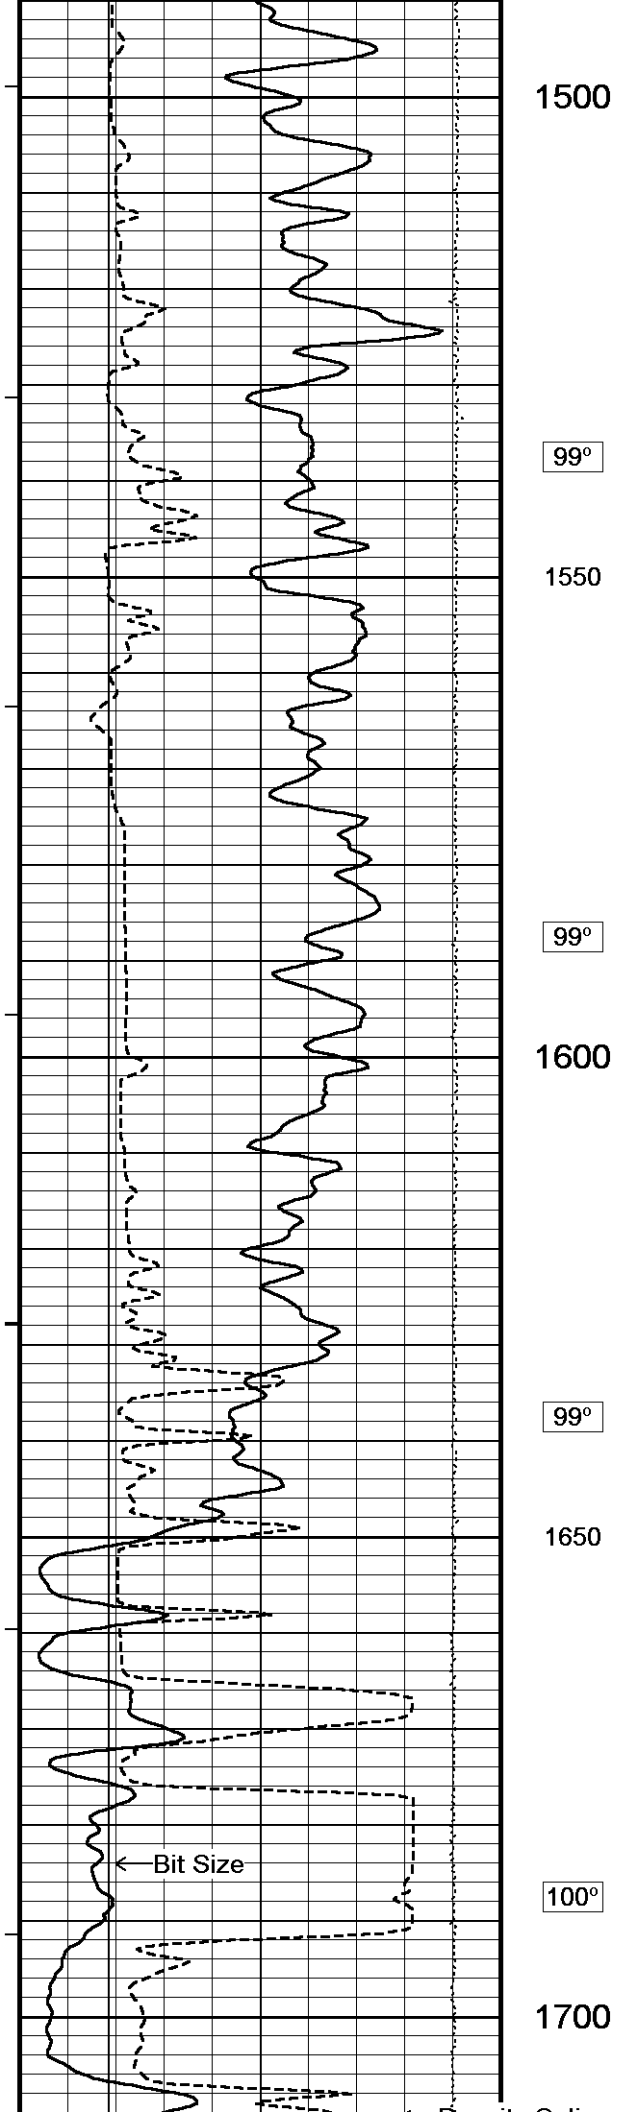


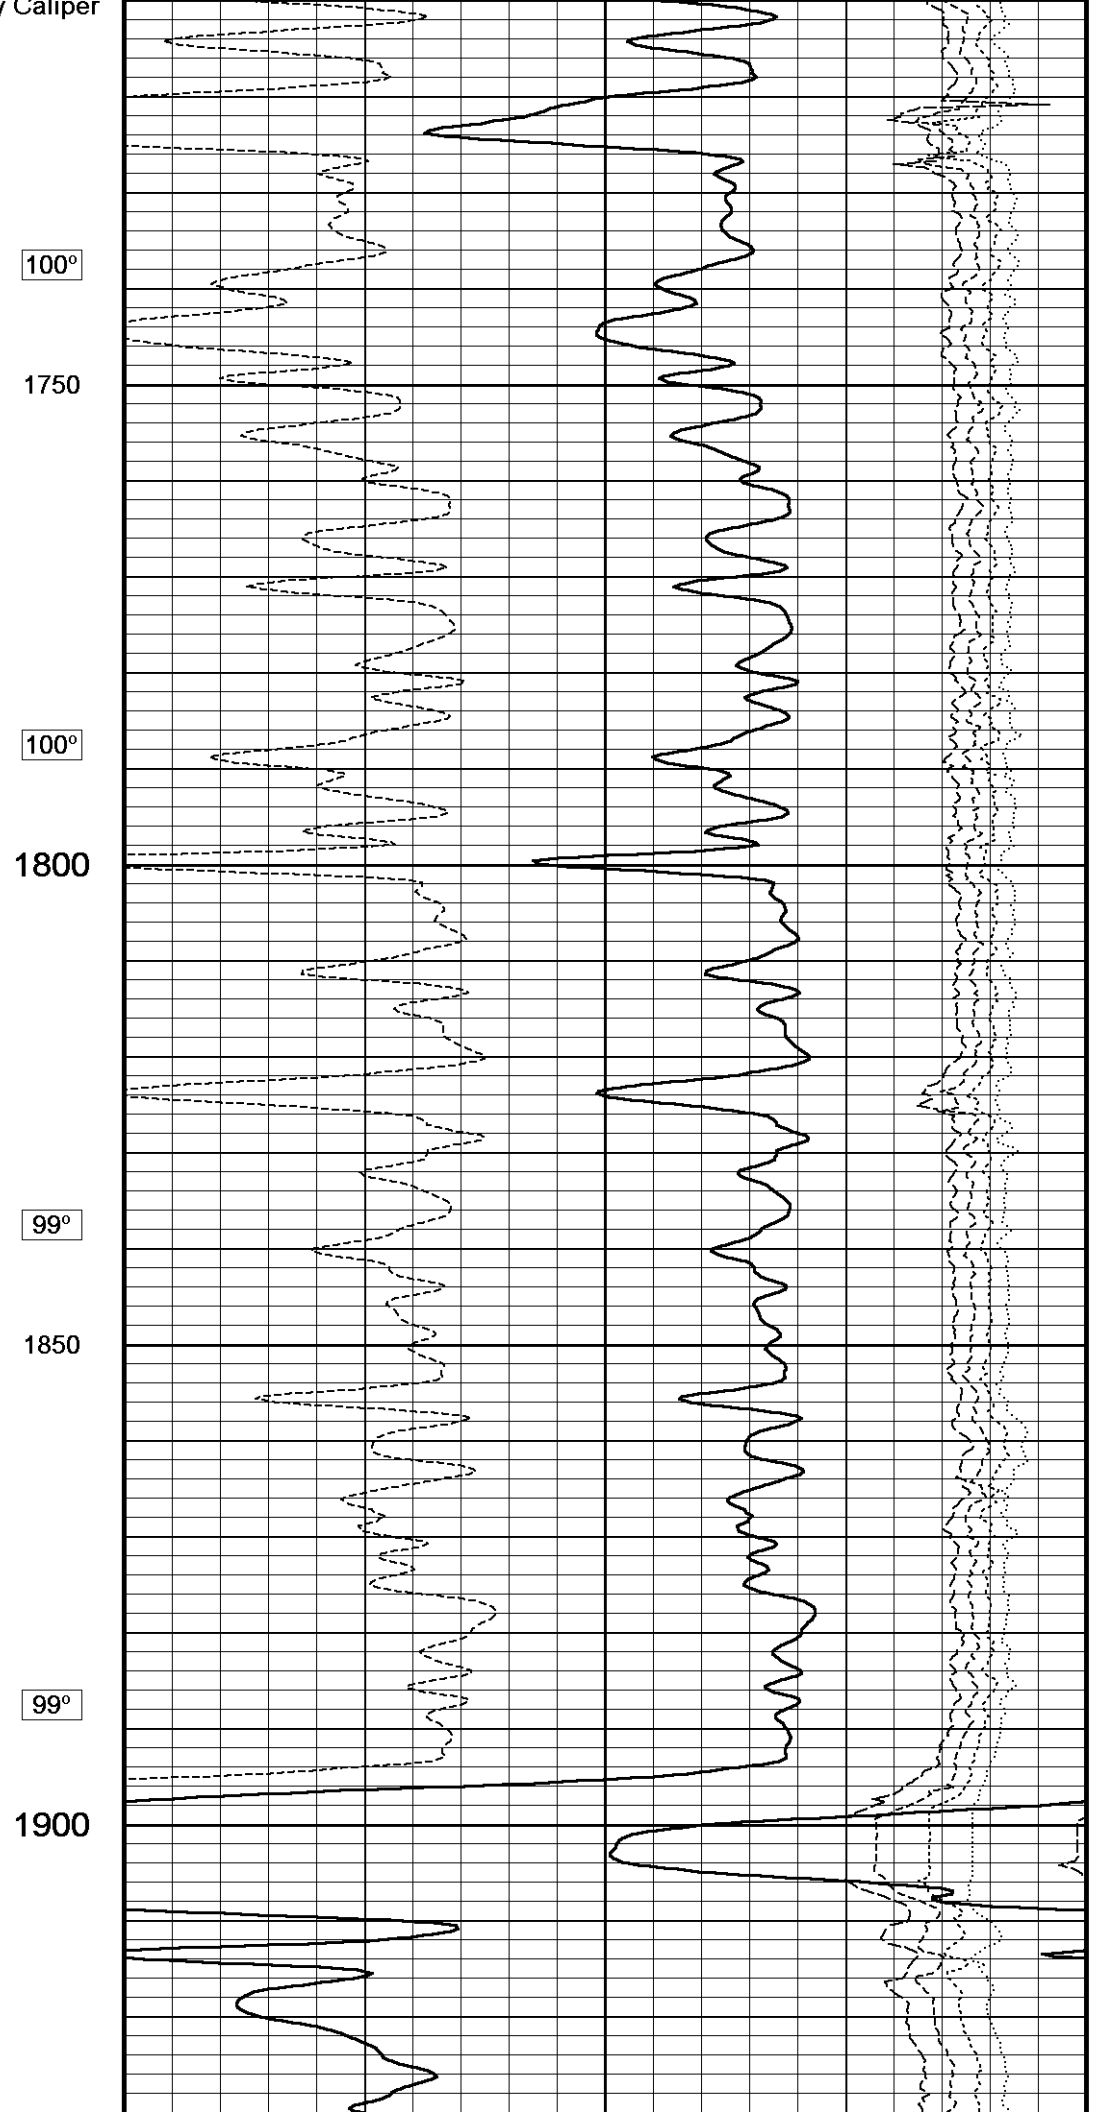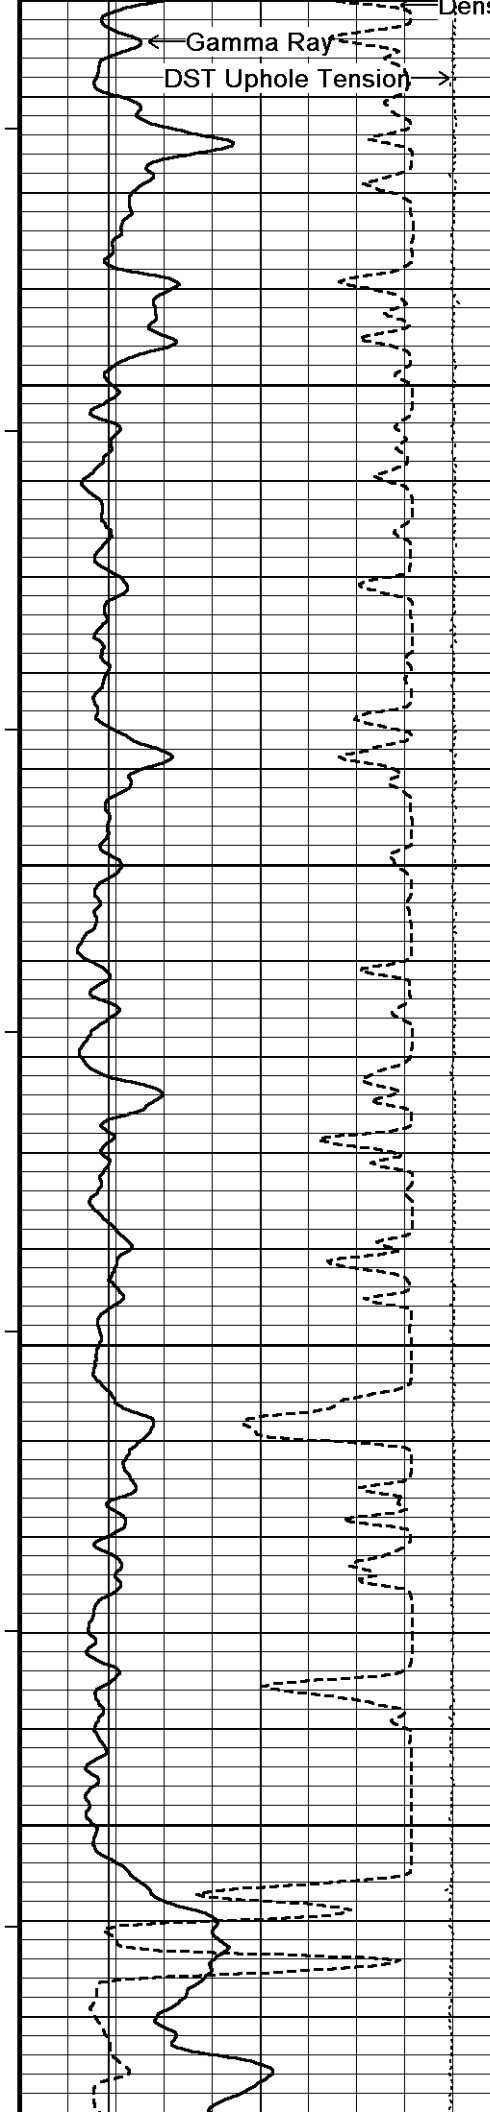


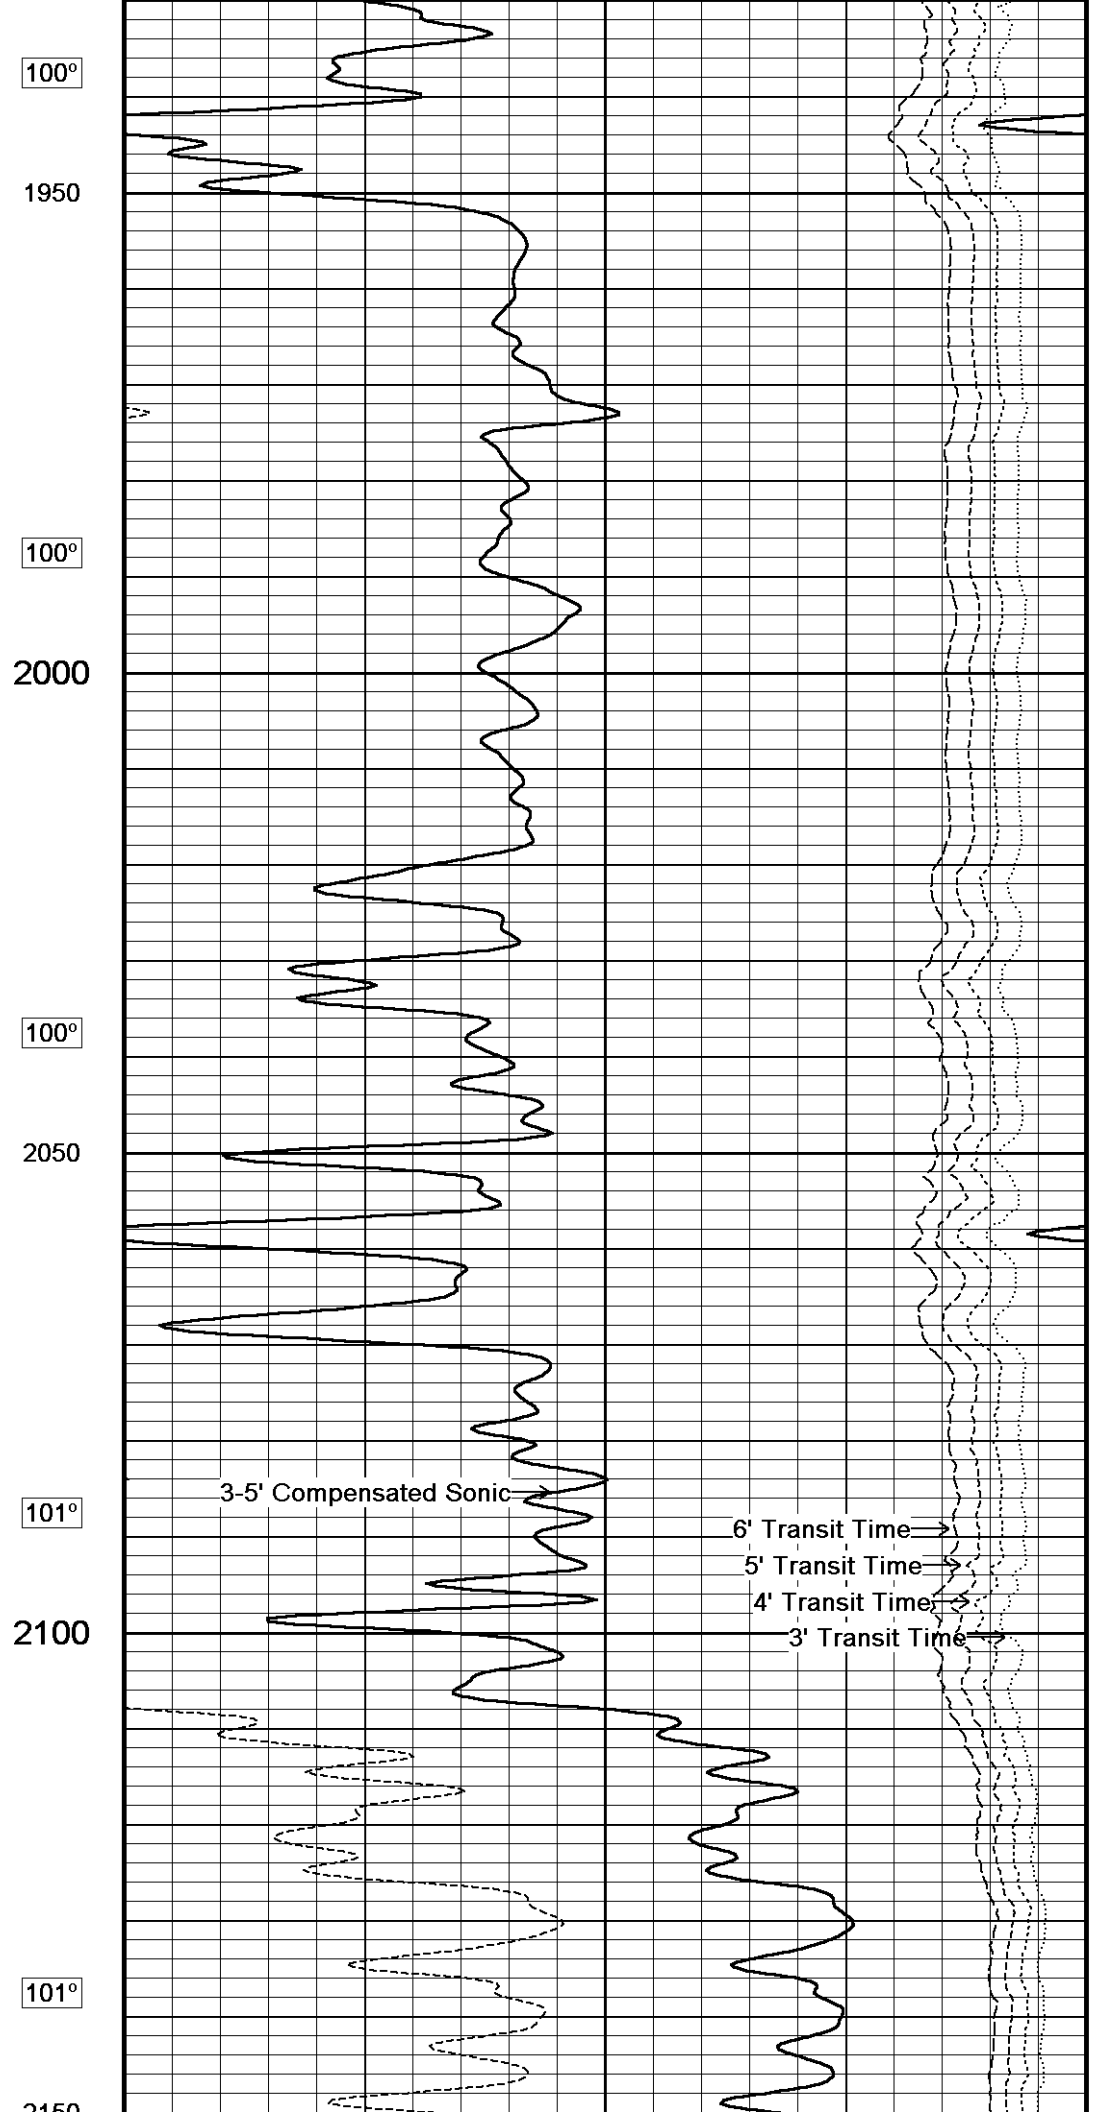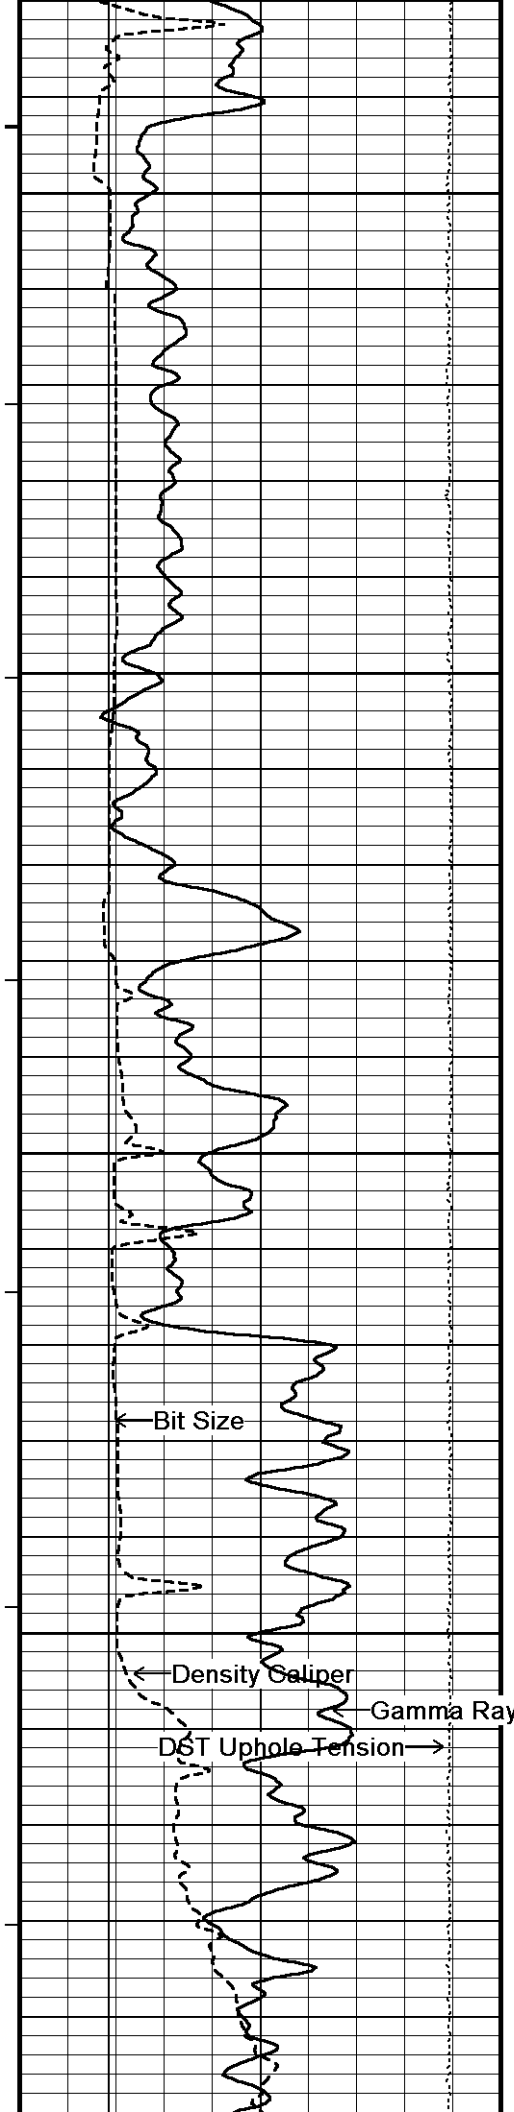

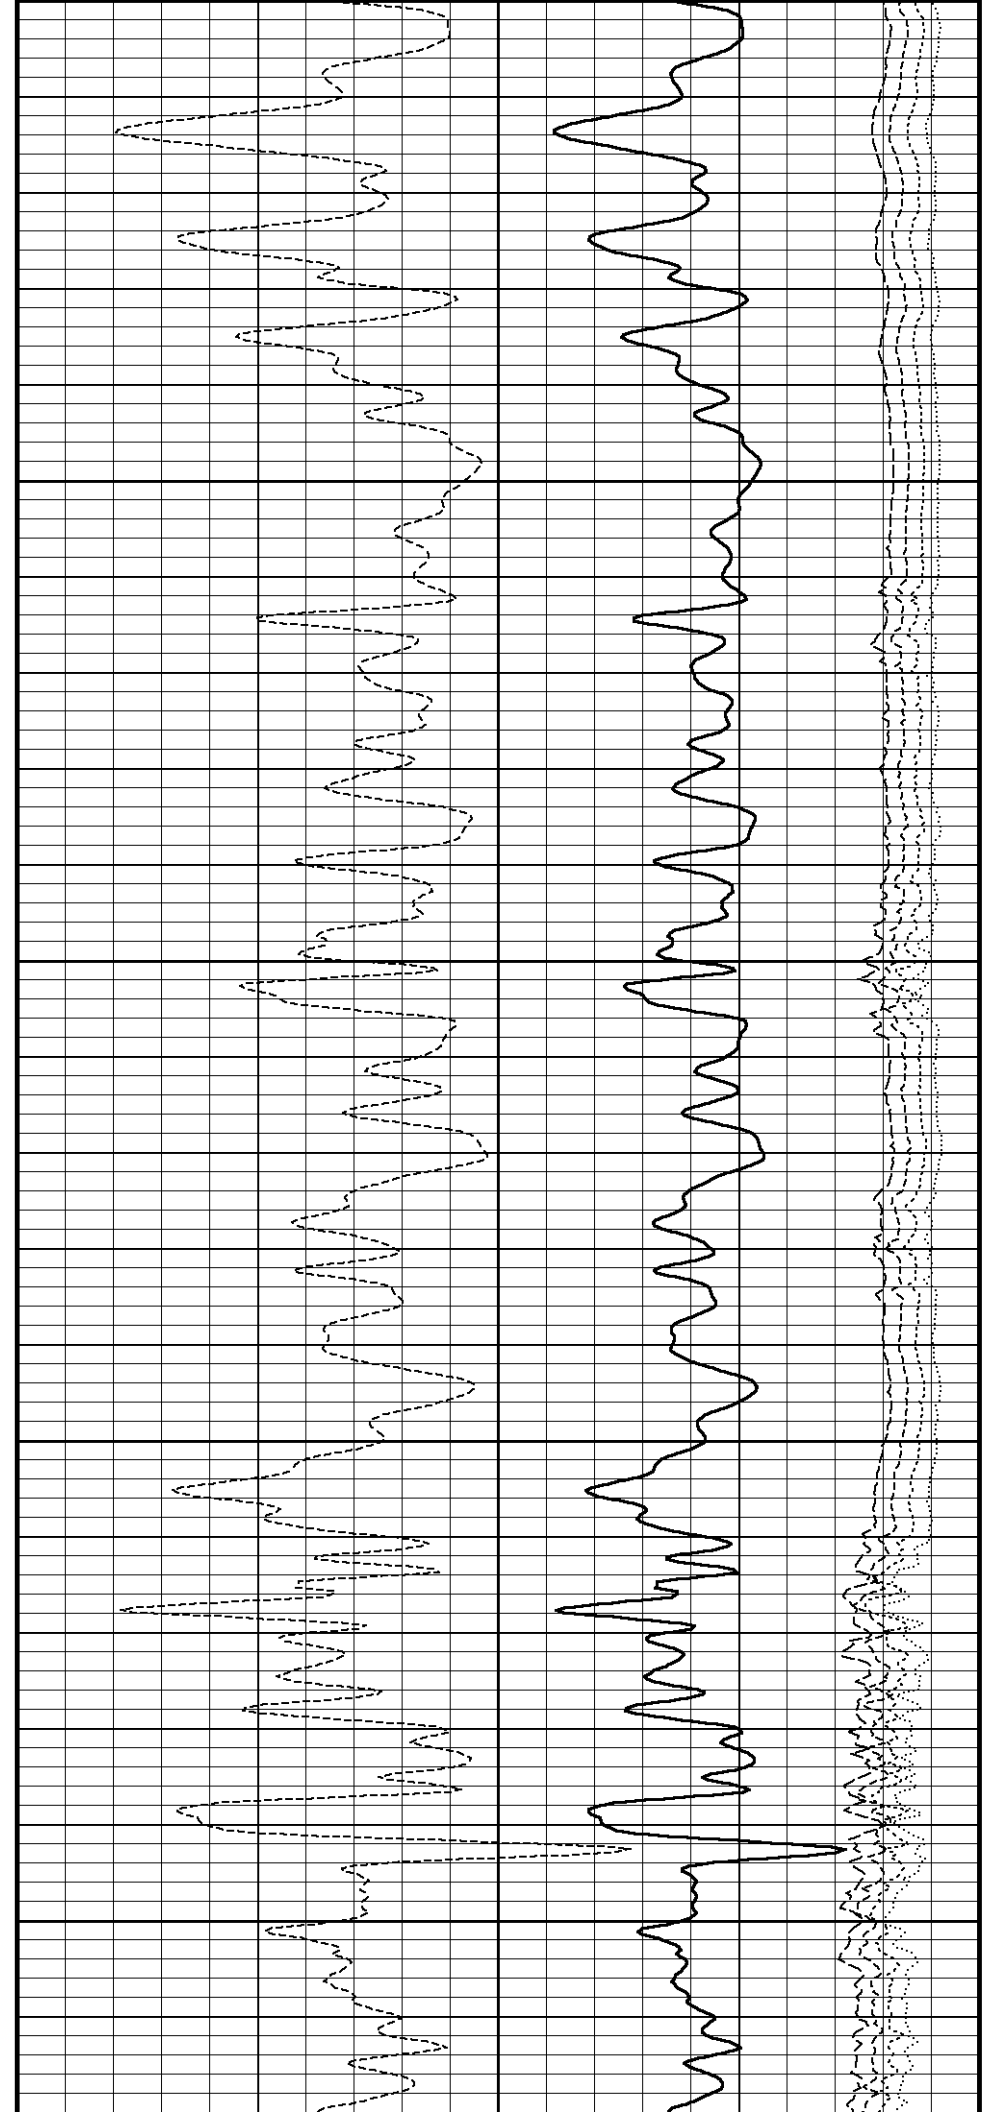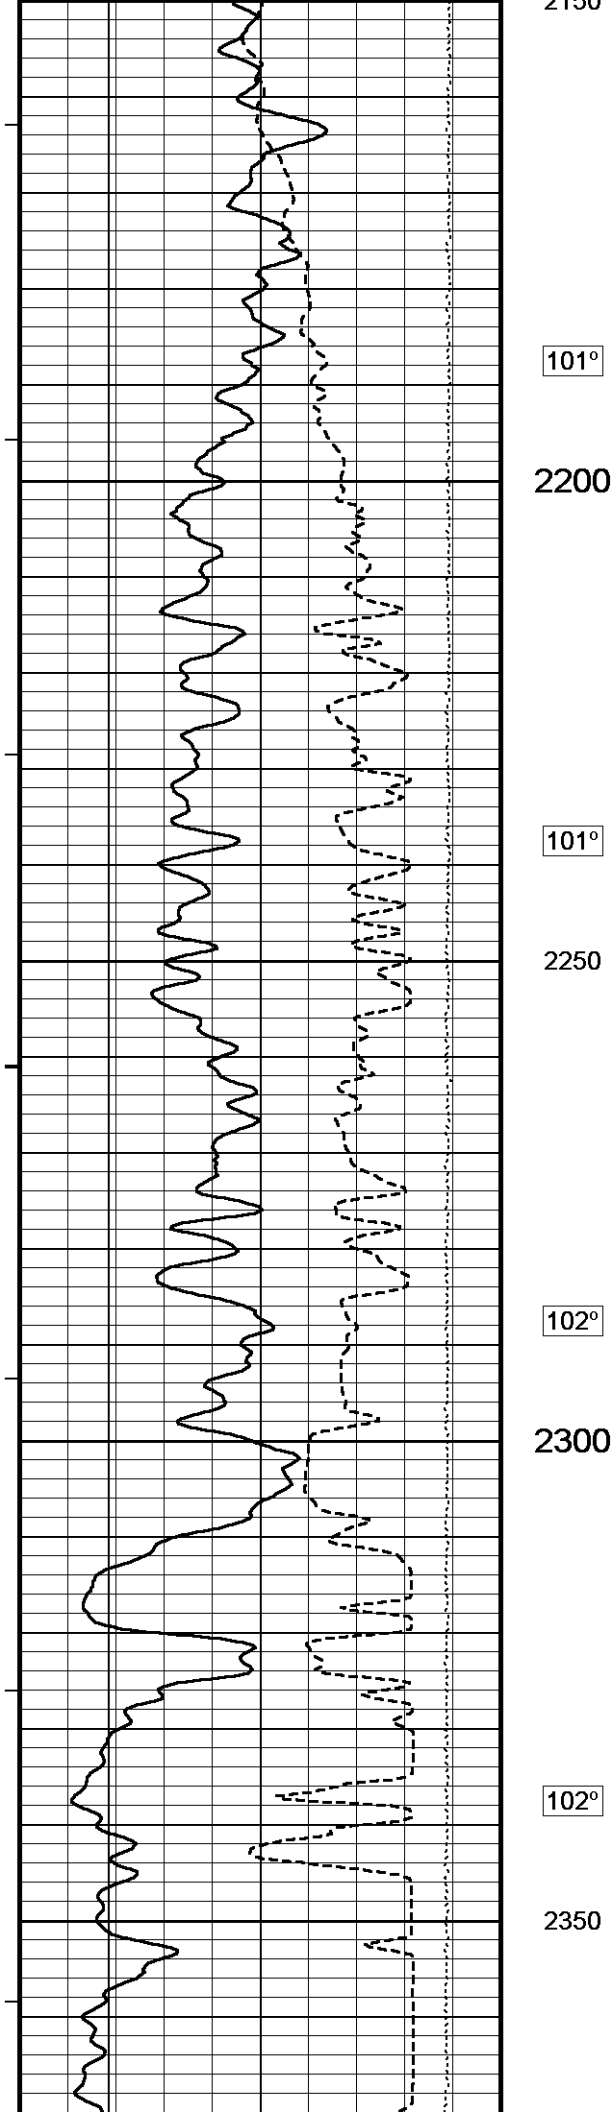


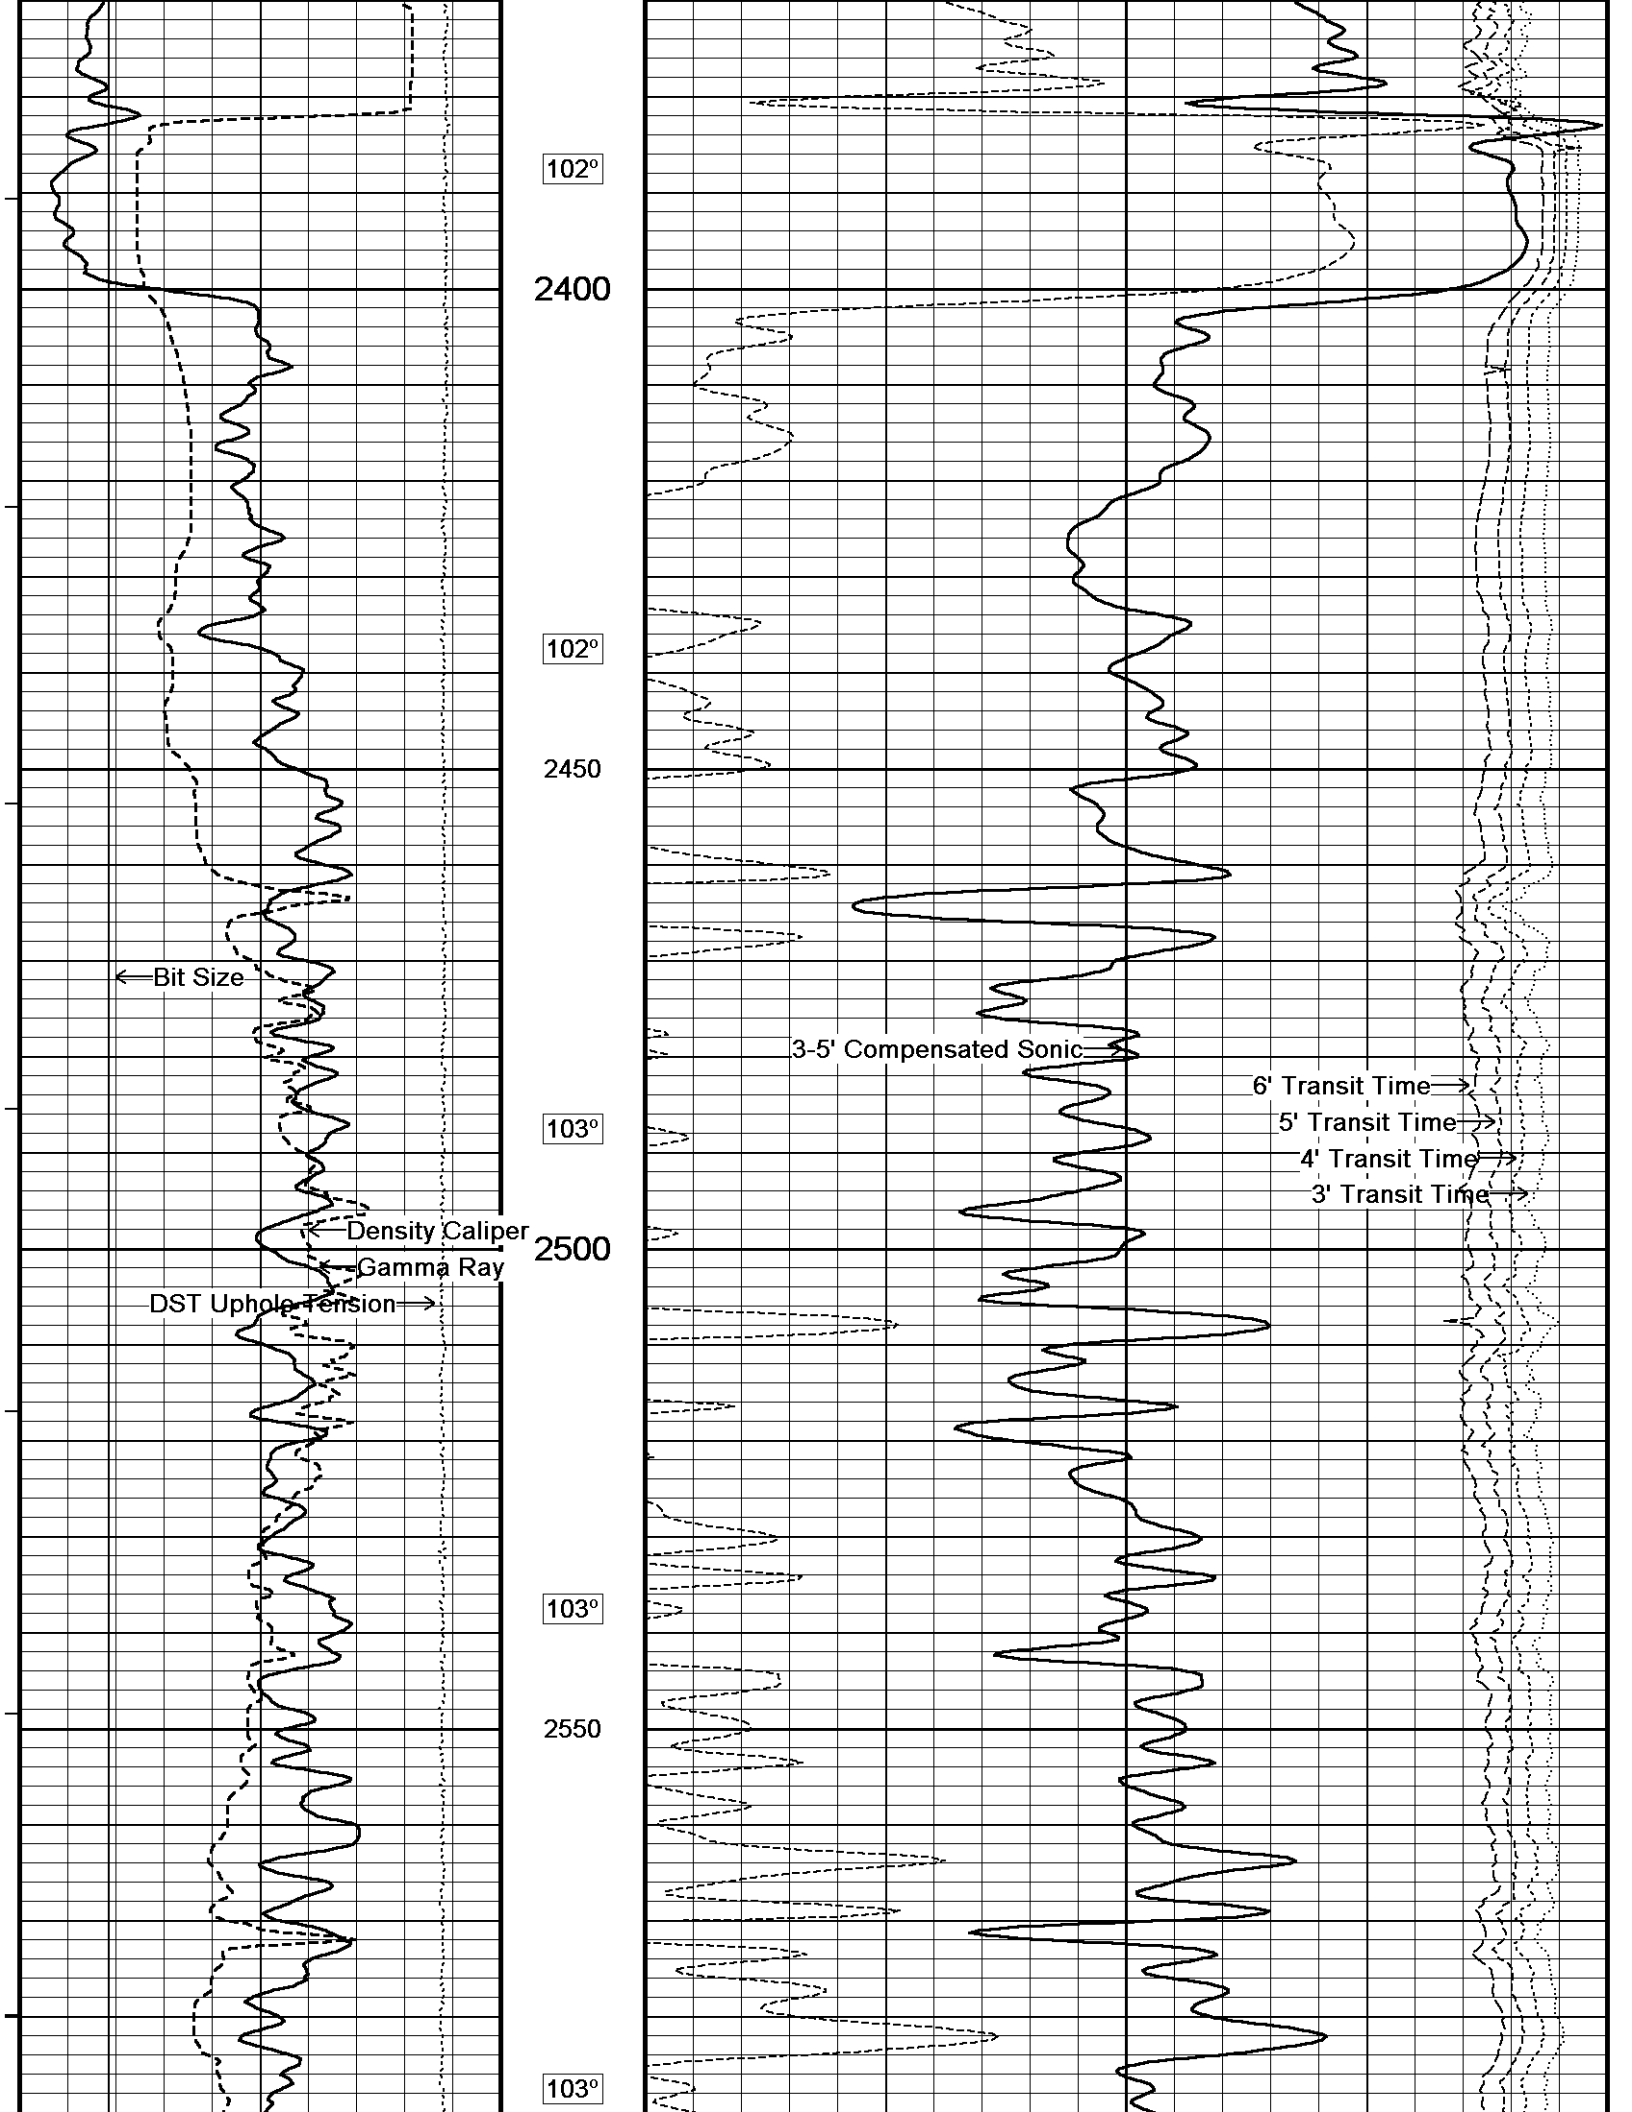


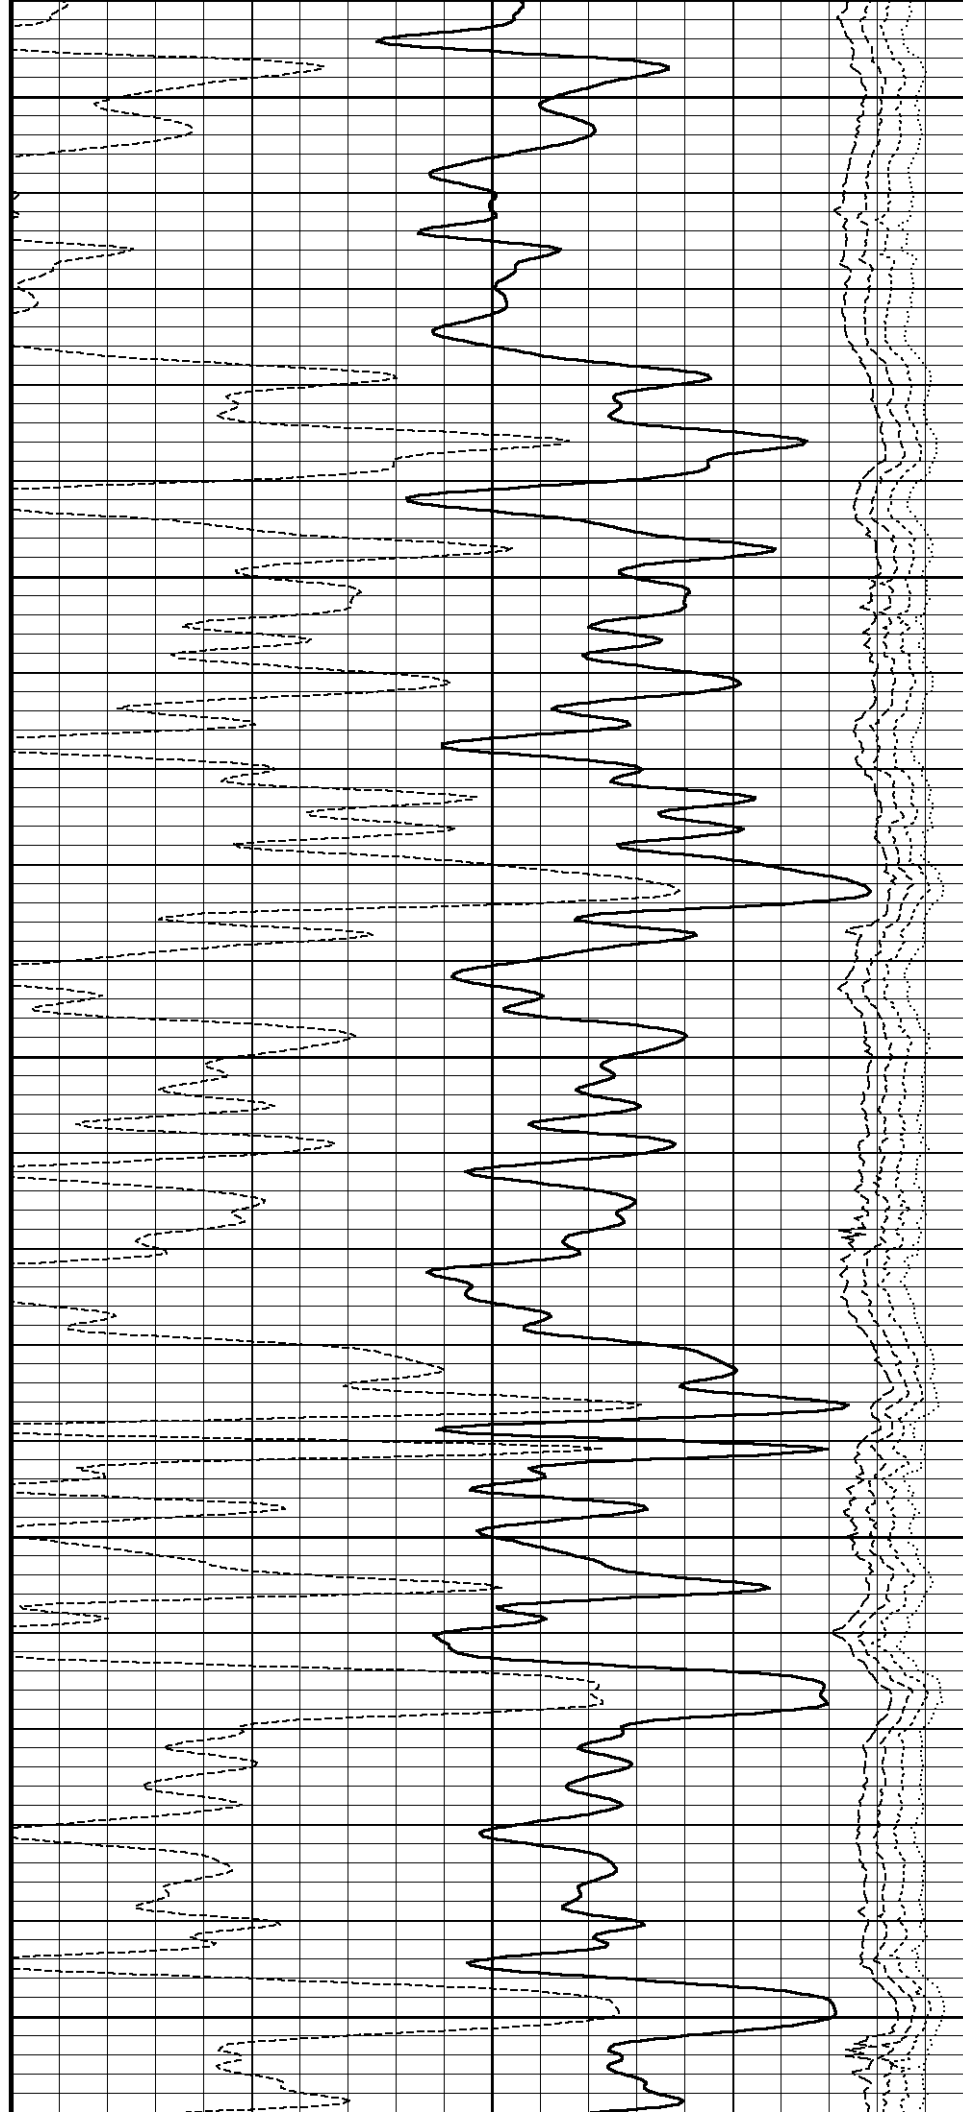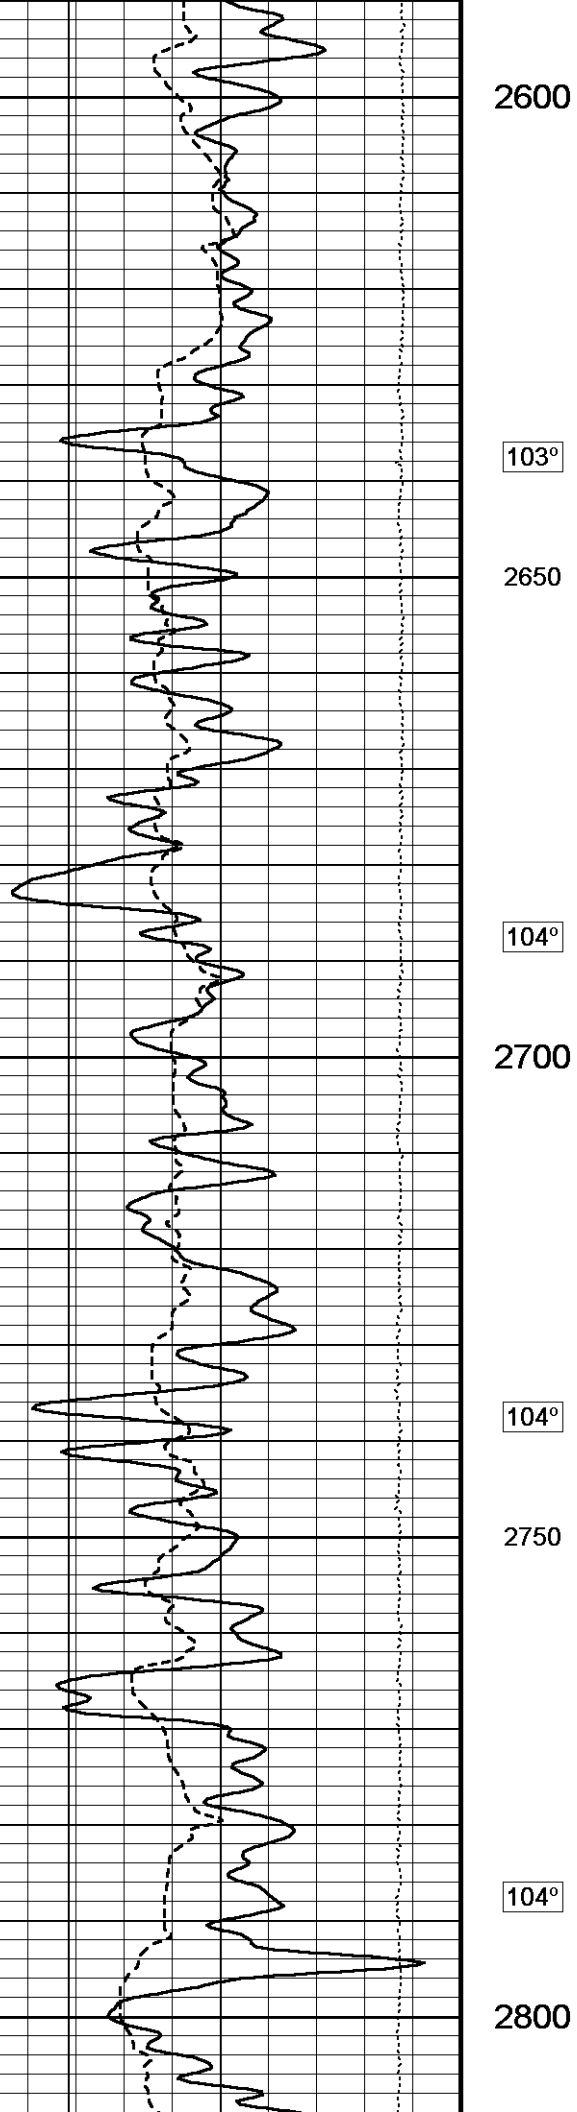

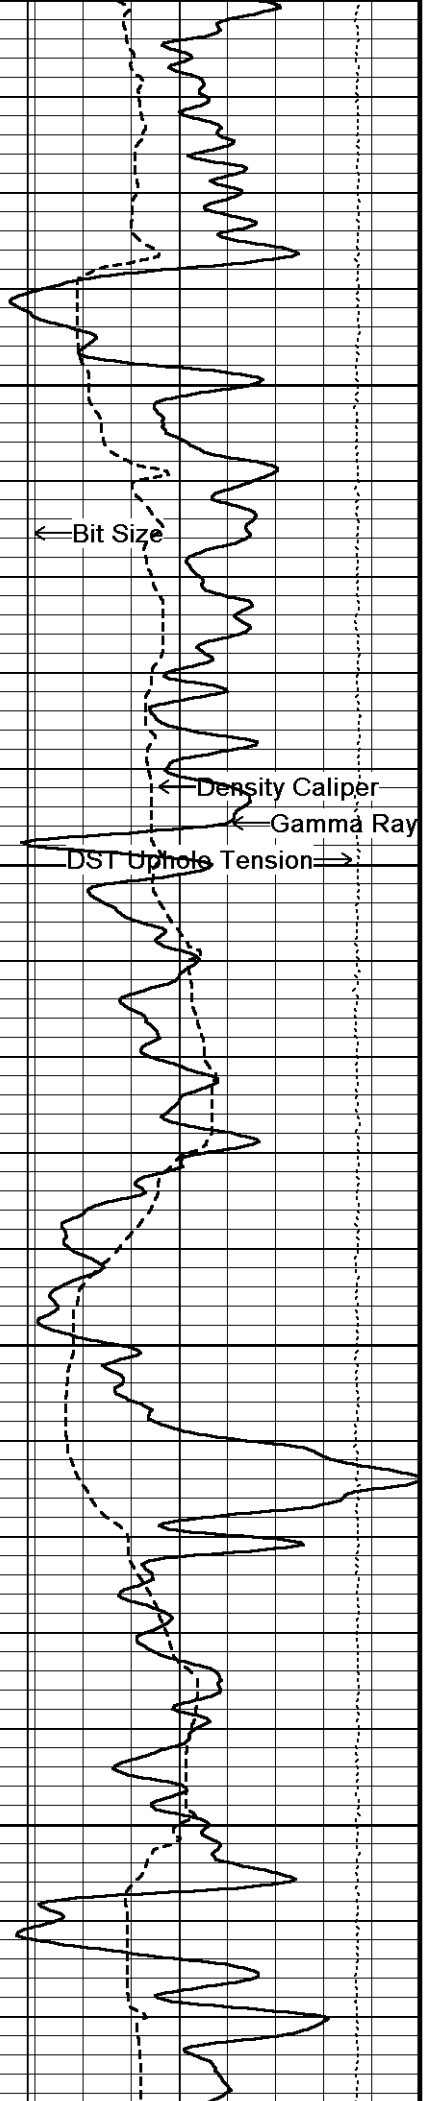


105°  
2850  
105°  
2900  
105°  
2950  
105°  
3000

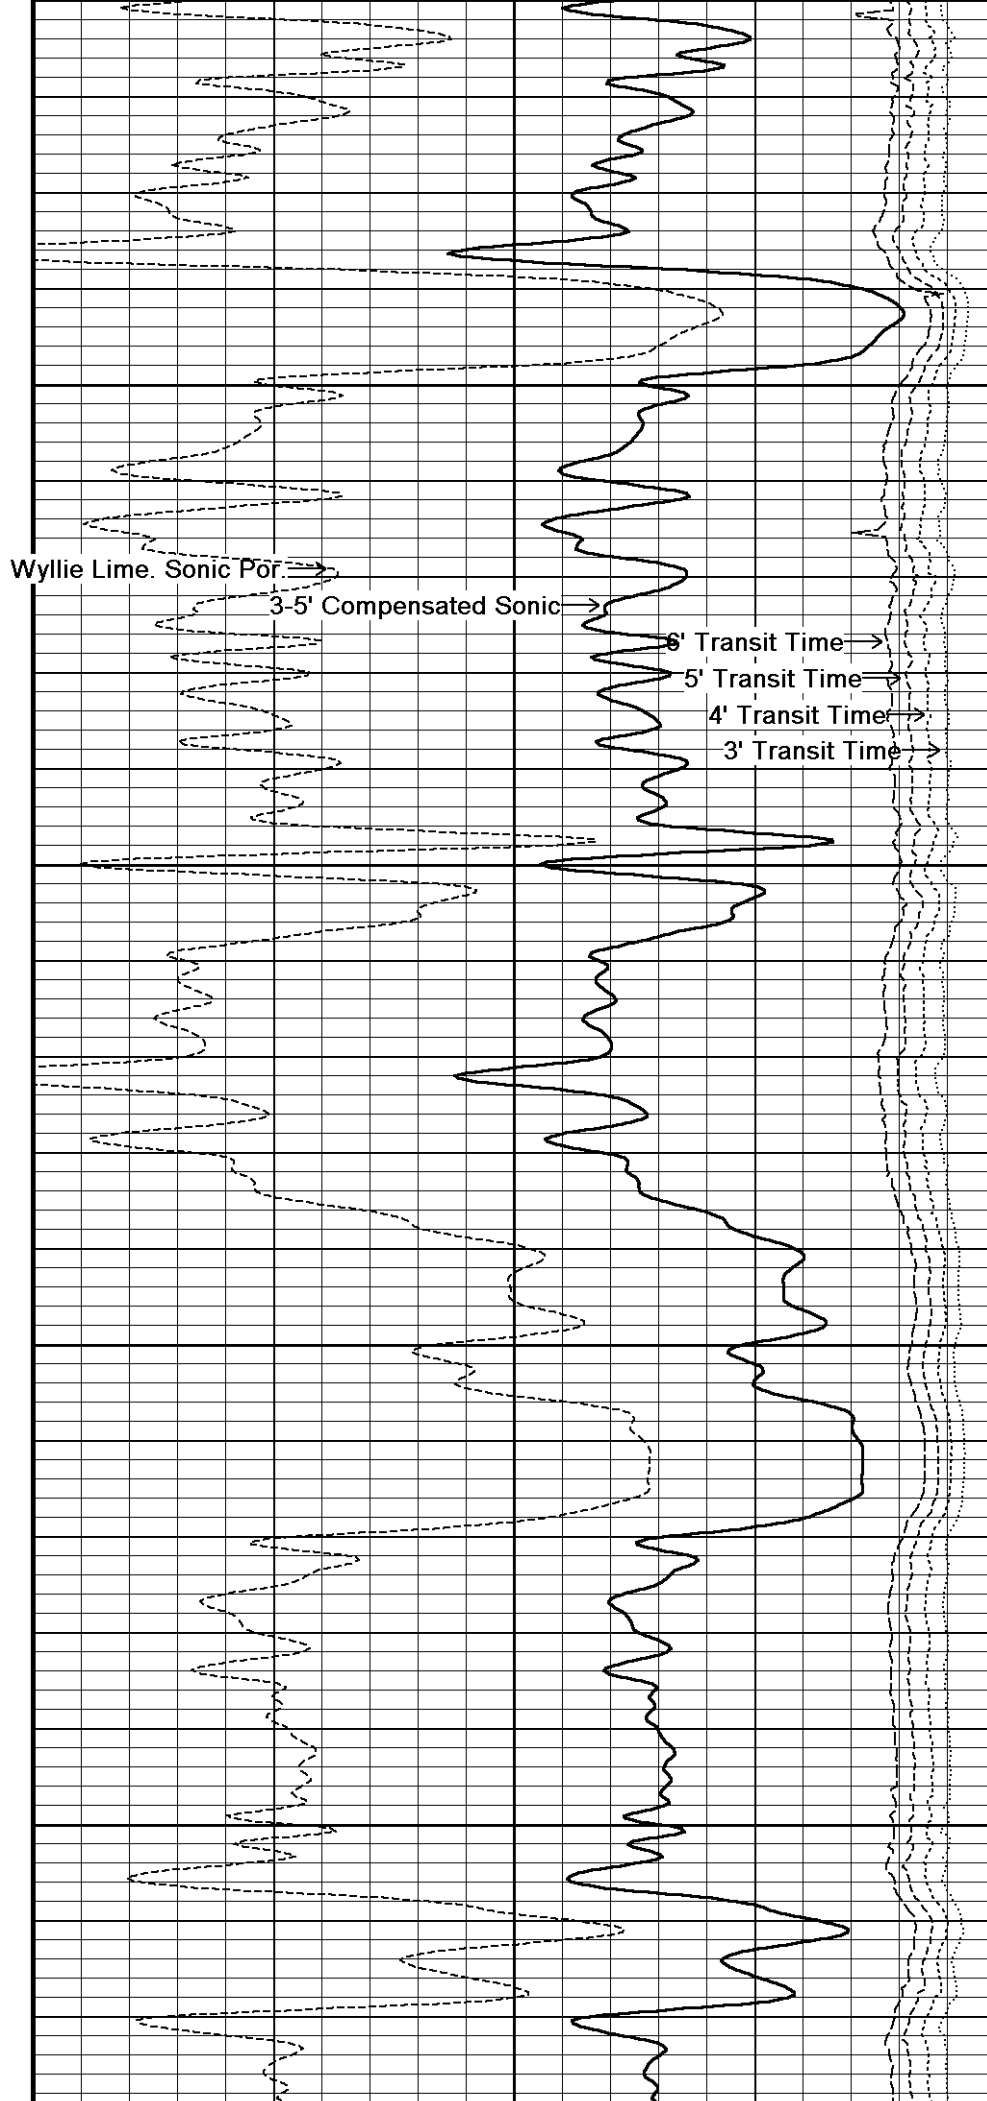

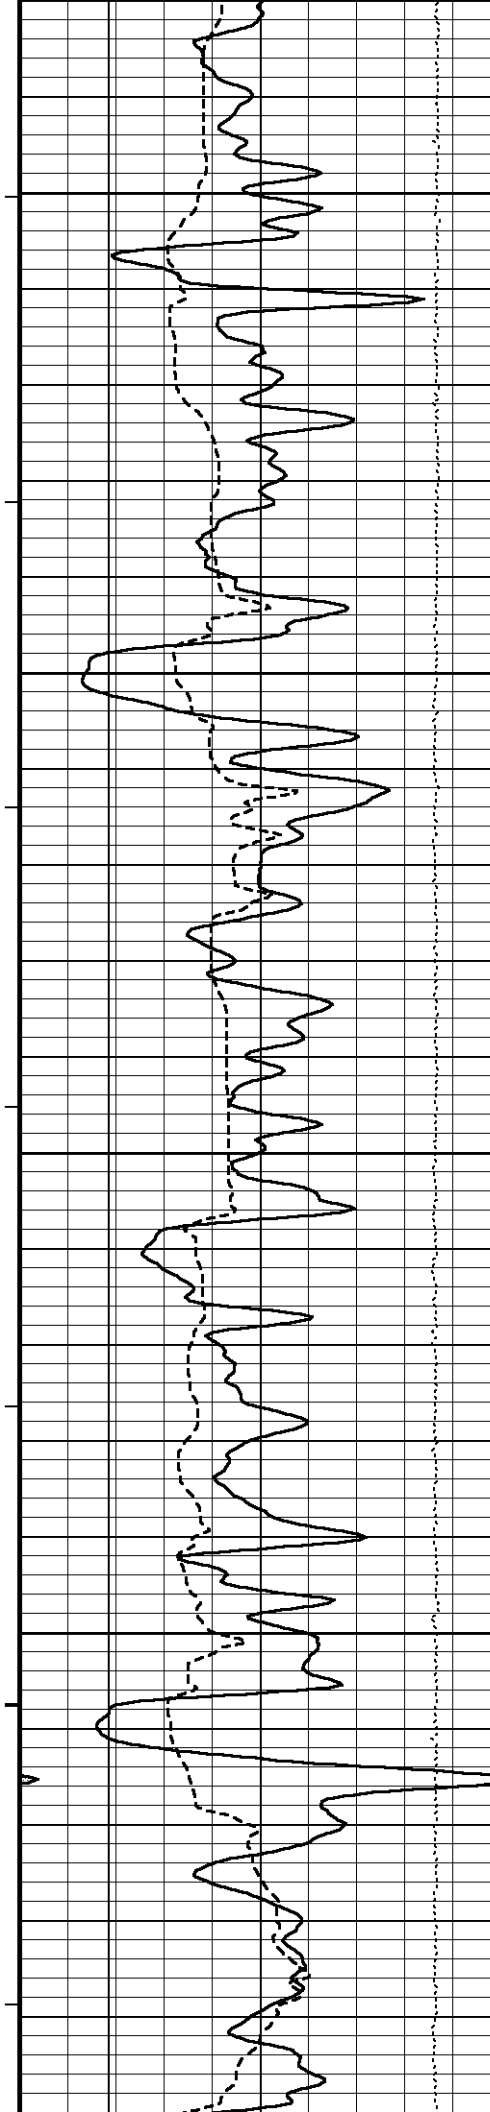

105°  
3050  
106°  
3100  
106°  
3150  
106°  
3200  
106°  
3250

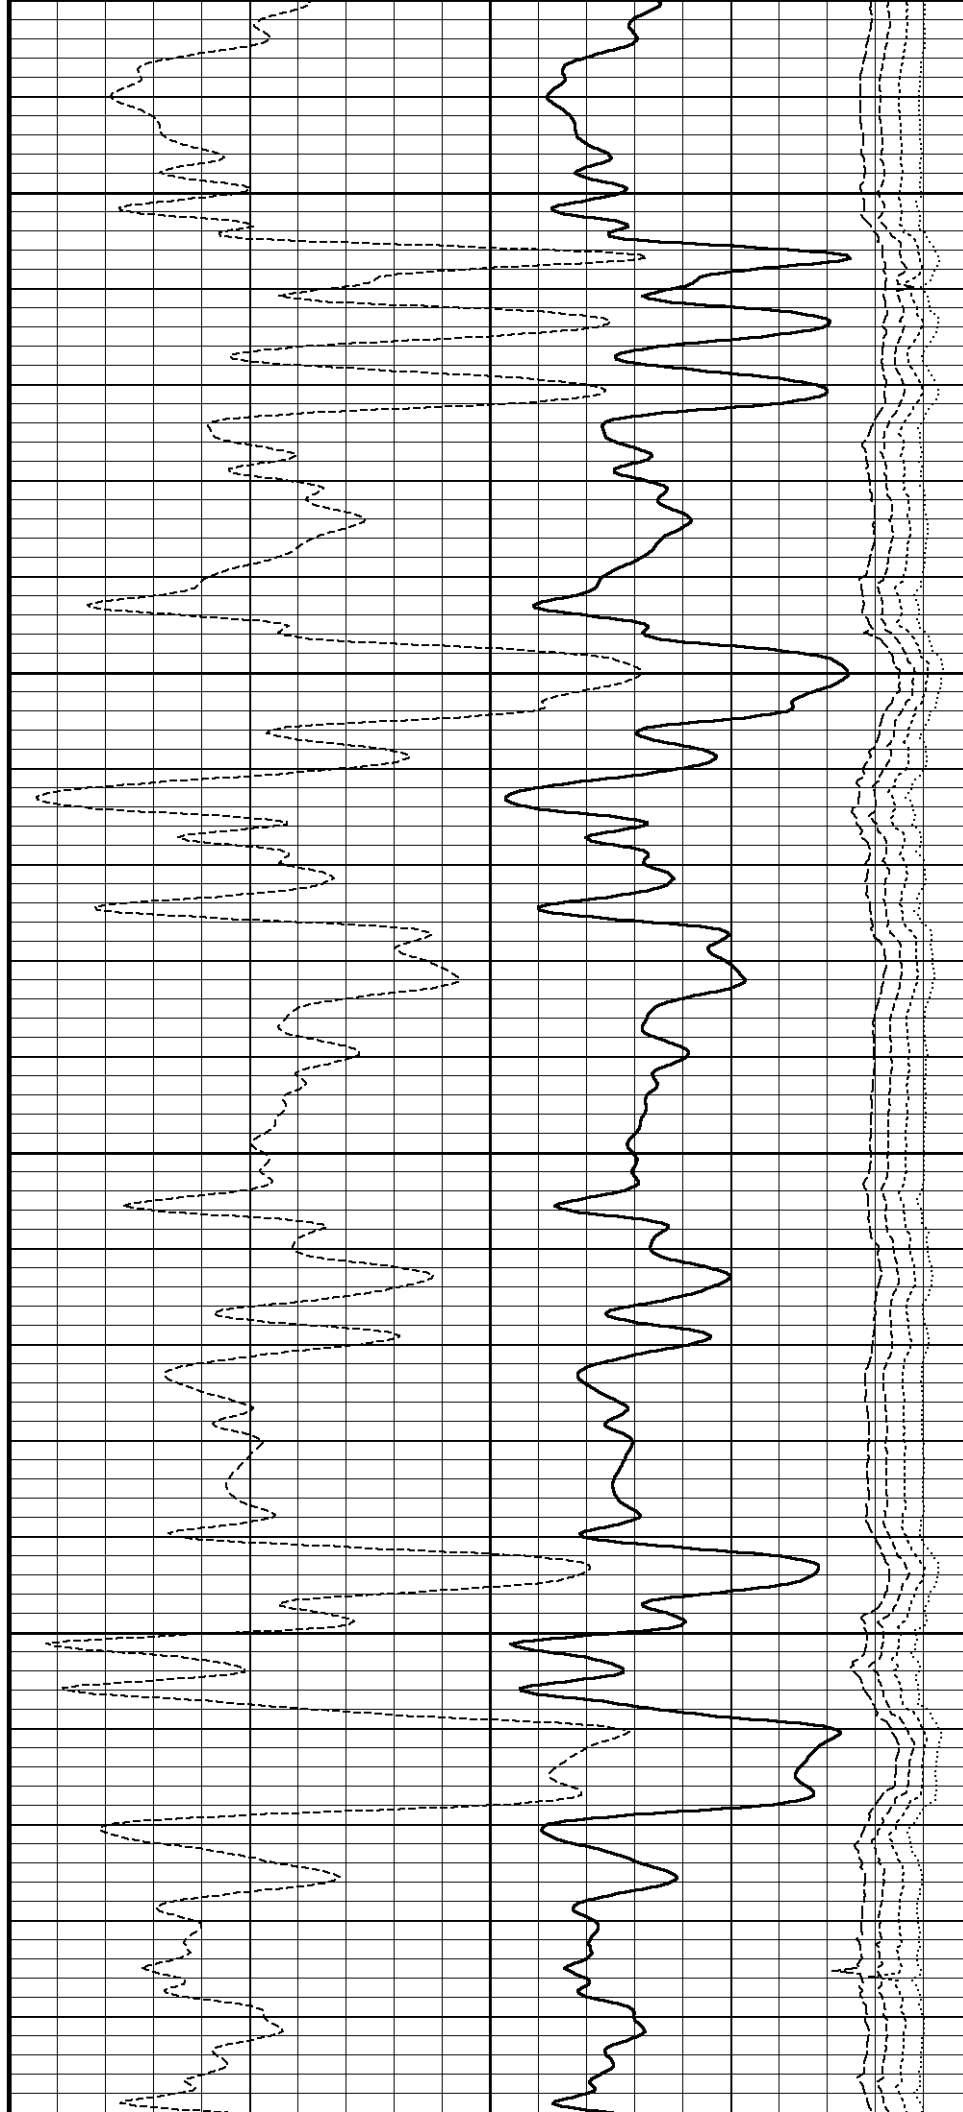



3250

← Bit Size

← Density Caliper

← Gamma Ray

DST Uphole Tension →

107°

3300

107°

3350

107°

3400

108°

3450

Wyllie Lime. Sonic Por. →



3-5' Compensated Sonic →



6' Transit Time →


5' Transit Time →

4' Transit Time →

3' Transit Time →

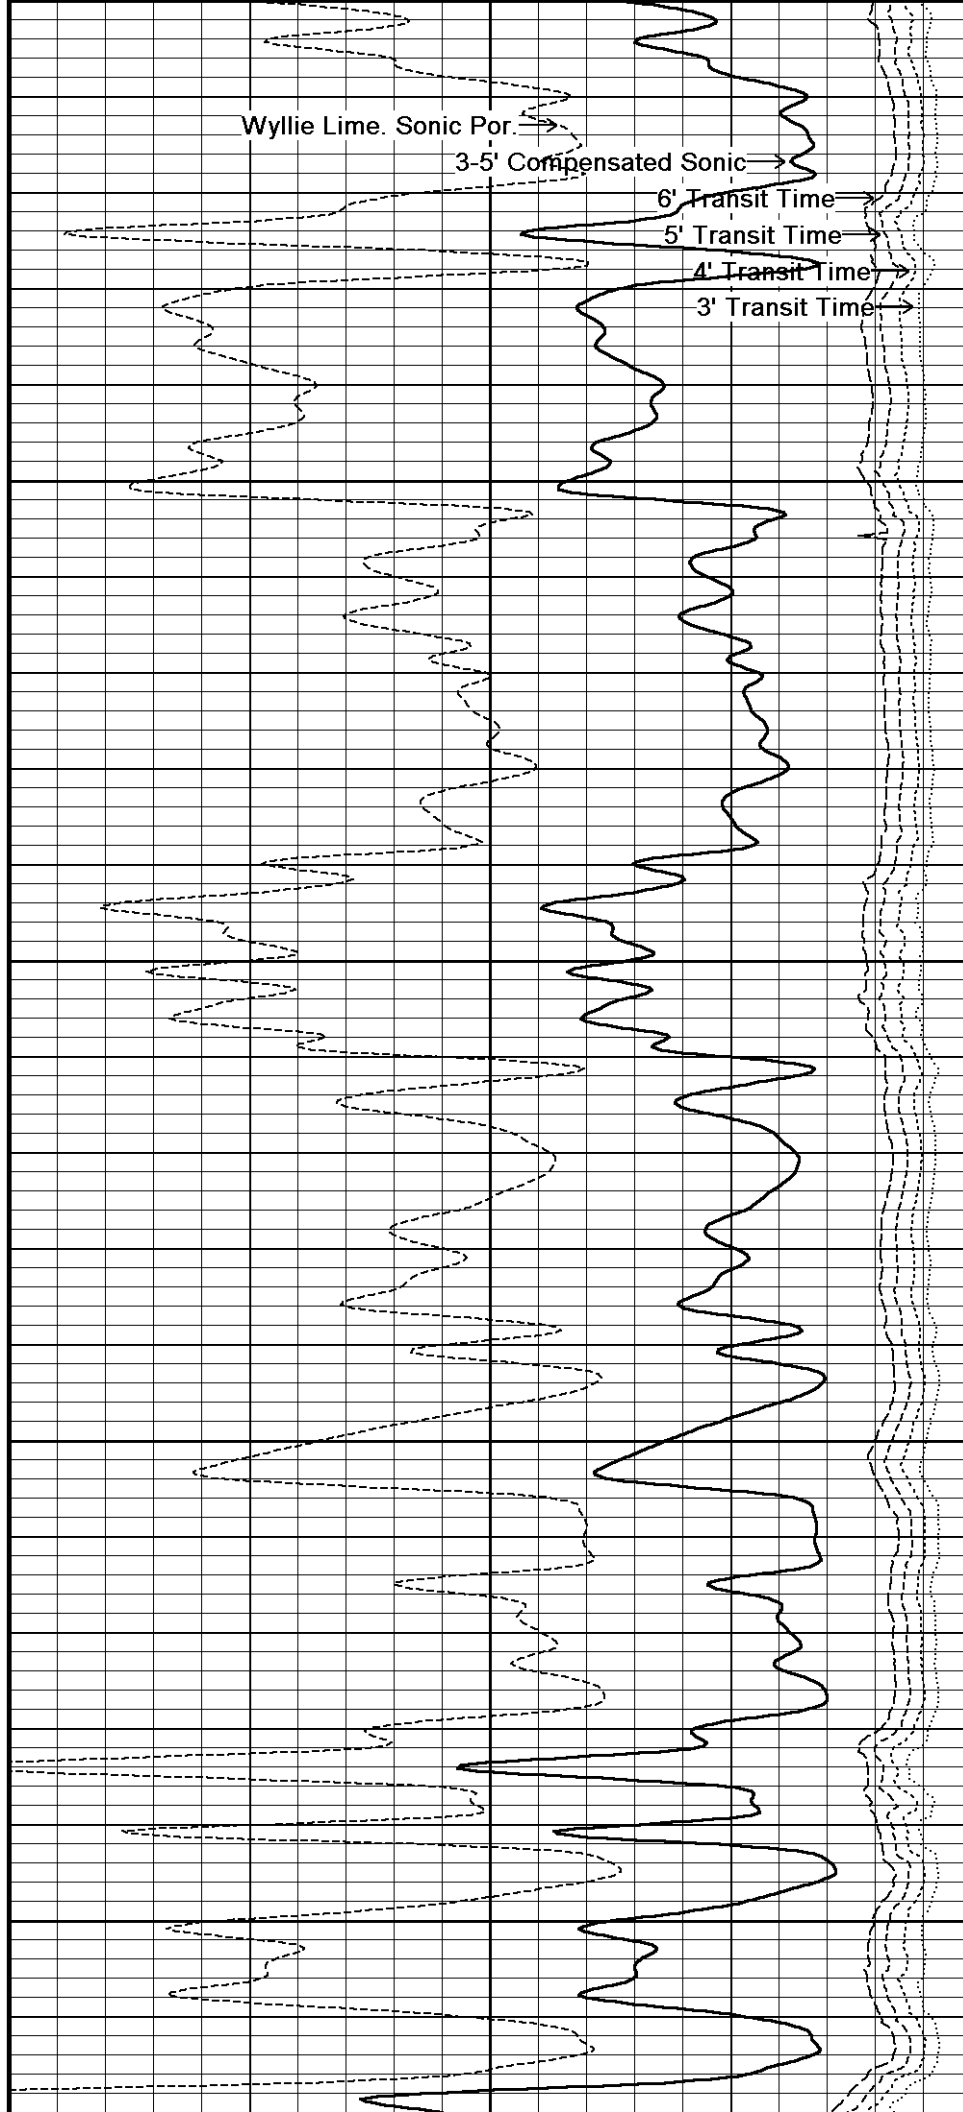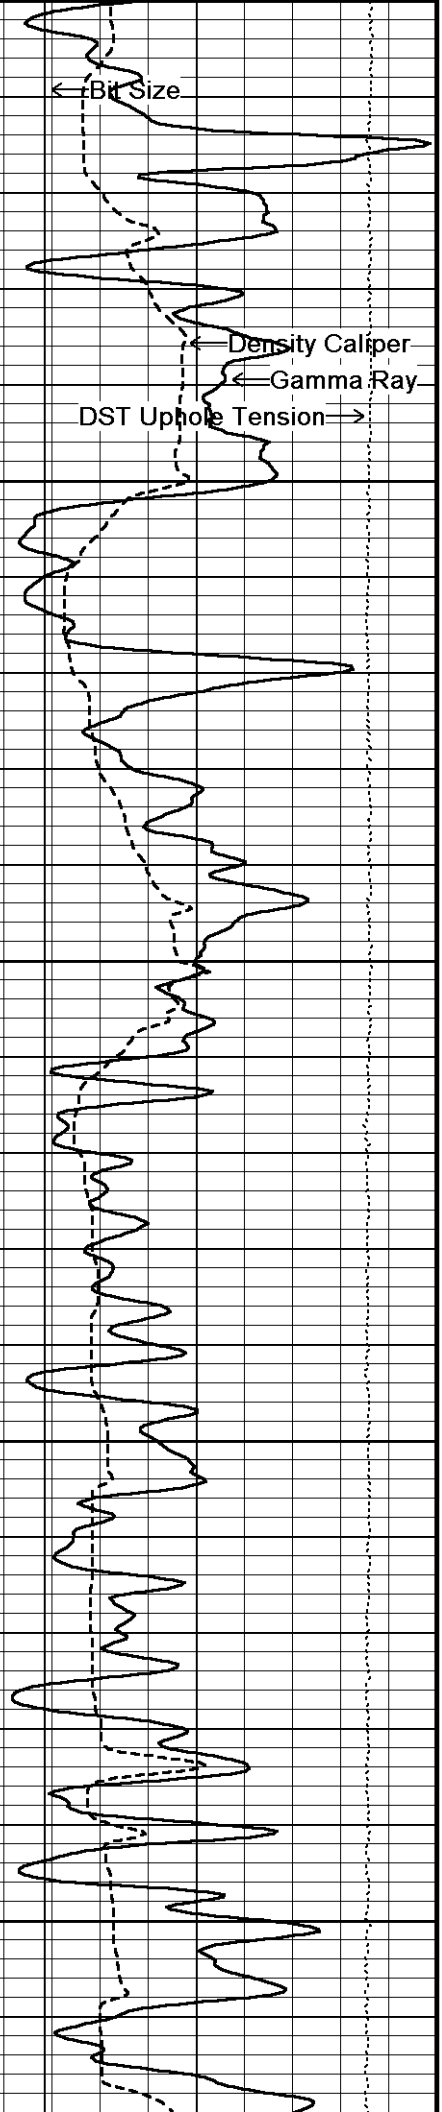

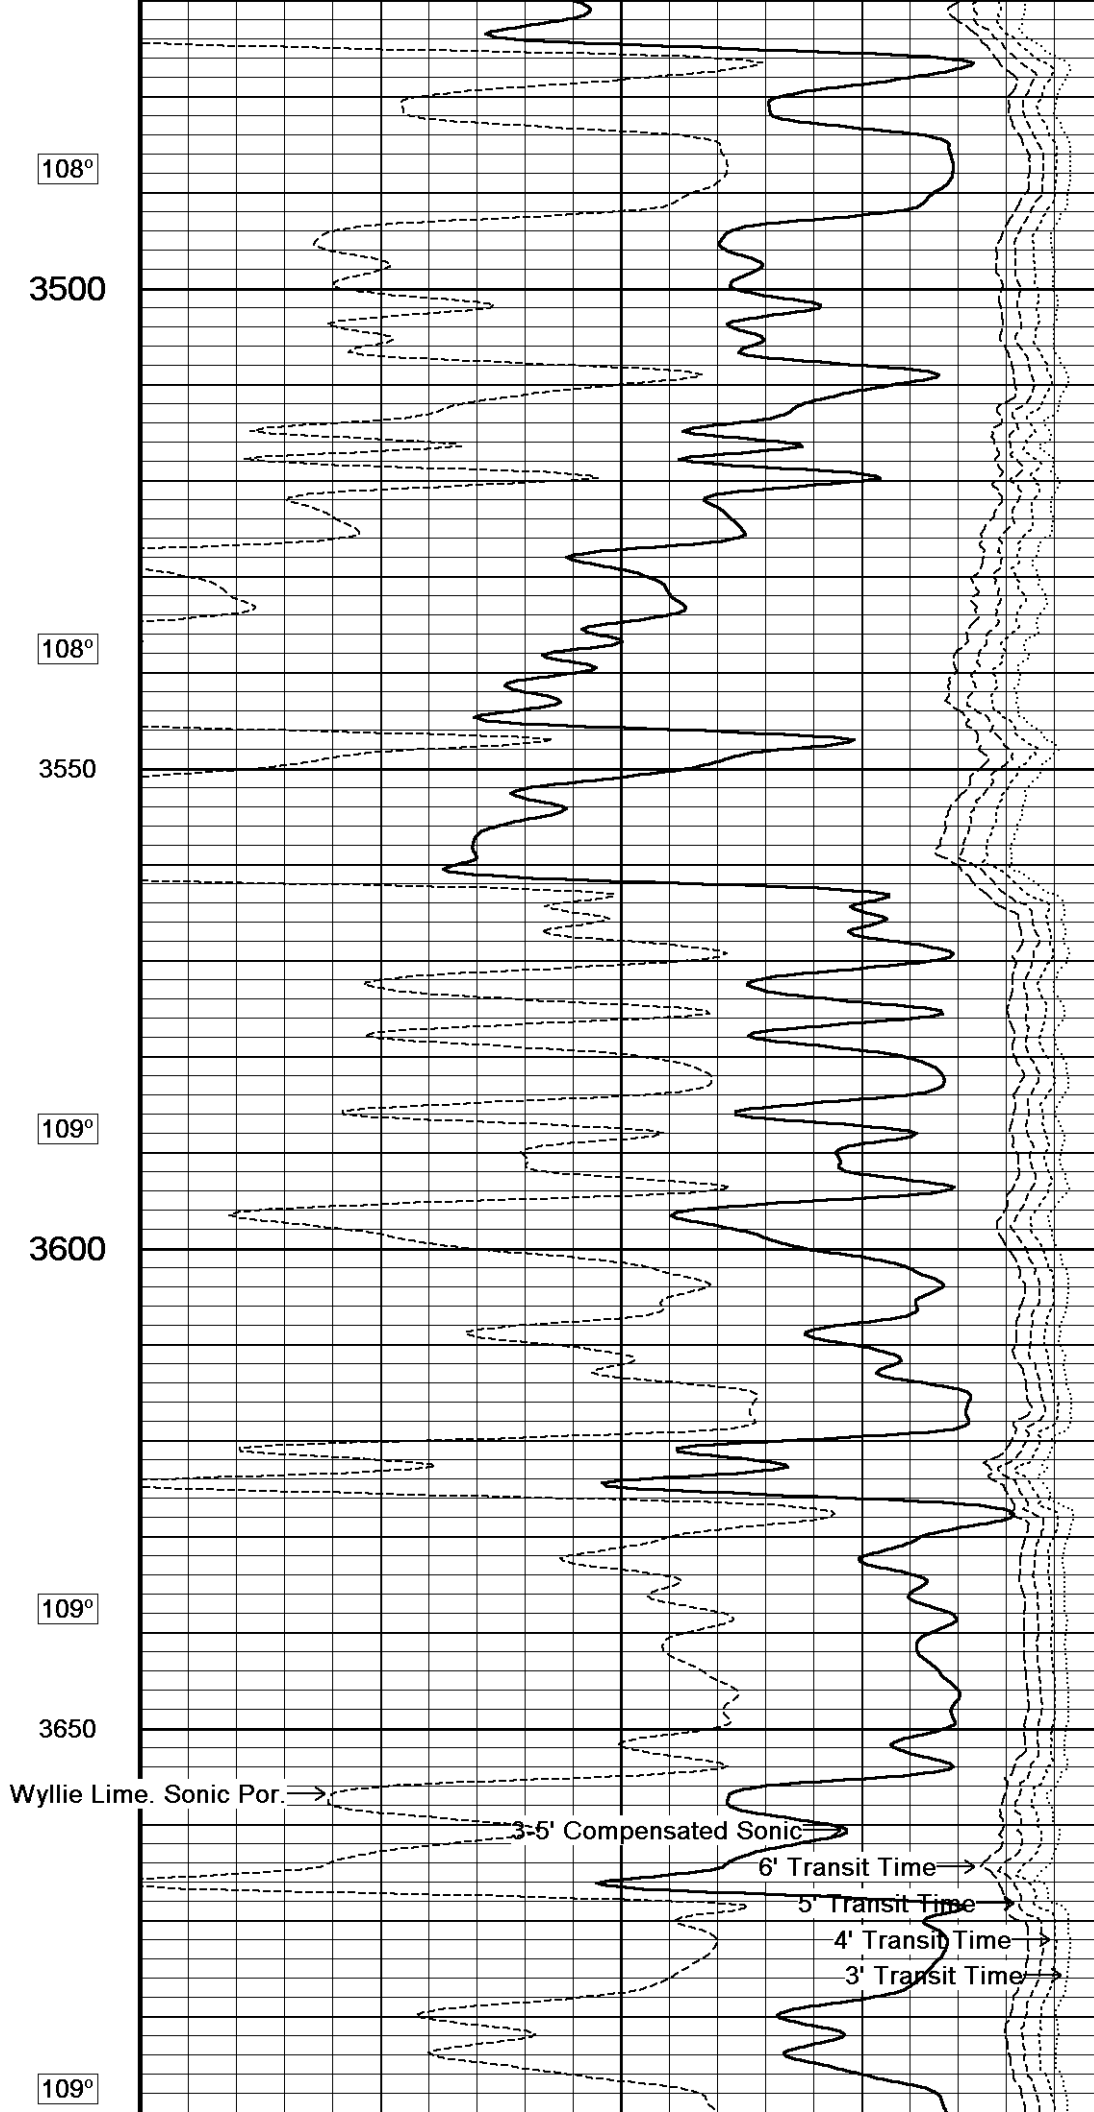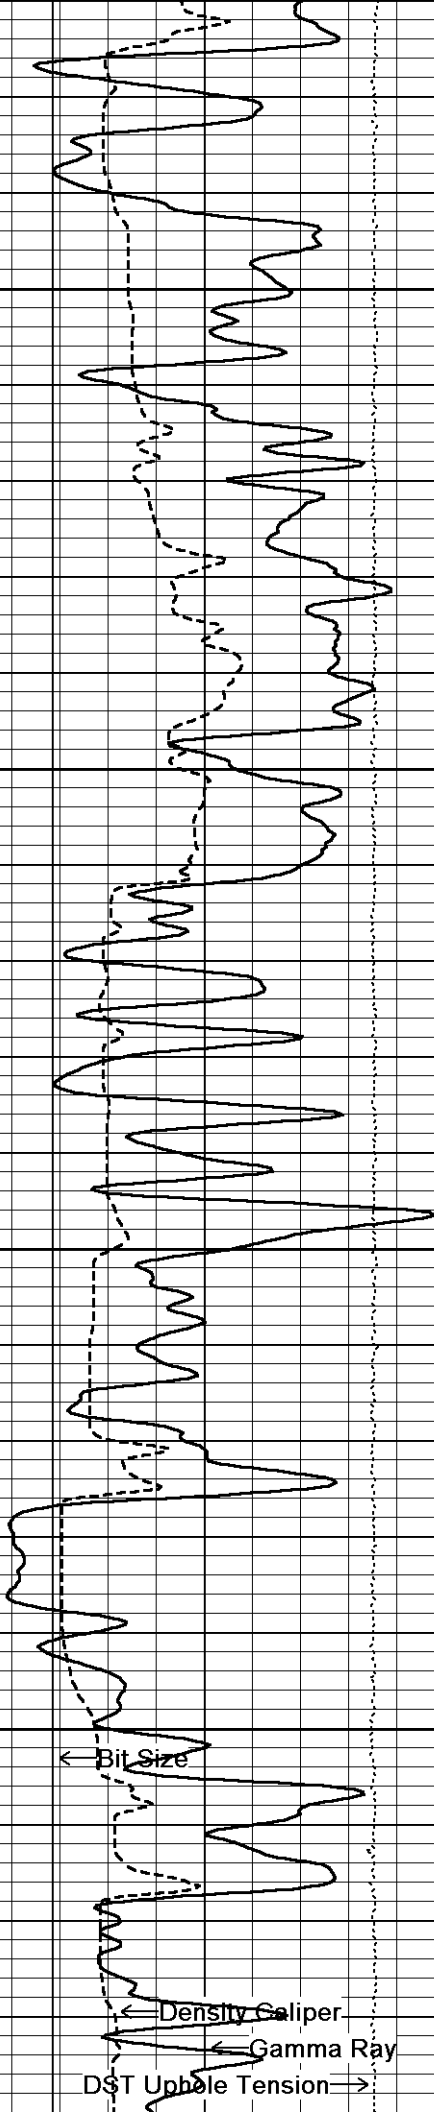

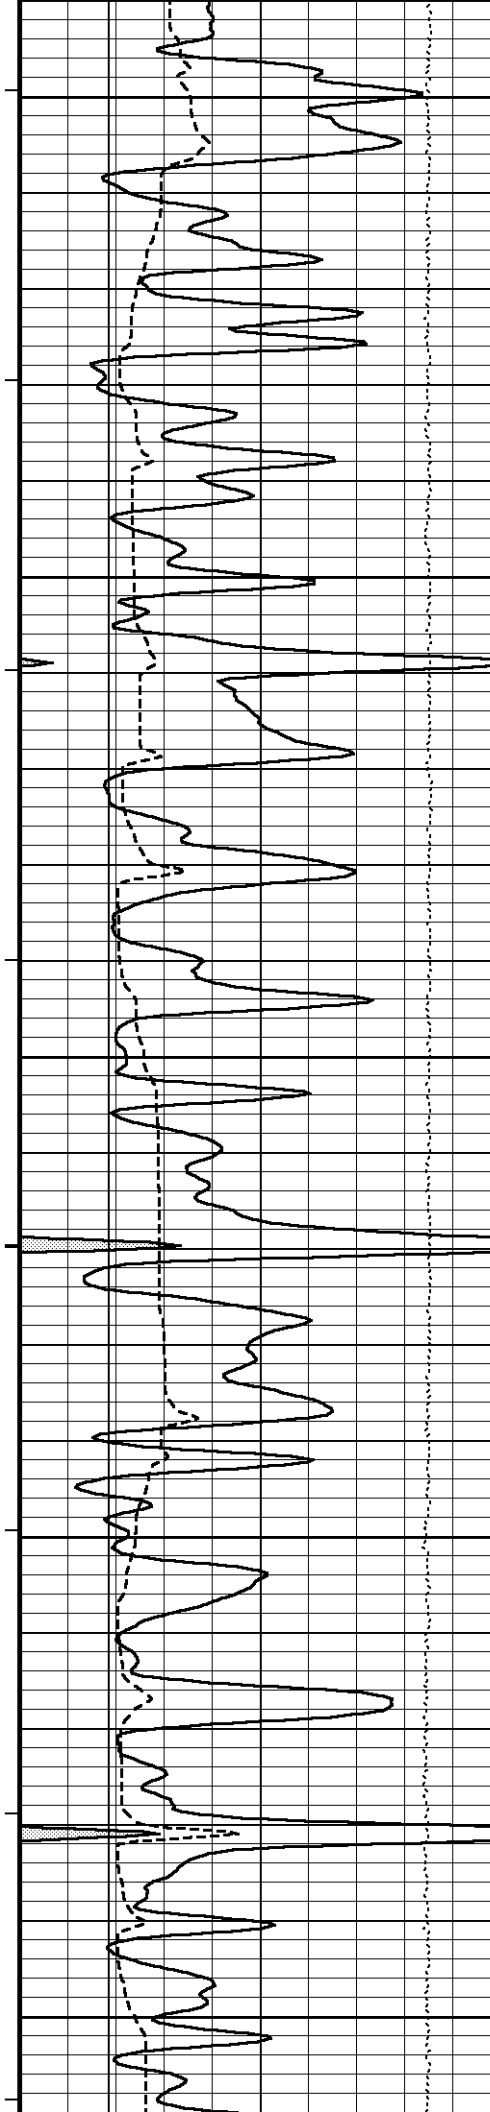

3700

109°

3750

109°


3800


109°

3850

110°

3900

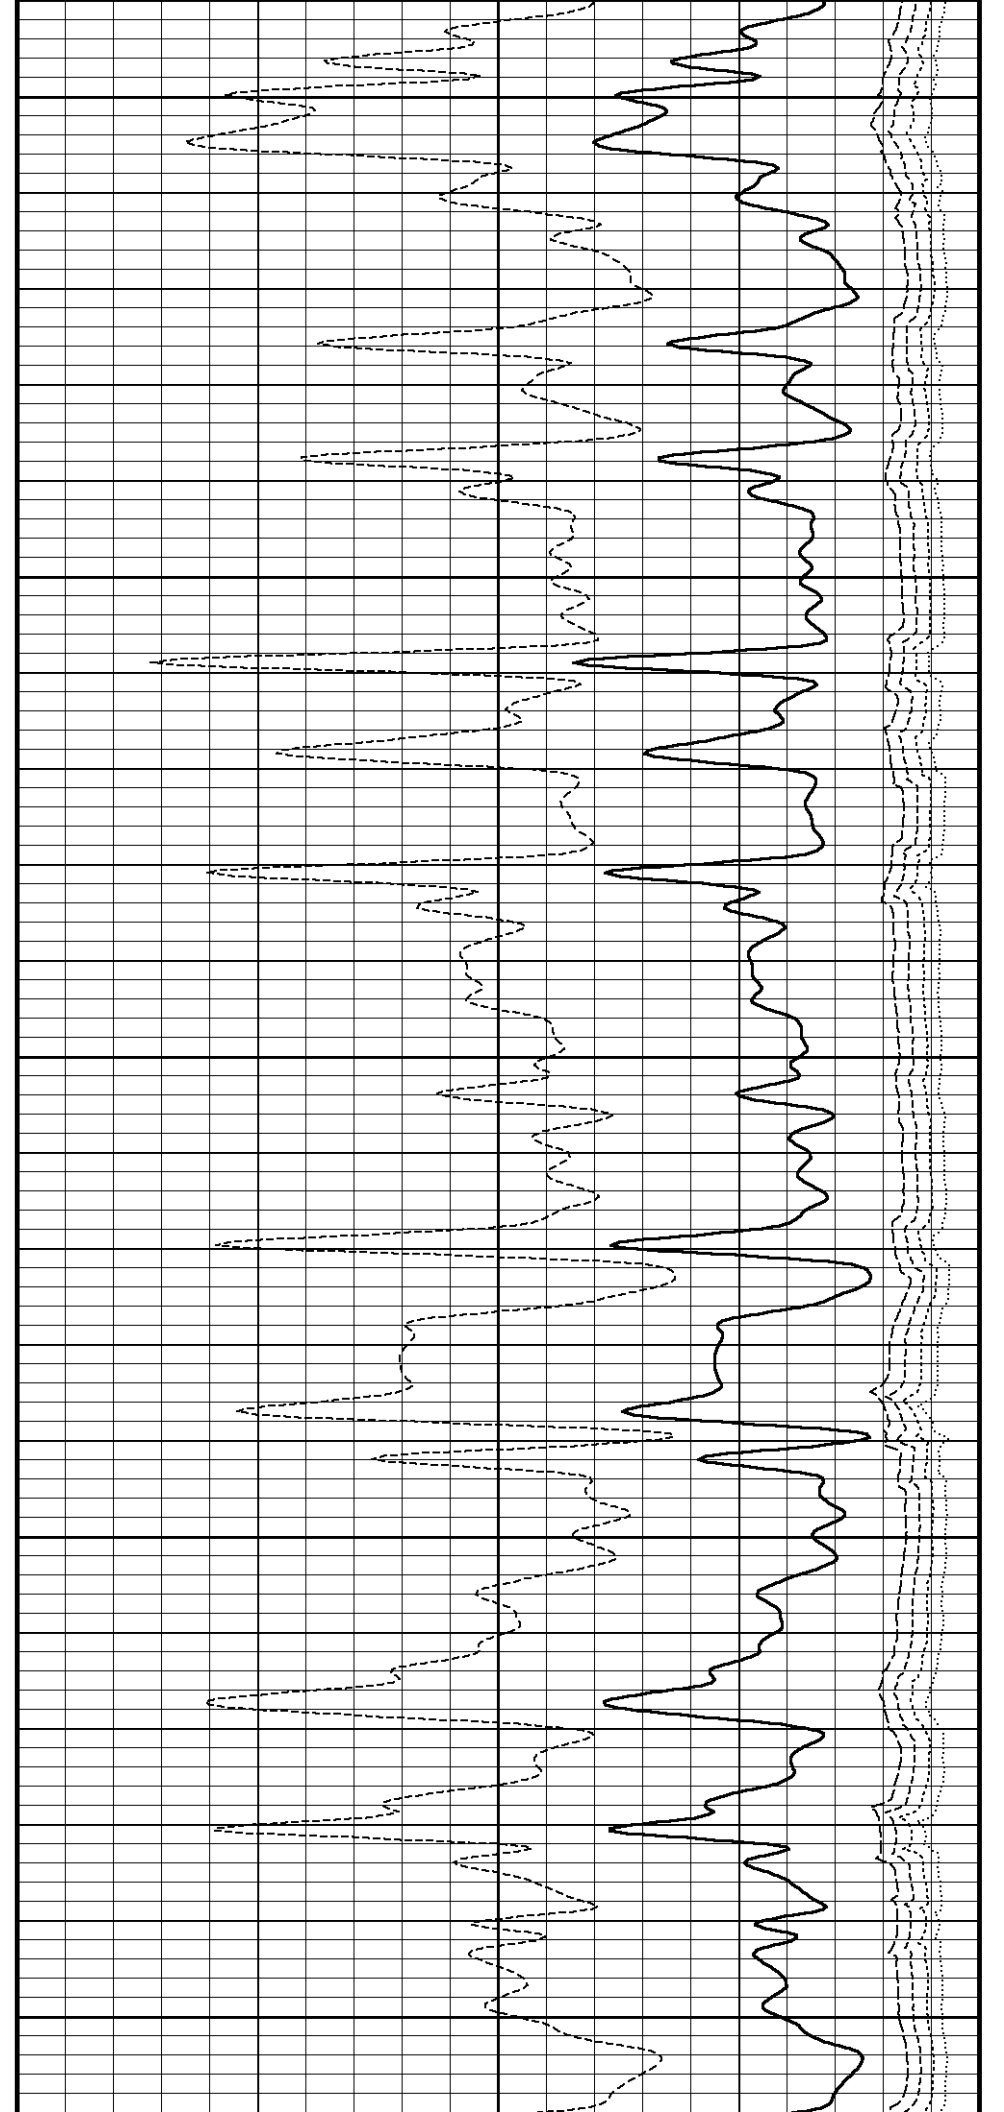

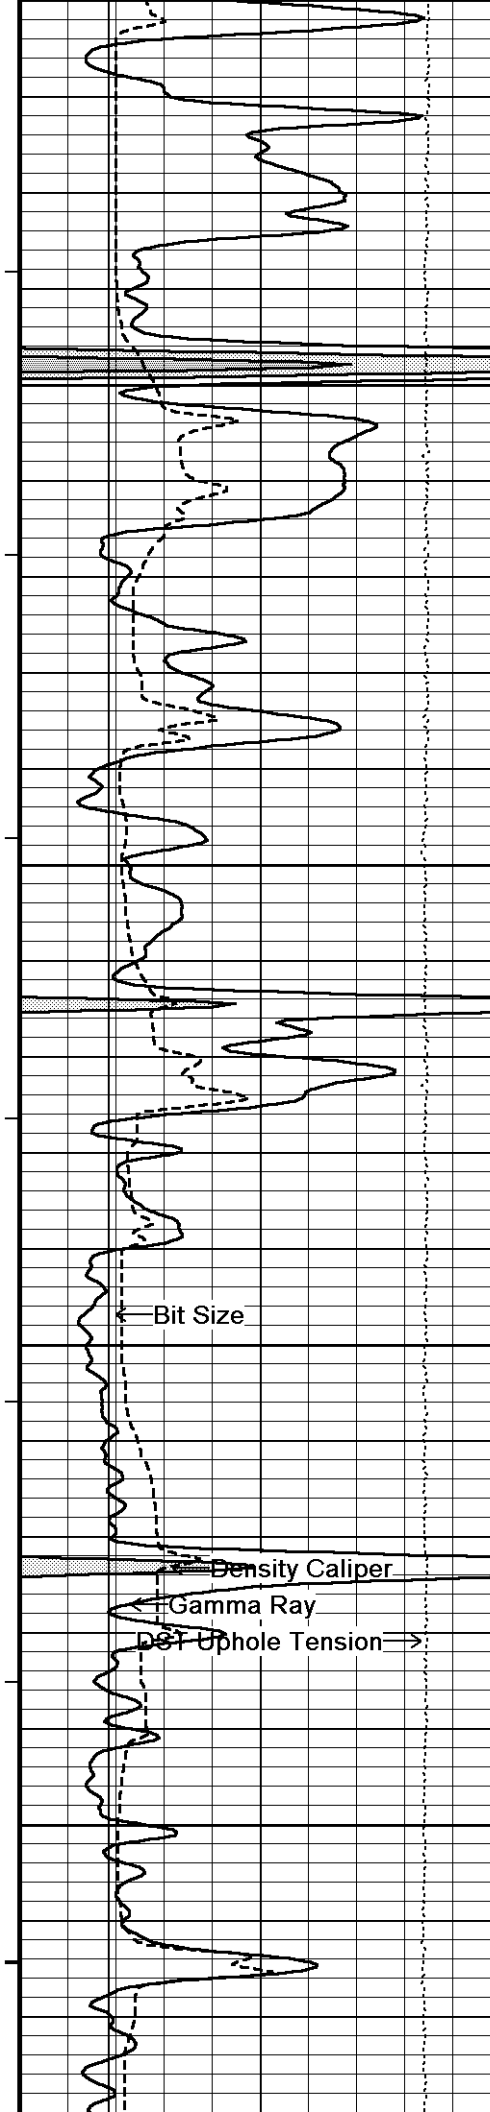

110°

3950

110°


4000

111°

4050

111°

4100

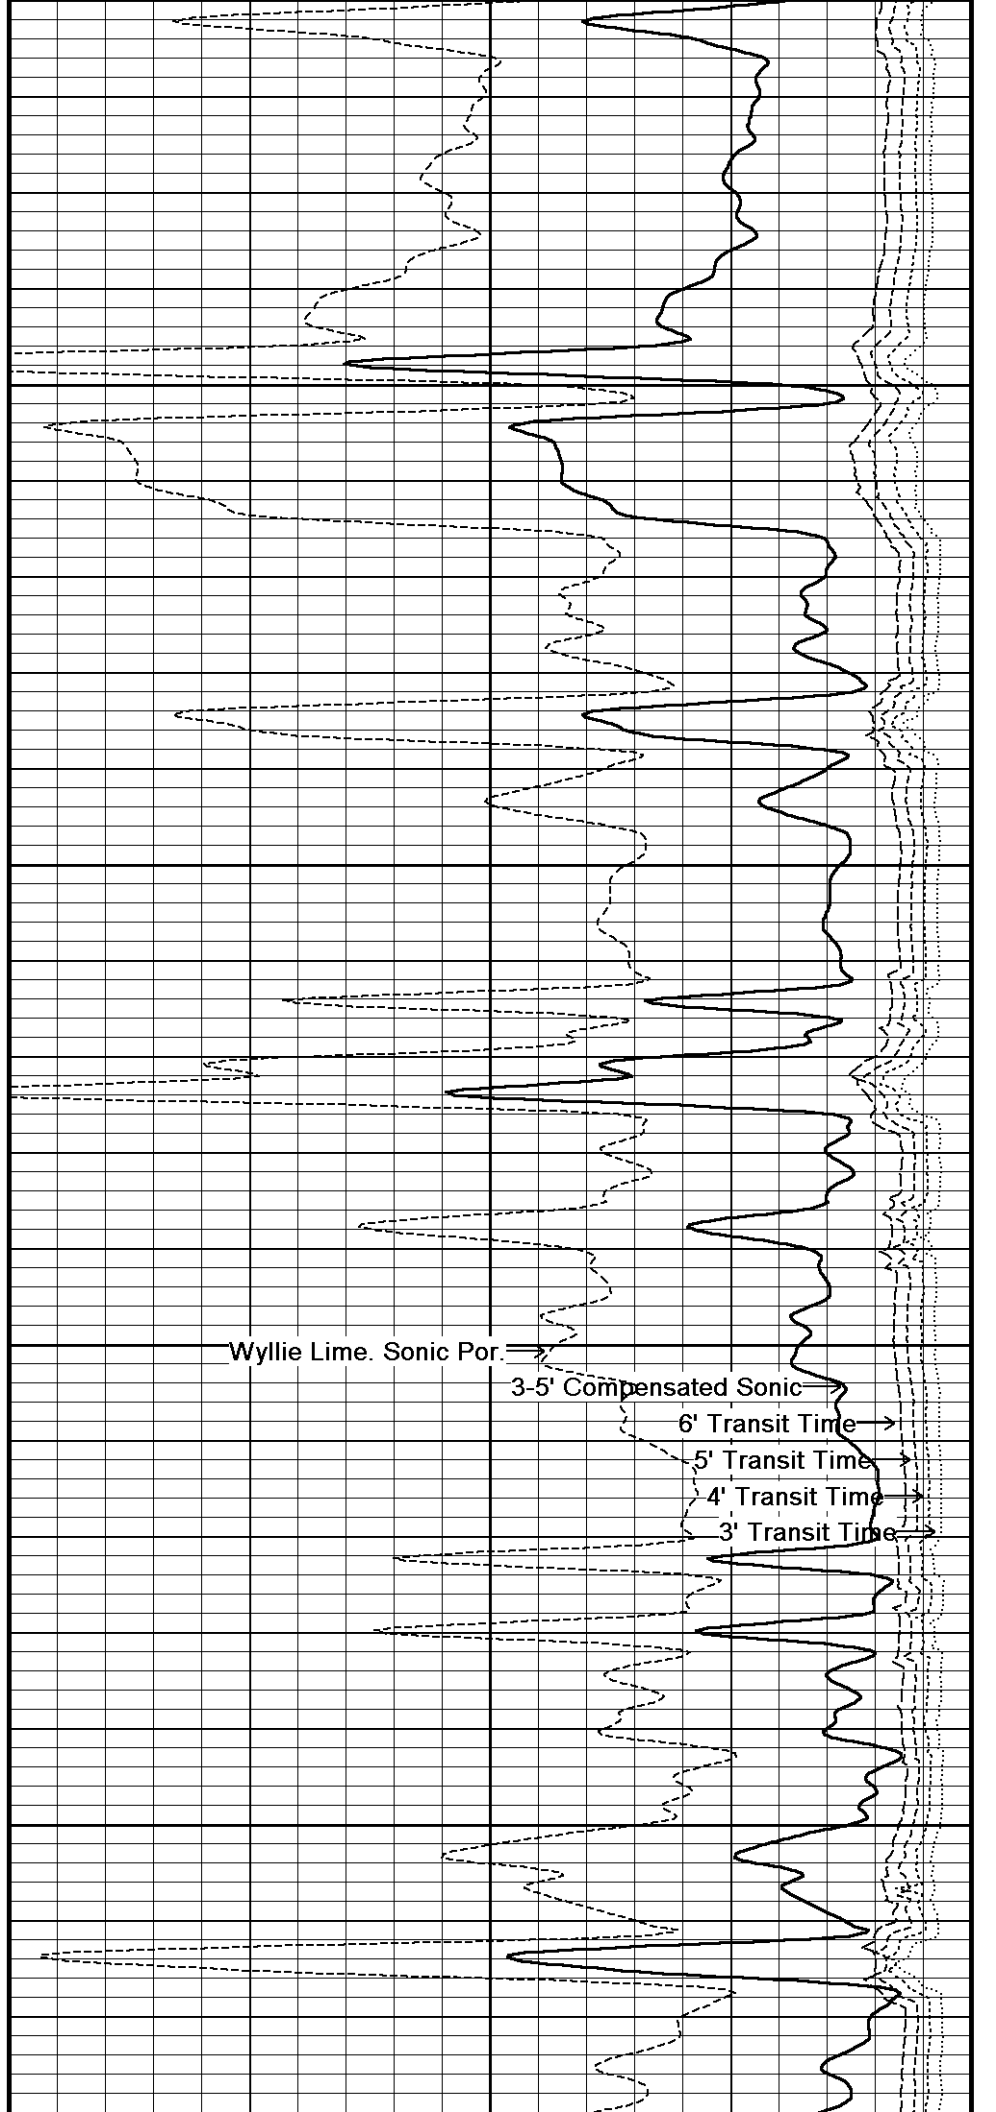

Wyllie Lime. Sonic Por.


3-5' Compensated Sonic

6' Transit Time

5' Transit Time

4' Transit Time

3' Transit Time

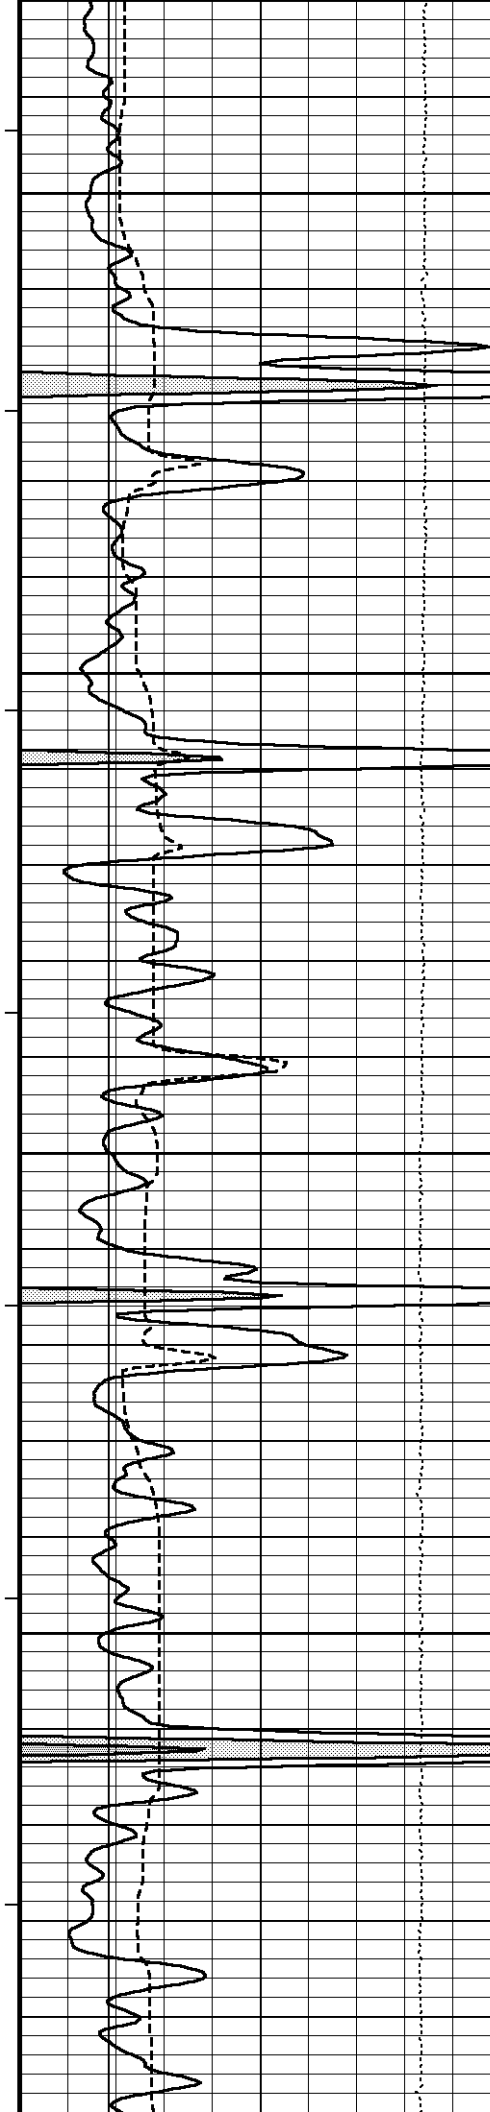

112°

4150

112°

4200

112°


4250


113°

4300


113°

4350

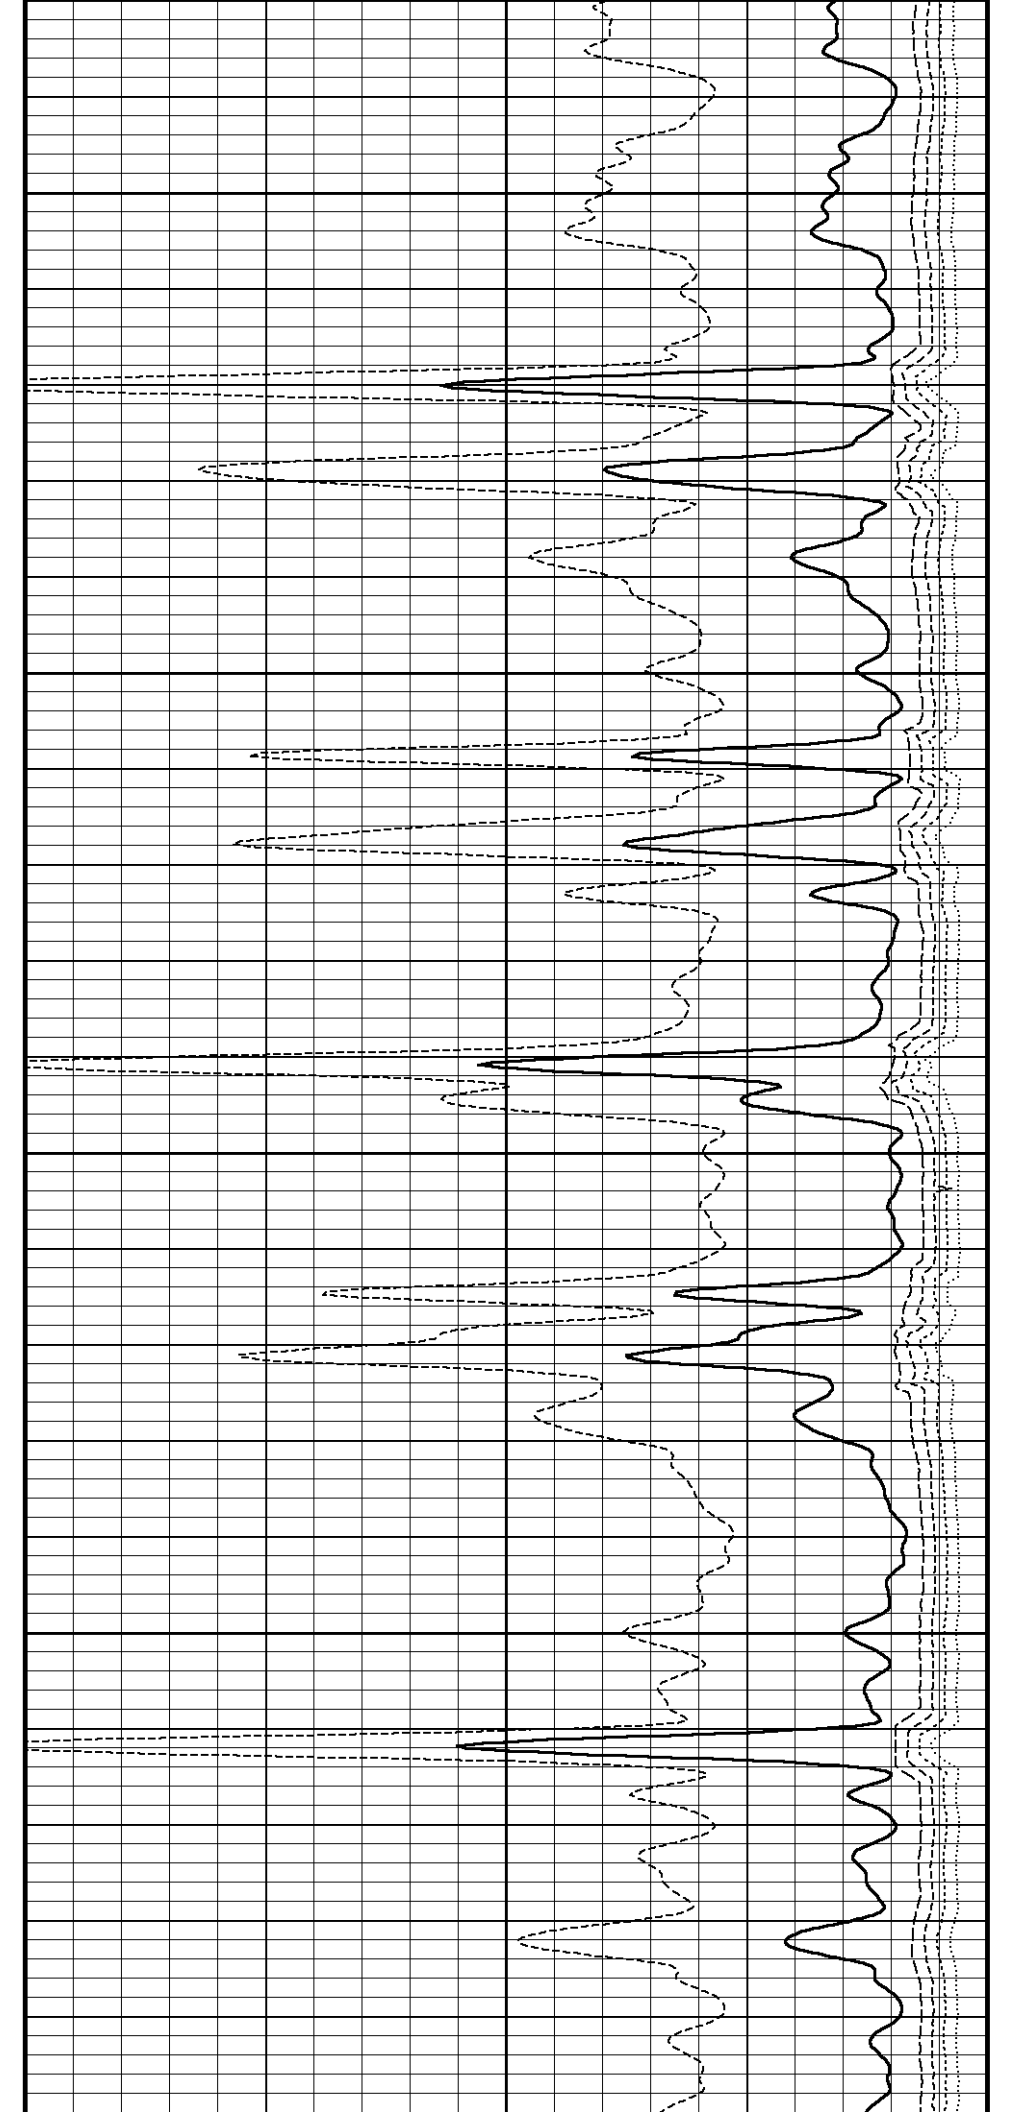


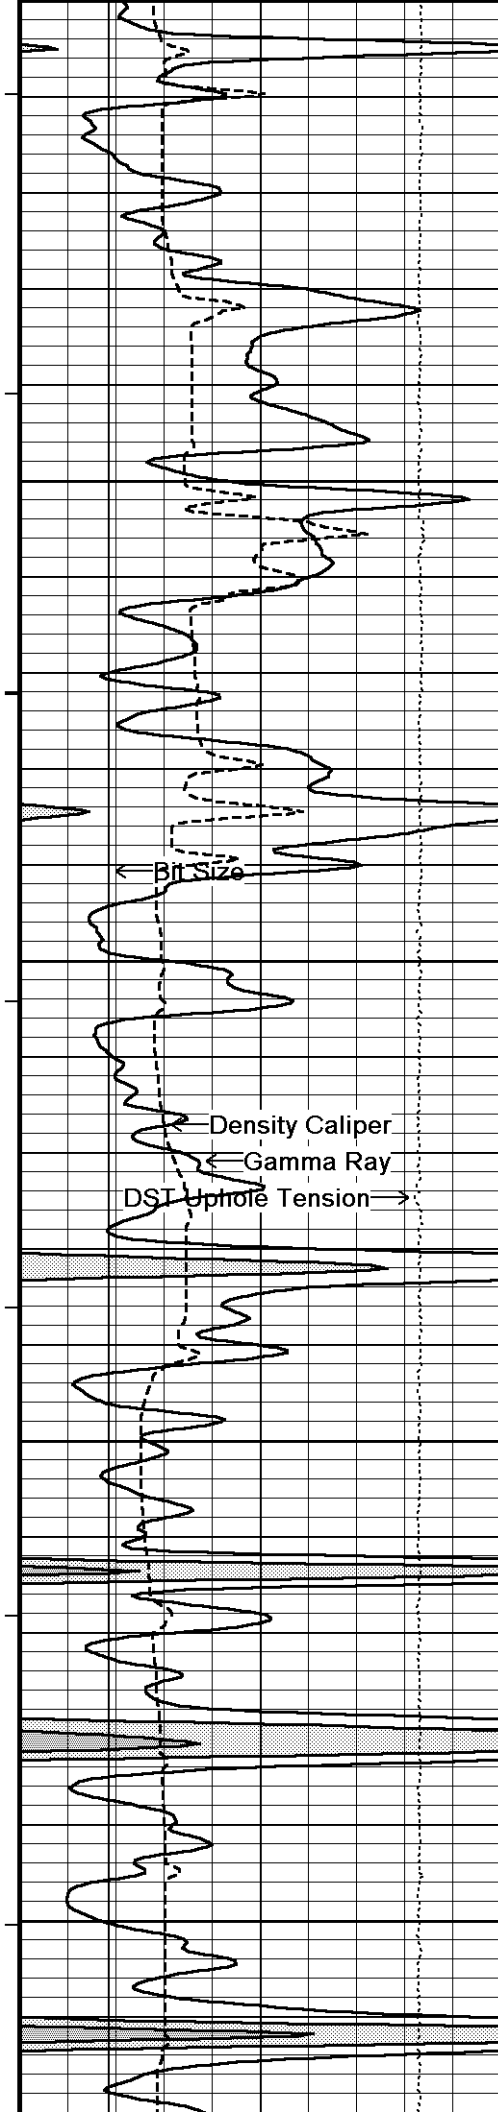

4550  
112°  
4400  
113°  
4450  
114°  
4500  
114°  
4550

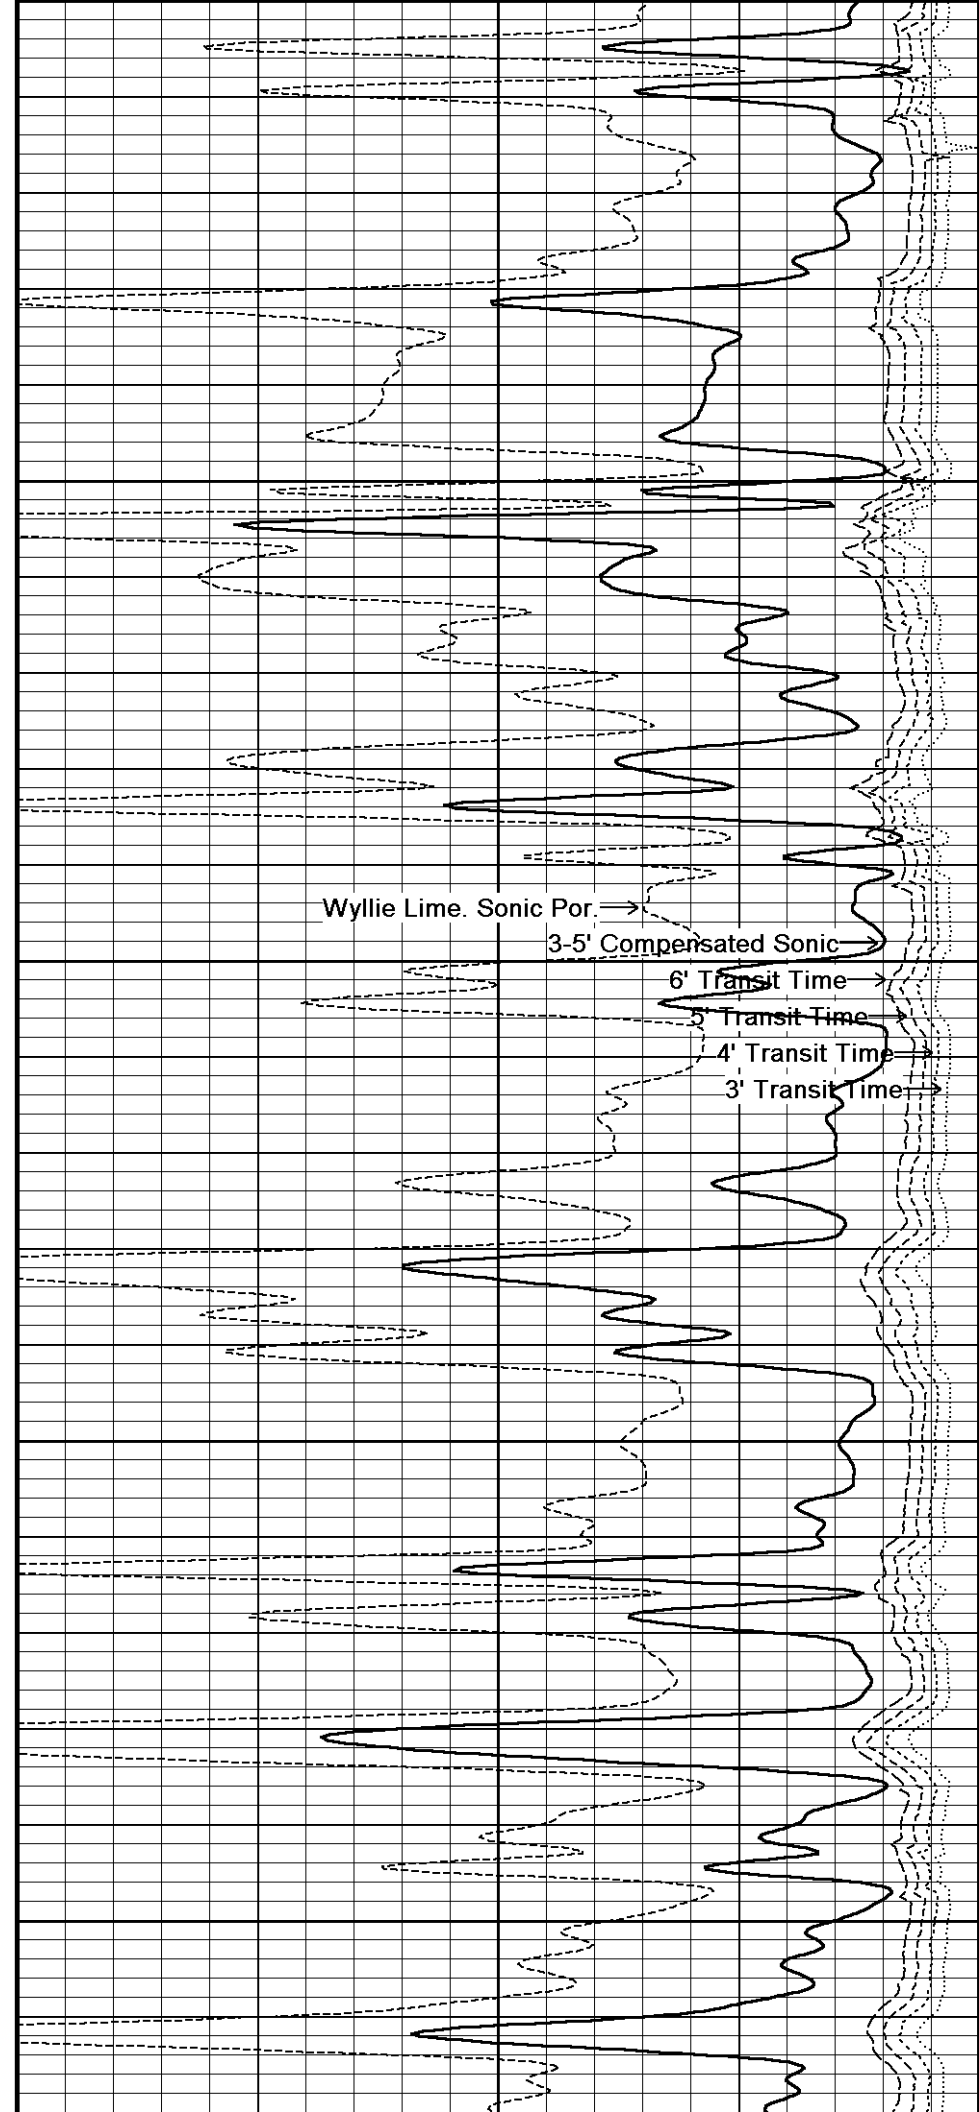

Wyllie Lime. Sonic Por. →  
3-5' Compensated Sonic →  
6' Transit Time →  
5' Transit Time →  
4' Transit Time →  
3' Transit Time →

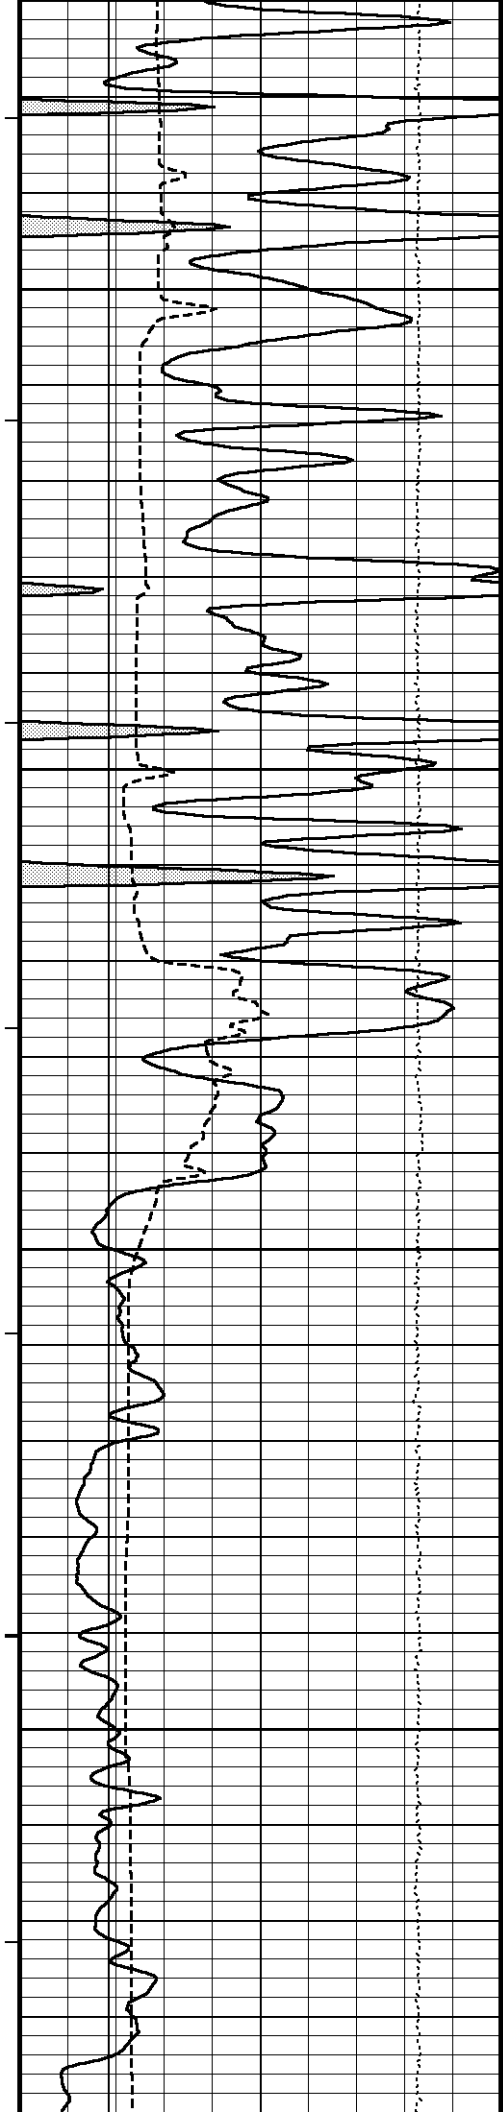

115°

4600

116°

4650


116°


4700

117°

4750

118°

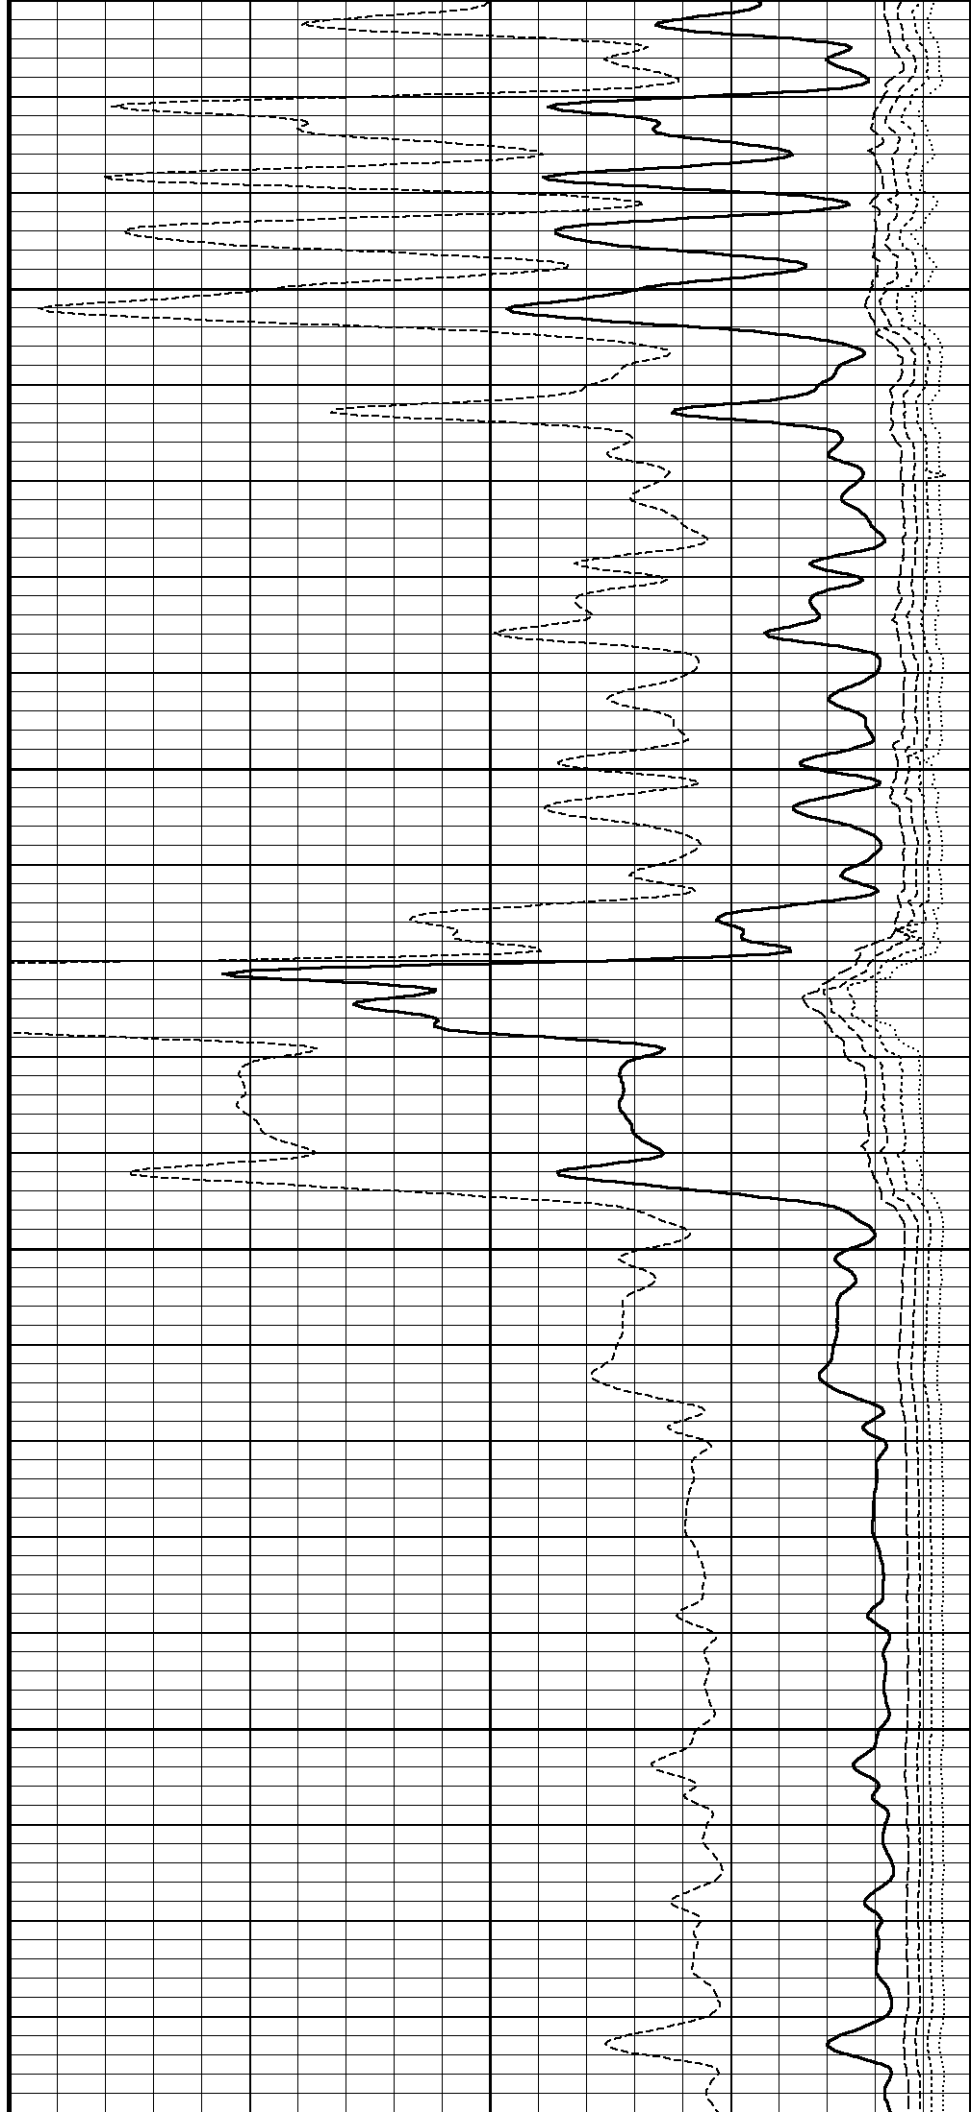

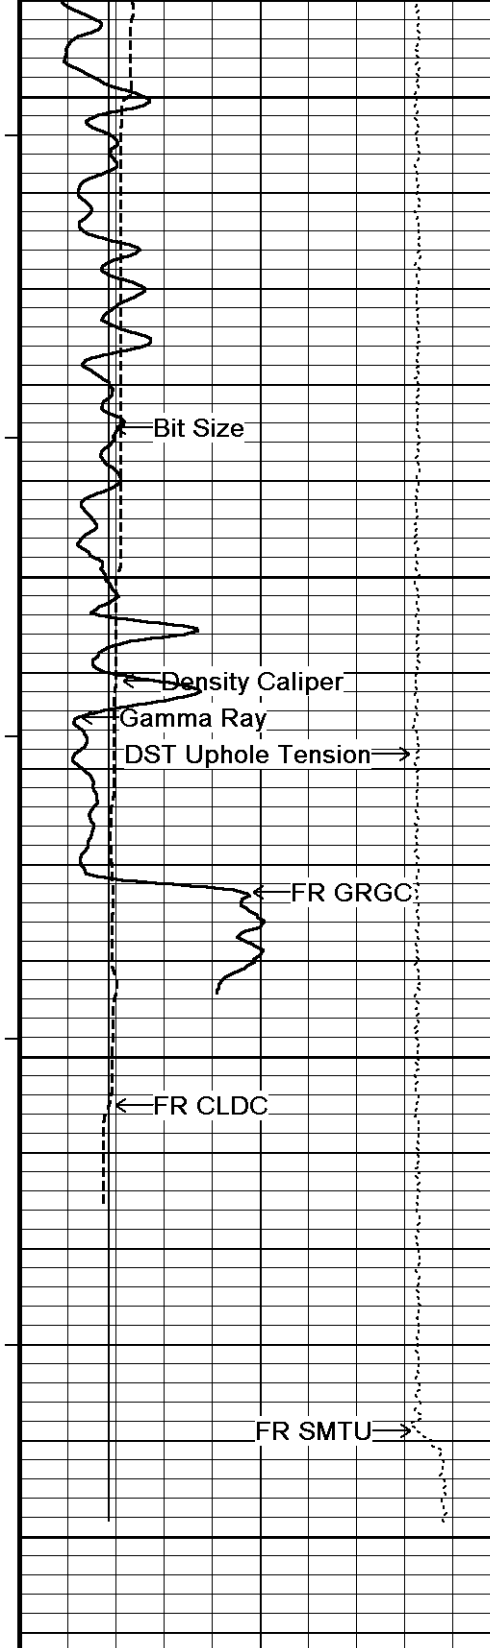

4800

119°

4850


119°

4900

4950

4960

Depth in Feet

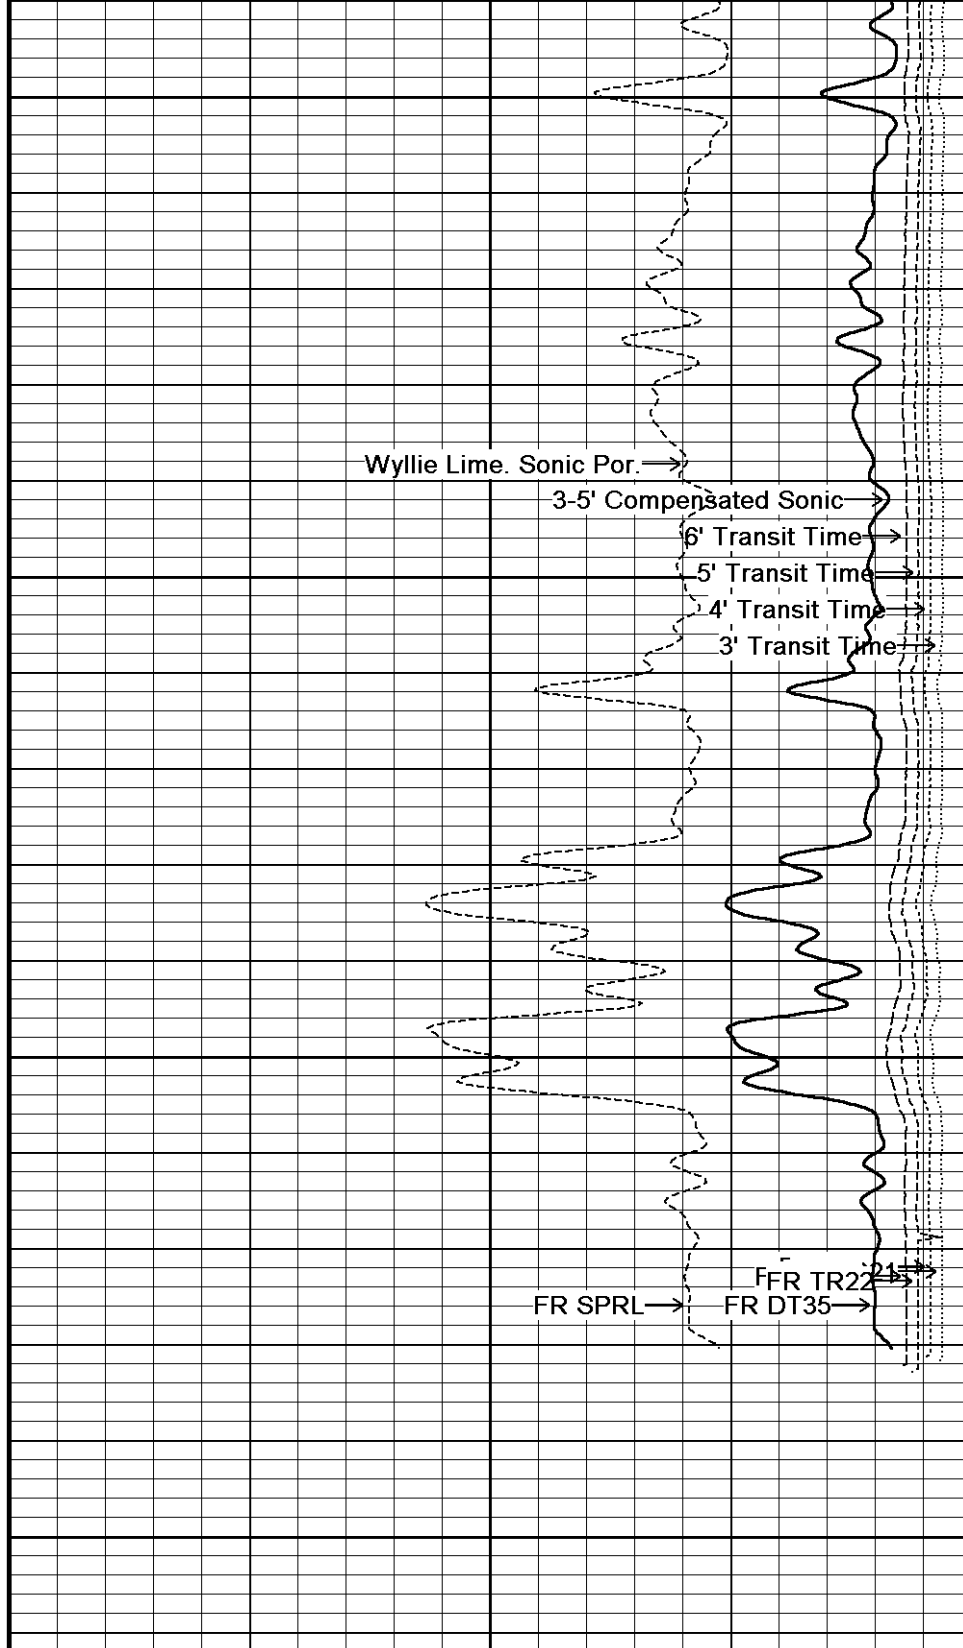

Timing Marks every 60.0 sec


Gamma Ray		
API		
0	75	150
150	225	300

3-5' Compensated Sonic				
microsec/foot				
140	115	90	65	40

Wyllie Lime. Sonic Por.				
percent				
30	20	10	0	-10



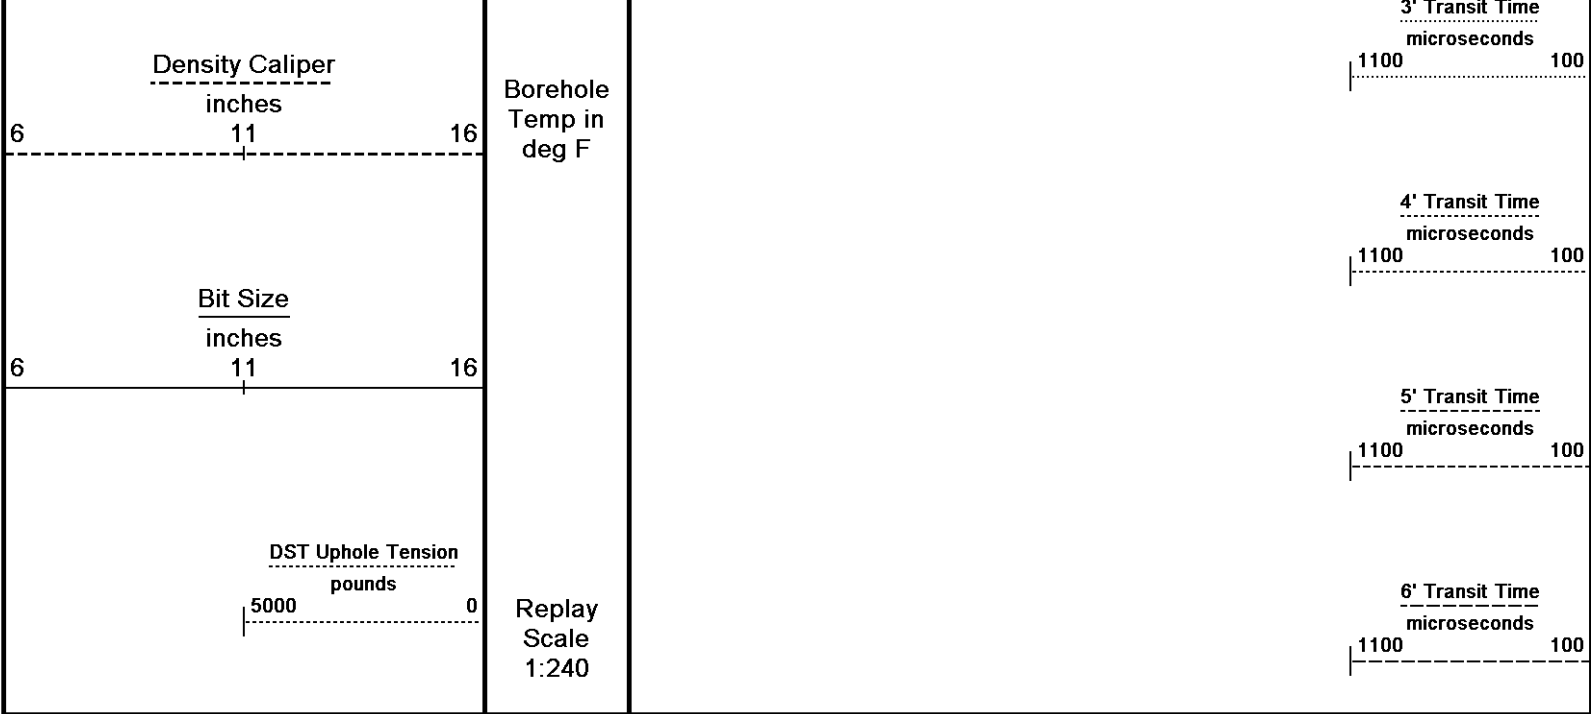


Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 28-APR-2013 15:44  
Filename: C:\Minimus\Archive 2013\LB13-104\Minimus 13.04.8...\Shakespeare Rudolph #1-22\_002.dta Recorded on 16-APR-2013 12:30  
System Versions: Logged with 13.04.8492 Plotted with 13.04.8492

↑ **5 INCH MAIN** ↑

↓ **REPEAT SECTION** ↓


Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 28-APR-2013 15:44  
Filename: C:\Minimus\Archive 2013\LB13-104\Minimus 13.04.8...\Shakespeare Rudolph #1-22\_001.dta Recorded on 16-APR-2013 12:04  
System Versions: Logged with 13.04.8492 Plotted with 13.04.8492

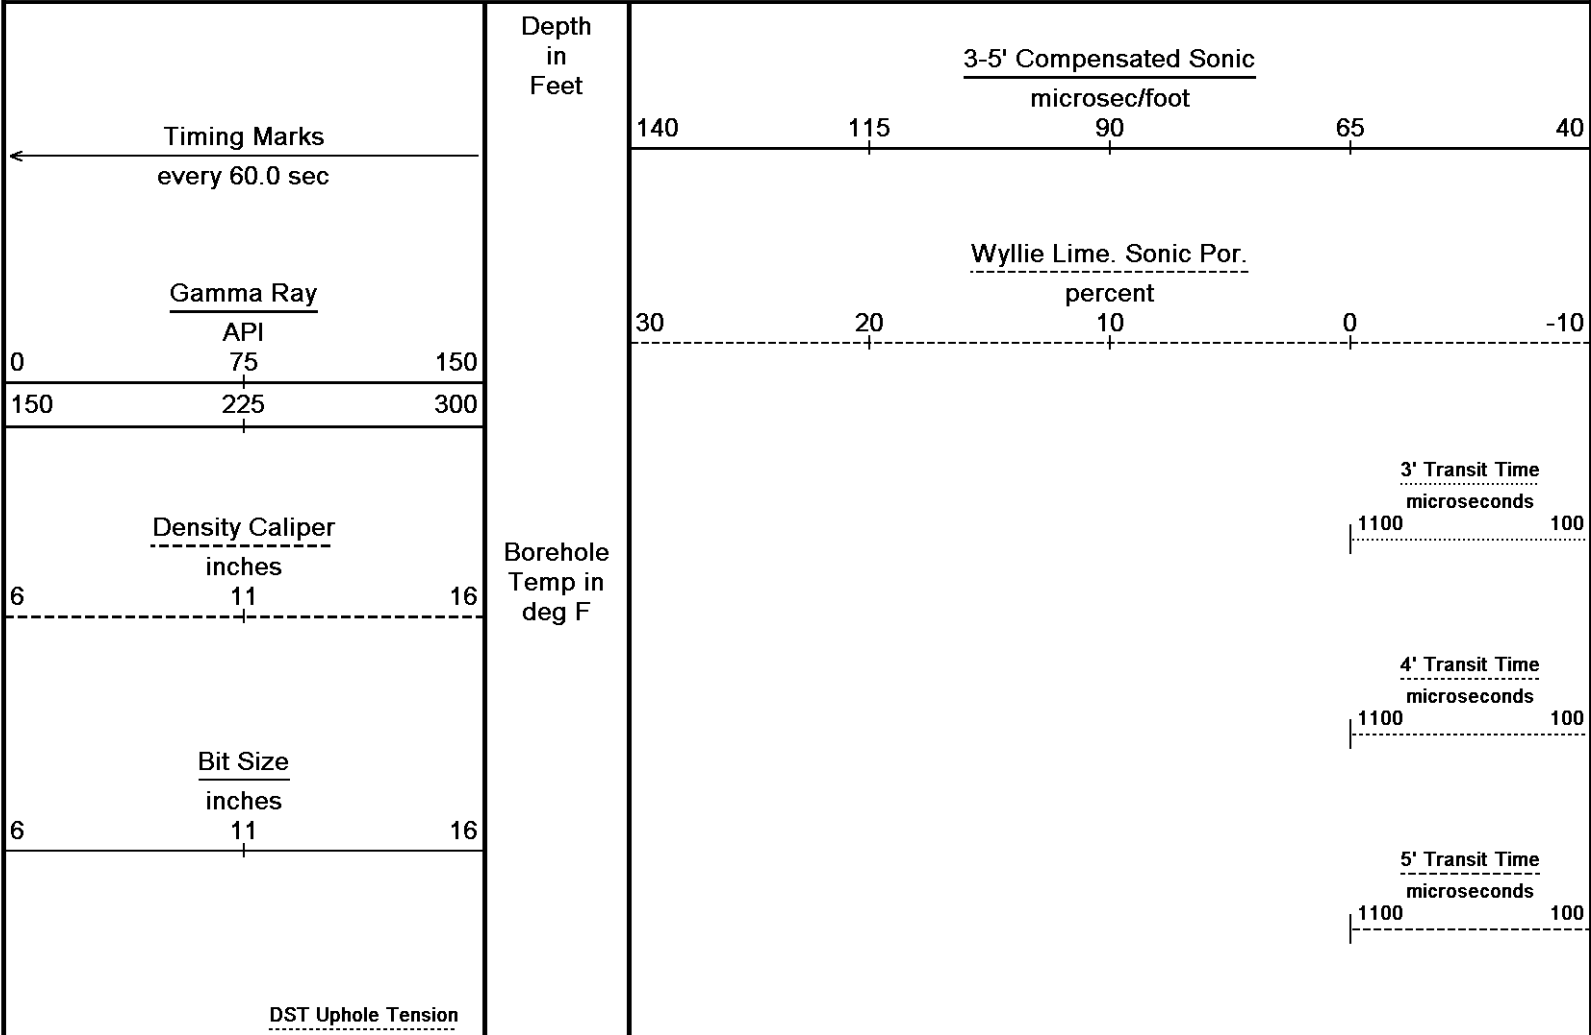

5000 pounds 0

Replay  
Scale  
1:240

6' Transit Time  
microseconds  
1100 100

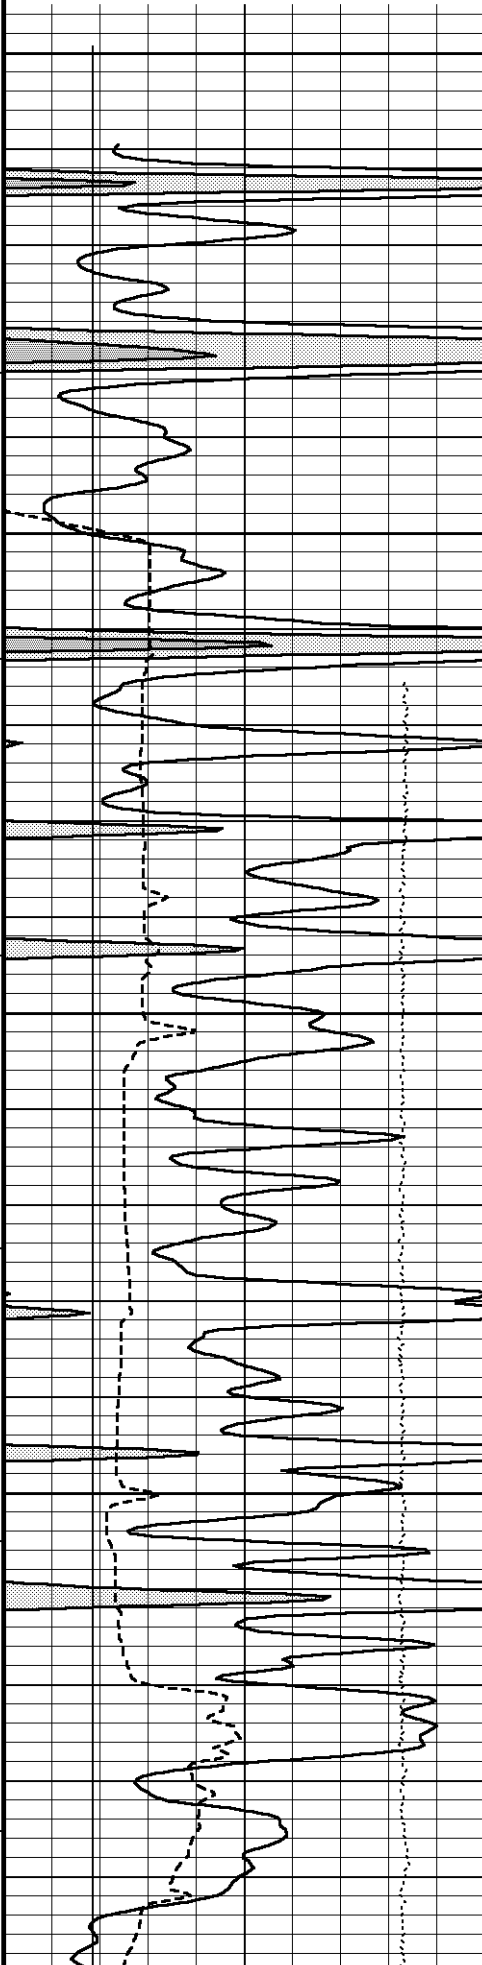

4500

114°

4550

115°


4600

115°

4650

116°

4700

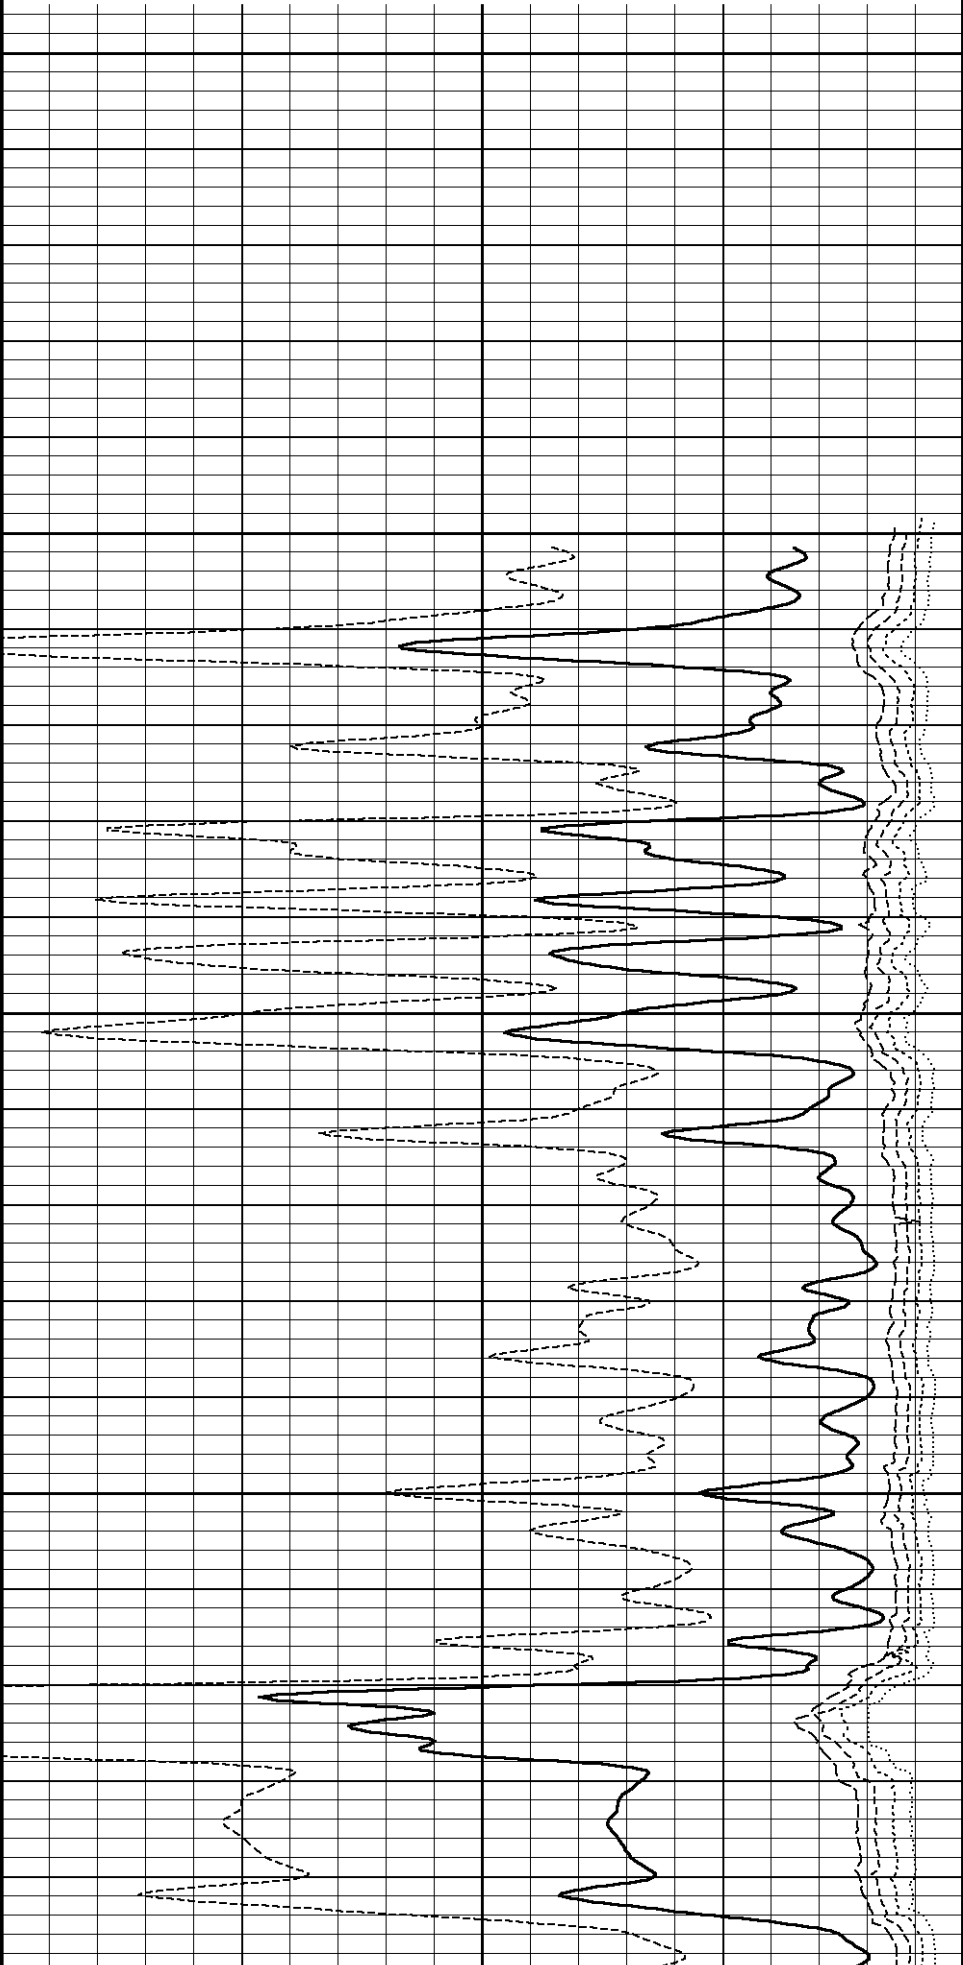



116°

4750

117°

4800


117°


4850

116°

4900

Wyllie Lime. Sonic Por. →  
3-5' Compensated Sonic →  
6' Transit Time →  
5' Transit Time →  
4' Transit Time →  
3' Transit Time →

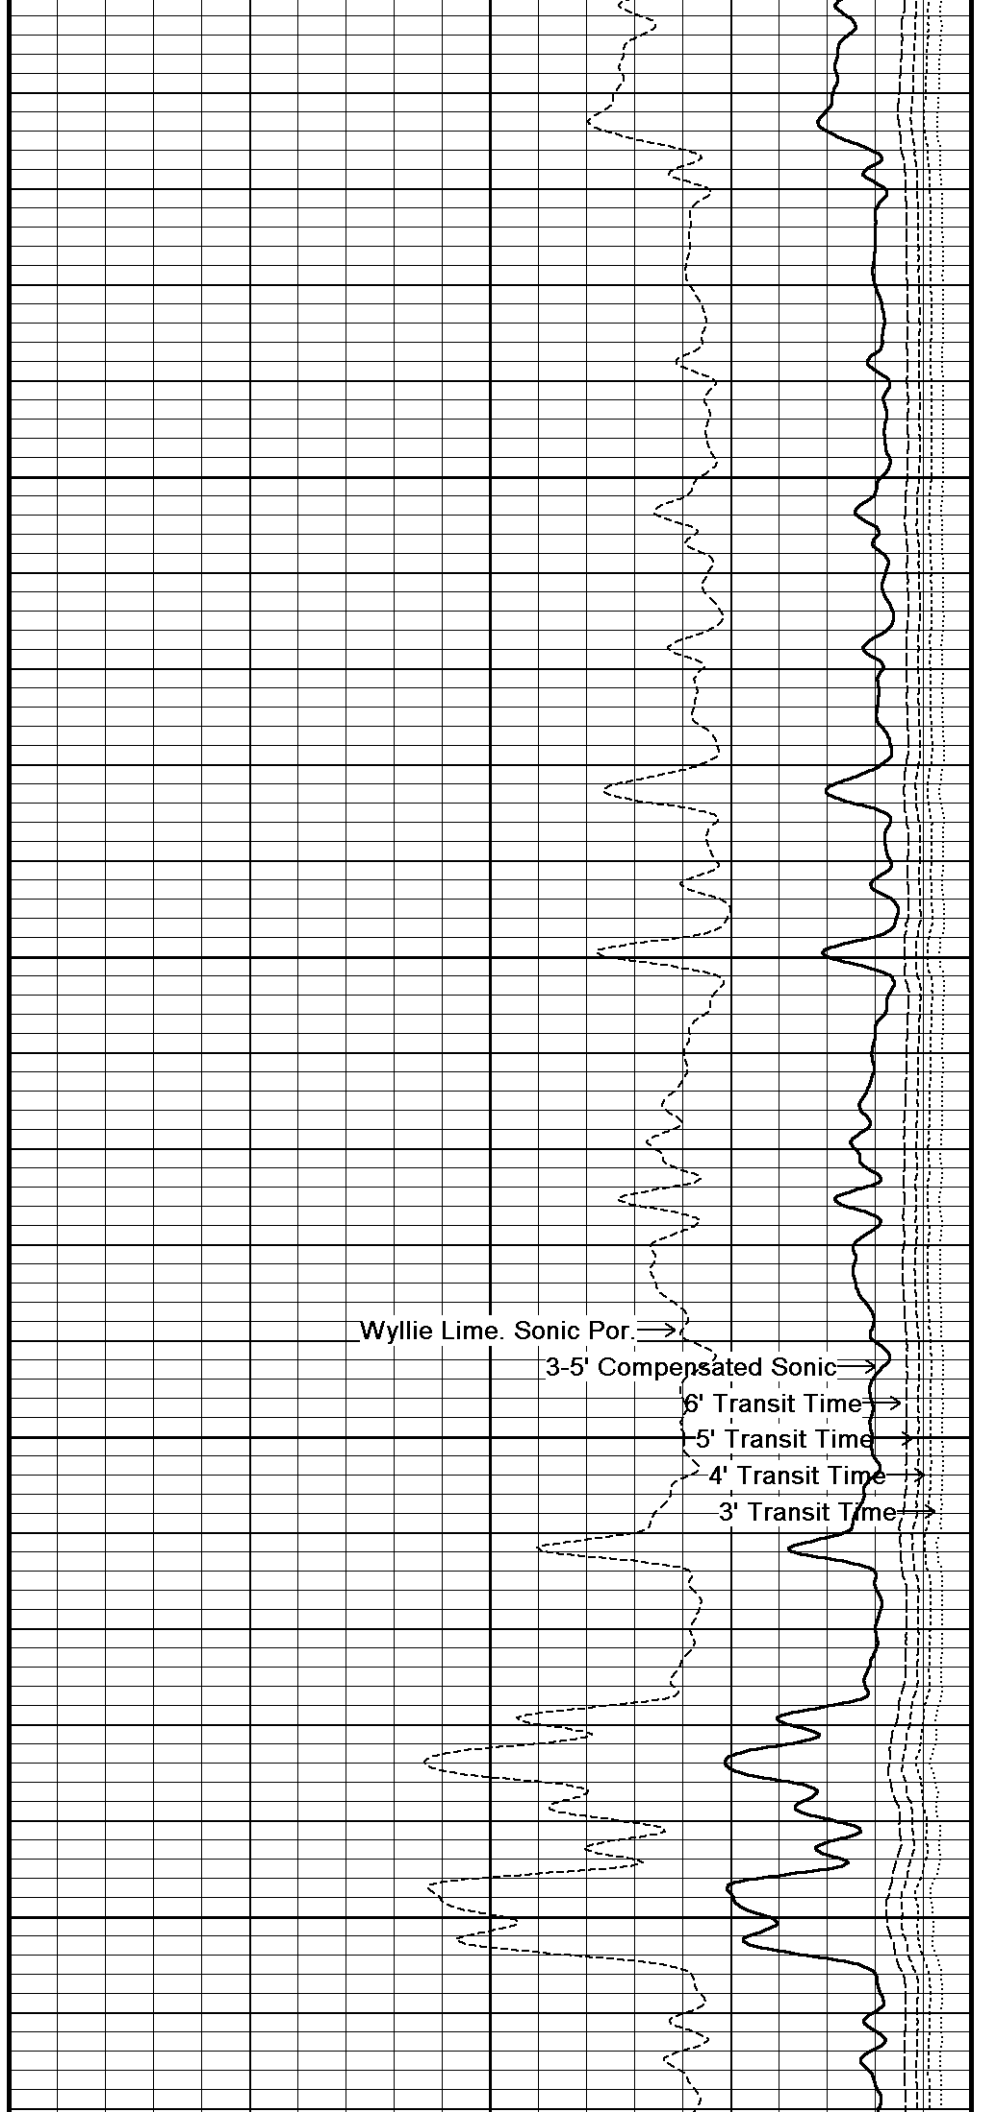

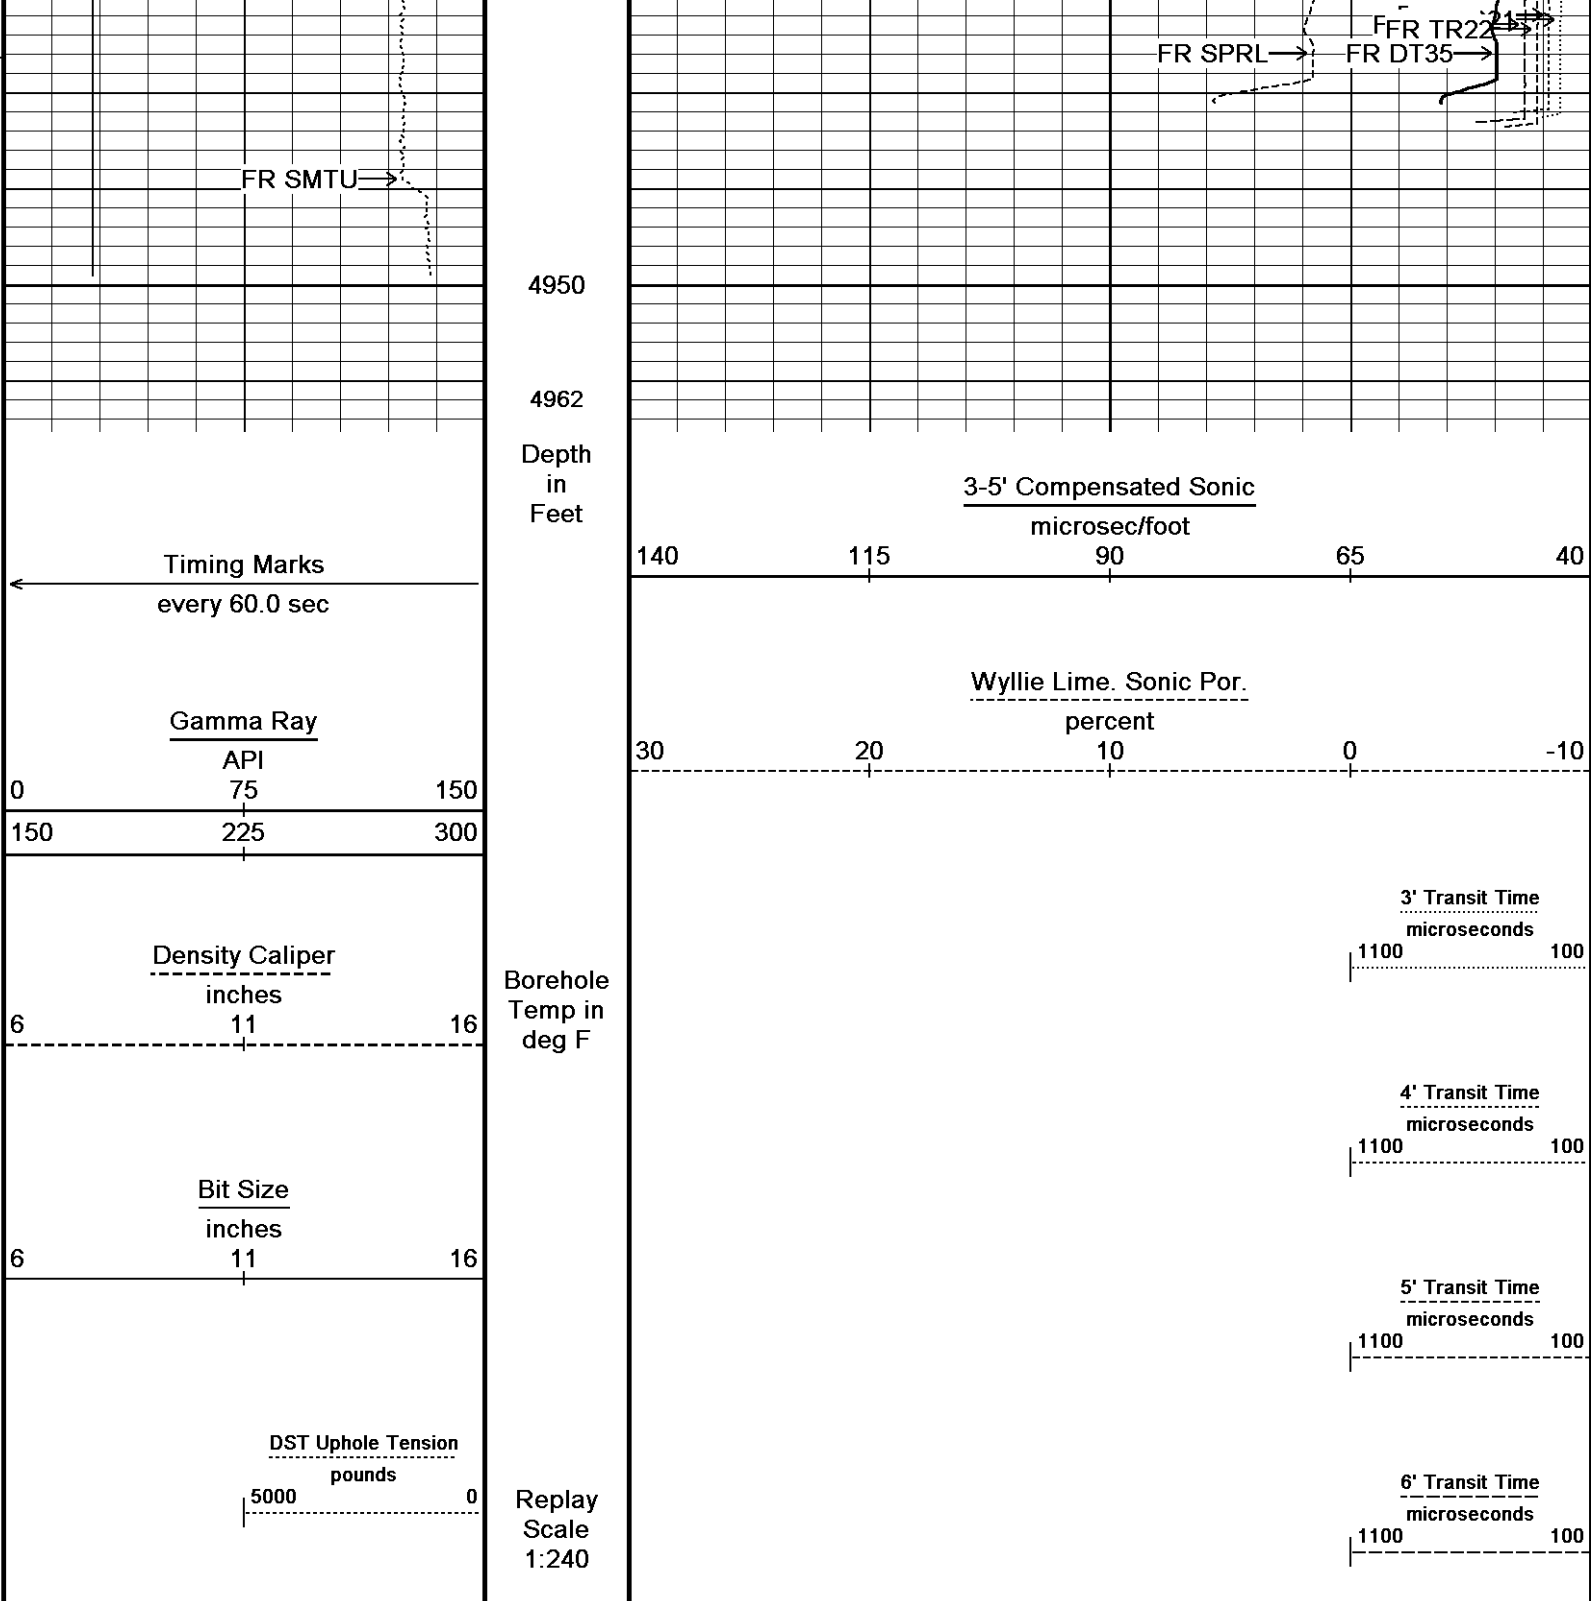

Depth Based Data - Maximum Sampling Increment 10.0cm  
 Plotted on 28-APR-2013 15:44  
 Filename: C:\Minimus\Archive 2013\LB13-104\Minimus 13.04.8...\Shakespeare Rudolph #1-22\_001.dta  
 Recorded on 16-APR-2013 12:04  
 System Versions: Logged with 13.04.8492 Plotted with 13.04.8492

↑ REPEAT SECTION ↑

BEFORE SURVEY CALIBRATION  
 C:\Minimus\Archive 2013\LB13-104\Minimus 13.04.8492\_Data\_Shakespeare Rudolph #1-22\Shakespeare Rudolph #1-22\_001.dta

General Constants All 000 Last Edited on 16-APR-2013,10:51

General Parameters  
 Mud Resistivity 0.620 ohm-metres  
 Mud Resistivity Temperature 74.000 degrees F  
 Water Level 0.000 feet  
 Borehole Fluid Processing Wet Hole

Hole/Annular Volume and Differential Caliper Parameters  
 HVOL Method Single Caliper  
 HVOL Caliper 1 Density Caliper  
 HVOL Caliper 2 N/A  
 Annular Volume Diameter 4.500 inches  
 Caliper for Differential Caliper Density Caliper

Rwa Parameters  
 Porosity used Base Density Porosity  
 Resistivity used Array Ind. Six Res Rt  
 RWA Constant A 0.610  
 RWA Constant M 2.150

Down-hole Tension Calibration SMS 0

Field Calibration on 13-APR-2013 20:15

Reading No	Measured	Calibrated (lbs)
1	14794.45	2.00
2	15339.36	383.60

Gamma Calibration MCG-B 34

Field Calibration on 10-APR-2013 10:25

	Measured	Calibrated (API)
Background	60	40
Calibrator (Gross)	1154	765
Calibrator (Net)	1095	725

Gamma Constants MCG-B 34

Last Edited on 16-APR-2013,10:46

Gamma Calibrator Number GR38  
 Mud Density 1.12 gm/cc  
 Caliper Source for Processing Density Caliper  
 Tool Position Eccentred  
 Concentration of KCl 0.00 kppm

SP Calibration MCG-B 34

Field Calibration on 29-MAR-2013,12:58

	Measured	Calibrated (mV)
Reference 1	101.0	100.0
Reference 2	-99.0	-100.0

High Resolution Temperature Calibration MCG-B 34

Field Calibration on 29-MAR-2013,12:58

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	75.00	75.00

High Resolution Temperature Constants MCG-B 34

Last Edited on 29-MAR-2013,12:58

Pre-filter Length 11

Micro Laterolog Calibration MMR-A 11

Base Calibration on 31-DEC-1999 00:00  
 Field Check on 31-DEC-1999 00:00

Base Calibration

	Measured		Calibrated (ohm-m)	
	Ref 1	Ref 2	Ref 1	Ref 2
	0.0	0.0	0.0	0.0
	Base Check (ohm-m)		Field Check (ohm-m)	
	0.0		0.0	

Micro Laterolog Constants MMR-A 11

Last Edited on

Pad Type 6 in Solid Nylon B23059  
 Micro Laterolog K Factor 0.0128  
 Standoff Offset 0.0000 inches

Mudcake Thickness Correction Constants

Mud Cake Source Constant Value  
 Mud Cake Thickness 0.4000 inches  
 Mud Cake Thickness Caliper  
 Mud Cake Resistivity 0.1500 ohm-m  
 Mud Cake Resistivity Temp. 20.00 Degrees C

Micro Normal and Micro Inverse Calibration MMR-A 11

Base Calibration on 08-MAR-2013 17:36  
 Field Check on 10-APR-2013 10:27

Base Calibration

Channel	Measured		Calibrated (ohm-m)	
	Resistor 1	Resistor 2	Resistor 1	Resistor 2
Micro Normal	12.4	60.0	5.0	25.0
Micro Inverse	15.5	77.5	5.0	25.0

Channel	Base Check (ohm-m)	Field Check (ohm-m)
Micro Normal	76.3	76.3
Micro Inverse	58.7	58.7

Micro Normal and Micro Inverse Constants MMR-A 11

Last Edited on 05-NOV-2012,13:54

Pad Type	8-12 in Soft Rubber Inflatable 006-9011-159		
Micro Normal K Factor	1.0000		
Micro Inverse K Factor	1.0000		
Standoff Offset	0.0000	inches	

Caliper Calibration MMR-A 11

Base Calibration on 08-APR-2013 09:09  
 Field Calibration on 10-APR-2013 10:30

Base Calibration

Reading No	Measured	Calibrator Size (in)
1	13932	5.98
2	17063	7.97
3	20236	9.86
4	24170	11.92
5	0	0.00
6	N/A	N/A

Field Calibration

Measured Caliper (in)	Actual Caliper (in)
5.93	5.98

Neutron Calibration MDN-A.B 65

Base Calibration on 13-MAR-2013 16:17  
 Field Check on 10-APR-2013 10:41

Base Calibration

Ratio	Measured		Calibrated (cps)	
	Near	Far	Near	Far
	2980	92	3714	110
	32.499		33.764	

Field Calibrator at Base

Calibrated (cps)
1736
2464
0.705

Field Check

Calibrated (cps)
1736
2470
0.680

Neutron Constants MDN-A.B 65

Last Edited on 16-APR-2013,10:46

Neutron Source Id	PN-521
Neutron Jig Number	5824NE
Epithermal Neutron	No
Caliper Source for Processing	Density Caliper
Stand-off	0.00 inches
Mud Density	1.00 gm/cc
Limestone Sigma	7.10 cu
Sandstone Sigma	4.26 cu
Dolomite Sigma	4.70 cu
Formation Pressure Source	None
Formation Pressure	N/A kpsi
Temperature Source	None
Temperature	N/A degrees F
Mud Salinity	0.00 kppm
Salinity Correction	Not Applied
Formation Fluid Salinity Source	None
Formation Fluid Salinity	N/A kppm
Porite Mud Correction	Not Applied

Baffle Mud Correction

Not Applied

FE Calibration MFE-B.J 352

Base Calibration on 16-JAN-2013 10:20  
Field Check on 10-APR-2013 10:50

Base Calibration

	Measured	Calibrated (ohm-m)
Reference 1	0.0	0.0
Reference 2	964.3	126.8
Base Check		281.2
Field Check		281.3

FE Constants MFE-B.J 352

Last Edited on 16-APR-2013,10:45

Running Mode	No Sleeve	
MFE K Factor	0.1268	
Caliper Source for FE correction	Density Caliper	
Caliper Value for FE correction	N/A	inches
Rm Source for FE correction	Temperature Corr	
Temp. for Rm Corr.	MCG External Temperature	
Stand-off	0.5	inches

Sonic Constants MSS-C.K 330

Last Edited on 16-APR-2013,10:45

Maximum Boundary Contrast	100.00	micro-sec/ft
Fluid Transit Time	189.00	micro-sec/ft
Limestone Transit Time	47.50	micro-sec/ft
Sandstone Transit Time	55.50	micro-sec/ft
Dolomite Transit Time	43.50	micro-sec/ft
Sonic used for Porosities	3-5' Compensated Sonic	
Correction for Sonde Skew	Applied	
Cycle Stretch Algorithm	Applied	
MN3FT	N/A	micro-sec
MX3FT	N/A	micro-sec
Hunt-Raymer Constant	83.13	micro-sec/ft

Sonde Mode	Compensated
Hole Type	Open Hole

Sonde Parameters

	Measured	Calibrated
Offset	N/A	0.0000
Free Pipe	N/A	N/A
Peak Amplitude Source		N/A

Waveform	Start Time (micro-sec)	Width (micro-sec)	Pre Gain	Start Gain	Discriminator (mV)
3'	N/A	N/A	N/A	N/A	N/A
4'	N/A	N/A	N/A	N/A	N/A
5'	N/A	N/A	N/A	N/A	N/A
6'	N/A	N/A	N/A	N/A	N/A

Processed Fixed Gate Parameters

Waveform Used For Processing	N/A		
Start Time (micro-sec)	End Time (micro-sec)	Discriminator (mV)	N/A
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A

Full Waveform Parameters

Use 3' Waveform to derive TR	N/A
Use 4' Waveform to derive TR	N/A
Use 5' Waveform to derive TR	N/A
Use 6' Waveform to derive TR	N/A
3' Waveform Discriminator Level	N/A mV
4' Waveform Discriminator Level	N/A mV
5' Waveform Discriminator Level	N/A mV
6' Waveform Discriminator Level	N/A mV

3' Waveform Filter	N/A	
4' Waveform Filter	N/A	
5' Waveform Filter	N/A	
6' Waveform Filter	N/A	
Semblance Level	N/A	
Semblance Window Width	N/A	micro-sec
Sonic 1 Despiker	N/A	N/A
Sonic 2 Despiker	N/A	N/A

High Resolution Temperature Calibration MAI-A.A 45			Field Calibration on 13-DEC-2012,10:54
	Measured	Calibrated(Deg F)	
Lower	50.00	50.00	
Upper	75.00	75.00	

High Resolution Temperature Constants MAI-A.A 45		Last Edited on 10-APR-2013,10:31
Pre-filter Length	11	

Induction Calibration MAI-A.A 45		Base Calibration on 26-JUL-2012,09:22	Field Check on 10-APR-2013 10:52	
Base Calibration				
Test Loop Calibration				
Channel	Low	High	Low	High
1	14.4	472.6	9.3	966.2
2	5.7	374.0	7.6	821.4
3	3.4	261.2	5.2	566.0
4	2.5	133.9	2.6	279.2
Array Temperature	78.4		Deg F	
Channel	Base Check (mmho/m)		Field Check (mmho/m)	
	Low	High	Low	High
1			18.4	3850.4
2			31.7	3628.8
3			28.7	3049.3
4			18.3	2079.1
Deep			16.1	1911.4
Medium			42.5	4060.4
Shallow			49.5	5481.9
Array Temperature			60.4	Deg F

Induction Constants MAI-A.A 45		Last Edited on 16-APR-2013,10:45		
Induction Model	RtAP-WBM			
Caliper for Borehole Corr.	Density Caliper			
Hole Size for Borehole Correction	N/A	inches		
Tool Centred	No			
Stand-off Type	Fins			
Stand-off	0.50	inches		
Number of Fins on Stand-off	8.0000			
Stand-off Fin Angle	45.00	degrees		
Stand-off Fin Width	0.5000	inches		
Borehole Corr. Rm Source	Temperature Corr			
Temp. for Rm Corr.	MCG External Temperature			
Squasher Start	0.0020	mhos/metre		
Squasher Offset	N/A	mhos/metre		
Borehole Normalisation				
DRM1	0.0000	DRC1	0.0000	
DRM2	0.0000	DRC2	0.0000	
MRM1	0.0000	MRC1	0.0000	
MRM2	0.0000	MRC2	0.0000	
SRM1	0.0000	SRC1	0.0000	
SRM2	0.0000	SRC2	0.0000	
Calibration Site Corrections				
Channel 1	0.00	mmhos/metre		
Channel 2	0.00	mmhos/metre		
Channel 3	0.00	mmhos/metre		
Channel 4	0.00	mmhos/metre		



Caliper 4	0.00	mm/metre
<b>Apparent Porosity and Water Saturation Constants</b>		
Archie Constant (A)	1.00	
Cementation Exponent (M)	2.00	
Saturation Exponent (N)	2.00	
Saturation of Water for Apor	100.00	percent
Resistivity of Water for Apor and Sw	0.05	ohm-m
Resistivity of Mud Filtrate for Sw	0.00	ohm-m
Source for Rt	0.00	
Source for Rxo	0.00	

**Caliper Calibration MPD-B 31**

Base Calibration on 28-MAR-2013 13:43  
Field Calibration on 08-APR-2013 08:48

<b>Base Calibration</b>		
Reading No	Measured	Calibrator Size (in)
1	16832	3.99
2	24690	5.98
3	33328	7.97
4	41600	9.86
5	50976	11.92
6	N/A	N/A
<b>Field Calibration</b>		
	Measured Caliper (in)	Actual Caliper (in)
	6.00	5.98

**Photo Density Calibration MPD-B 31**

Base Calibration on 13-MAR-2013 15:17  
Field Check on 10-APR-2013 10:49

<b>Density Calibration</b>					
<b>Base Calibration</b>					
		Measured		Calibrated (sdu)	
	Near	Far	Near	Far	
Reference 1	46119	23502	59556	30836	
Reference 2	19149	1933	24941	2541	
<b>Field Check at Base</b>					
	681.1	838.4			
<b>Field Check</b>					
	679.5	834.9			
<b>PE Calibration</b>					
<b>Base Calibration</b>					
	WS	WH	Ratio	Calibrated Ratio	
Background	125	604			
Reference 1	19219	46004	0.421	0.371	
Reference 2	5674	19062	0.301	0.272	
<b>Field Check at Base</b>					
	125.1	603.7			
<b>Field Check</b>					
	124.6	603.1			

**Density Constants MPD-B 31**

Last Edited on 16-APR-2013,10:46

Density Source Id	254	
Nylon Calibrator Number	DNCE695	
Aluminium Calibrator Number	DACD698	
Density Shoe Profile	8 inch	
Caliper Source for Processing	Density Caliper	
PE Correction to Density	Not Applied	
Mud Density	1.12	gm/cc
Mud Density Z/A Multiplier	1.11	
Mud Filtrate Density	1.00	gm/cc
Dry Hole Mud Filtrate Density	1.00	gm/cc
DNCT	0.00	gm/cc
CRCT	0.00	gm/cc
Density Z/A Correction	Hybrid	
Matrix Density (gm/cc)	Depth (ft)	
2.71	0.00	

0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00

### DOWNHOLE EQUIPMENT

C:\Minimus\Archive 2013\LB13-104\Minimus 13.04.8492\_Data\_Shakespeare Rudolph #1-22\Shakespeare Rudolph #1-22\_001.dta

Compact Comms Gamma  
MCG-B 34 LG: 8.70 ft WT: 63.9 lb OD: 2.24 in

Compact Micro-Resistivity  
MMR-A 11 LG: 8.59 ft WT: 81.6 lb OD: 4.88 in

Compact Neutron  
MDN-A.B 65 LG: 5.04 ft WT: 50.7 lb OD: 2.24 in


Compact Density/Caliper  
MPD-B 31 LG: 9.59 ft WT: 90.4 lb OD: 2.45 in

Compact Focused Electric  
MFE-B.J 352 LG: 6.05 ft WT: 48.5 lb OD: 2.24 in

Compact Sonic  
MSS-C.K 330 LG: 12.52 ft WT: 72.8 lb OD: 2.24 in

Compact Induction  
MAI-A.A 45 LG: 10.81 ft WT: 48.5 lb OD: 2.24 in

Total Length: 61.30 ft Weight: 456.4 lb

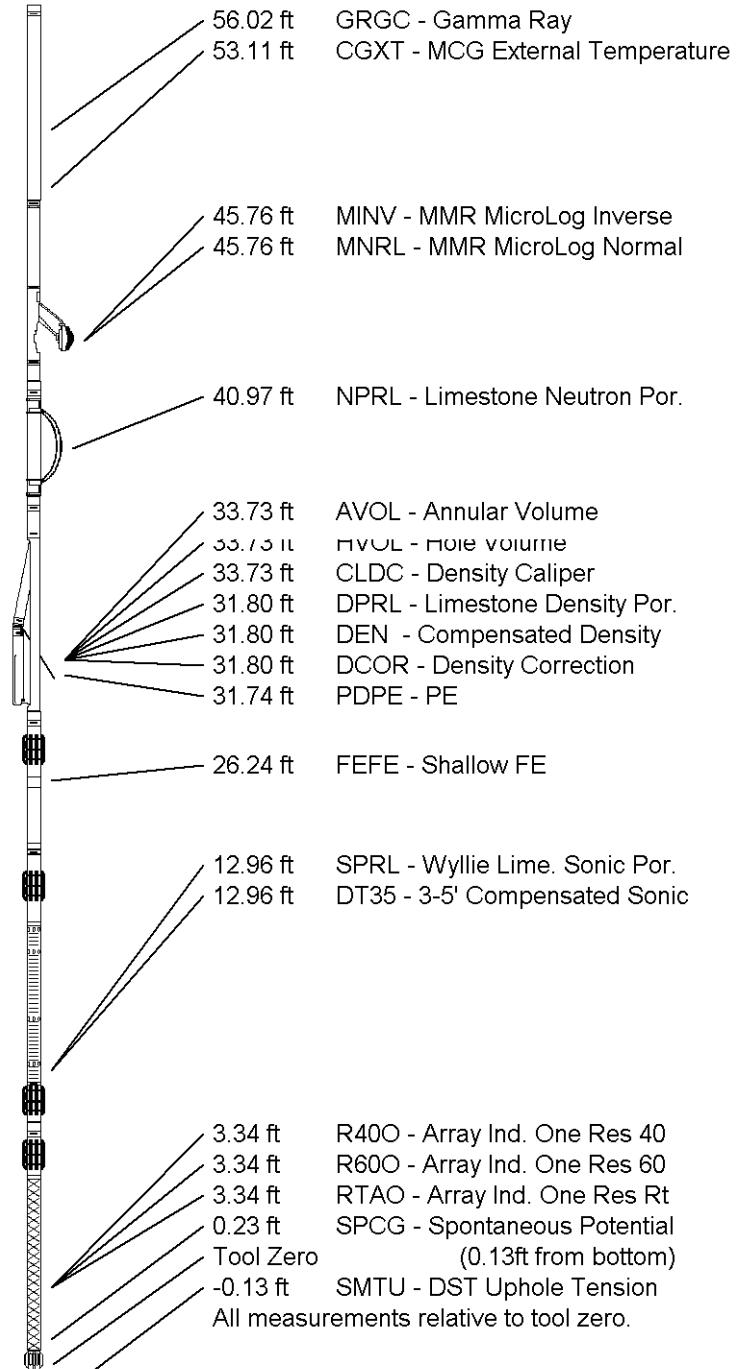

COMPANY	SHAKESPEARE OIL COMPANY
WELL	RUDOLPH #1-22
FIELD	WILDCAT
PROVINCE/COUNTY	SCOTT
COUNTRY/STATE	U.S.A. / KANSAS

Elevation Kelly Bushing	3035.00	feet
Elevation Drill Floor	3033.00	feet
Elevation Ground Level	3025.00	feet

First Reading	4926.00	feet
Depth Driller	4940.00	feet
Depth Logger	4939.00	feet



**Weatherford**<sup>®</sup>

COMPENSATED SONIC  
WITH INTEGRATED TRANSIT TIME