

HALLIBURTON

DUAL SPACED NEUTRON SPECTRAL DENSITY LOG

COMPANY	SANDRIDGE ENERGY
WELL	PAMELA 2330 1-34 RE
FIELD/BLOCK	
COUNTY	FINNEY
STATE	KANSAS
COMPANY	SANDRIDGE ENERGY
WELL	PAMELA 2330 1-34 RE
FIELD/BLOCK	
COUNTY	FINNEY
STATE	KANSAS
API No.	15-055-21942-00-00
Location	880' FNL 2360' FWL
Sect.	34
Twp.	23S
Rge.	30W
Elev.	2806.0 ft
Log measured from	KB
Drilling measured from	KB
Other Services:	MICRO ACRT CSNG WSTT MRIL
Elev.: K.B.	2818.0 ft
D.F.	2816.0 ft
G.L.	2806.0 ft

Date	17-Apr-13
Run No.	ONE
Depth - Driller	5420.00 ft
Depth - Logger	5374.0 ft
Bottom - Logged Interval	5286.0 ft
Top - Logged Interval	352.0 ft
Casing - Driller	8.625 in @ 346.0 ft
Casing - Logger	352.0 ft @
Bit Size	7.875 in @
Type Fluid in Hole	WATER BASED MUD
Density	9.1 ppg
Viscosity	51.00 s/qt
PH	11.00 pH
Fluid Loss	4.0 cphm
Source of Sample	FLOWLINE
Rm @ Meas. Temperature	0.360 ohmm @ 75.00 degF
Rmf @ Meas. Temperature	0.29 ohmm @ 75.00 degF
Rmc @ Meas. Temperature	0.420 ohmm @ 75.00 degF
Source Rmf	MEASURED
Rmc	MEASURED
Rm @ BHT	0.22 ohmm @ 125.0 degF
Time Since Circulation	8.0 hr
Time on Bottom	17-Apr-13 19:41
Max. Rec. Temperature	125.0 degF @ 5374.0 ft
Equipment	10546696 LIBERAL
Recorded By	THOMAS HYDE
Witnessed By	W. SCOTT

Fold here

Service Ticket No.: 900366024 API Serial No.: 15-055-21942-00-00 PGM Version: WL INSITE R3.8.4 (Build 5)

CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE					RESISTIVITY SCALE CHANGES				
Date	Sample No.				Type Log	Depth	Scale Up Hole	Scale Down Hole	
Depth-Driller									
Type Fluid in Hole									
Density	Viscosity								
Ph	Fluid Loss								
Source of Sample					RESISTIVITY EQUIPMENT DATA				
Rm @ Meas. Temp		@		@	Run No.	Tool Type & No.	Pad Type	Tool Pos.	Other
Rmf @ Meas. Temp.		@		@					
Rmc @ Meas. Temp.		@		@					
Source Rmf	Rmc								
Rm @ BHT		@		@					
Rmf @ BHT		@		@					
Rmc @ BHT		@		@					

EQUIPMENT DATA							
GAMMA		ACOUSTIC		DENSITY		NEUTRON	
Run No.	ONE	Run No.		Run No.	ONE	Run No.	ONE
Serial No.	11039640	Serial No.		Serial No.	11014296	Serial No.	11055304
Model No.	GTET	Model No.		Model No.	SDLT	Model No.	DSNT
Diameter	3.625"	No. of Cent.		Diameter	4.5"	Diameter	3.625"
Detector Model No.	T-102	Spacing		Log Type	GAM-GAM	Log Type	NEU-NEU
Type	SCINT			Source Type	Cs137	Source Type	Am241Be
Length	8"	LSA [Y/N]		Serial No.	5168 GW	Serial No.	DSN-424
Distance to Source	10'	FWDA [Y/N]		Strength	1.5 Ci	Strength	15 Ci

LOGGING DATA

GENERAL			GAMMA		ACOUSTIC		DENSITY			NEUTRON				
Run No.	Depth		Speed	Scale		Scale		Matrix	Scale		Matrix	Scale		Matrix
	From	To	ft/min	L	R	L	R		L	R		L	R	
ONE	5374	352	REC	0	150				30	-10	2.71	30	-10	LIME

DIRECTIONAL INFORMATION

Maximum Deviation @ KOP @

Remarks: ANNULAR HOLE VOLUME CALCULATED FOR 5.5 INCH CASING
CHLORIDES REPORTED AT 8800 MG/L

TODAY'S CREW M. GRAHAM F. VILLA

THANK YOU FOR CHOOSING HALLIBURTON ENERGY SERVICES LIBERAL, KANSAS 620-624-8123


HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.


HALLIBURTON





Plot Time: 18-Apr-13 03:21:06
Plot Range: 340 ft to 5377.25 ft
Data: PAMELA_2330_1-3\Well Based\DAQ-0001-003\
Plot File: \\PORO\Poro_IQ_5_MAIN_LIB


5 INCH MAIN LOG

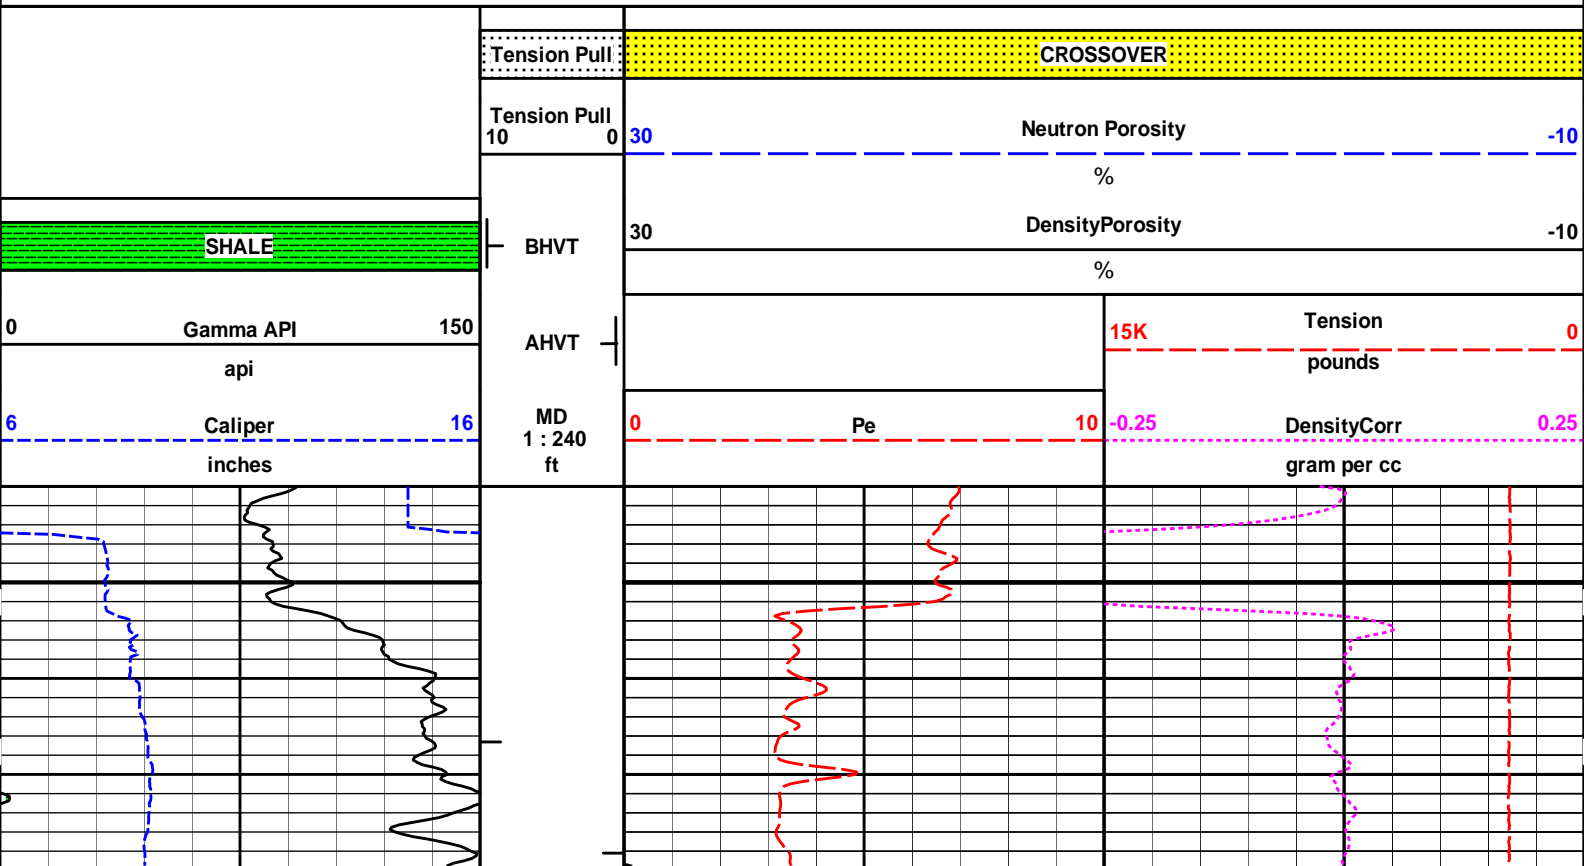


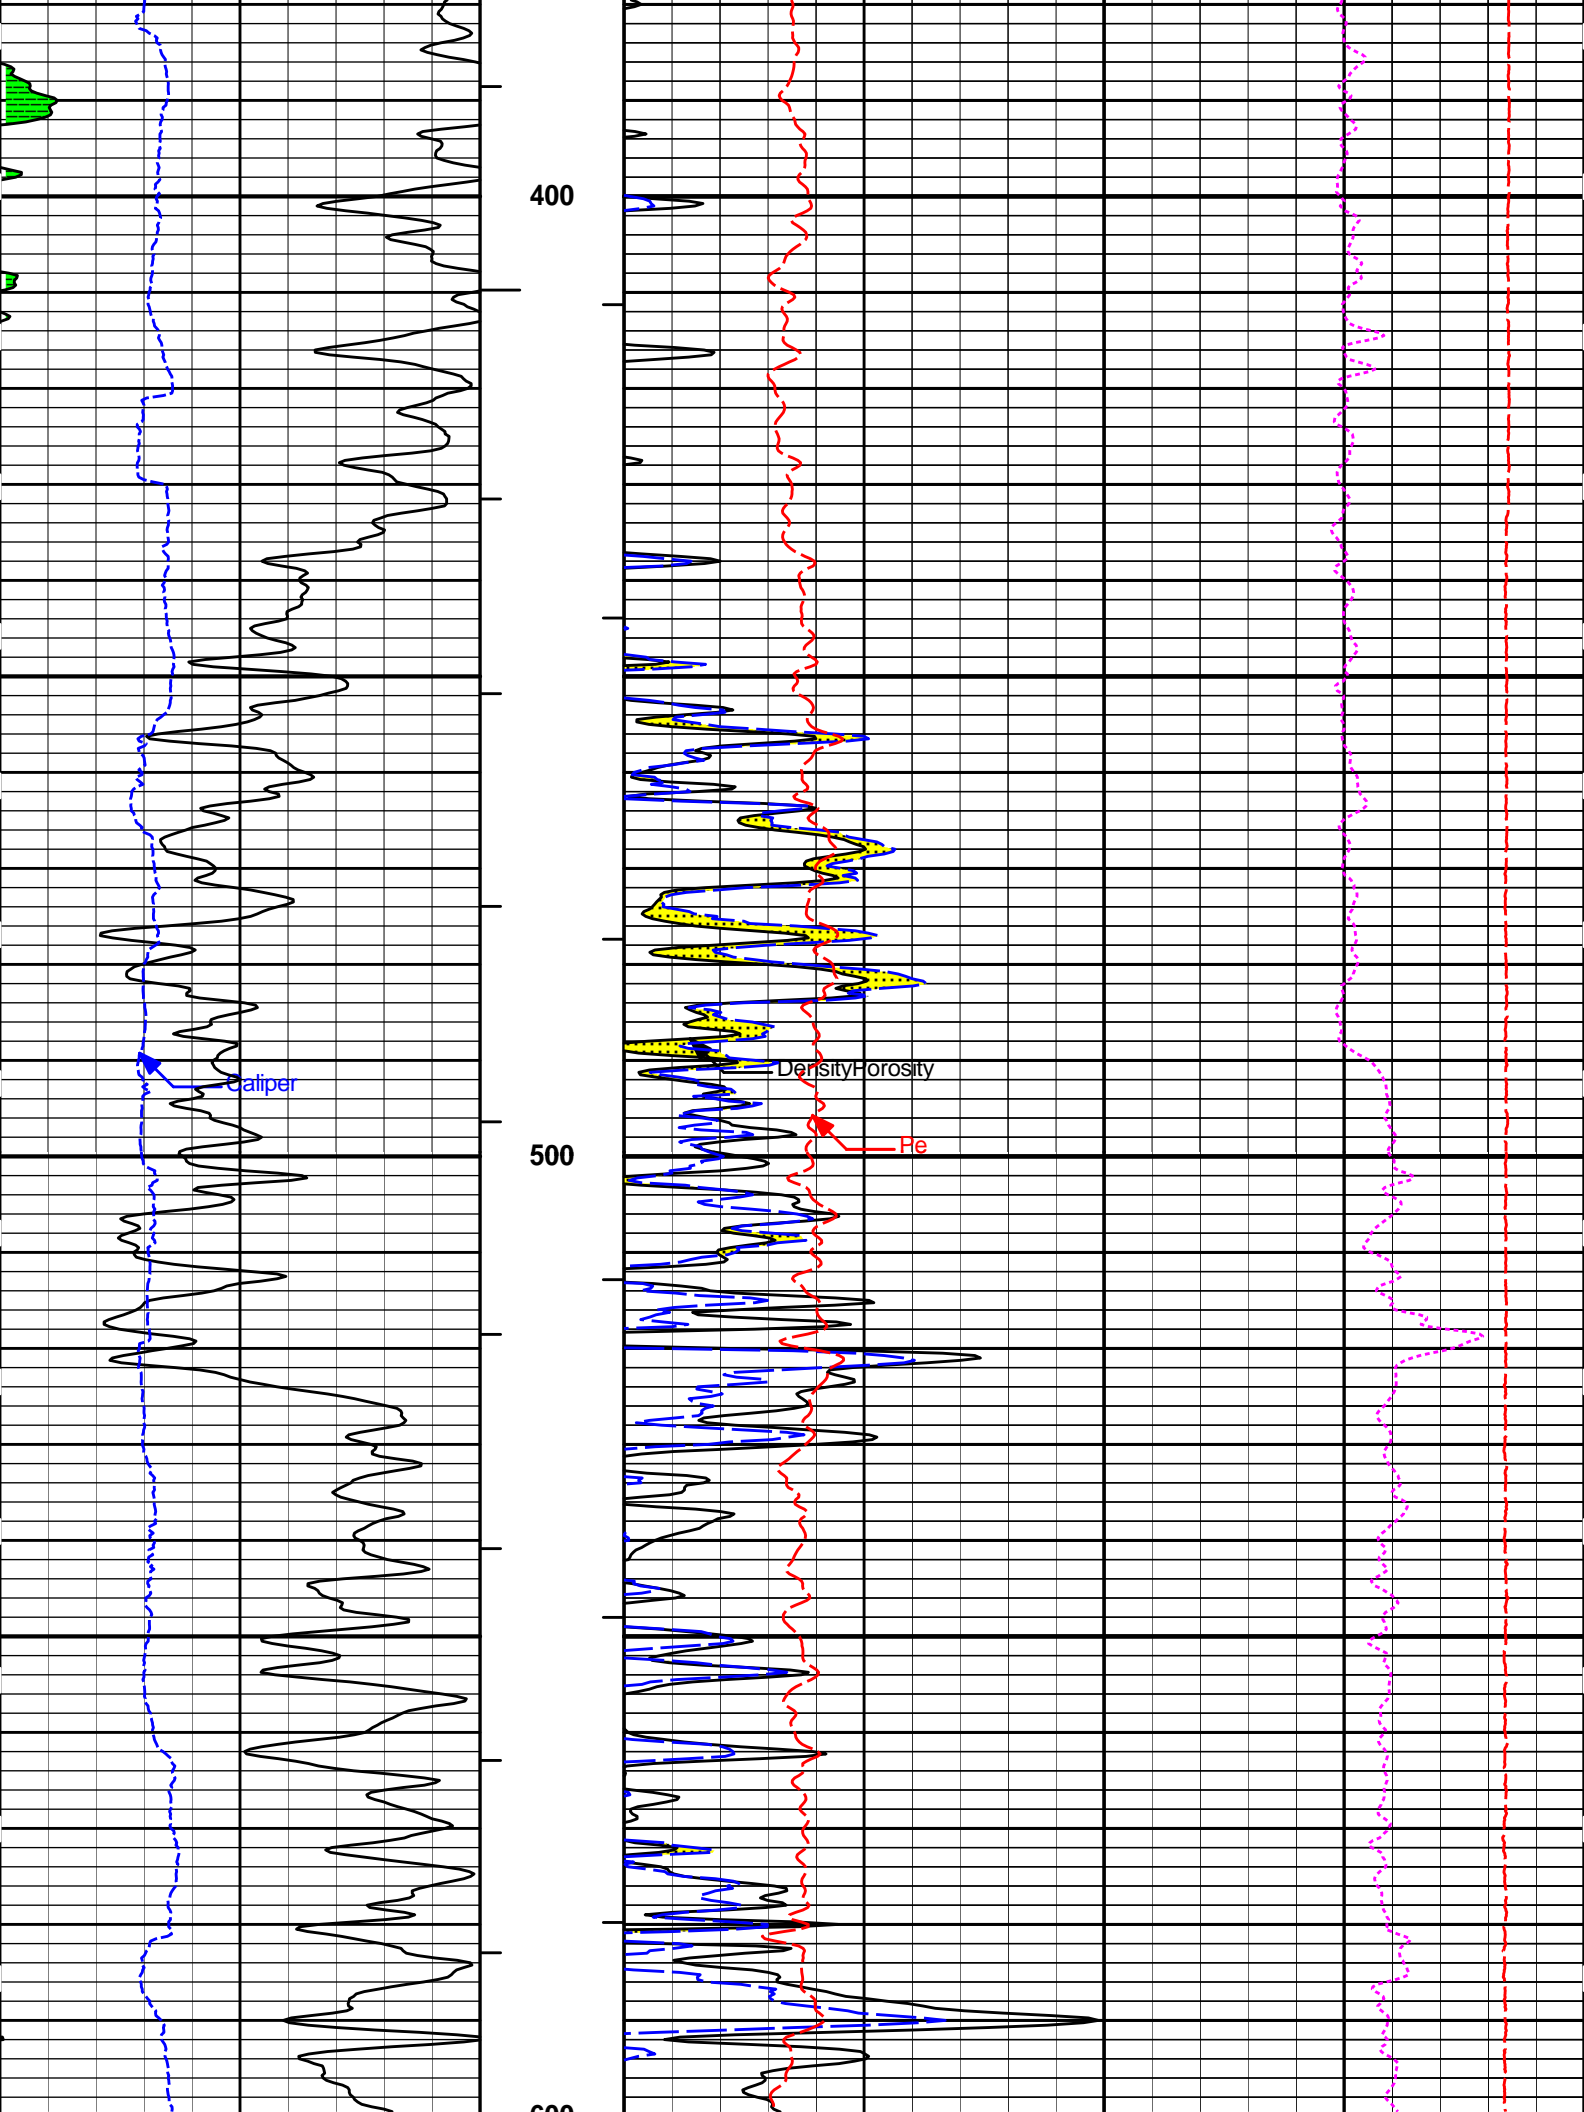


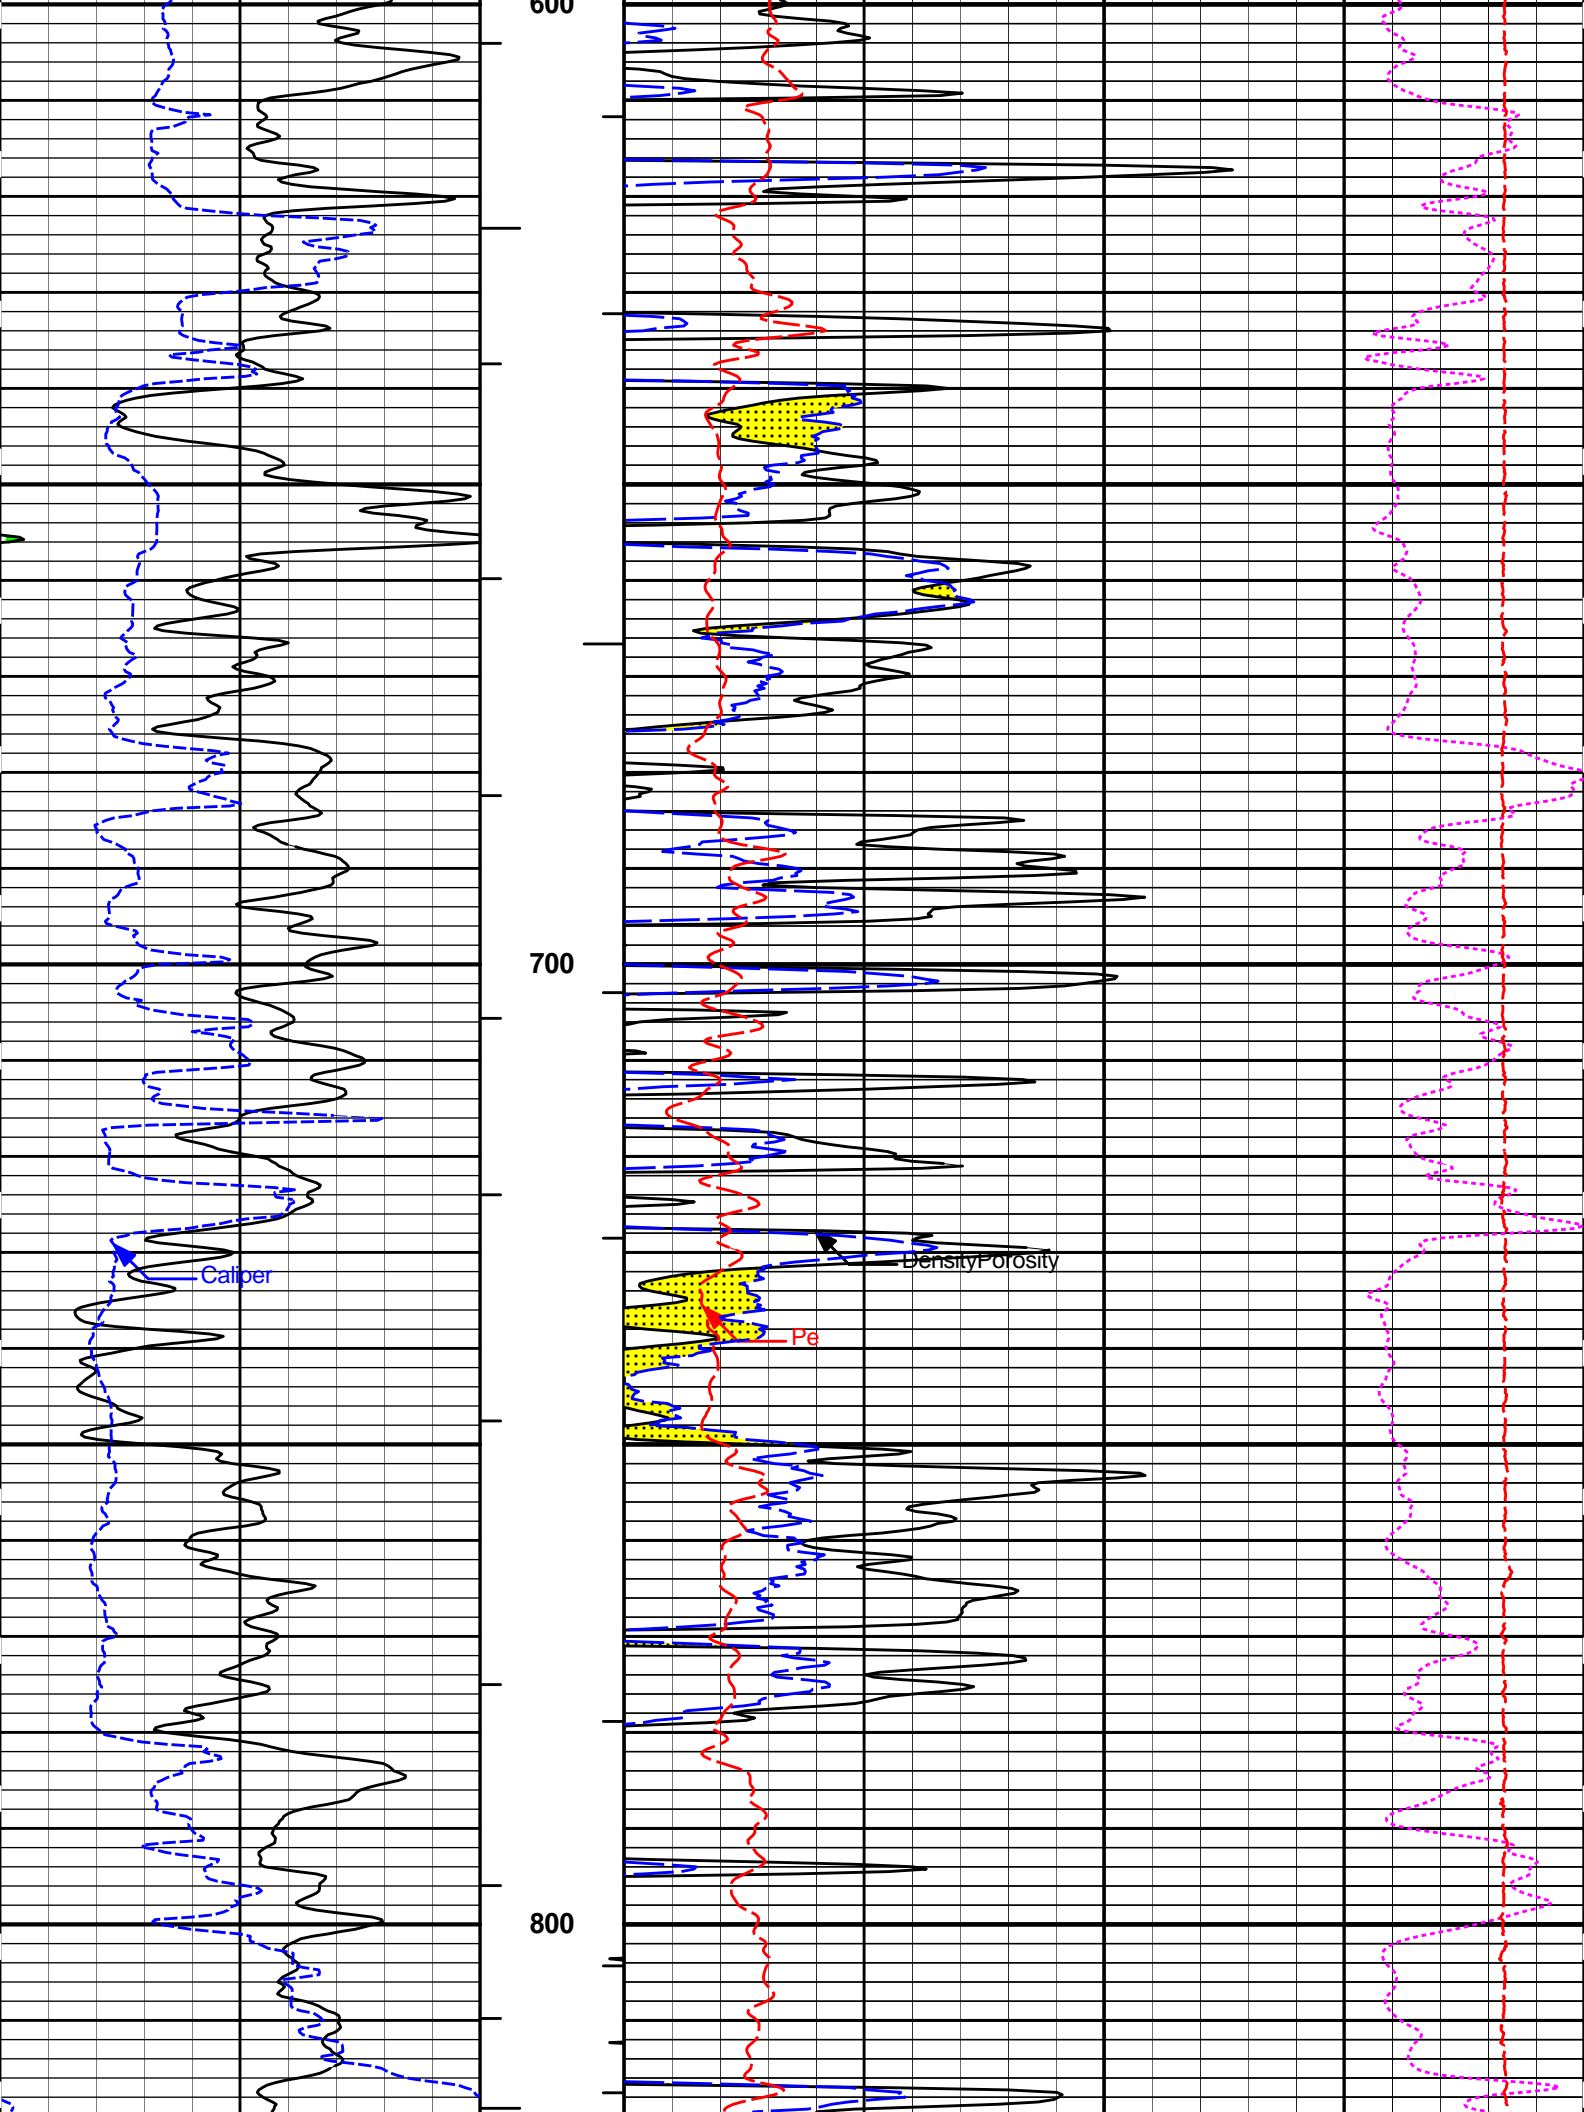


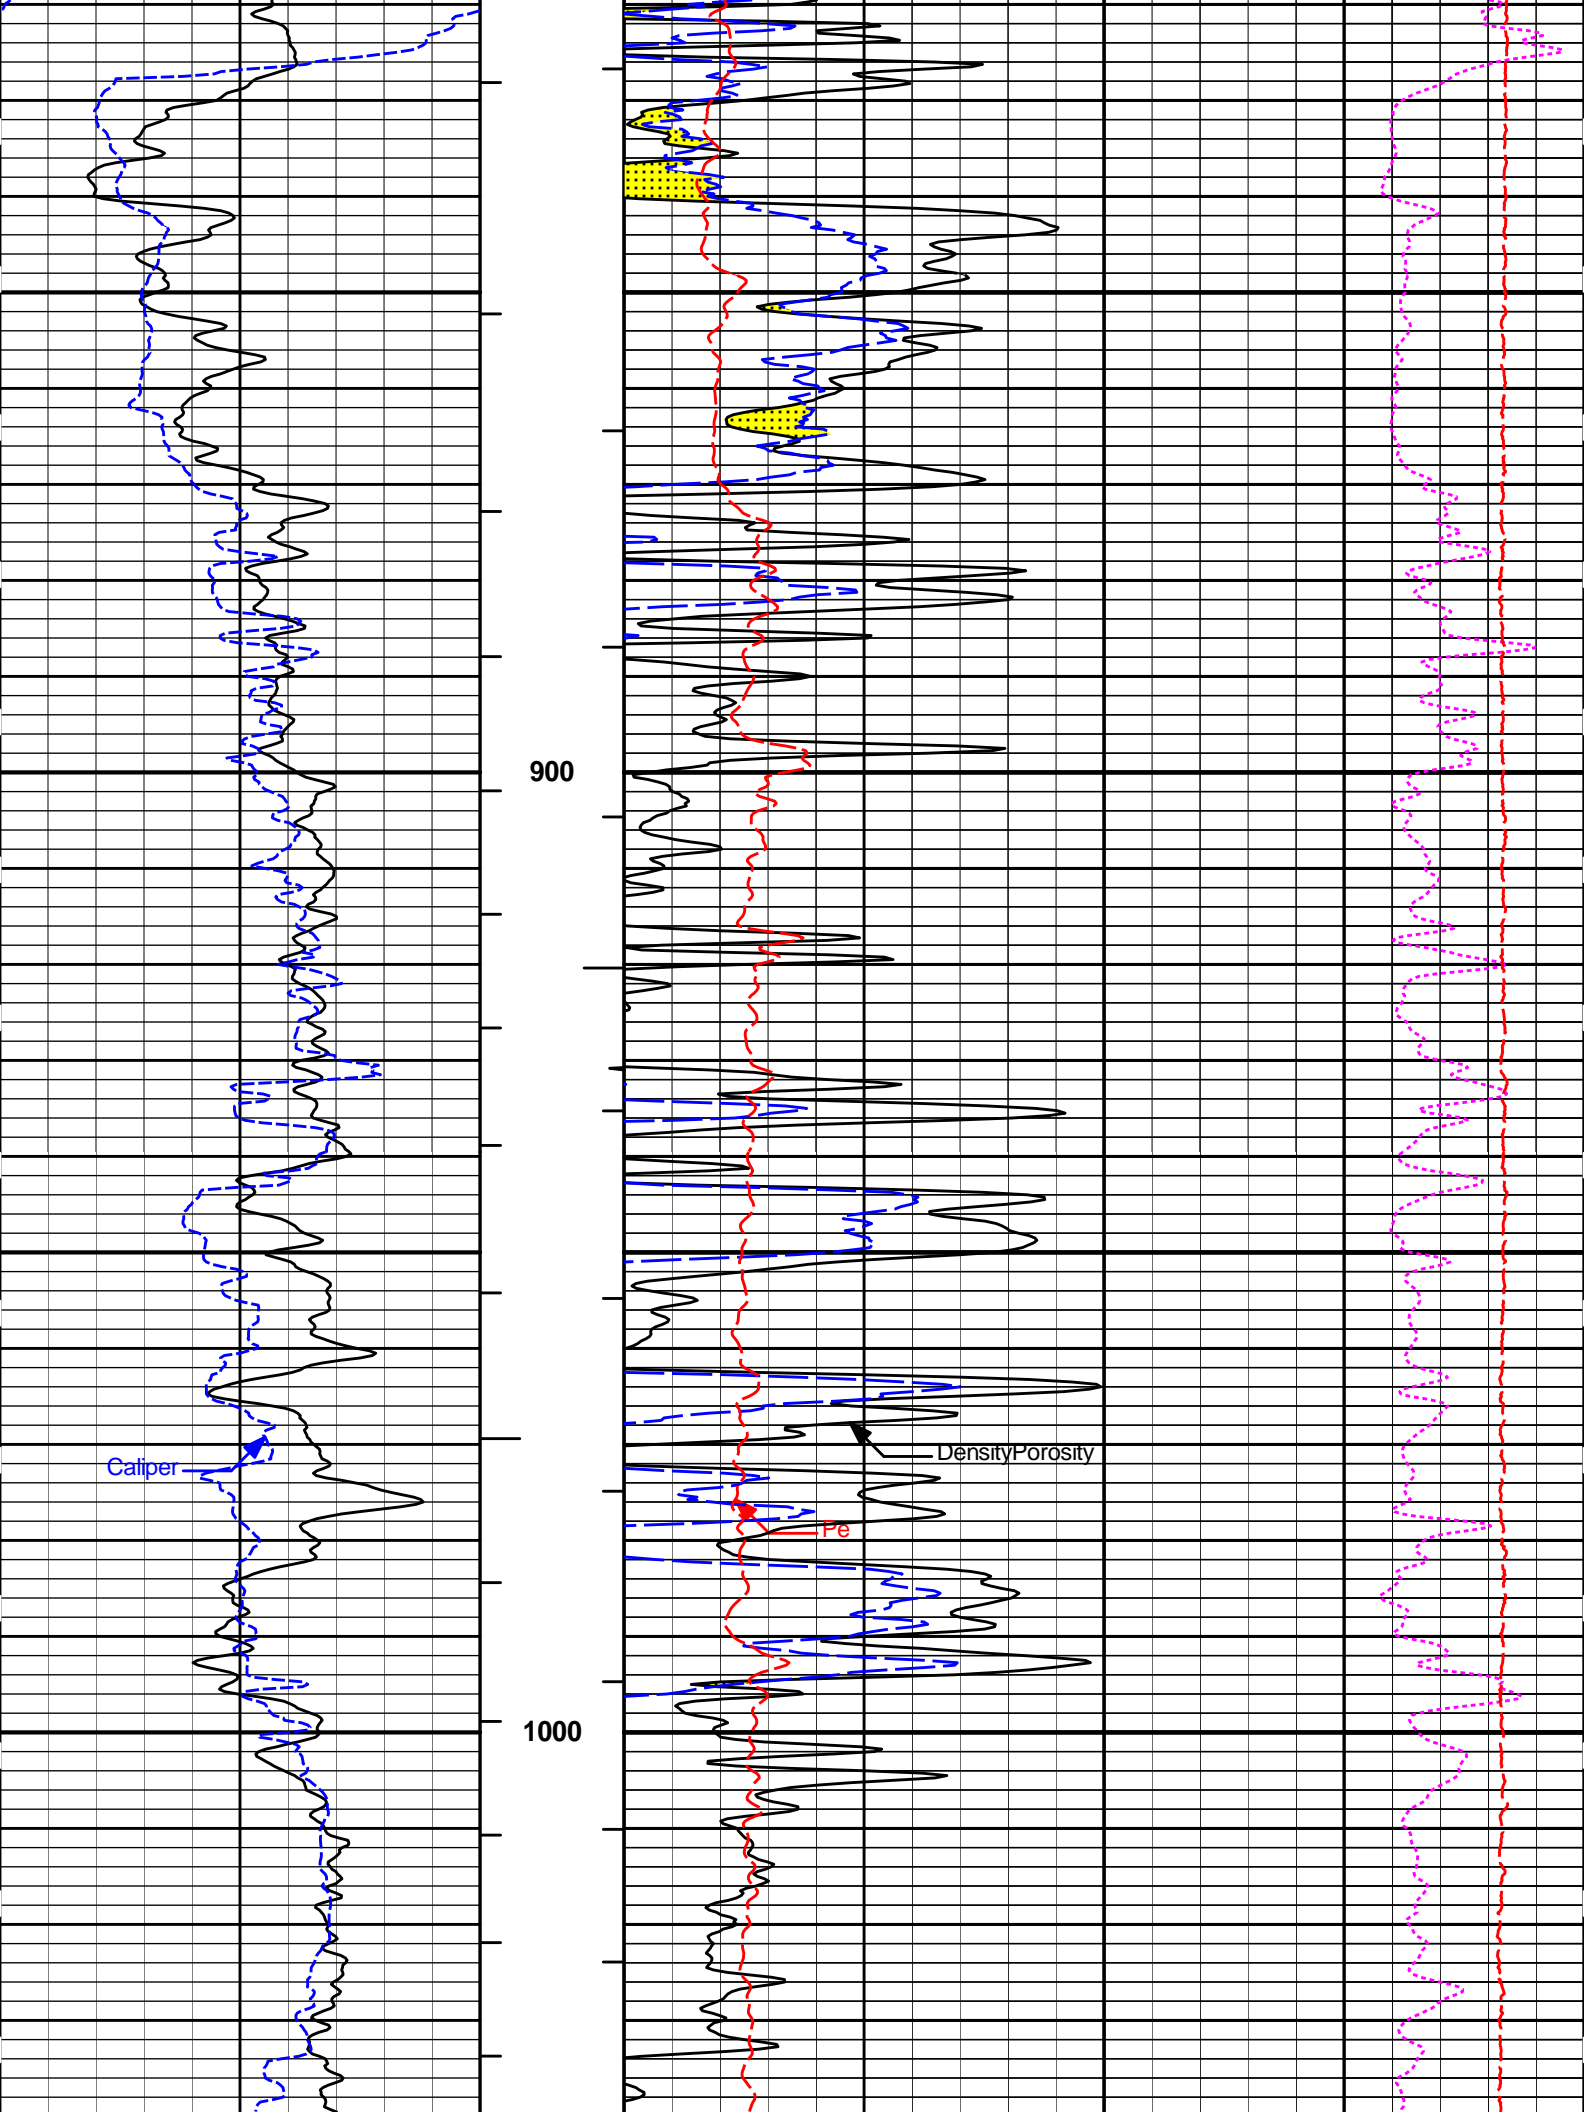


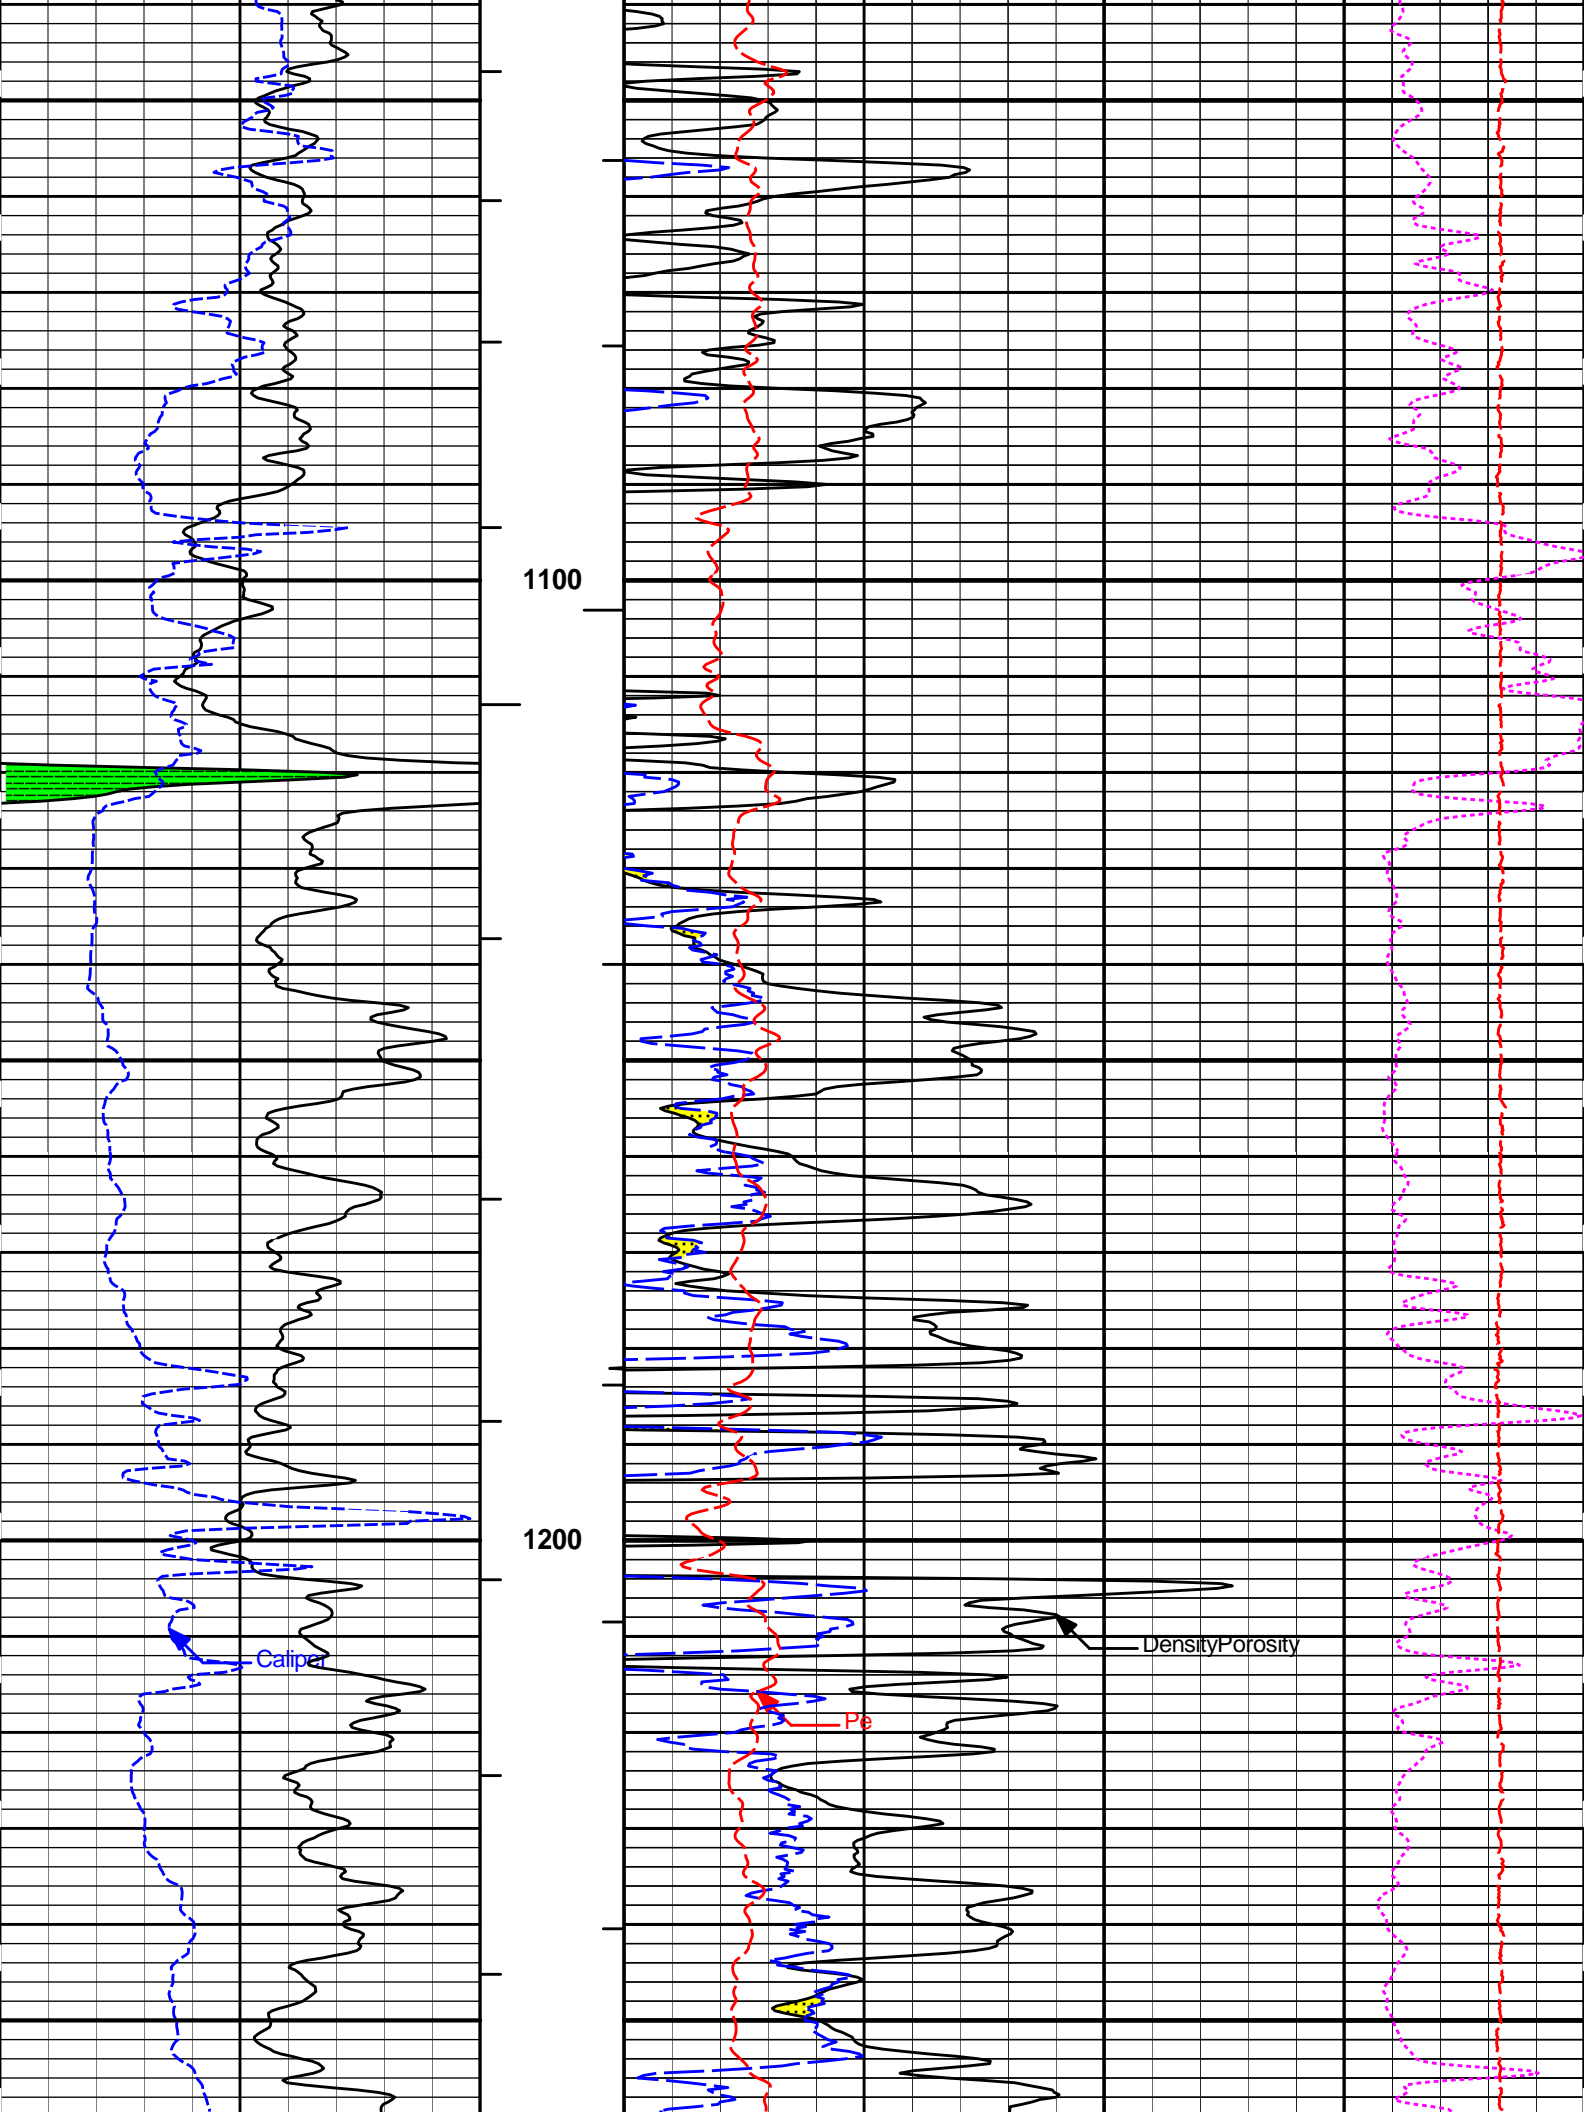


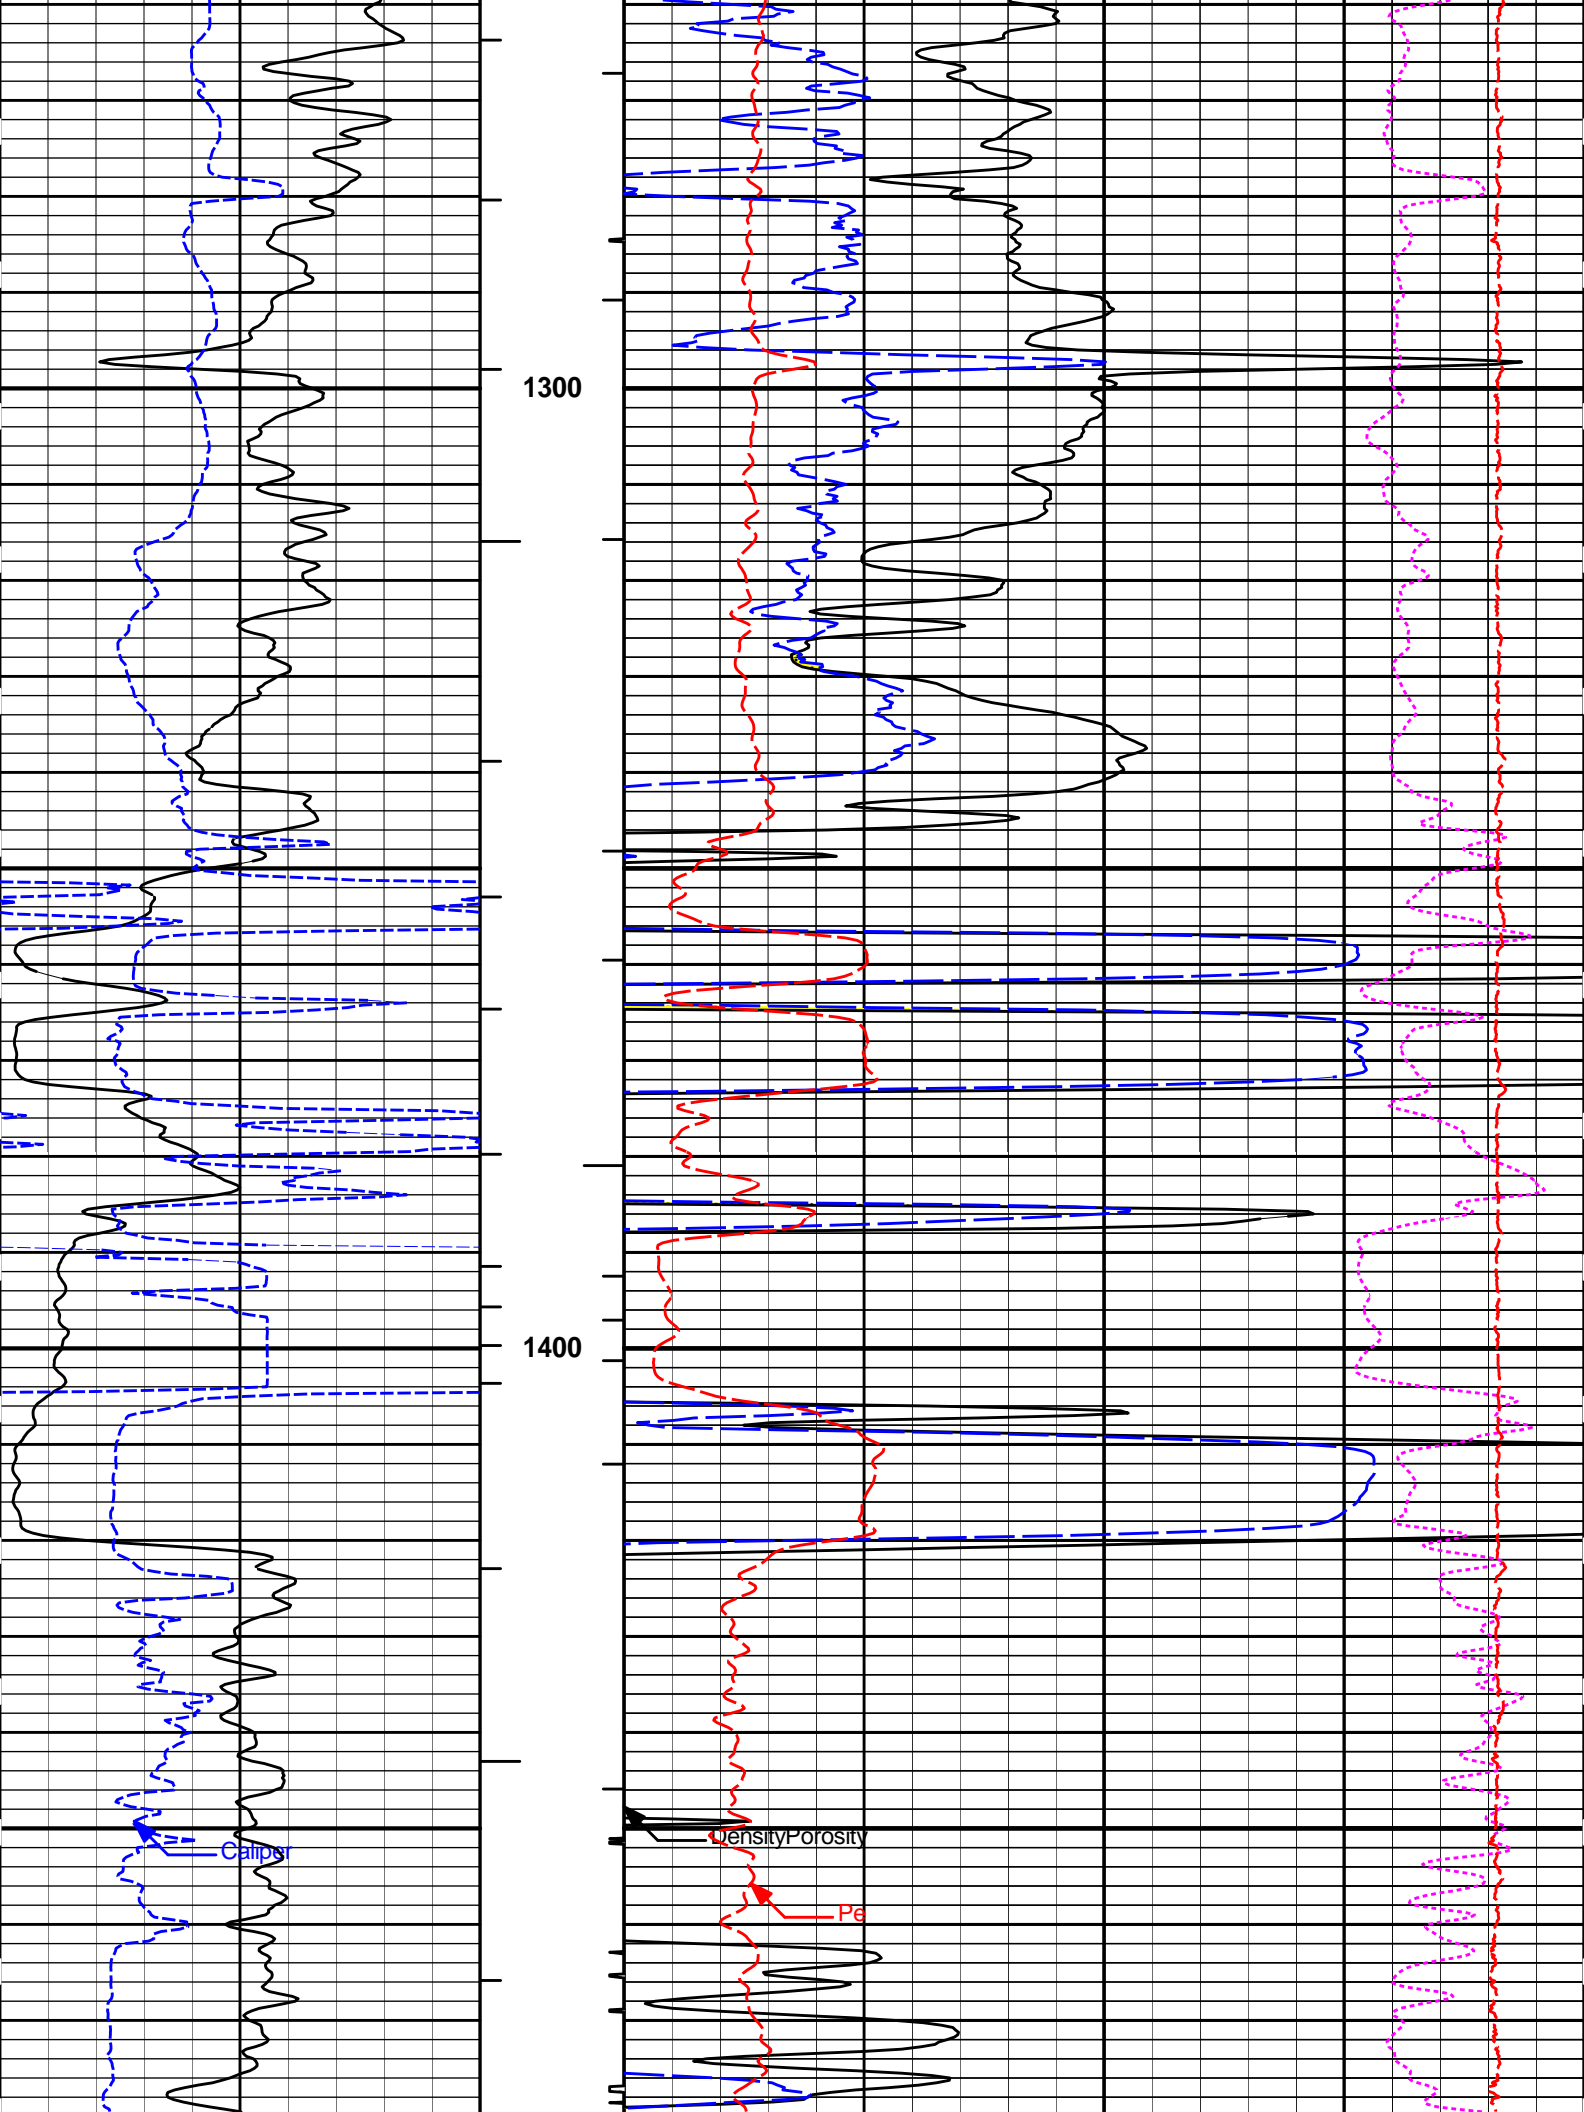


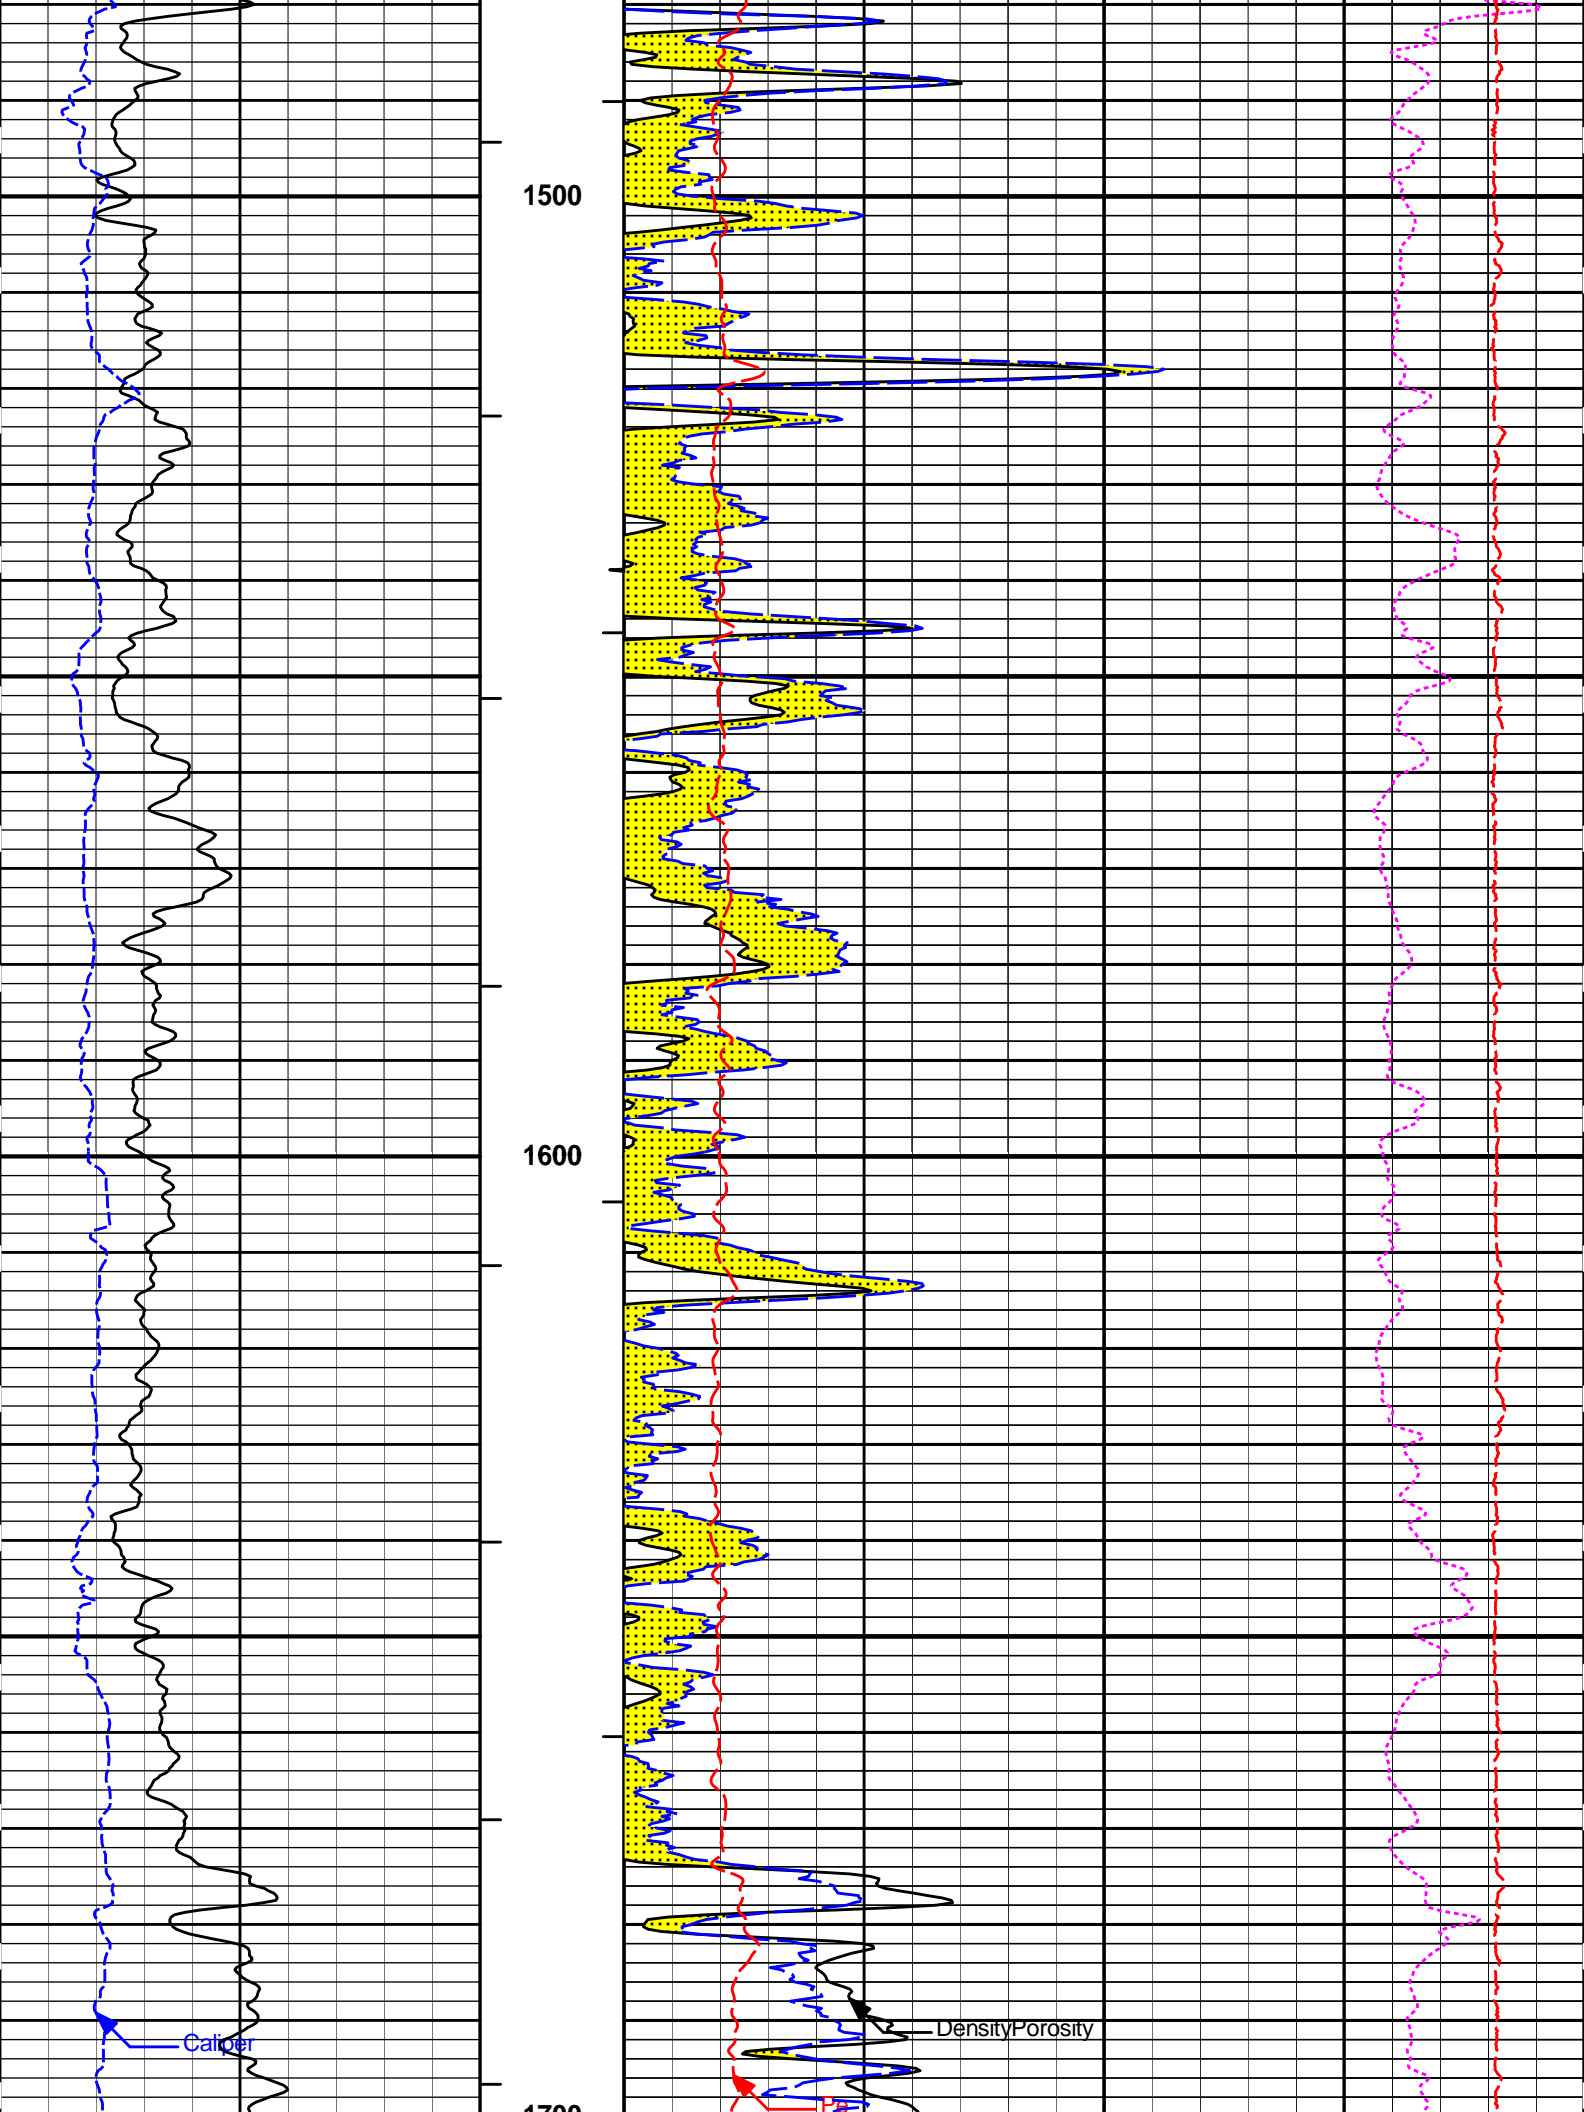


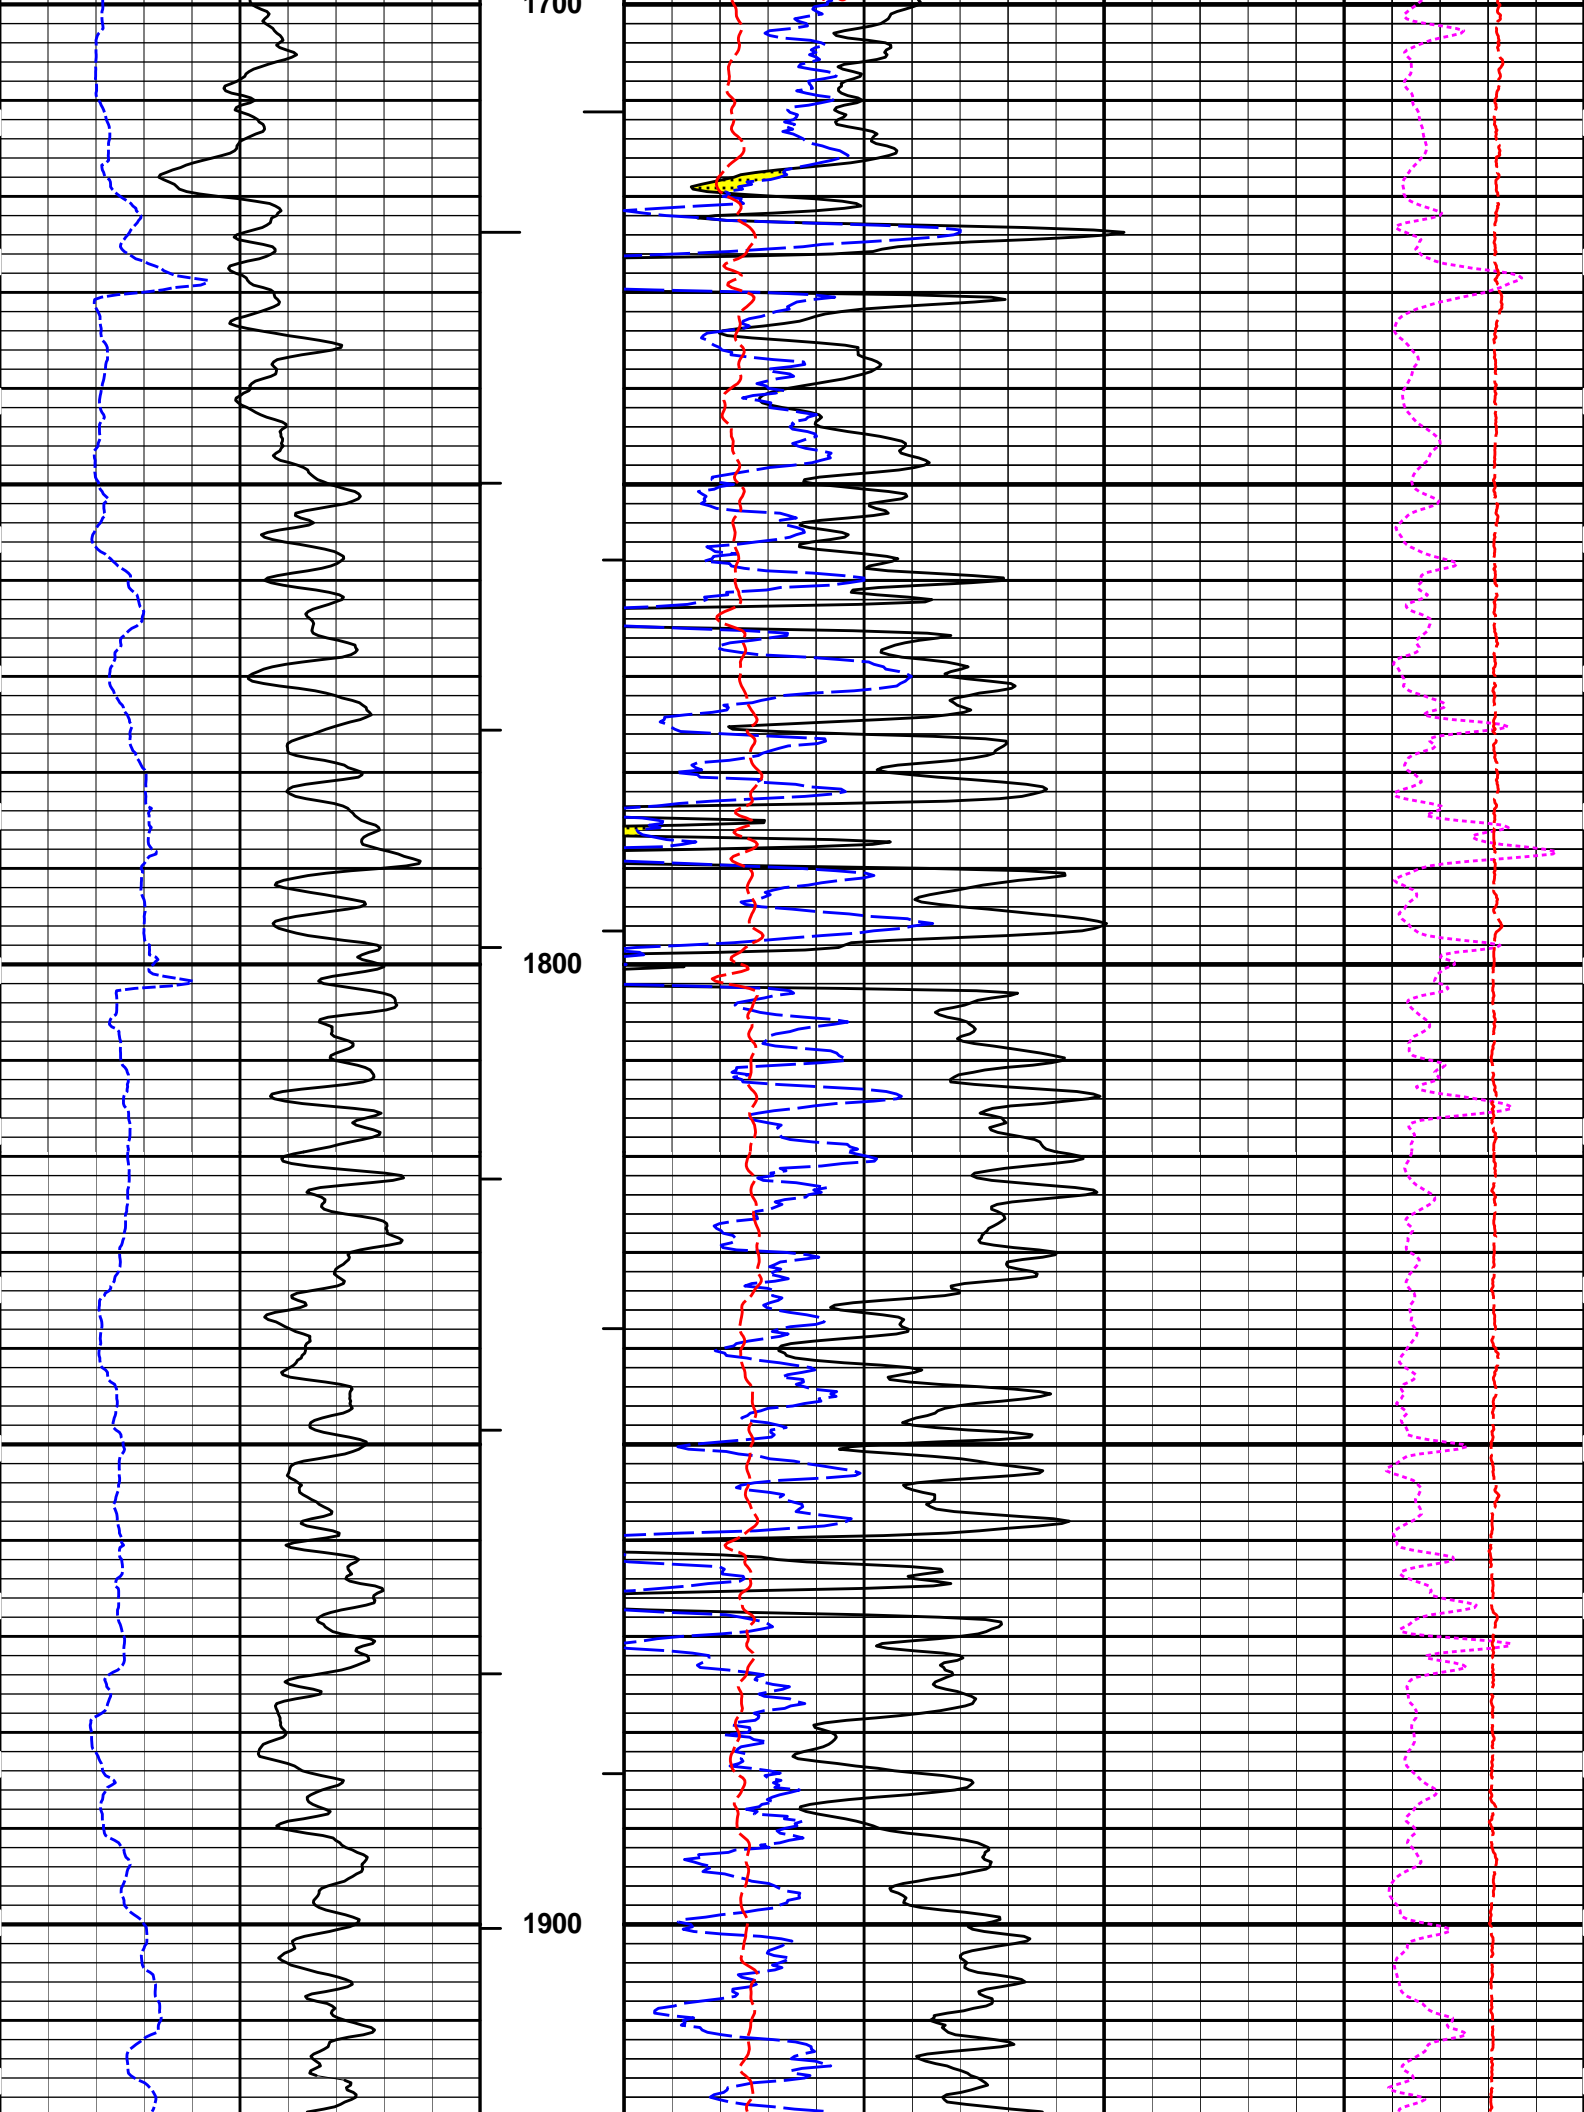


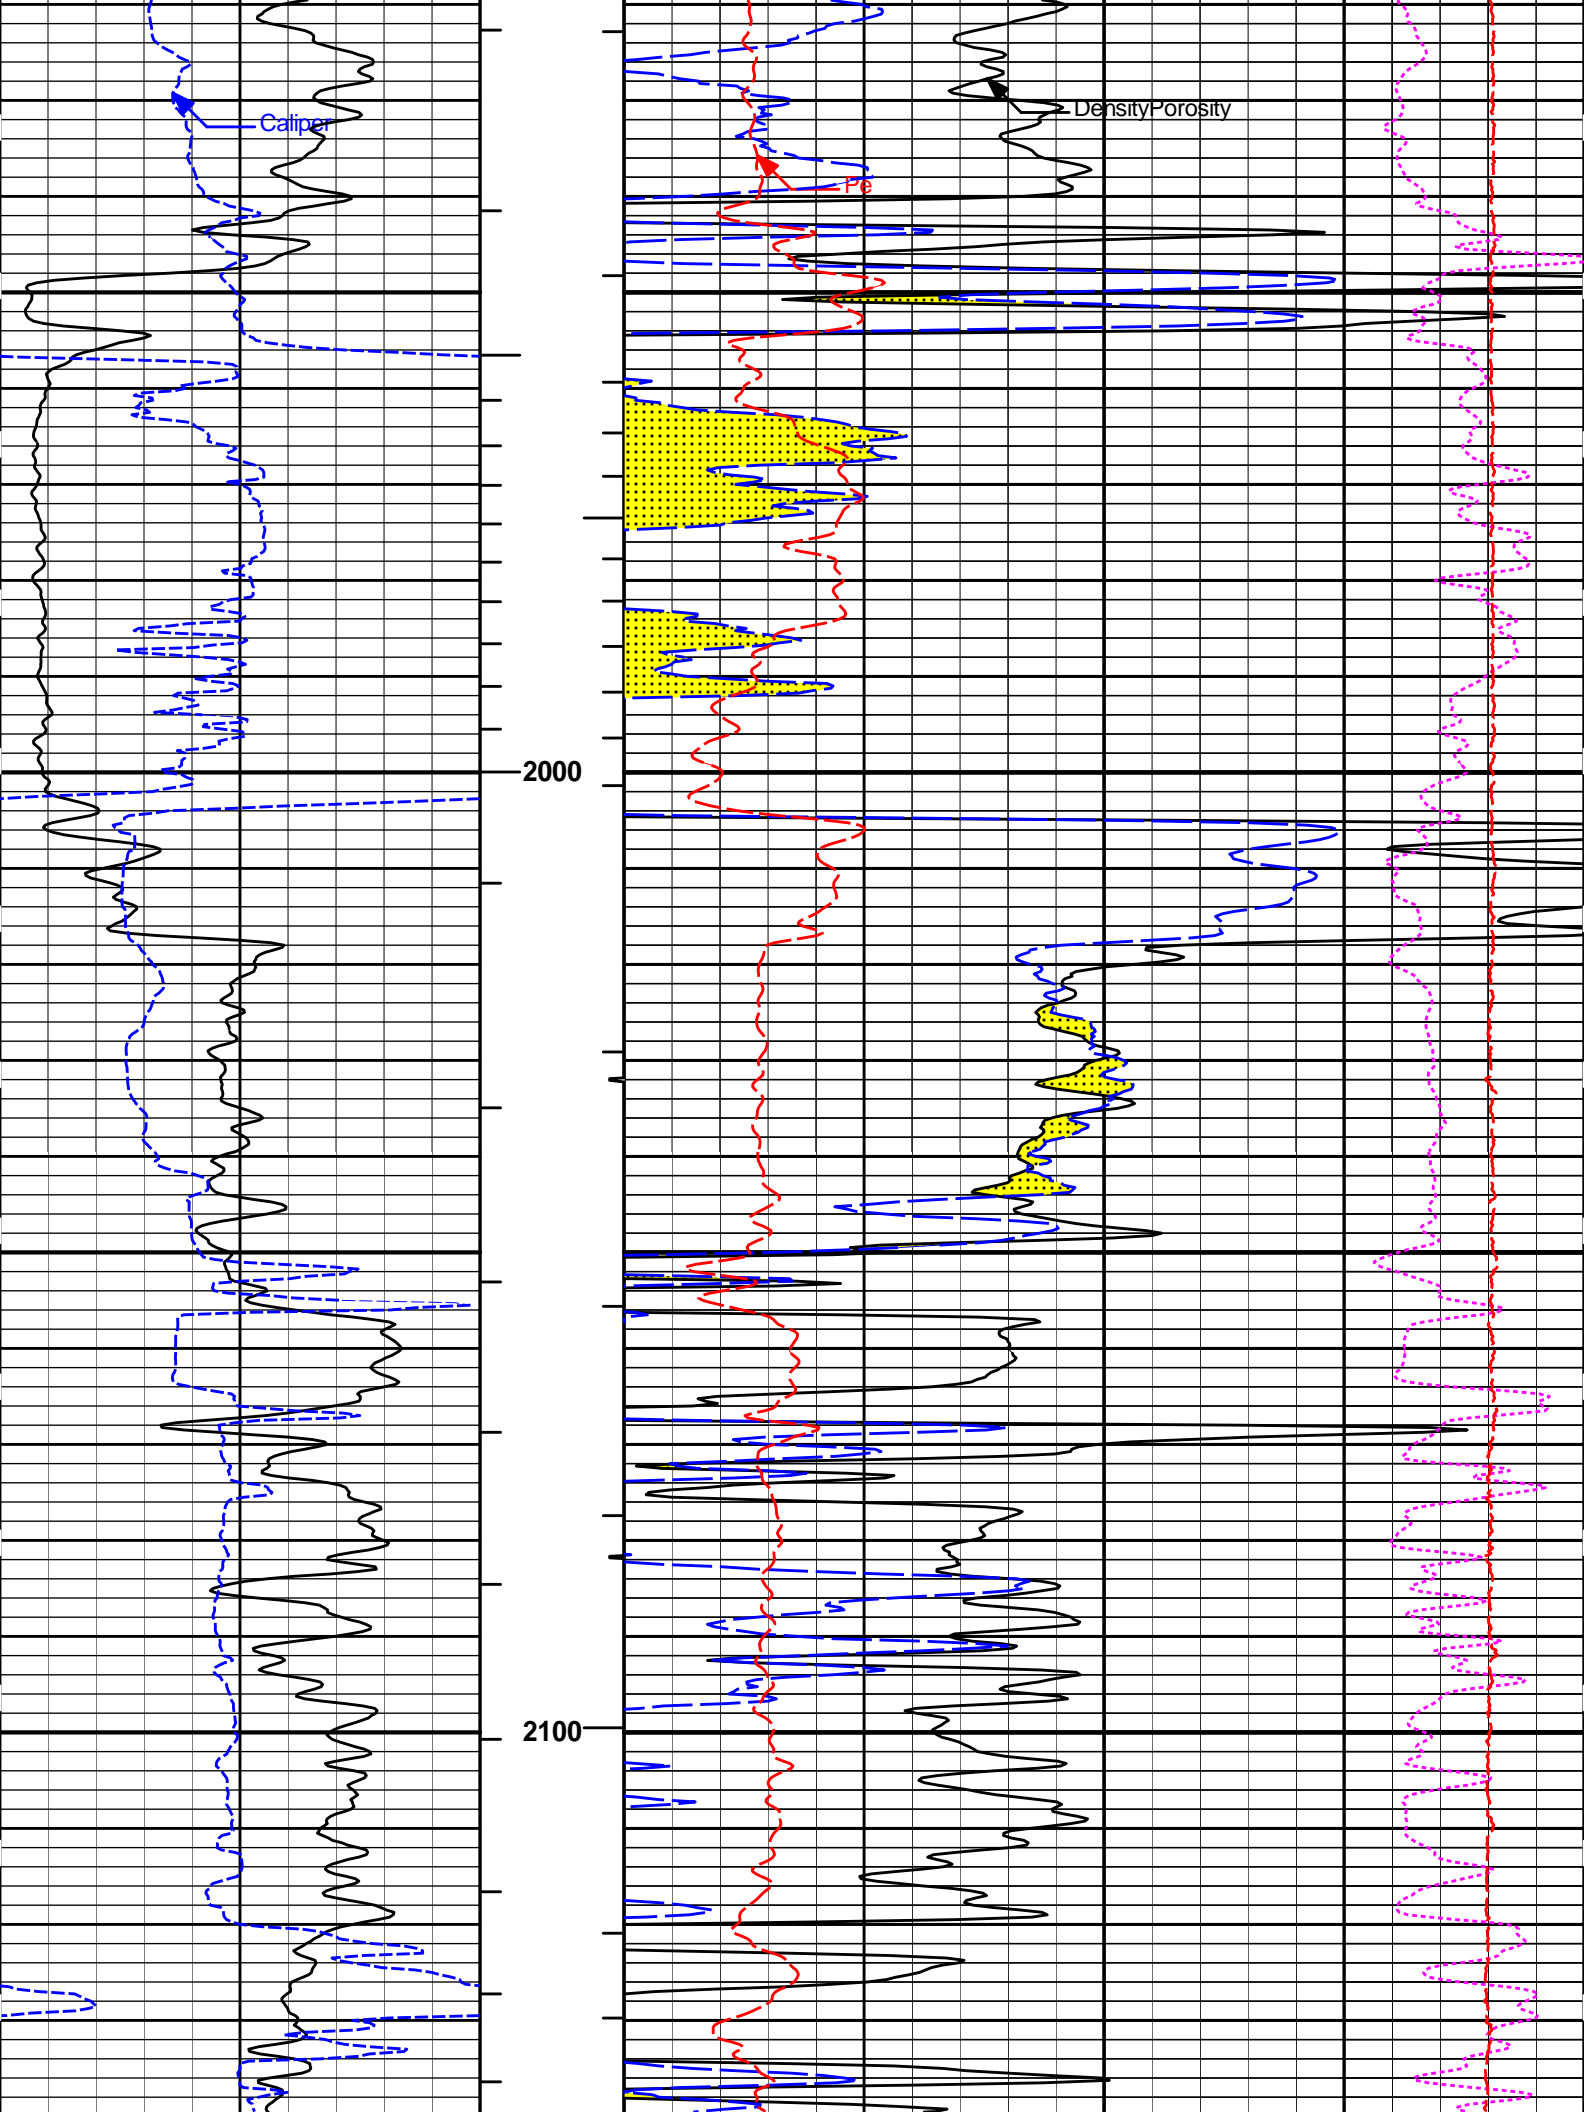


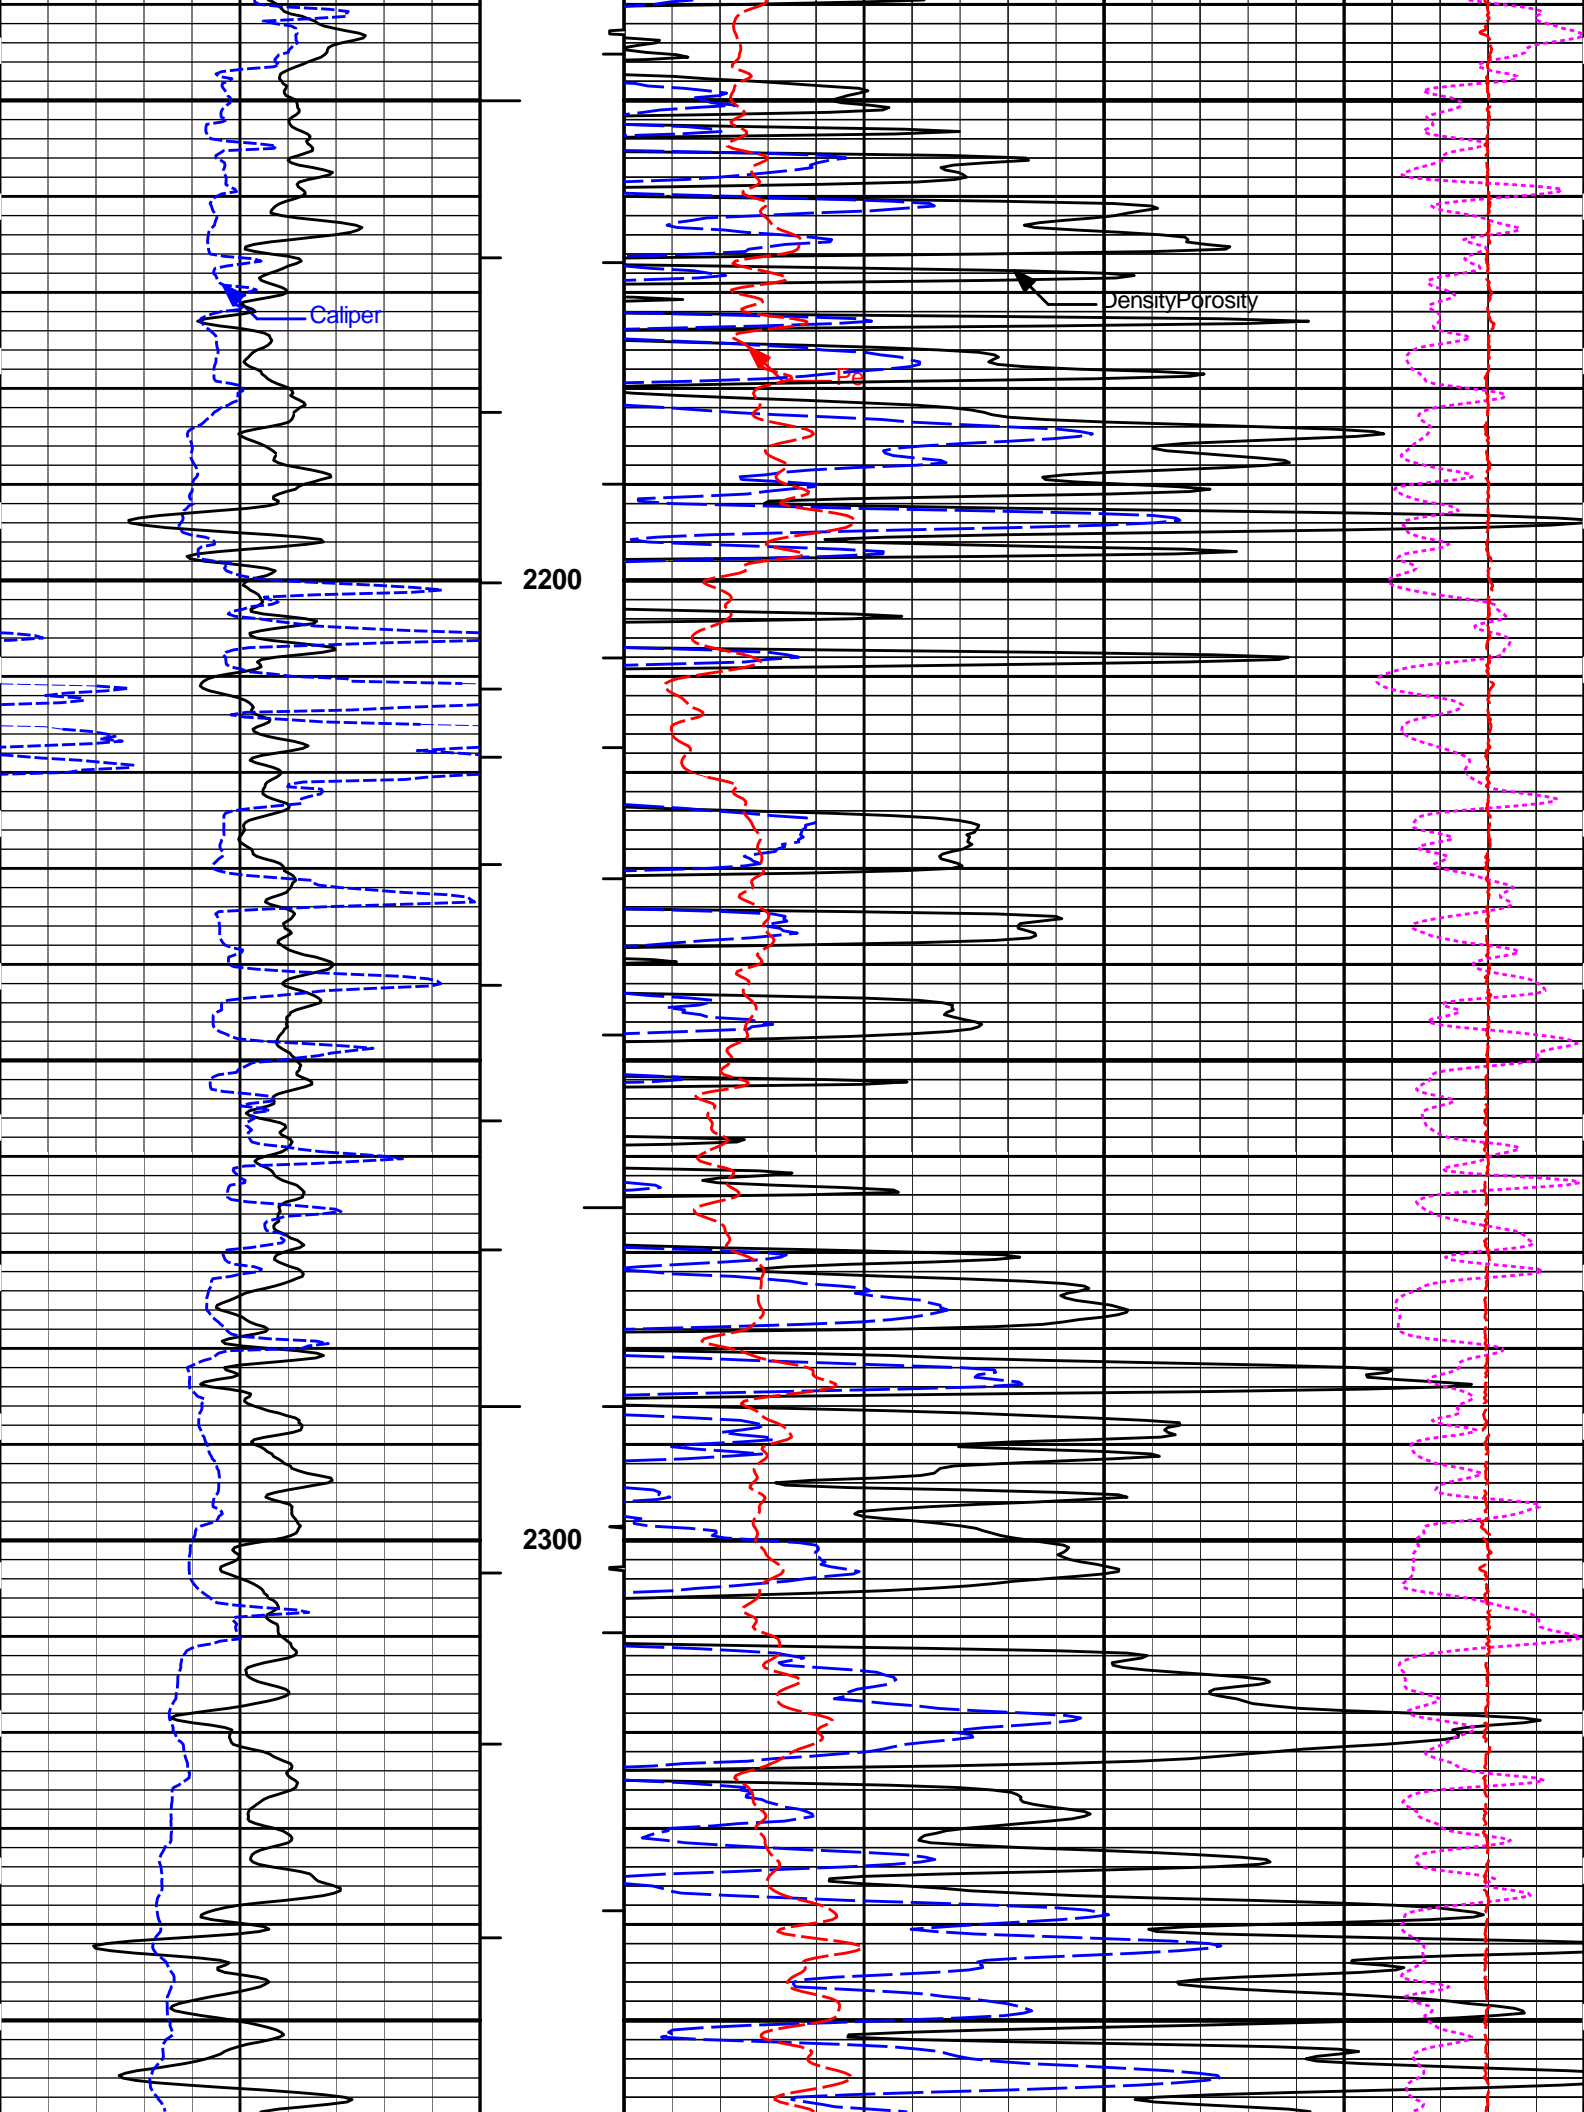


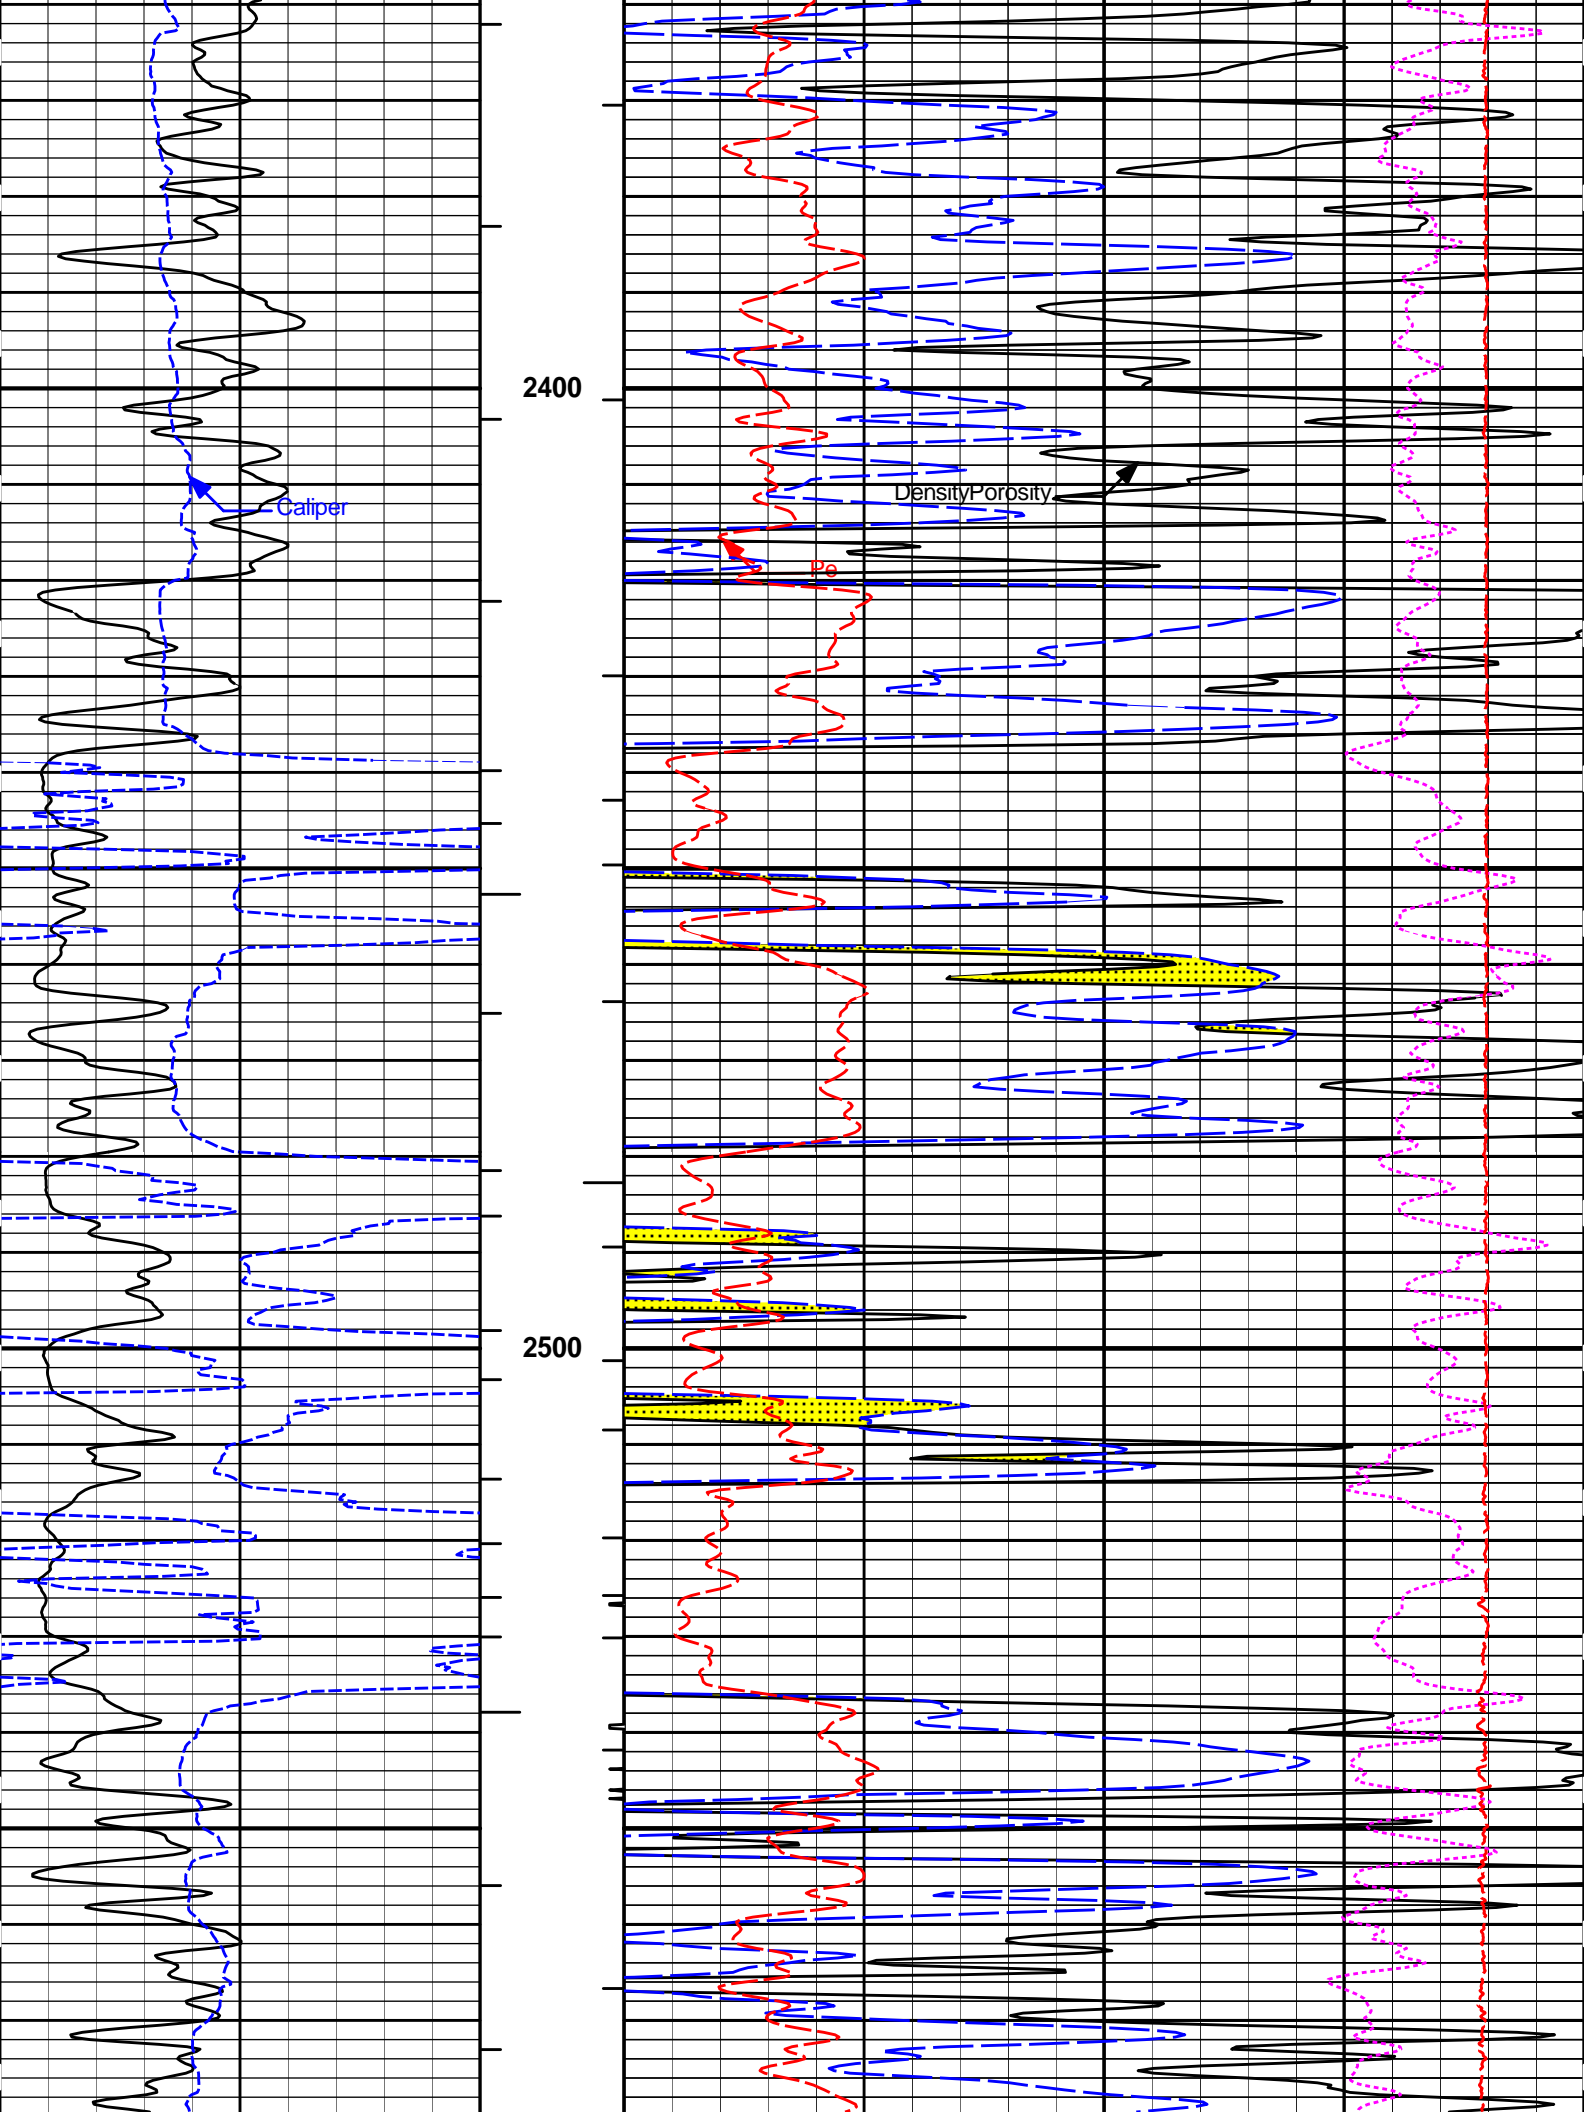


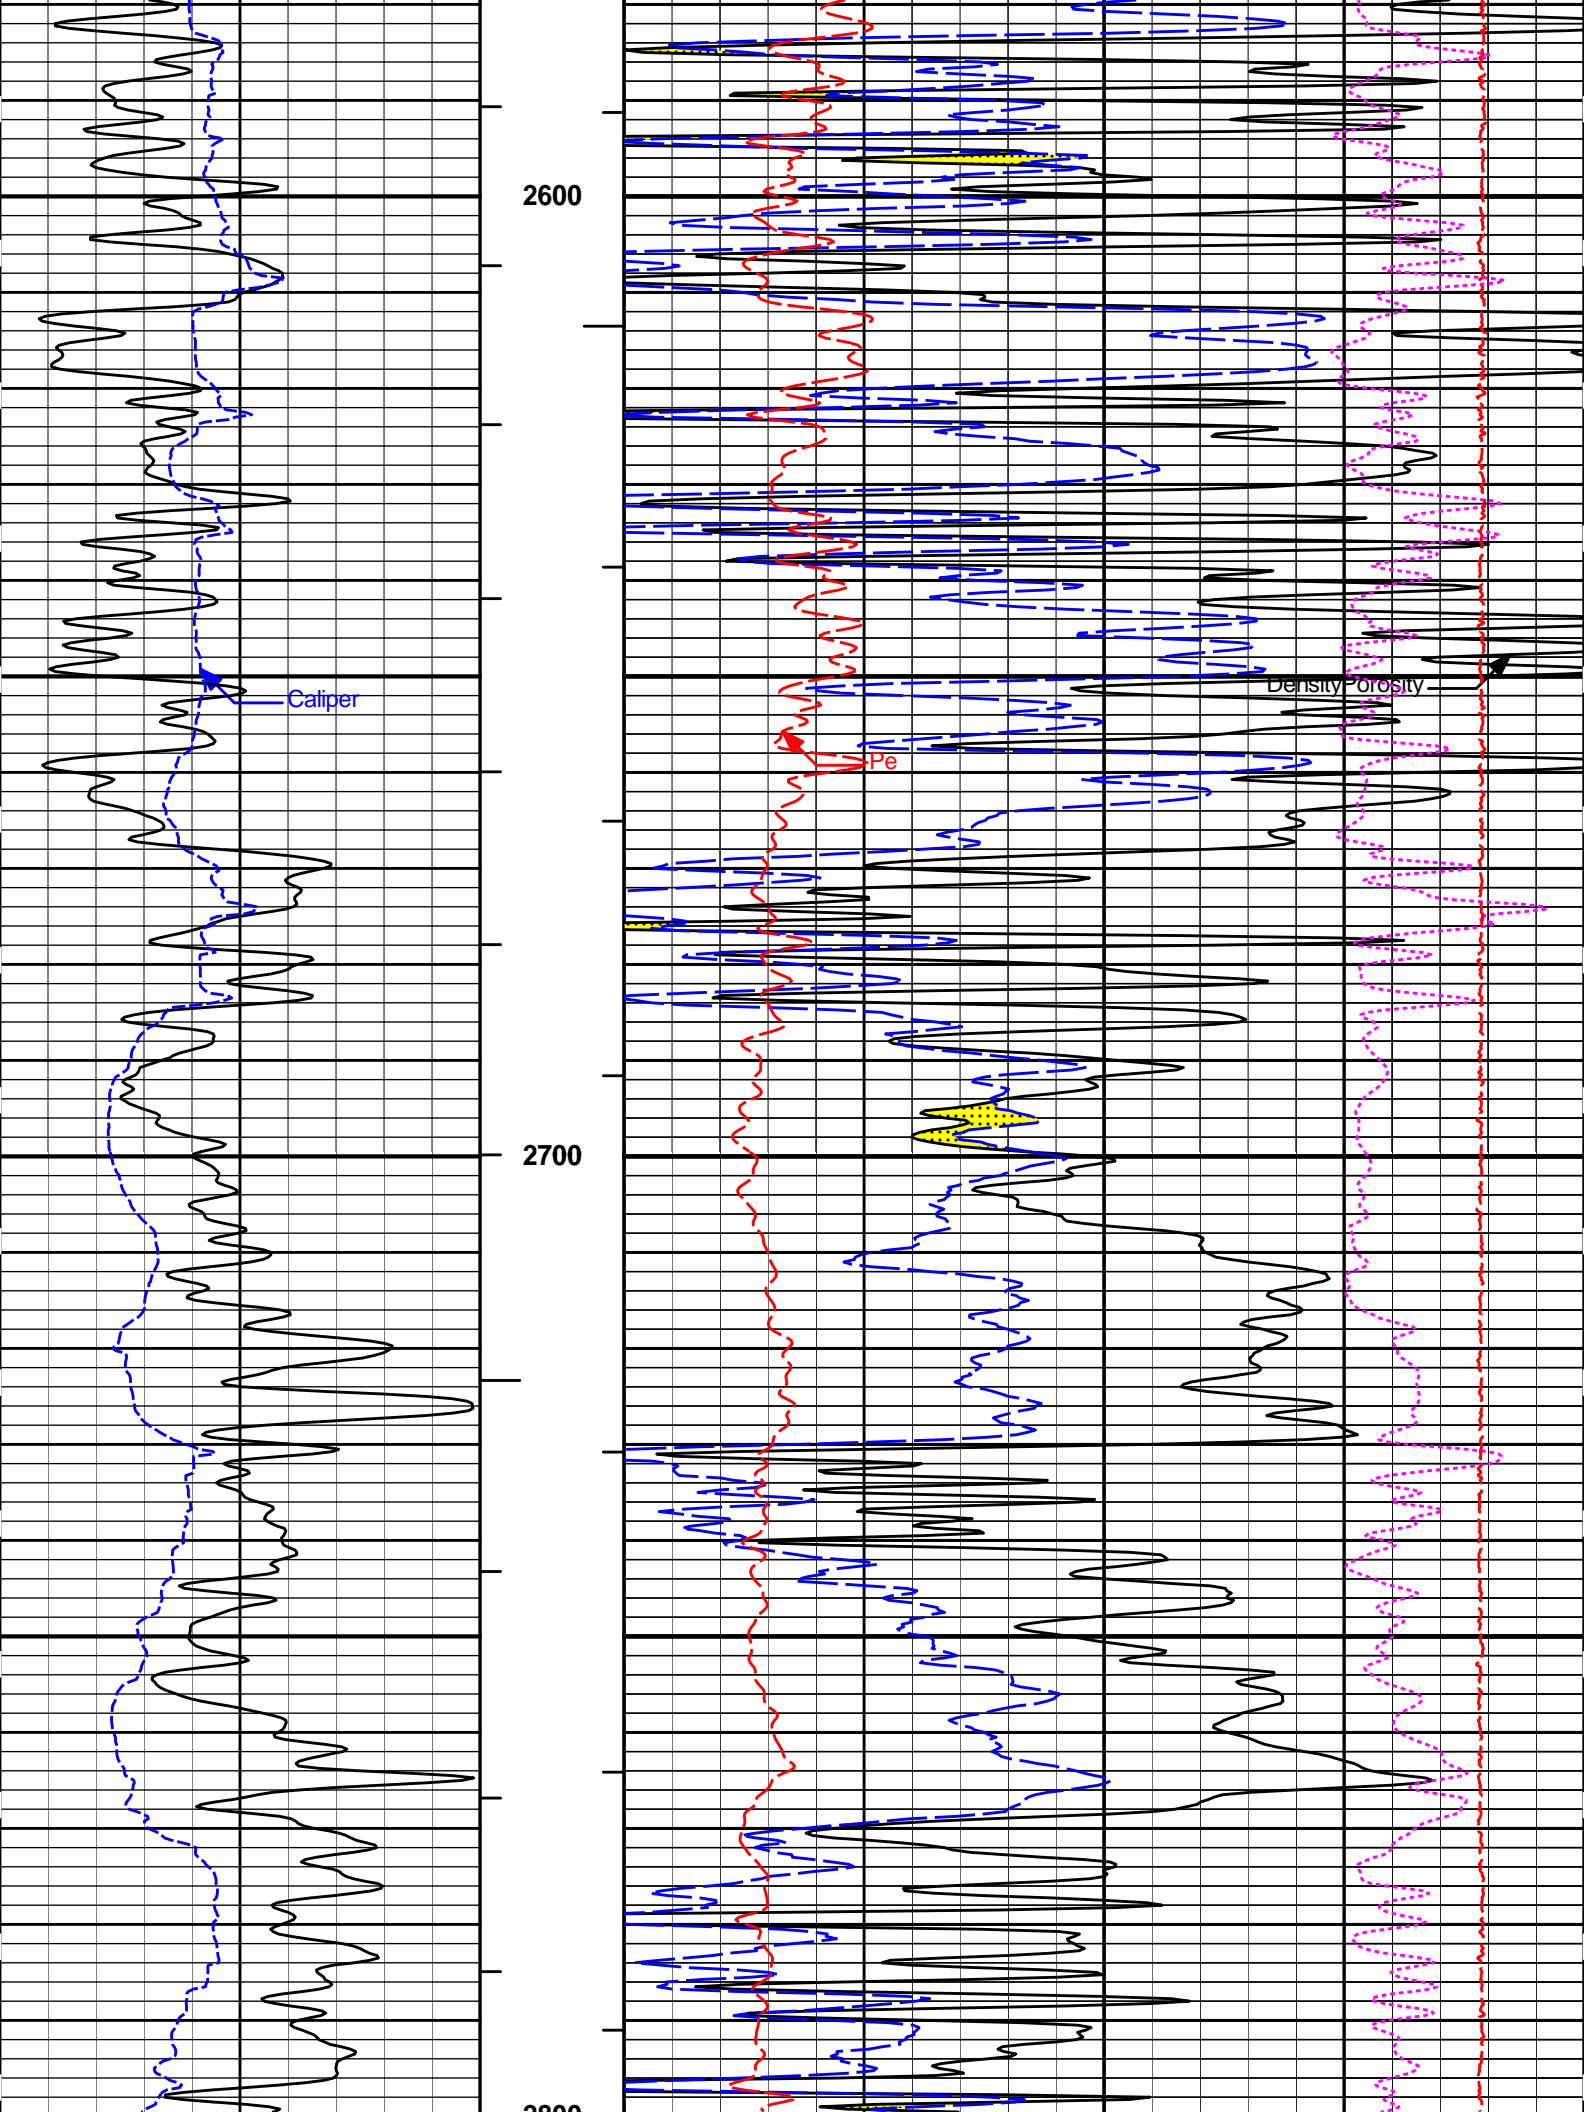


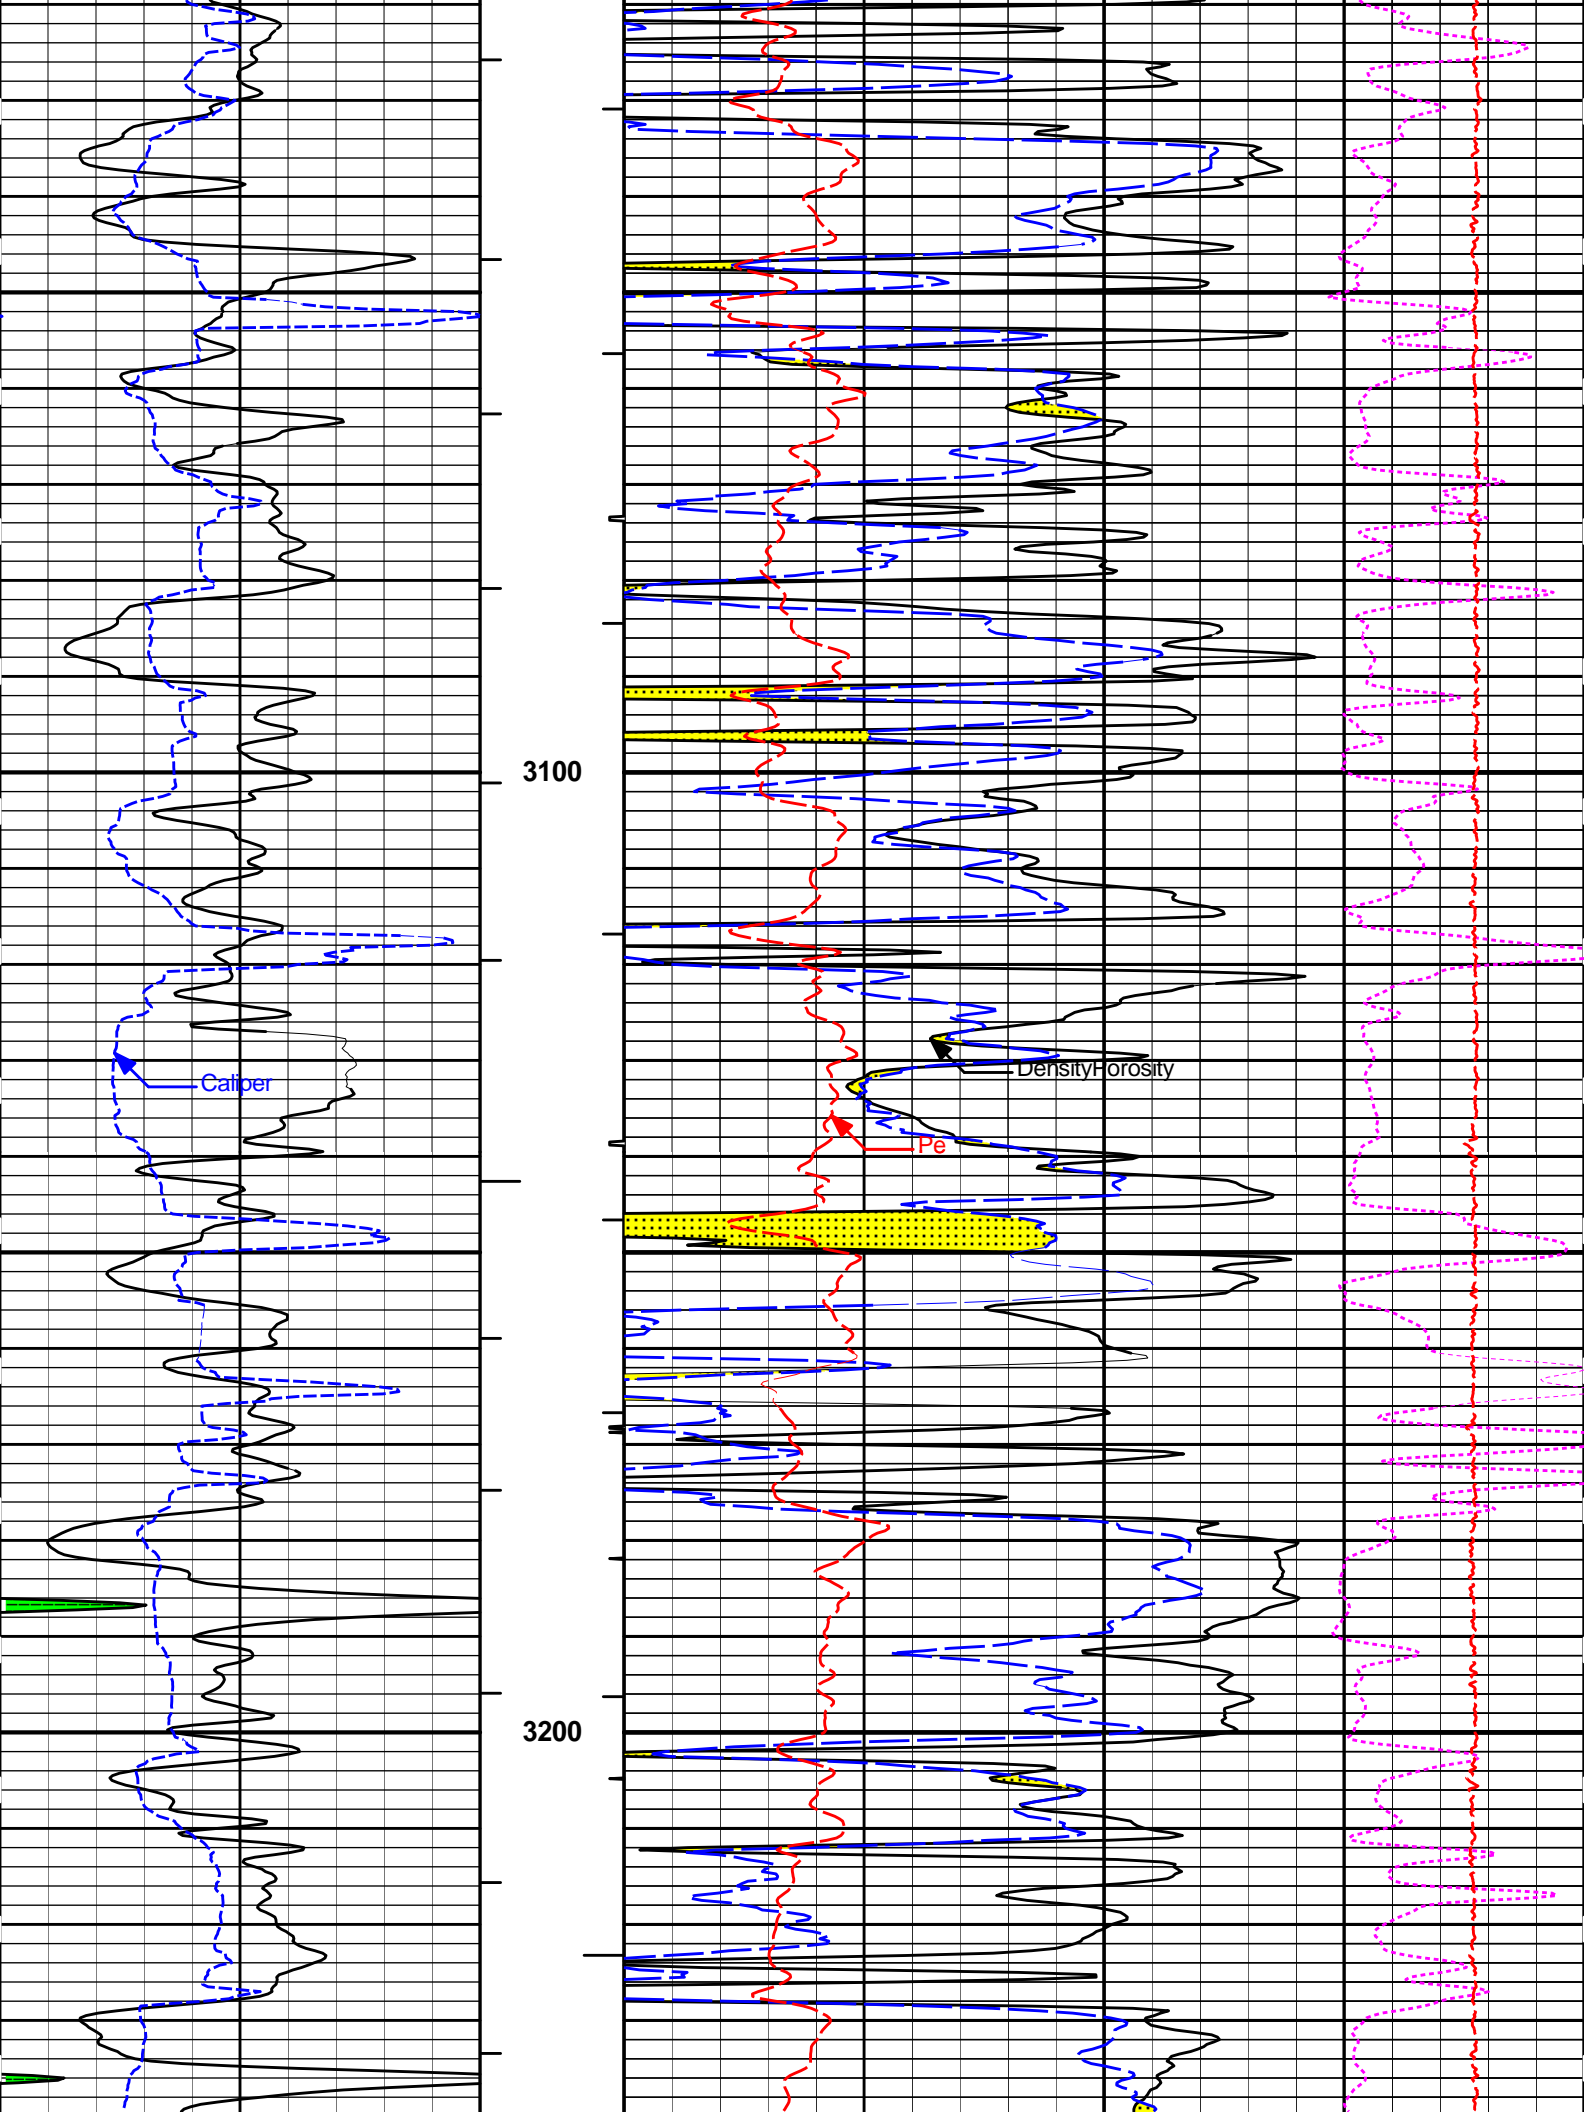


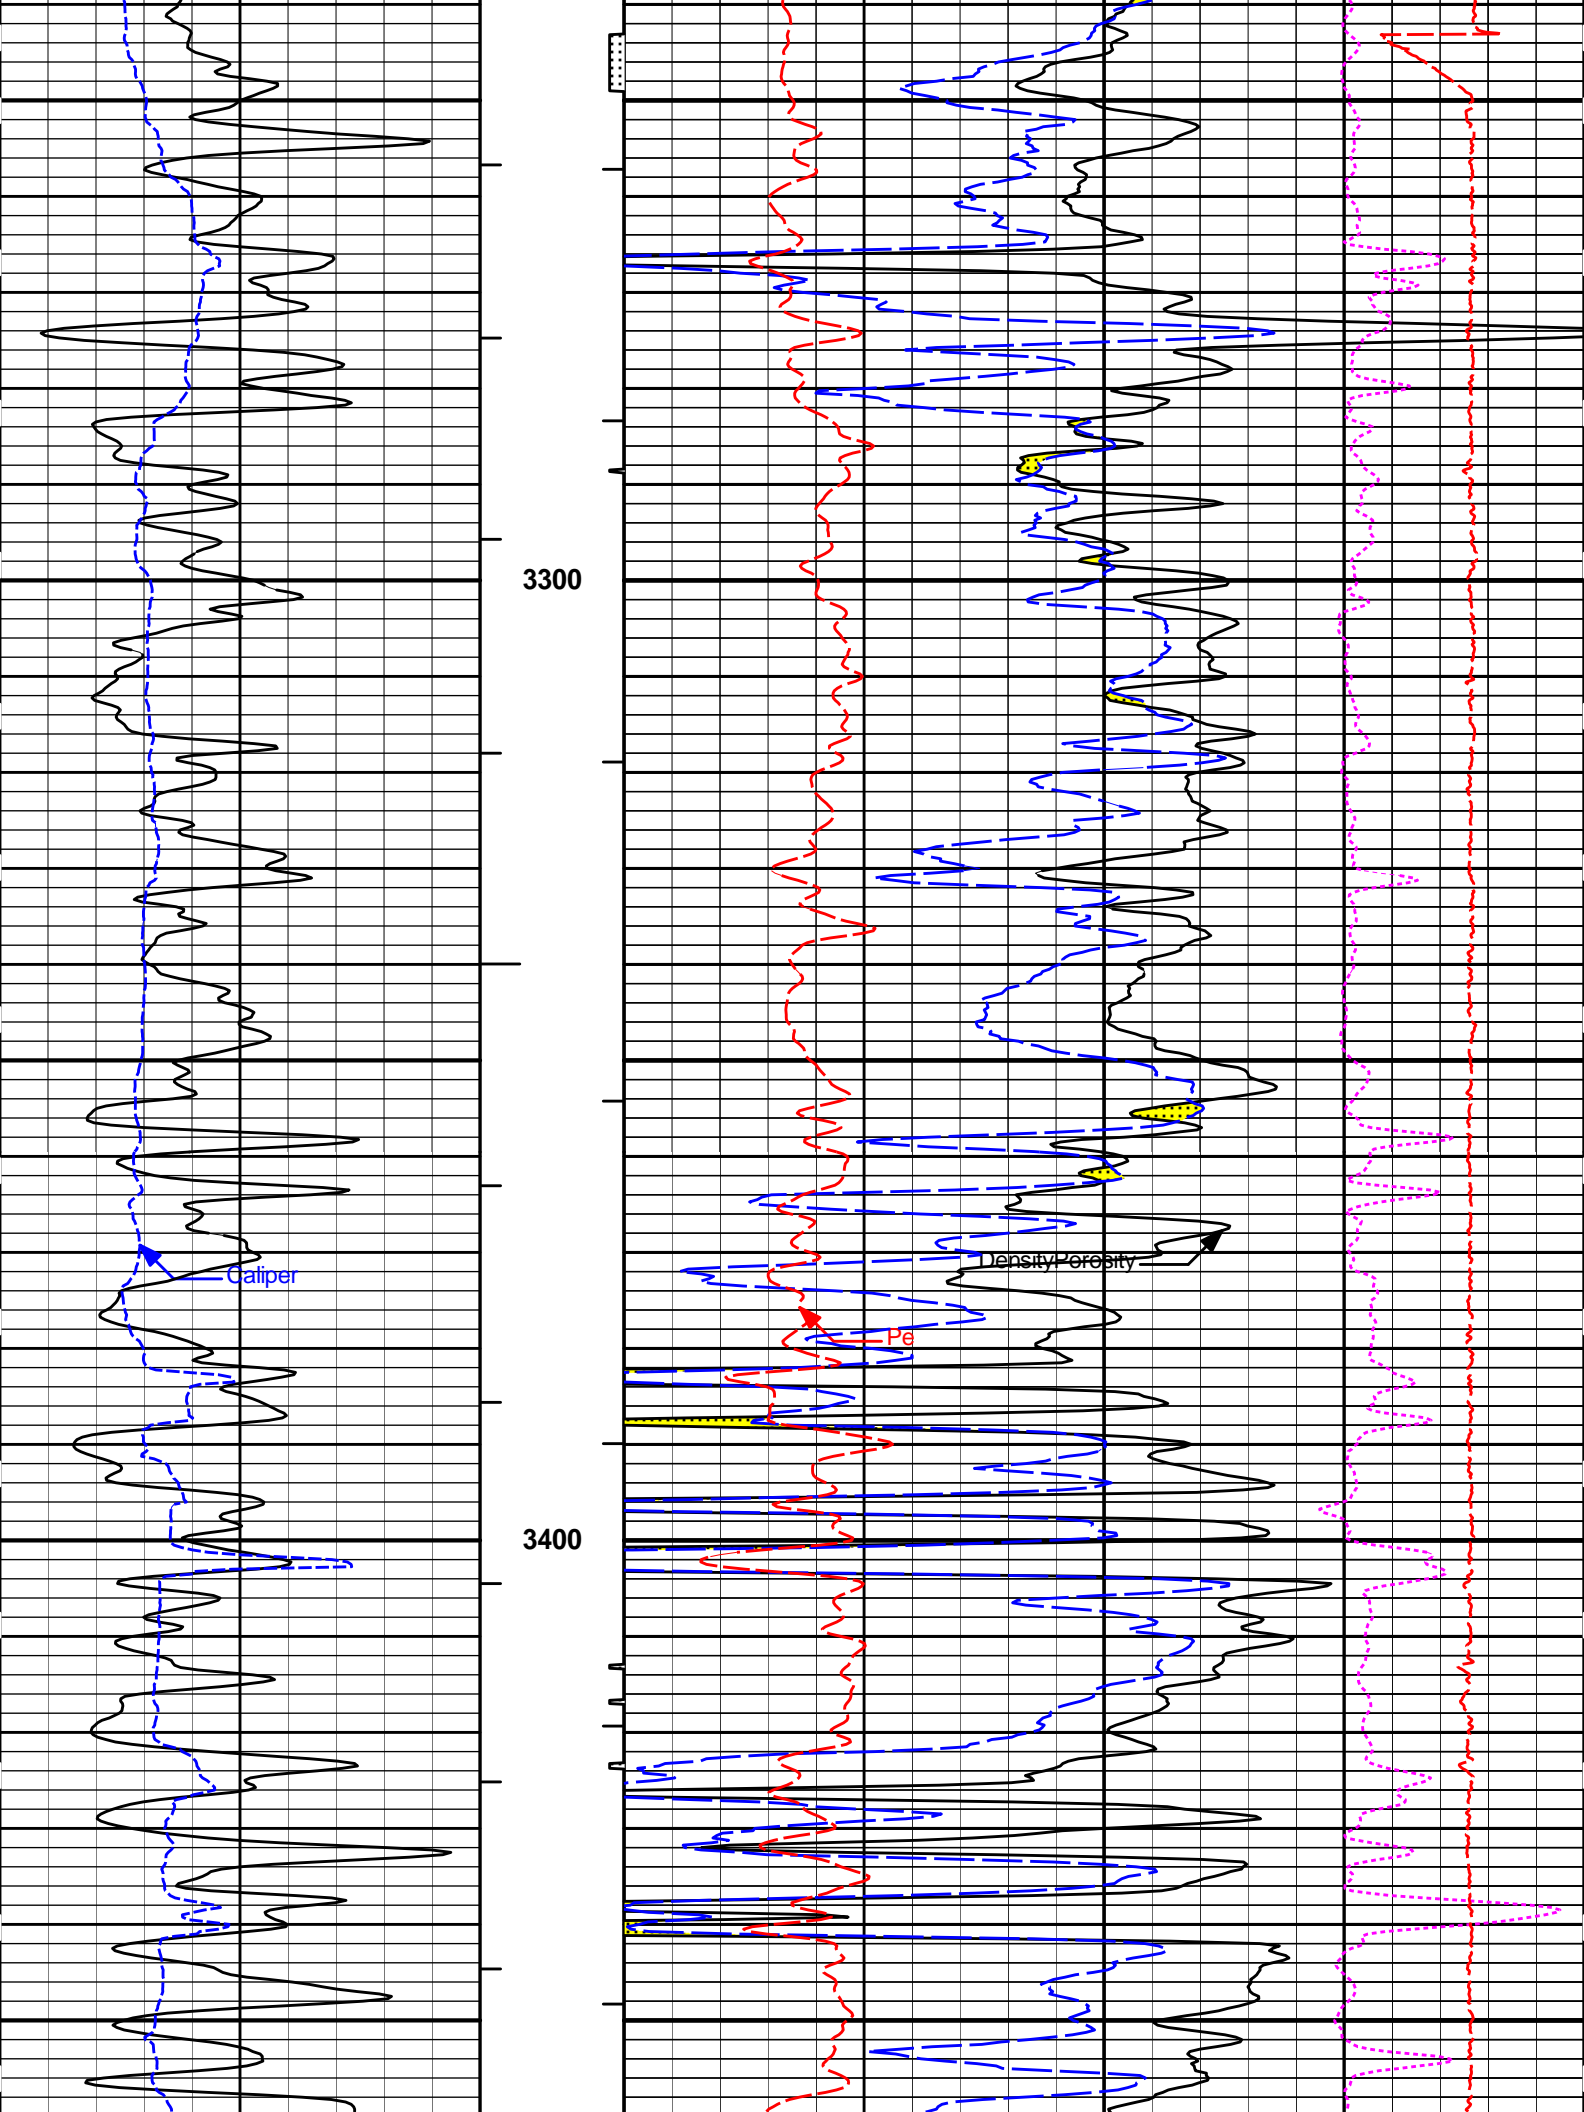


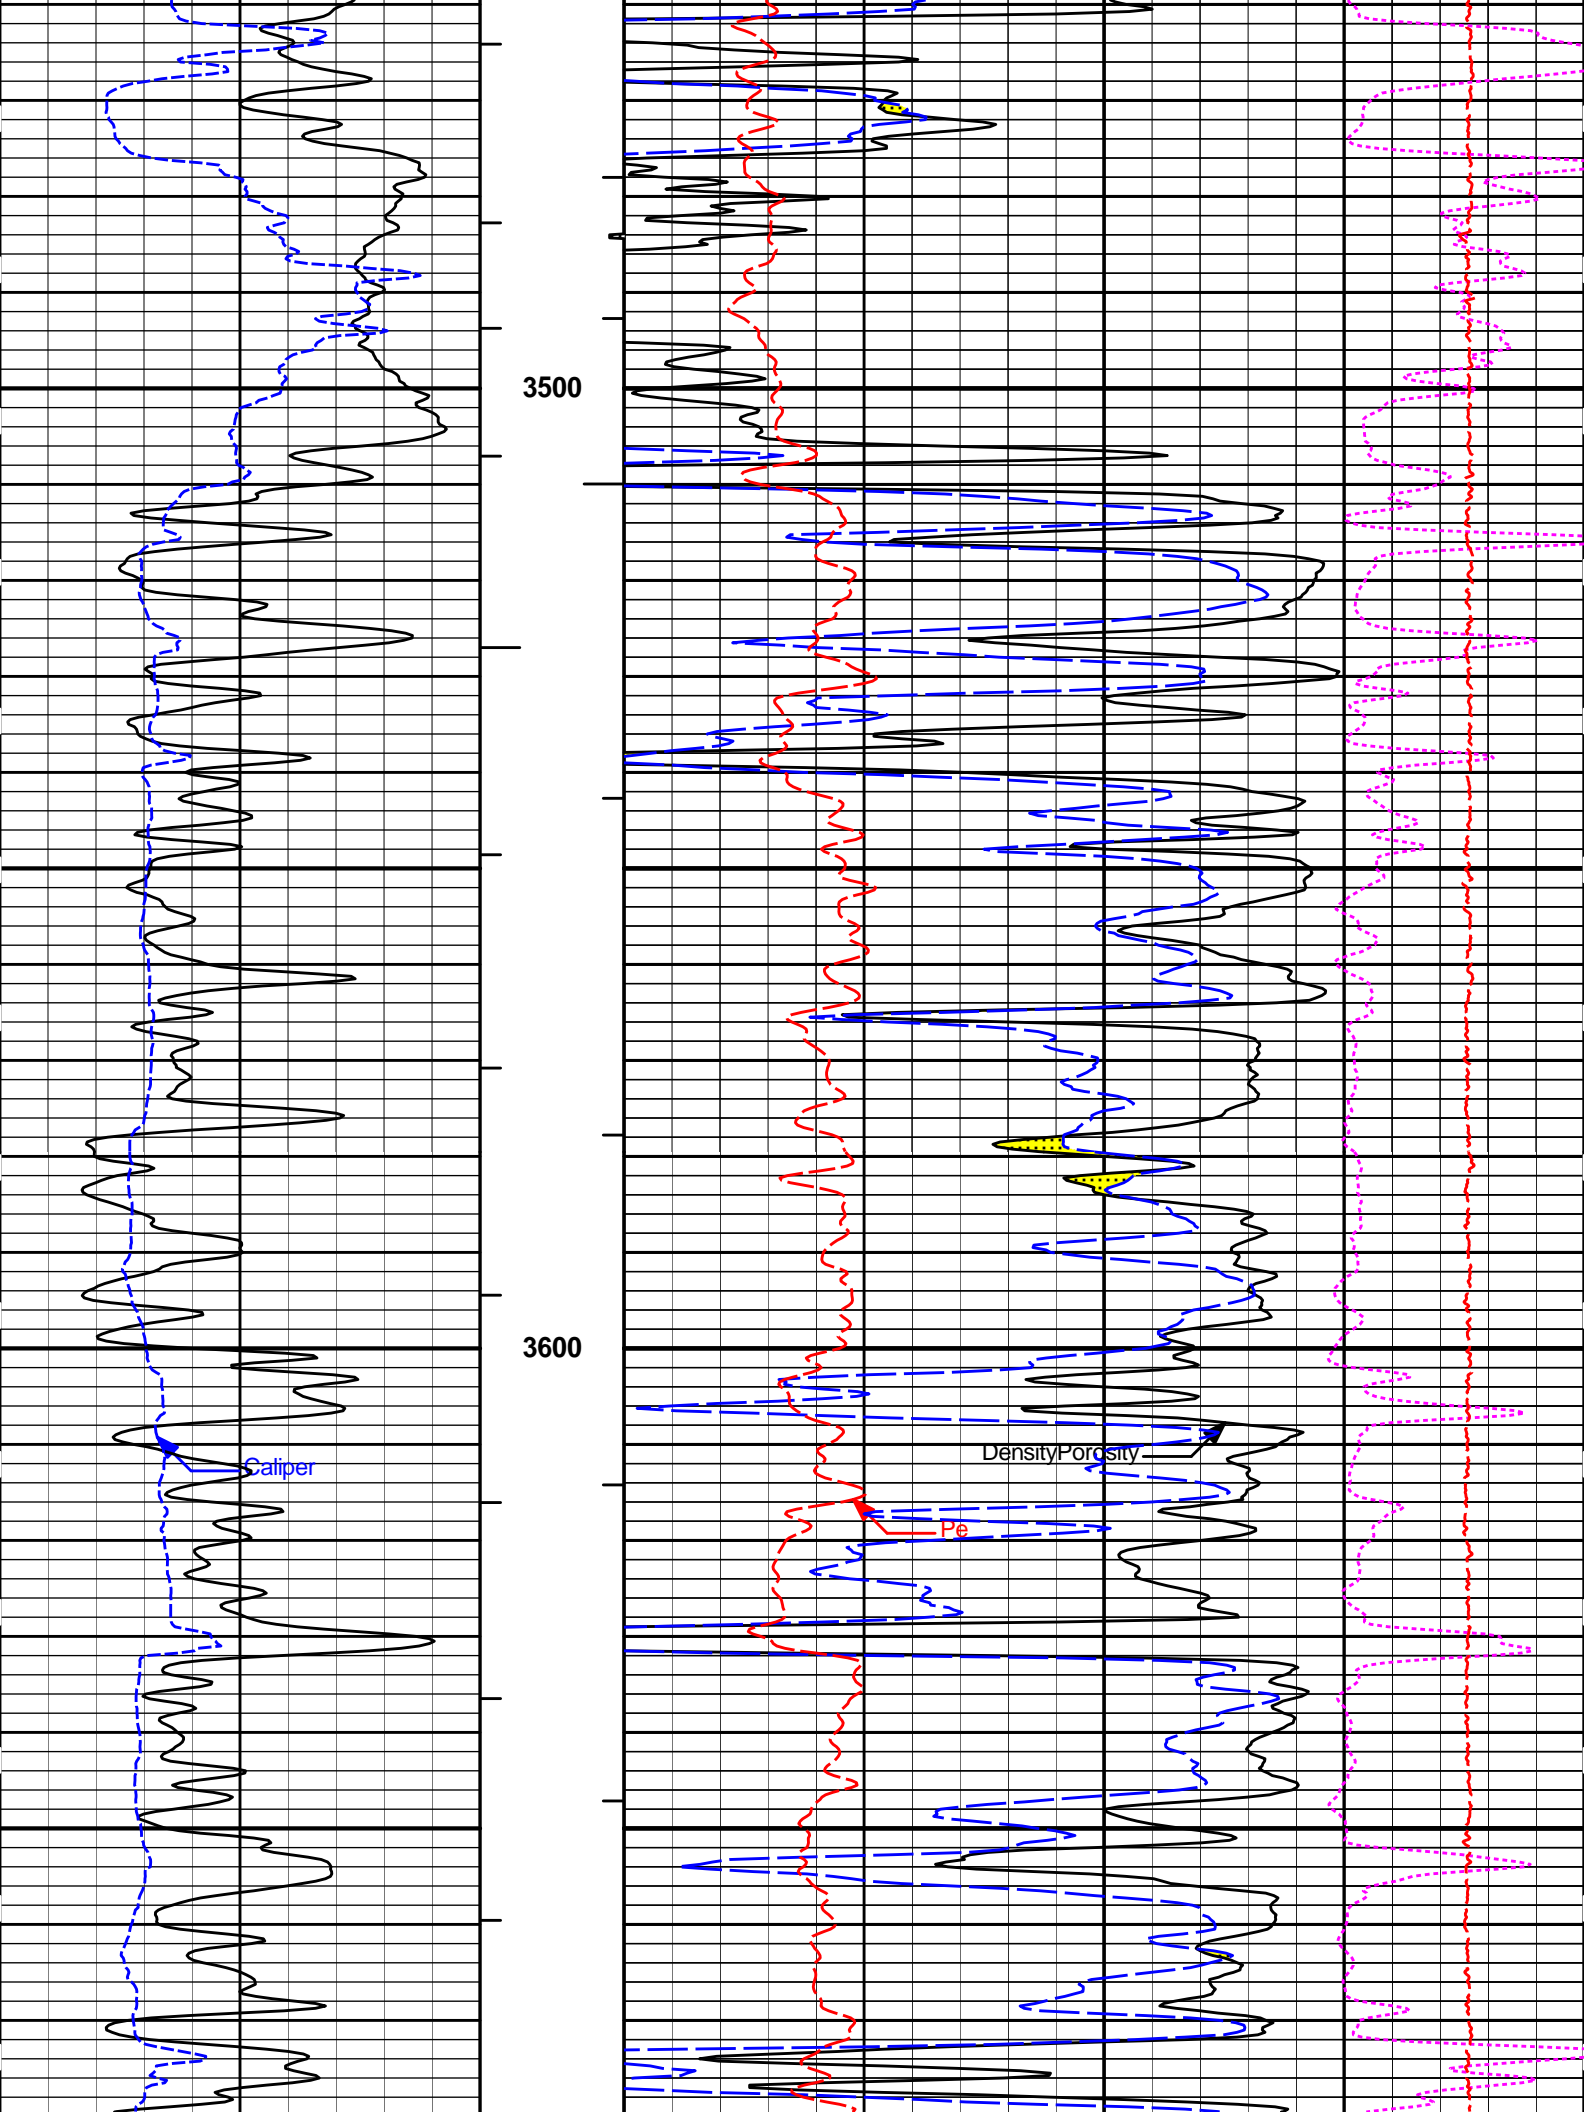


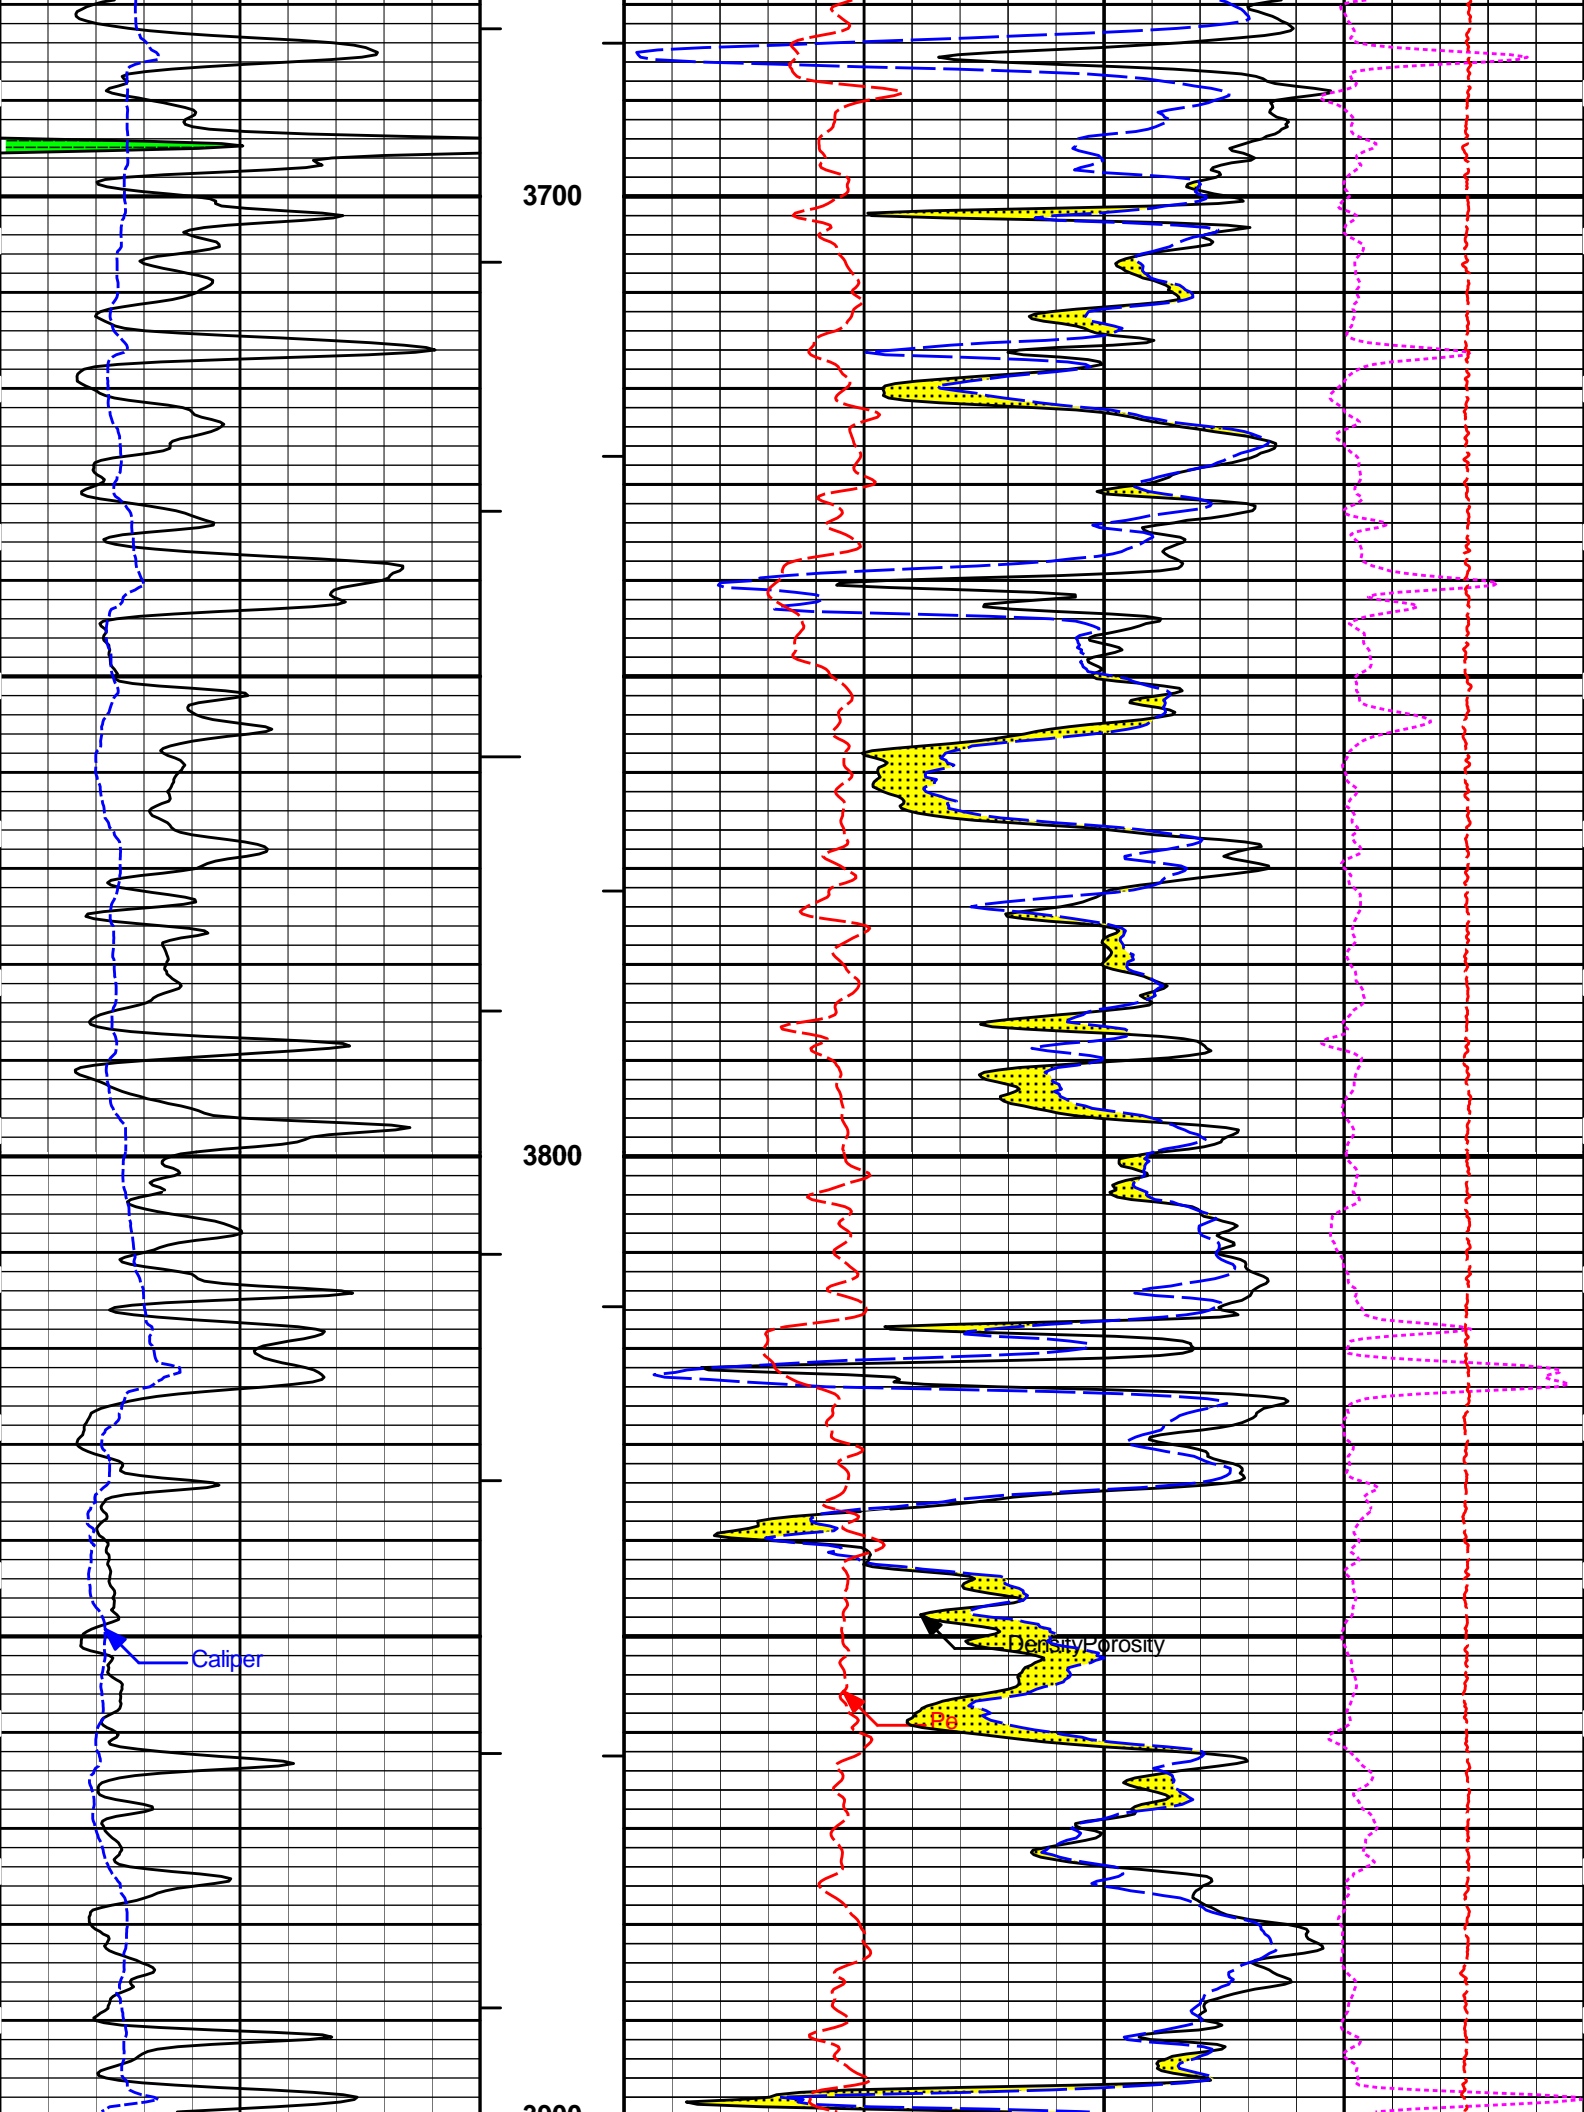

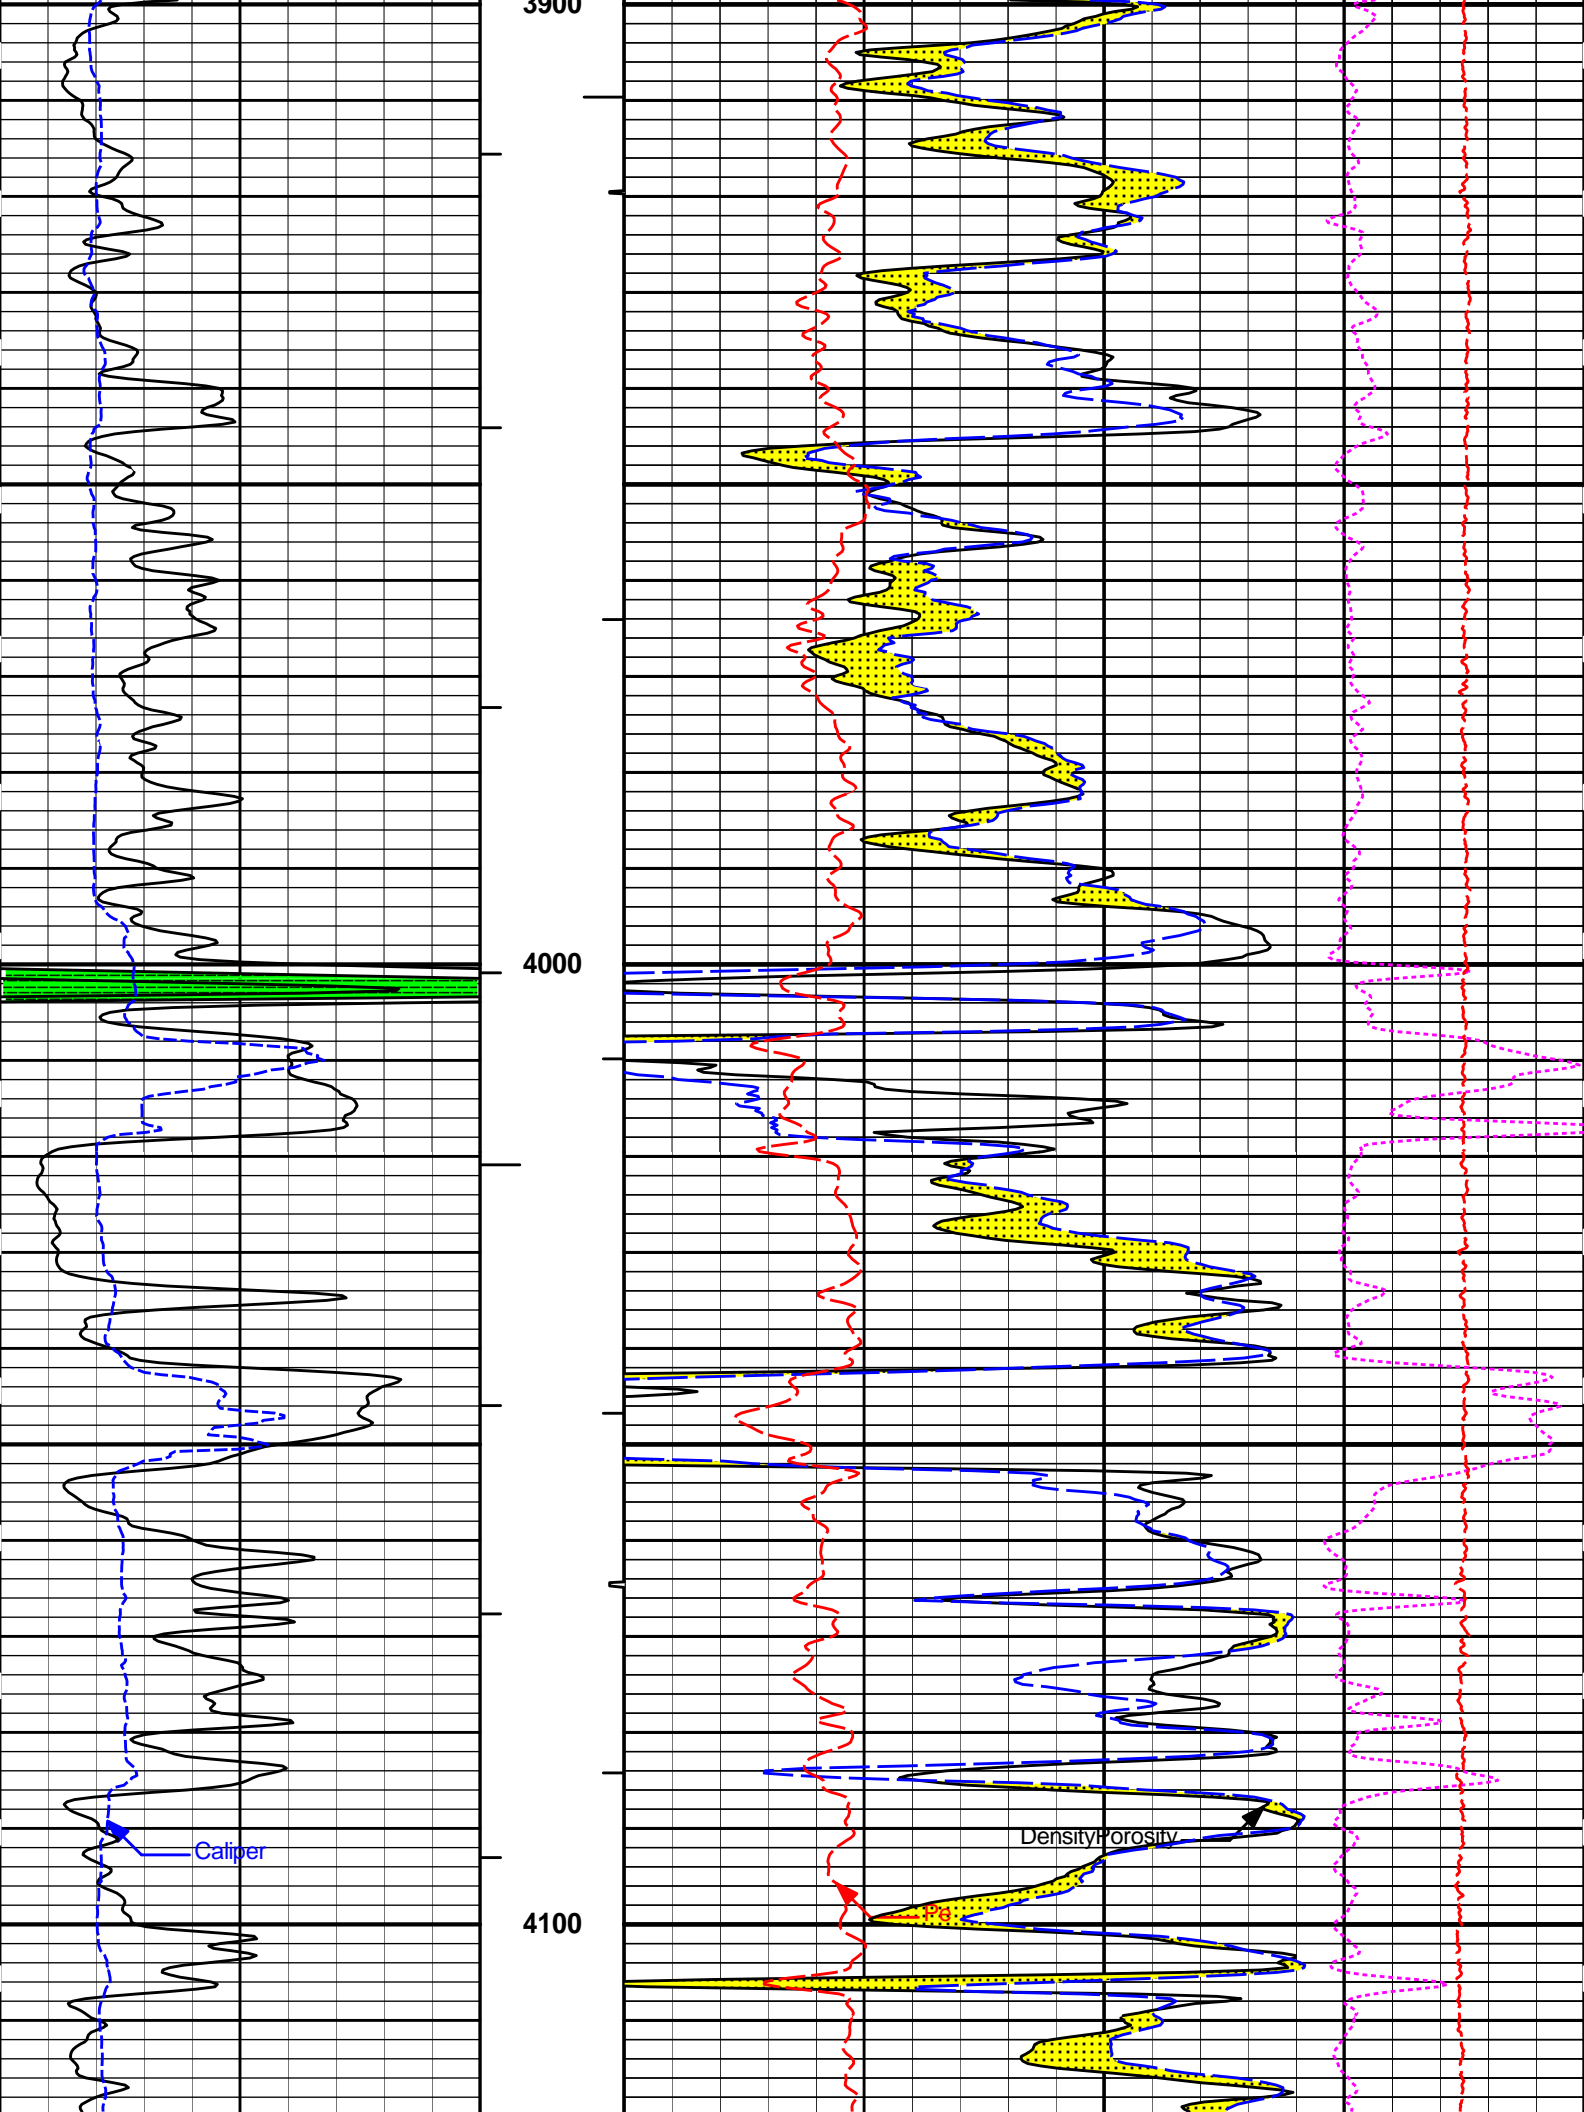

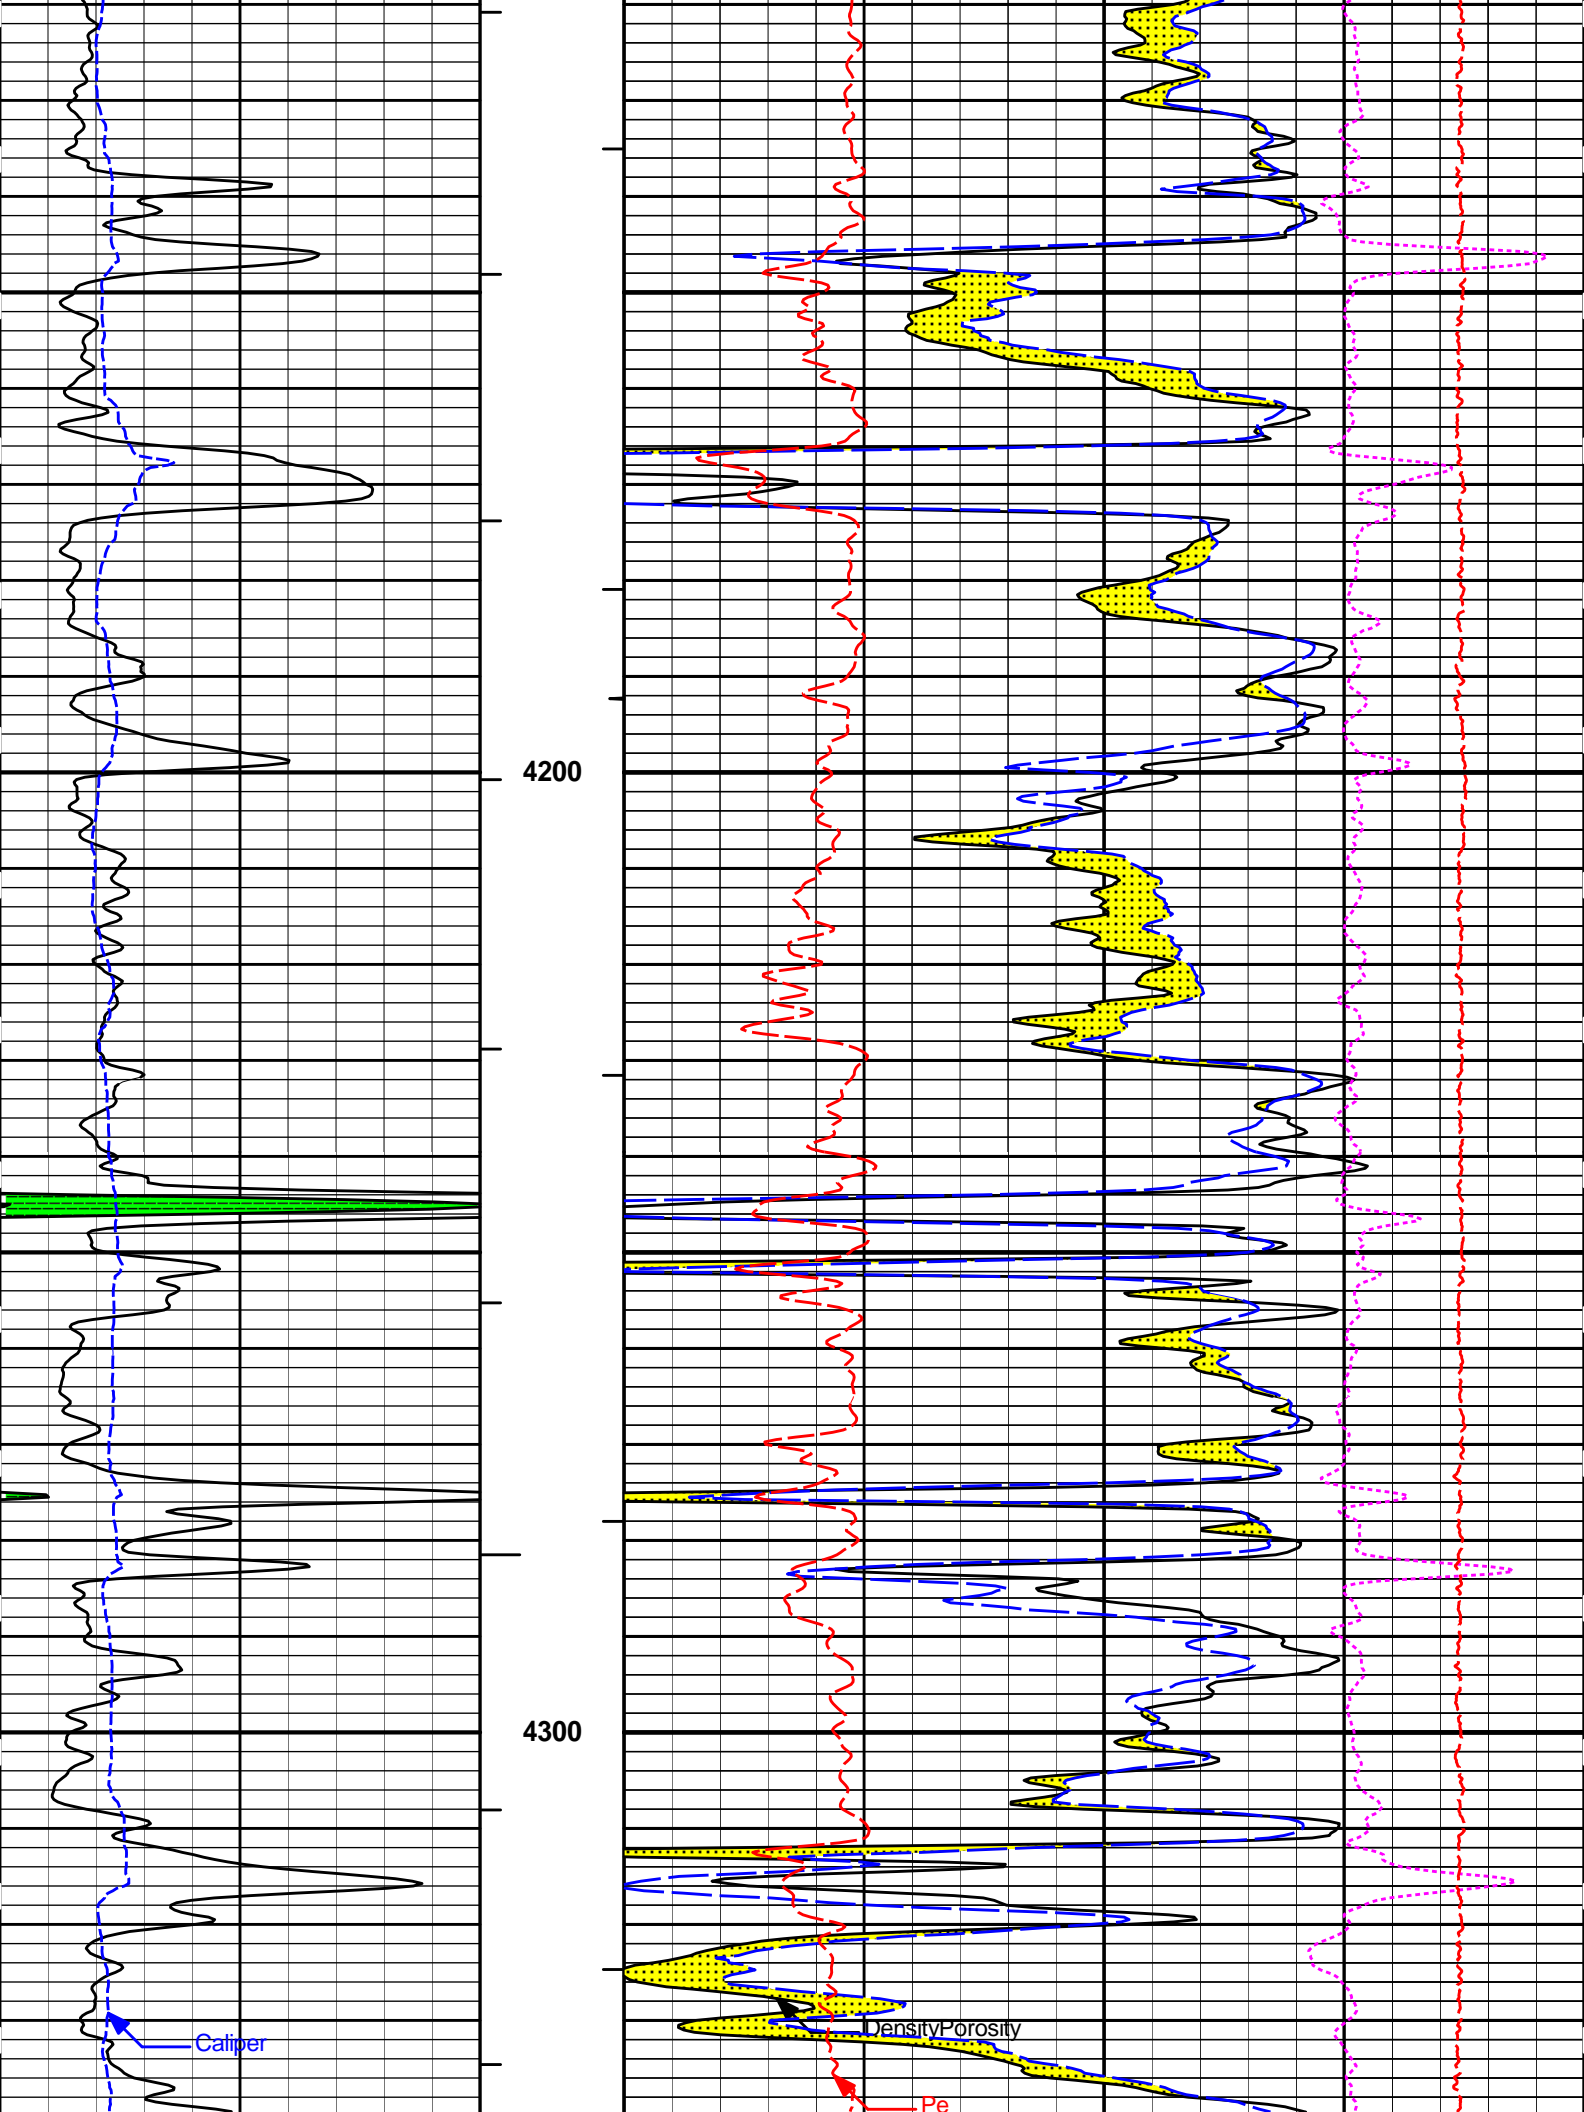


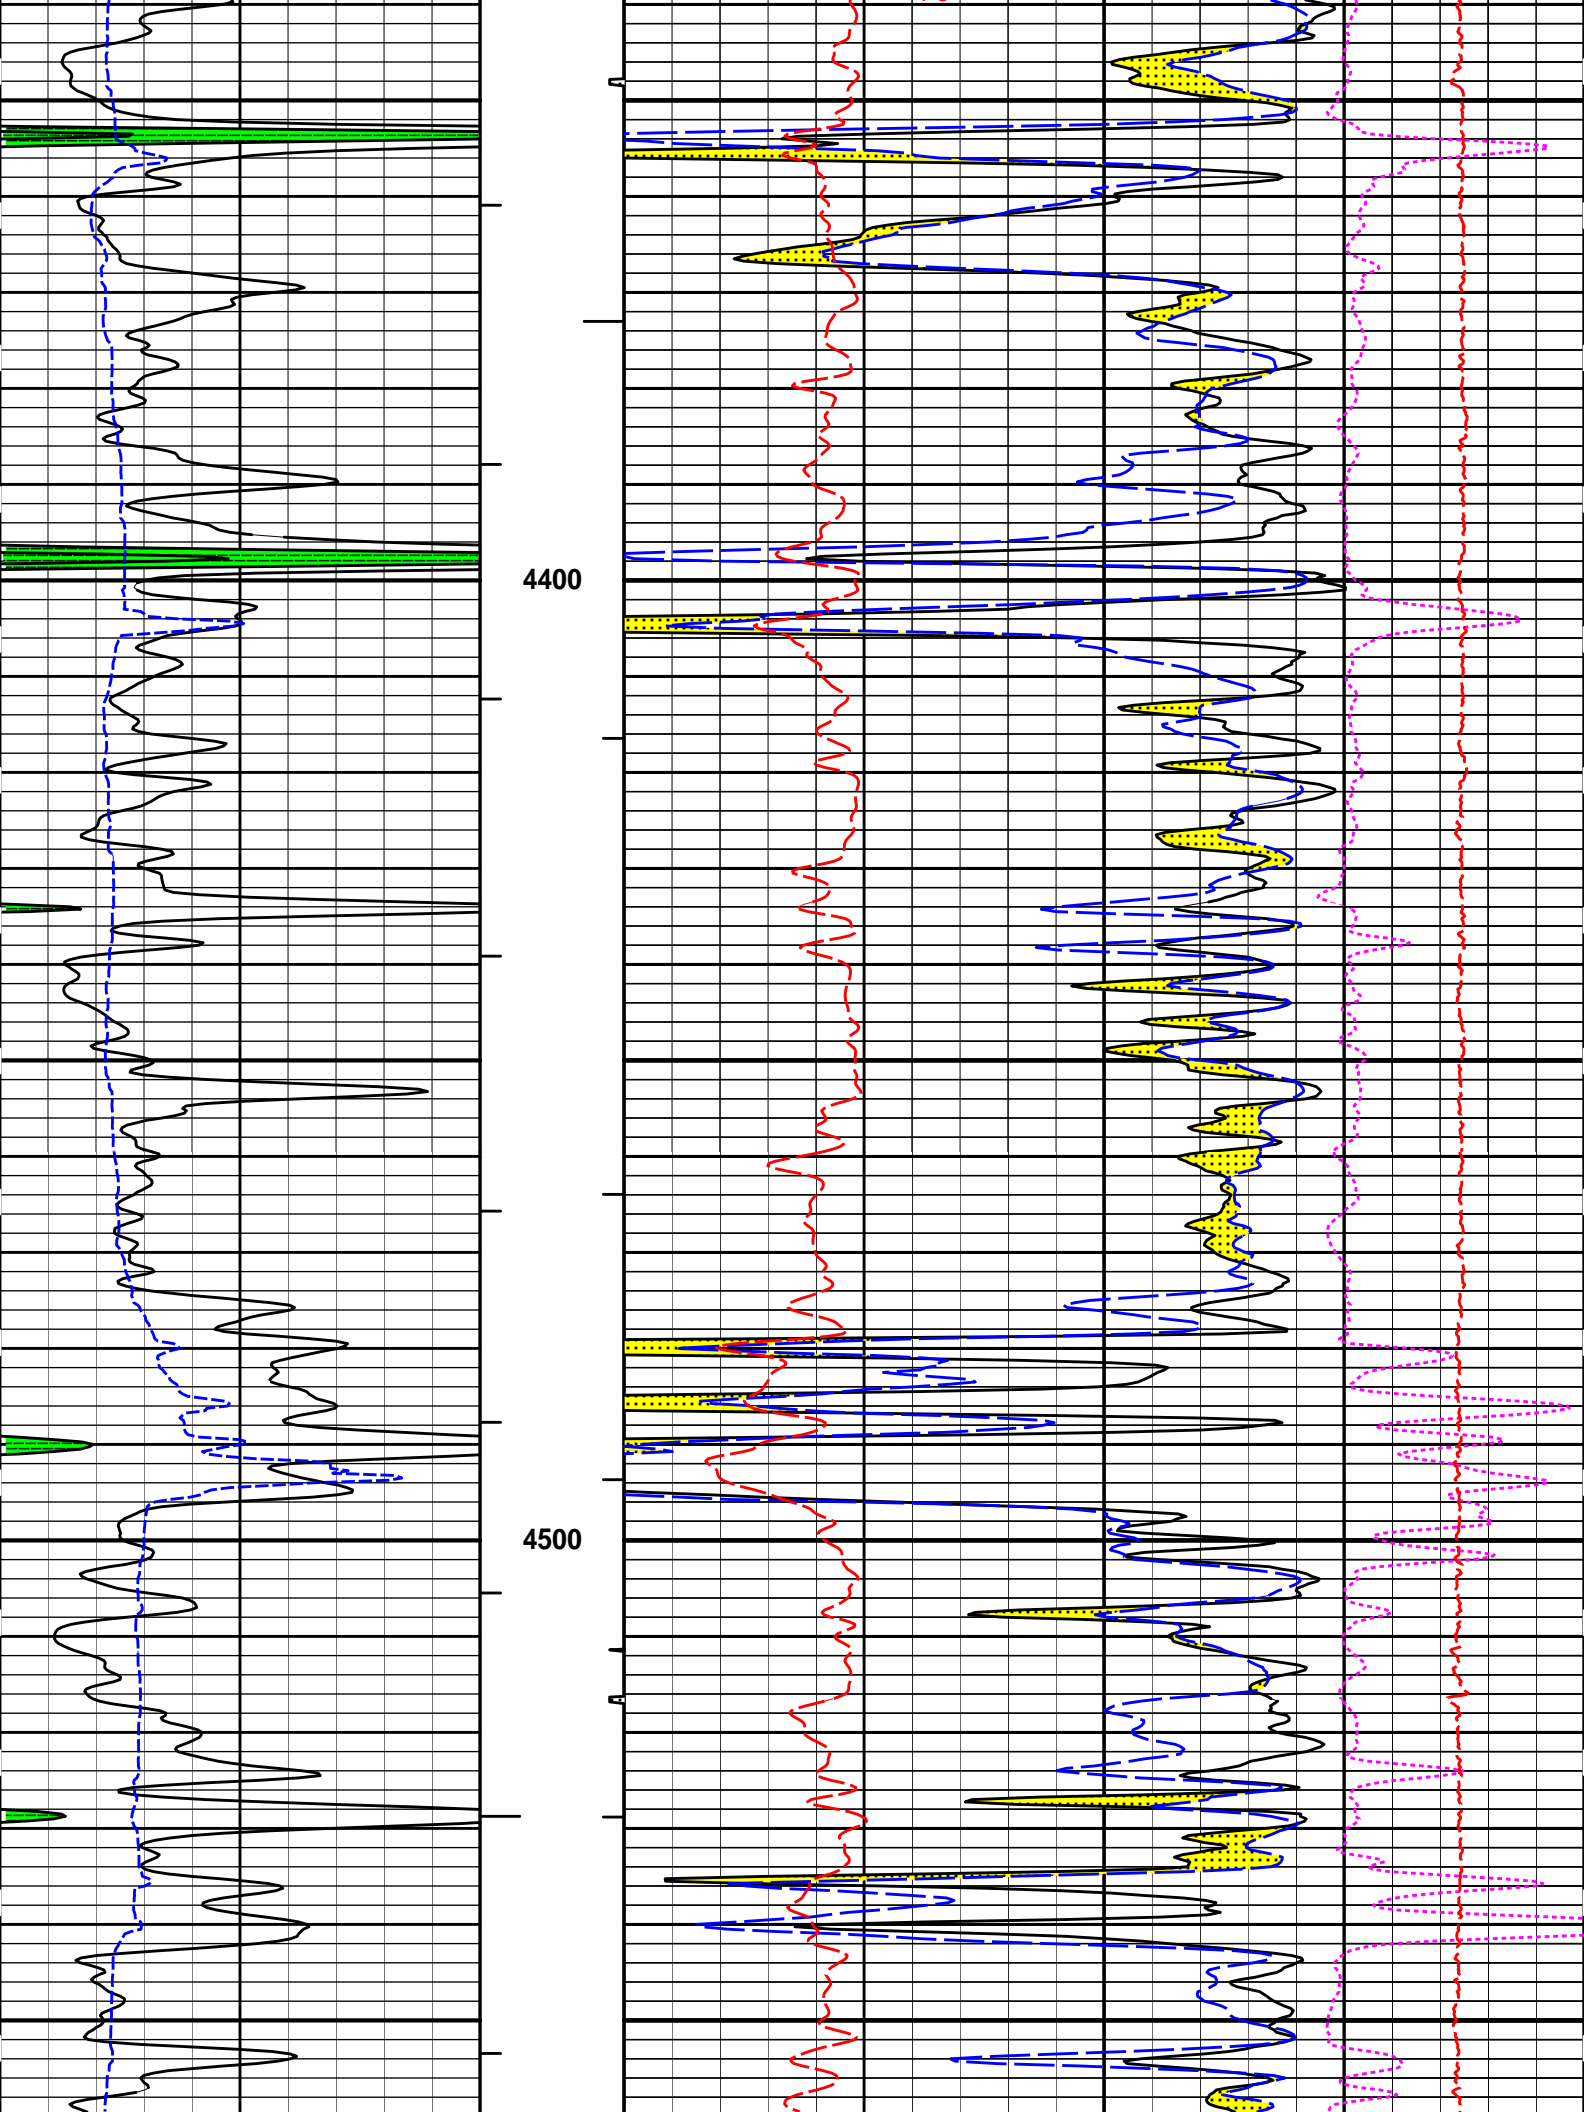

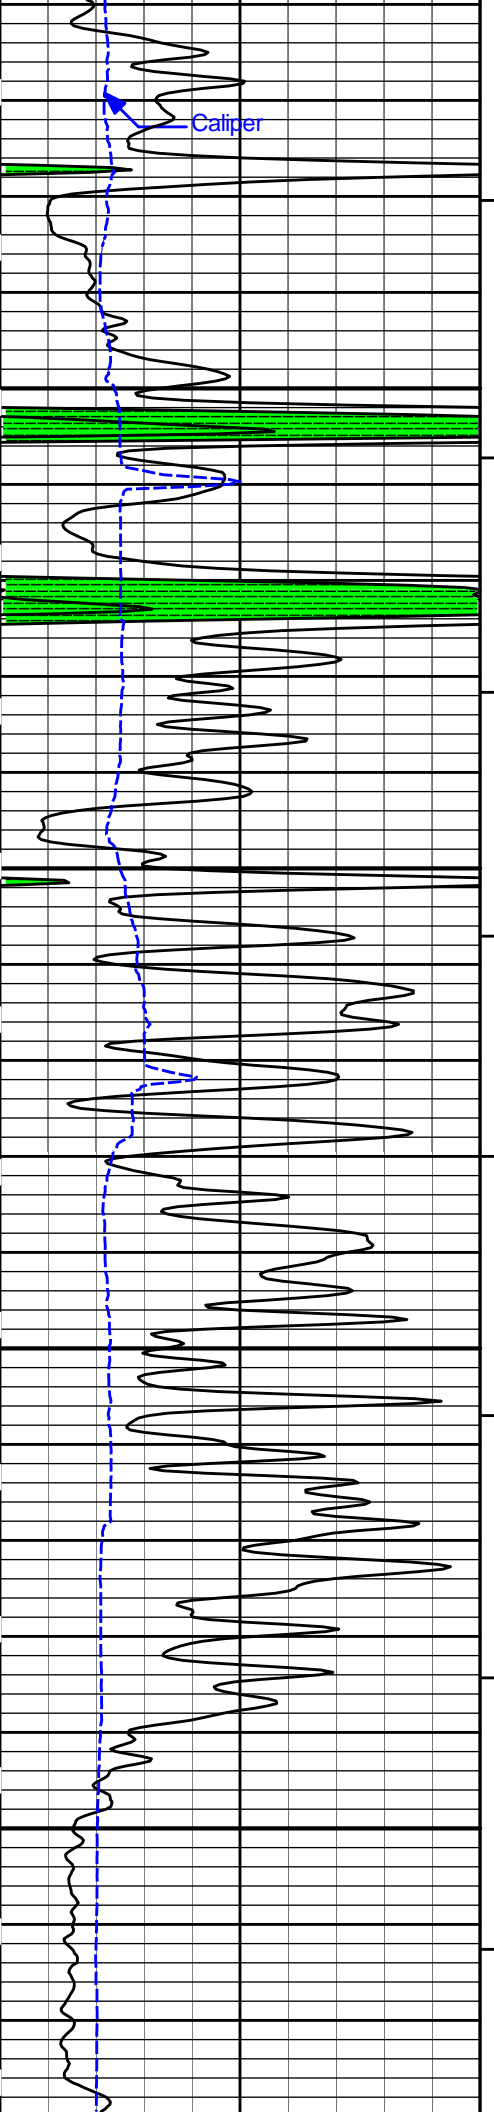


4600


4700

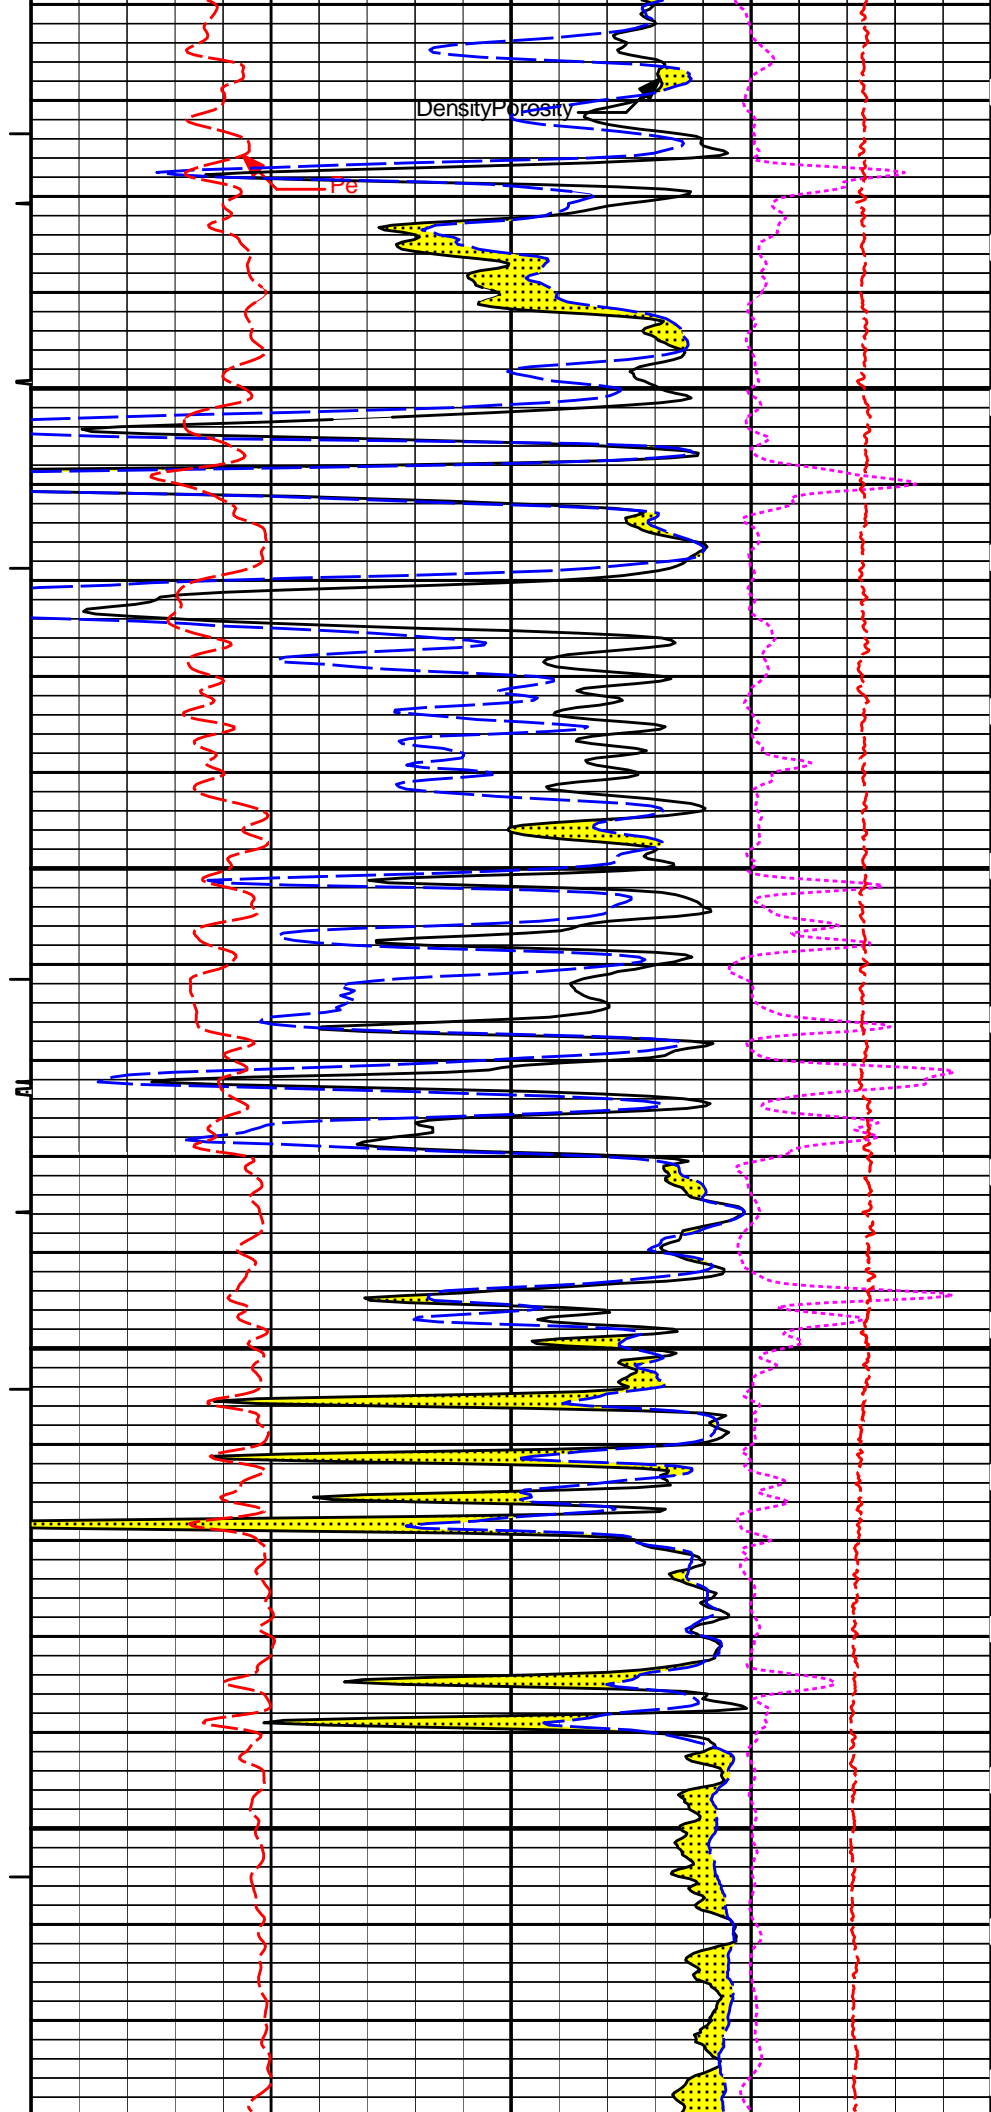


Density/Porosity

Fe

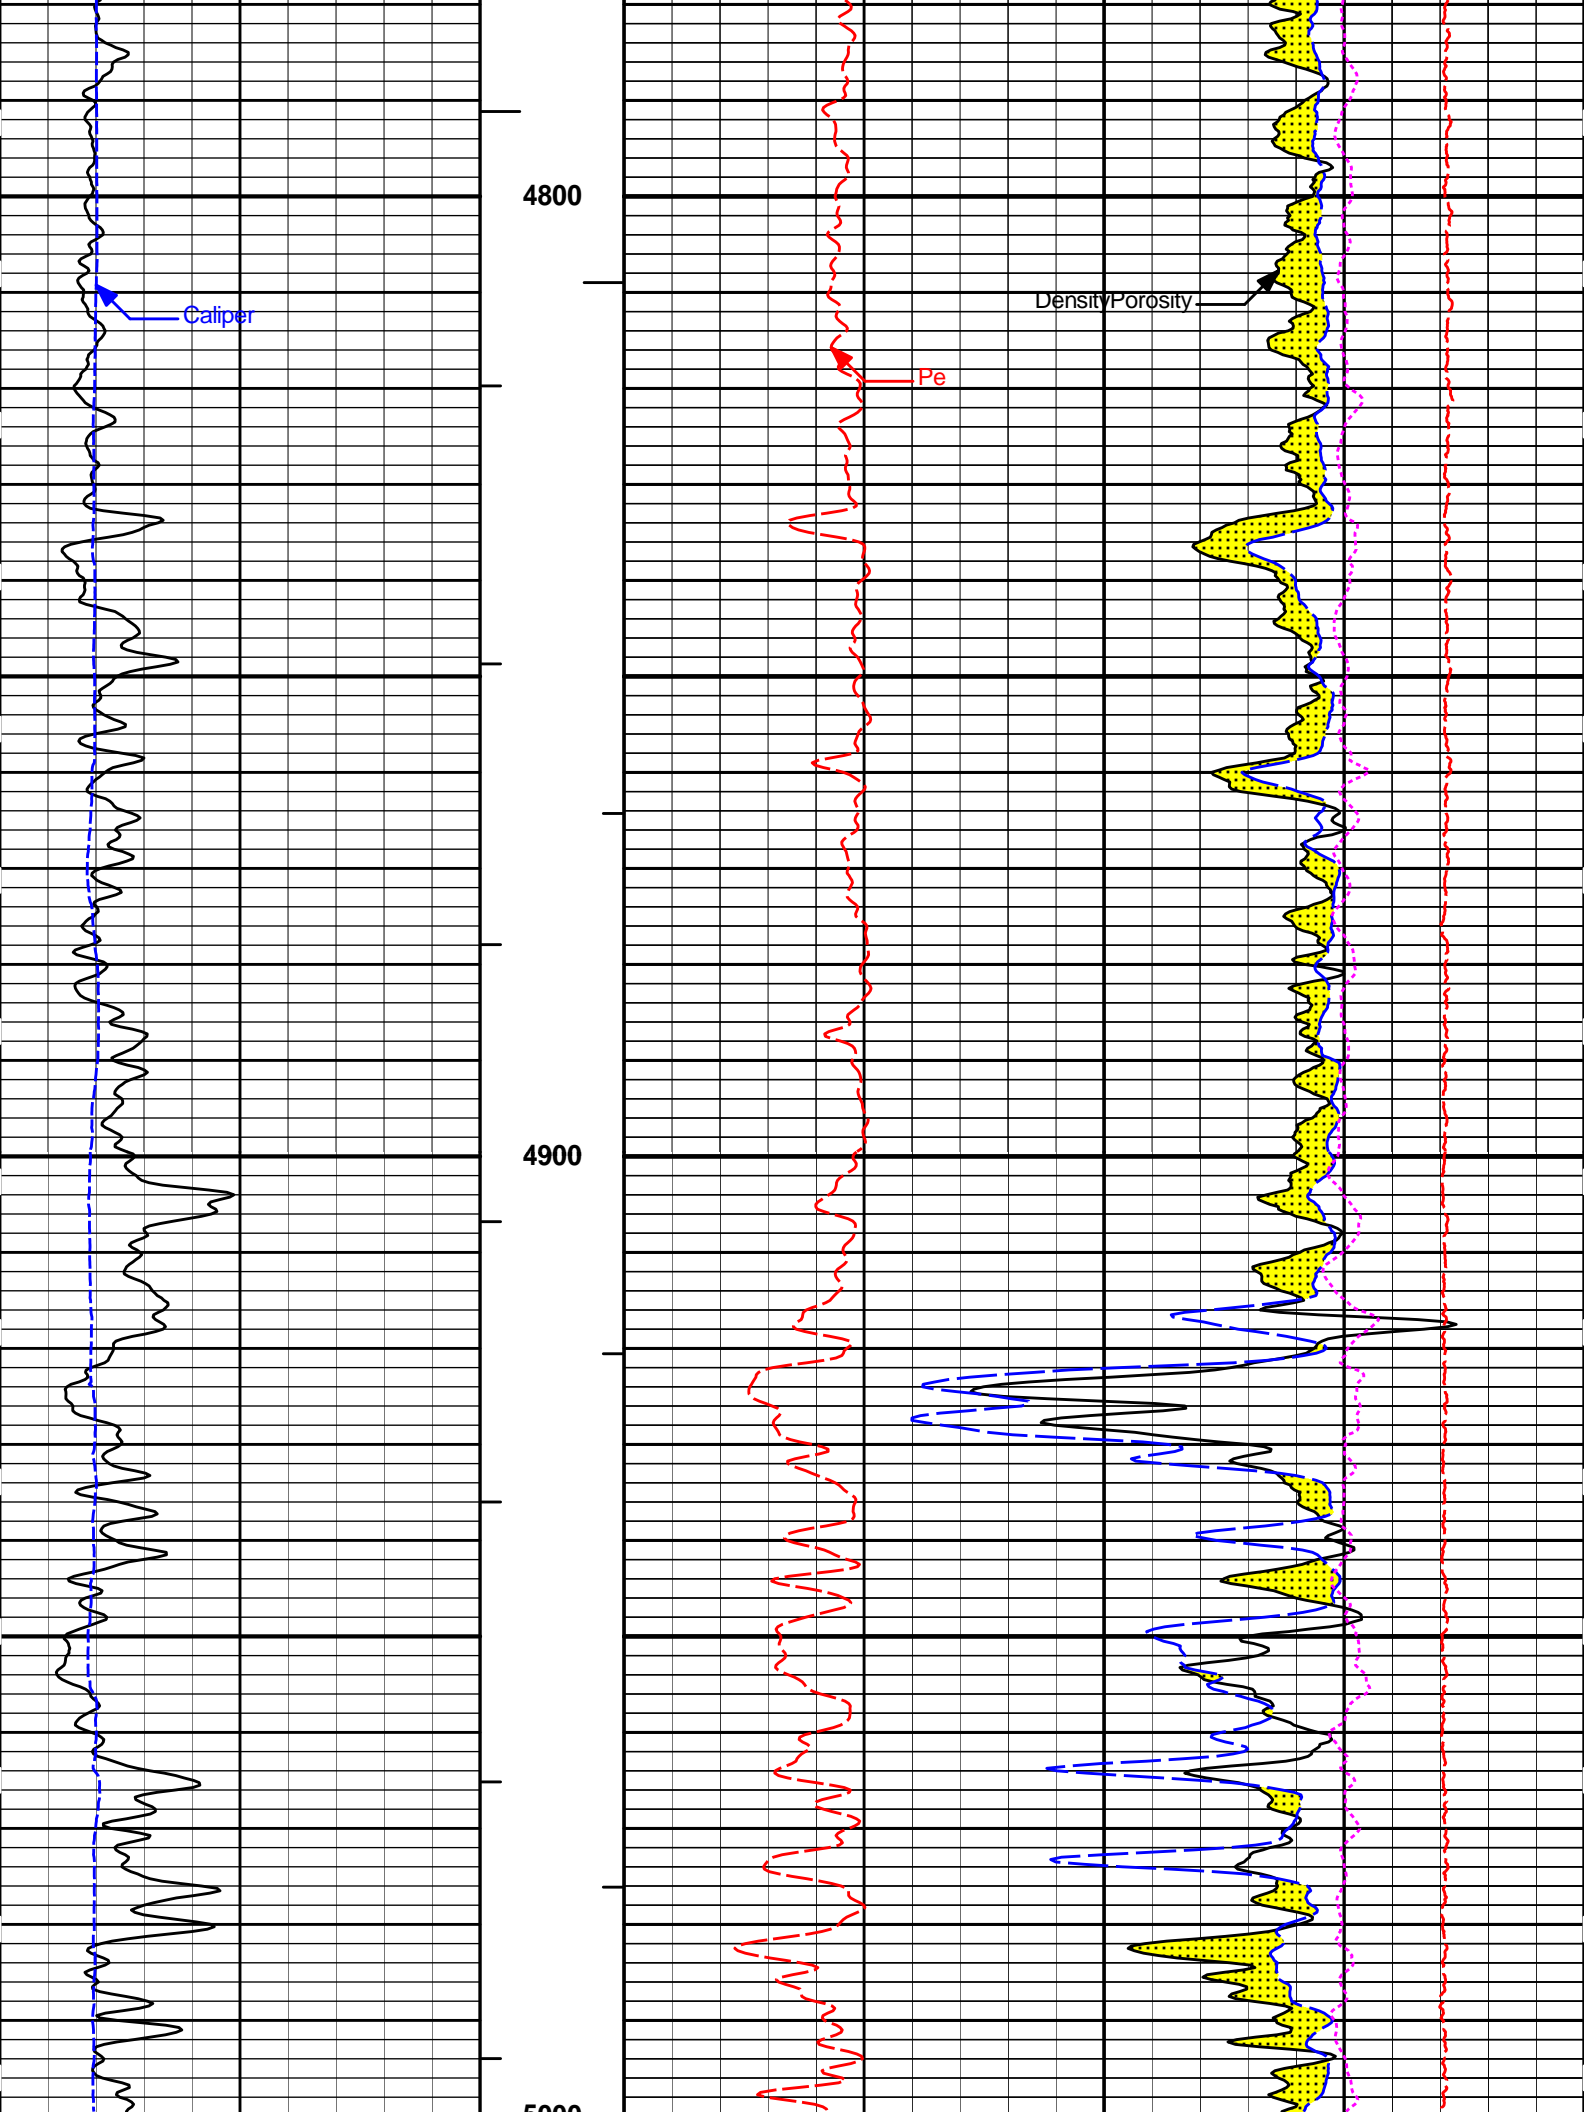

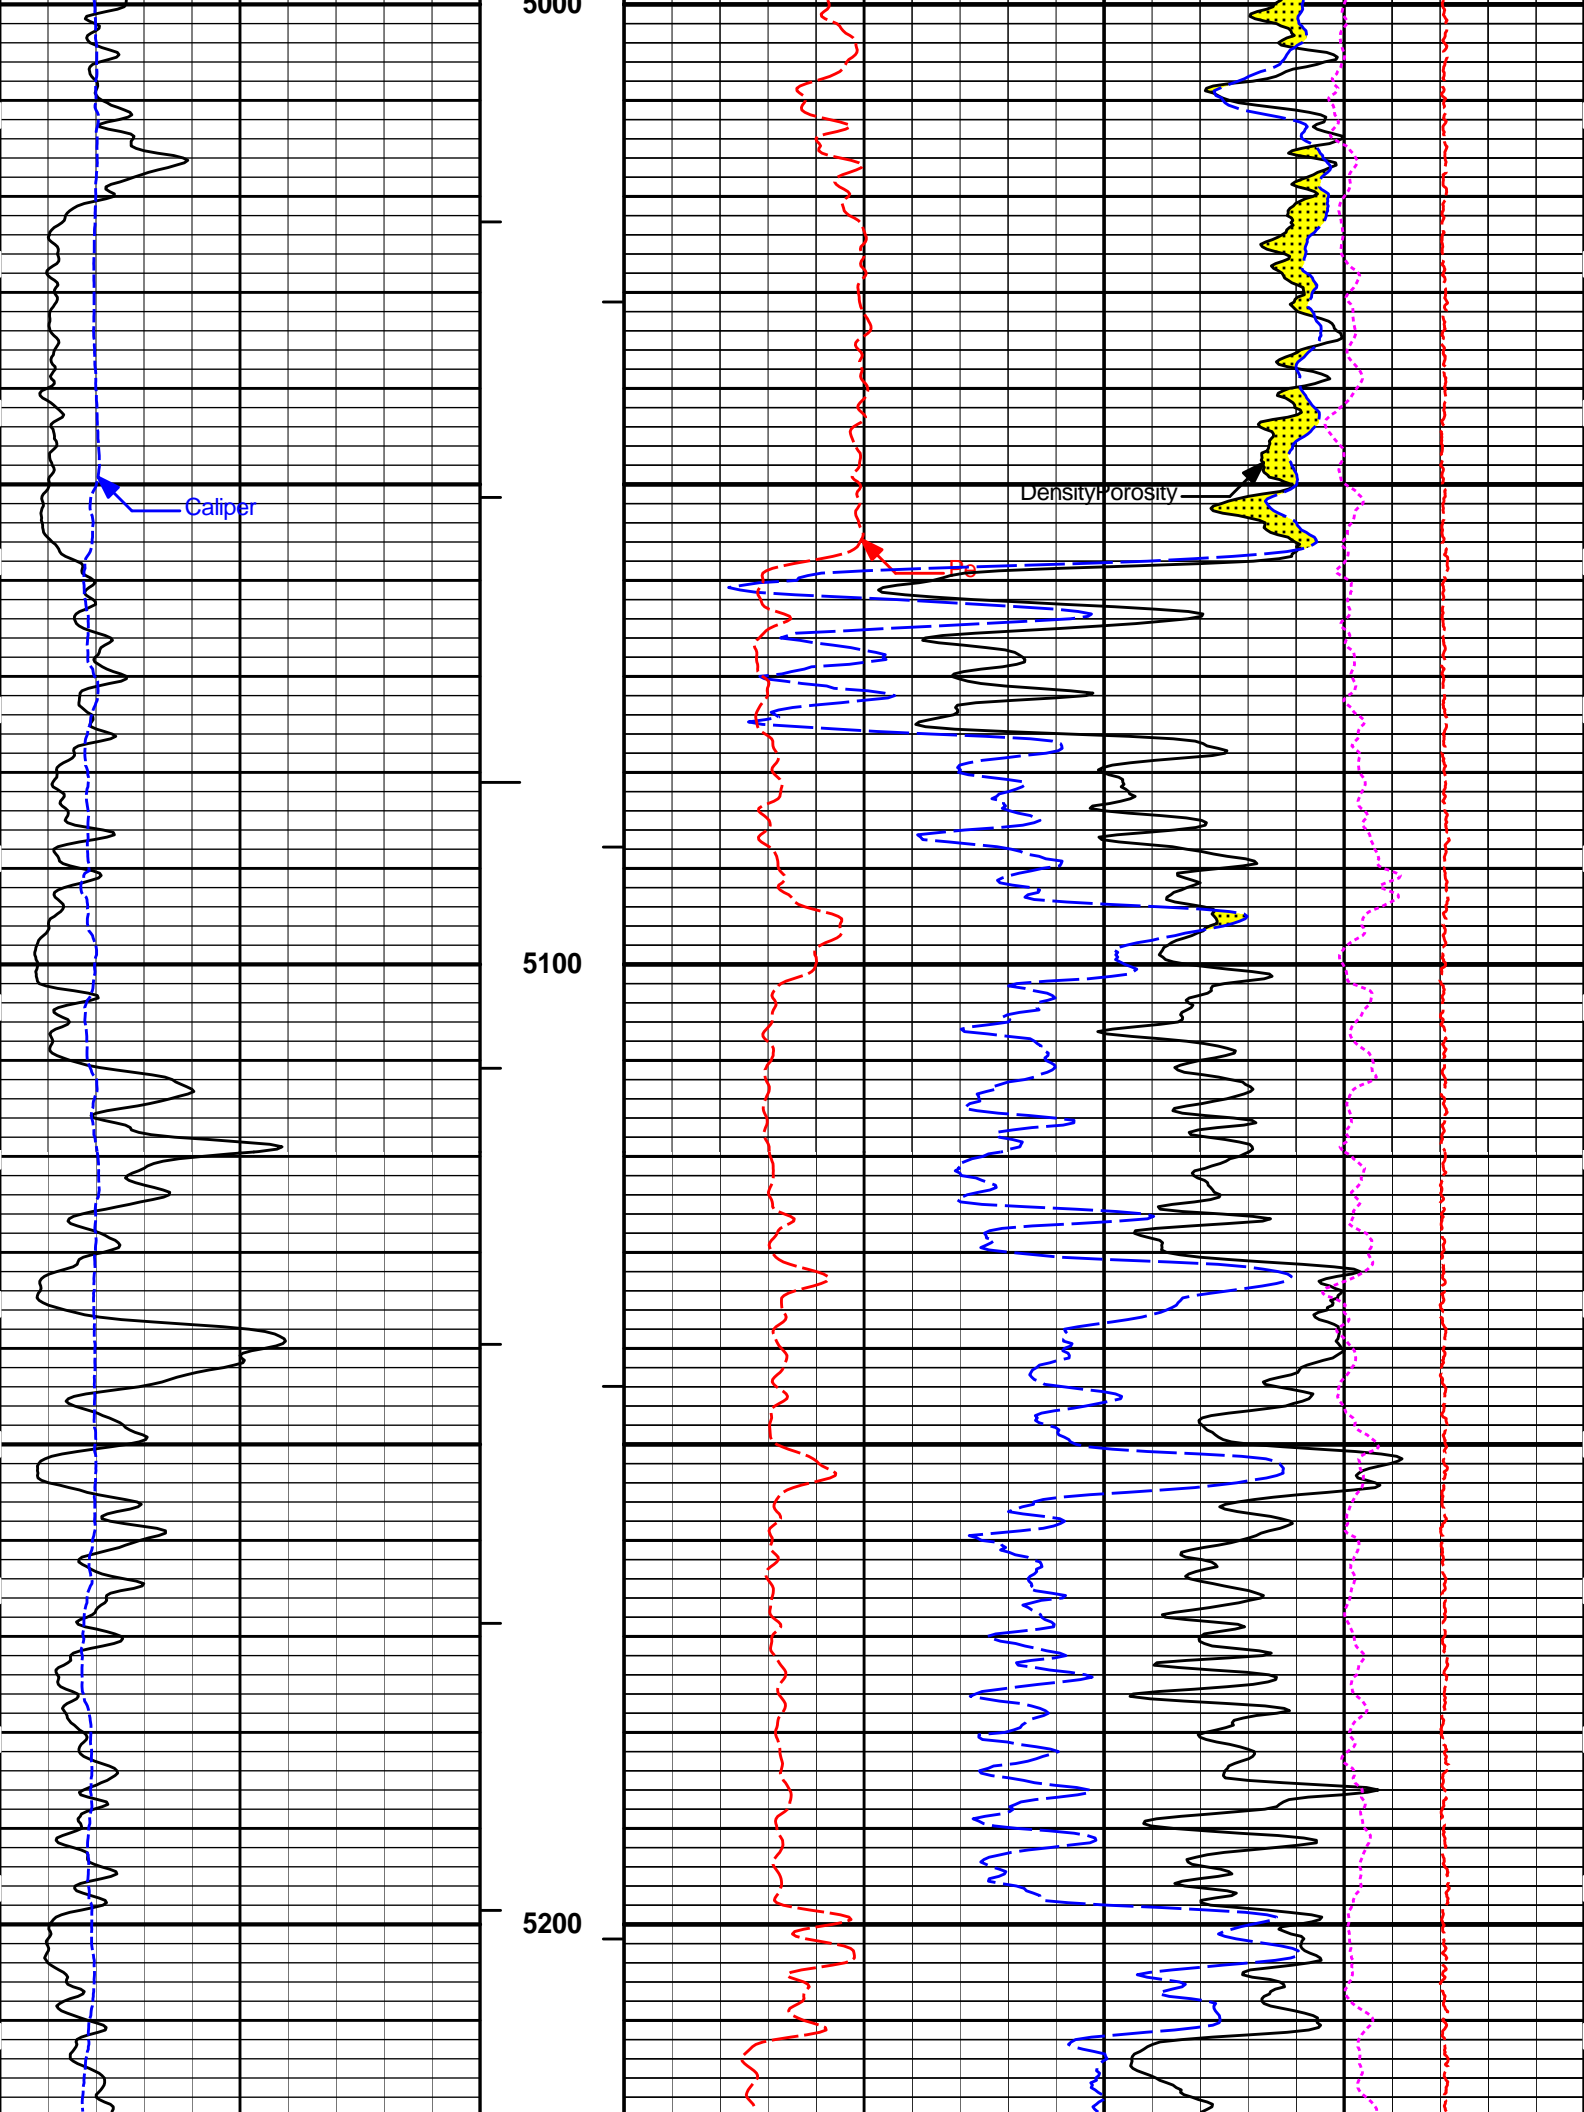

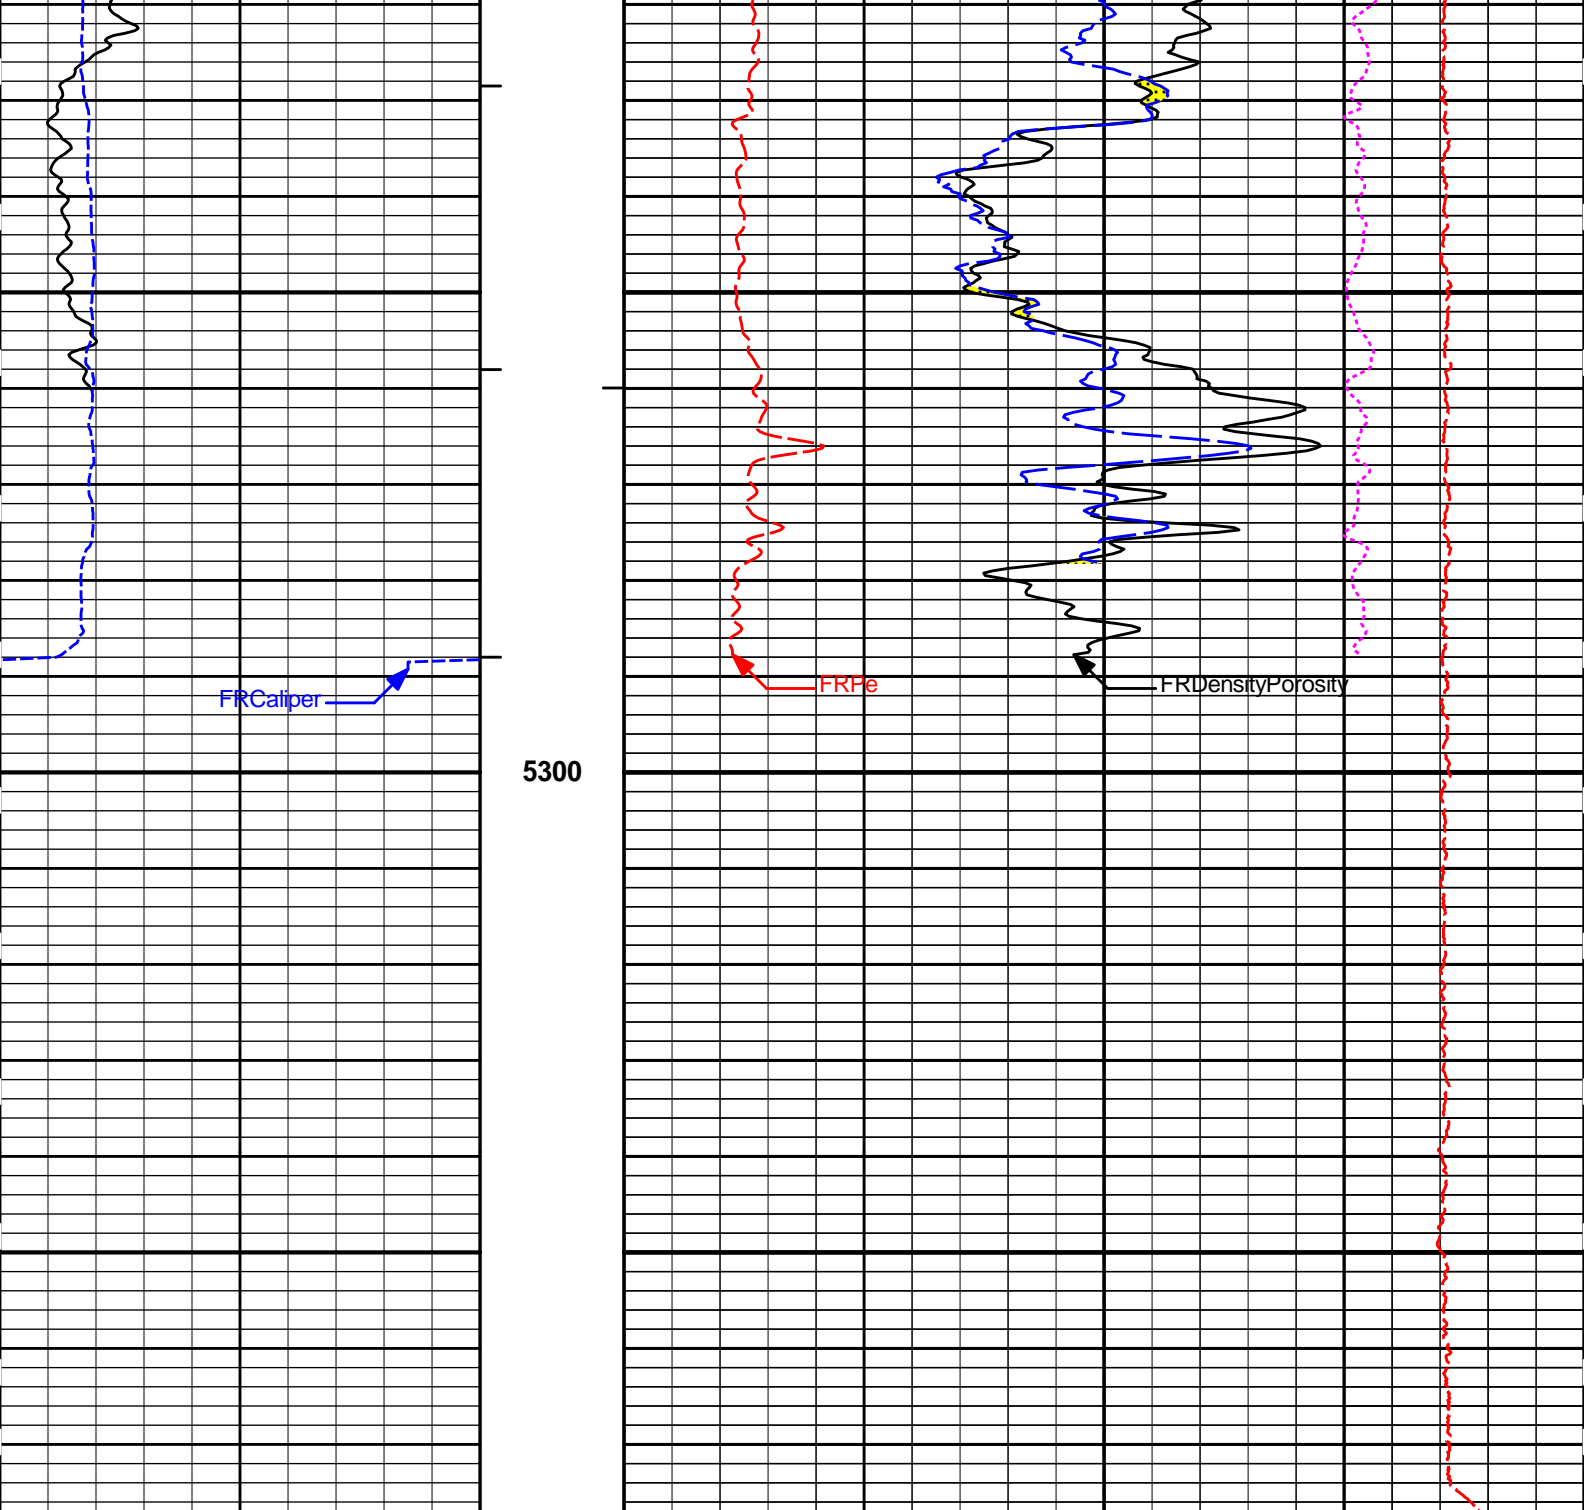

5300

FRCaliper

FRPe

FRDensityPorosity

6	Caliper	16	MD	0	Pe	10	-0.25	DensityCorr	0.25
	inches		1 : 240					gram per cc	
0	Gamma API	150	AHVT			15K		Tension	0
	api							pounds	
	SHALE		BHVT	30				DensityPorosity	-10
								%	
			Tension Pull	10	0	30		Neutron Porosity	-10
								%	
			Tension Pull					CROSSOVER	

HALLIBURTON


Plot Time: 18-Apr-13 03:21:16
 Plot Range: 340 ft to 5377.25 ft
 Data: PAMELA_2330_1-3\Well Based\DAQ-0001-003\
 Plot File: \\BOBO\Bore IQ_5_MAIN_LIP


5 INCH MAIN LOG

HALLIBURTON

Plot Time: 18-Apr-13 03:21:16
Plot Range: 5044 ft to 5378.58 ft
Data: PAMELA_2330_1-3\Well Based\DAQ-0001-002\
Plot File: \\PORO\Poro_IQ_5_REP_LIB

REPEAT SECTION

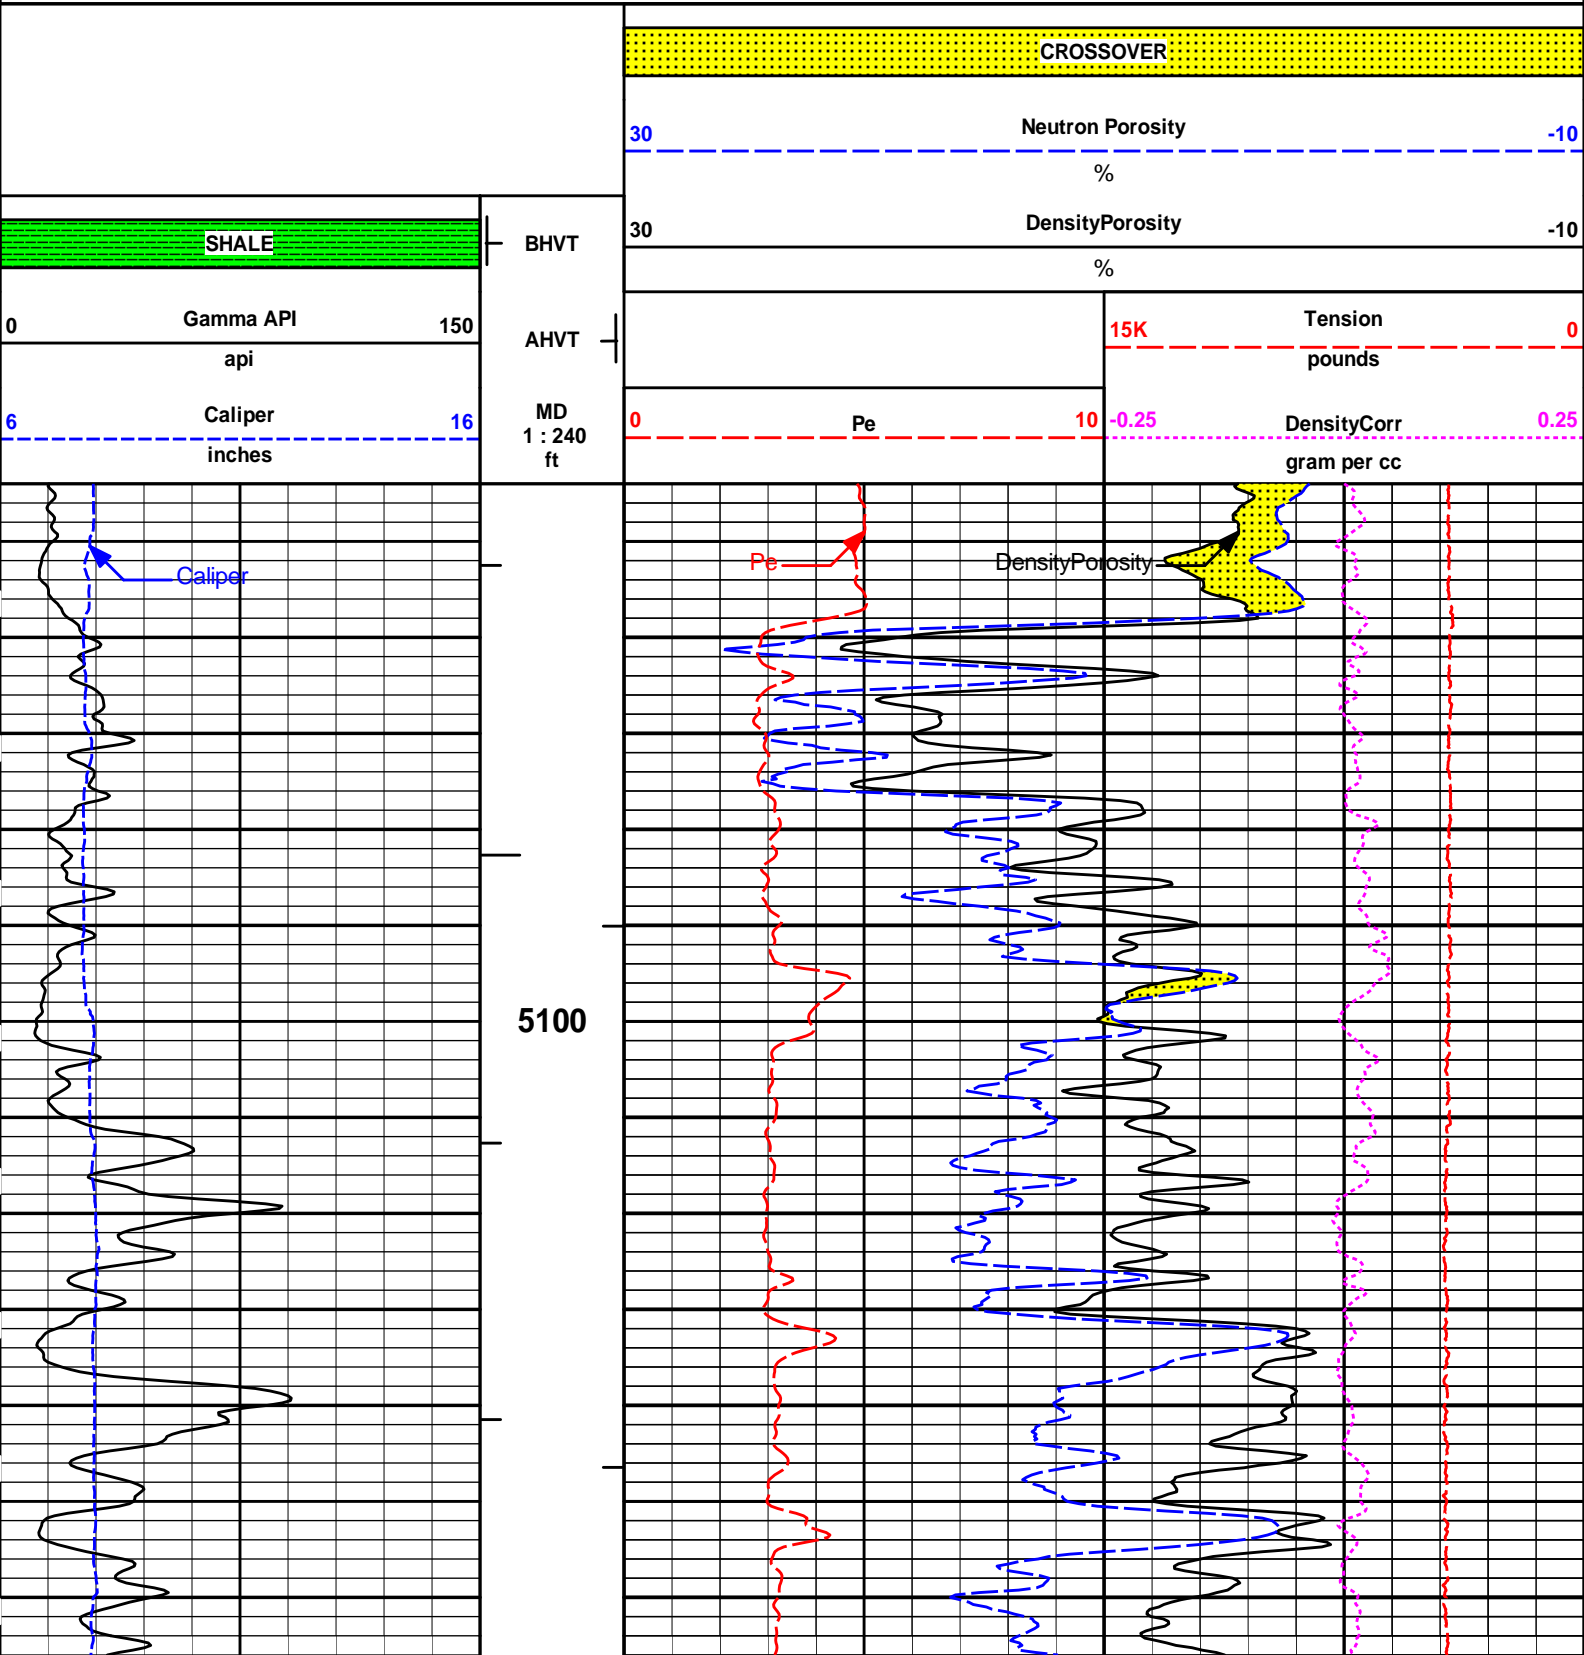

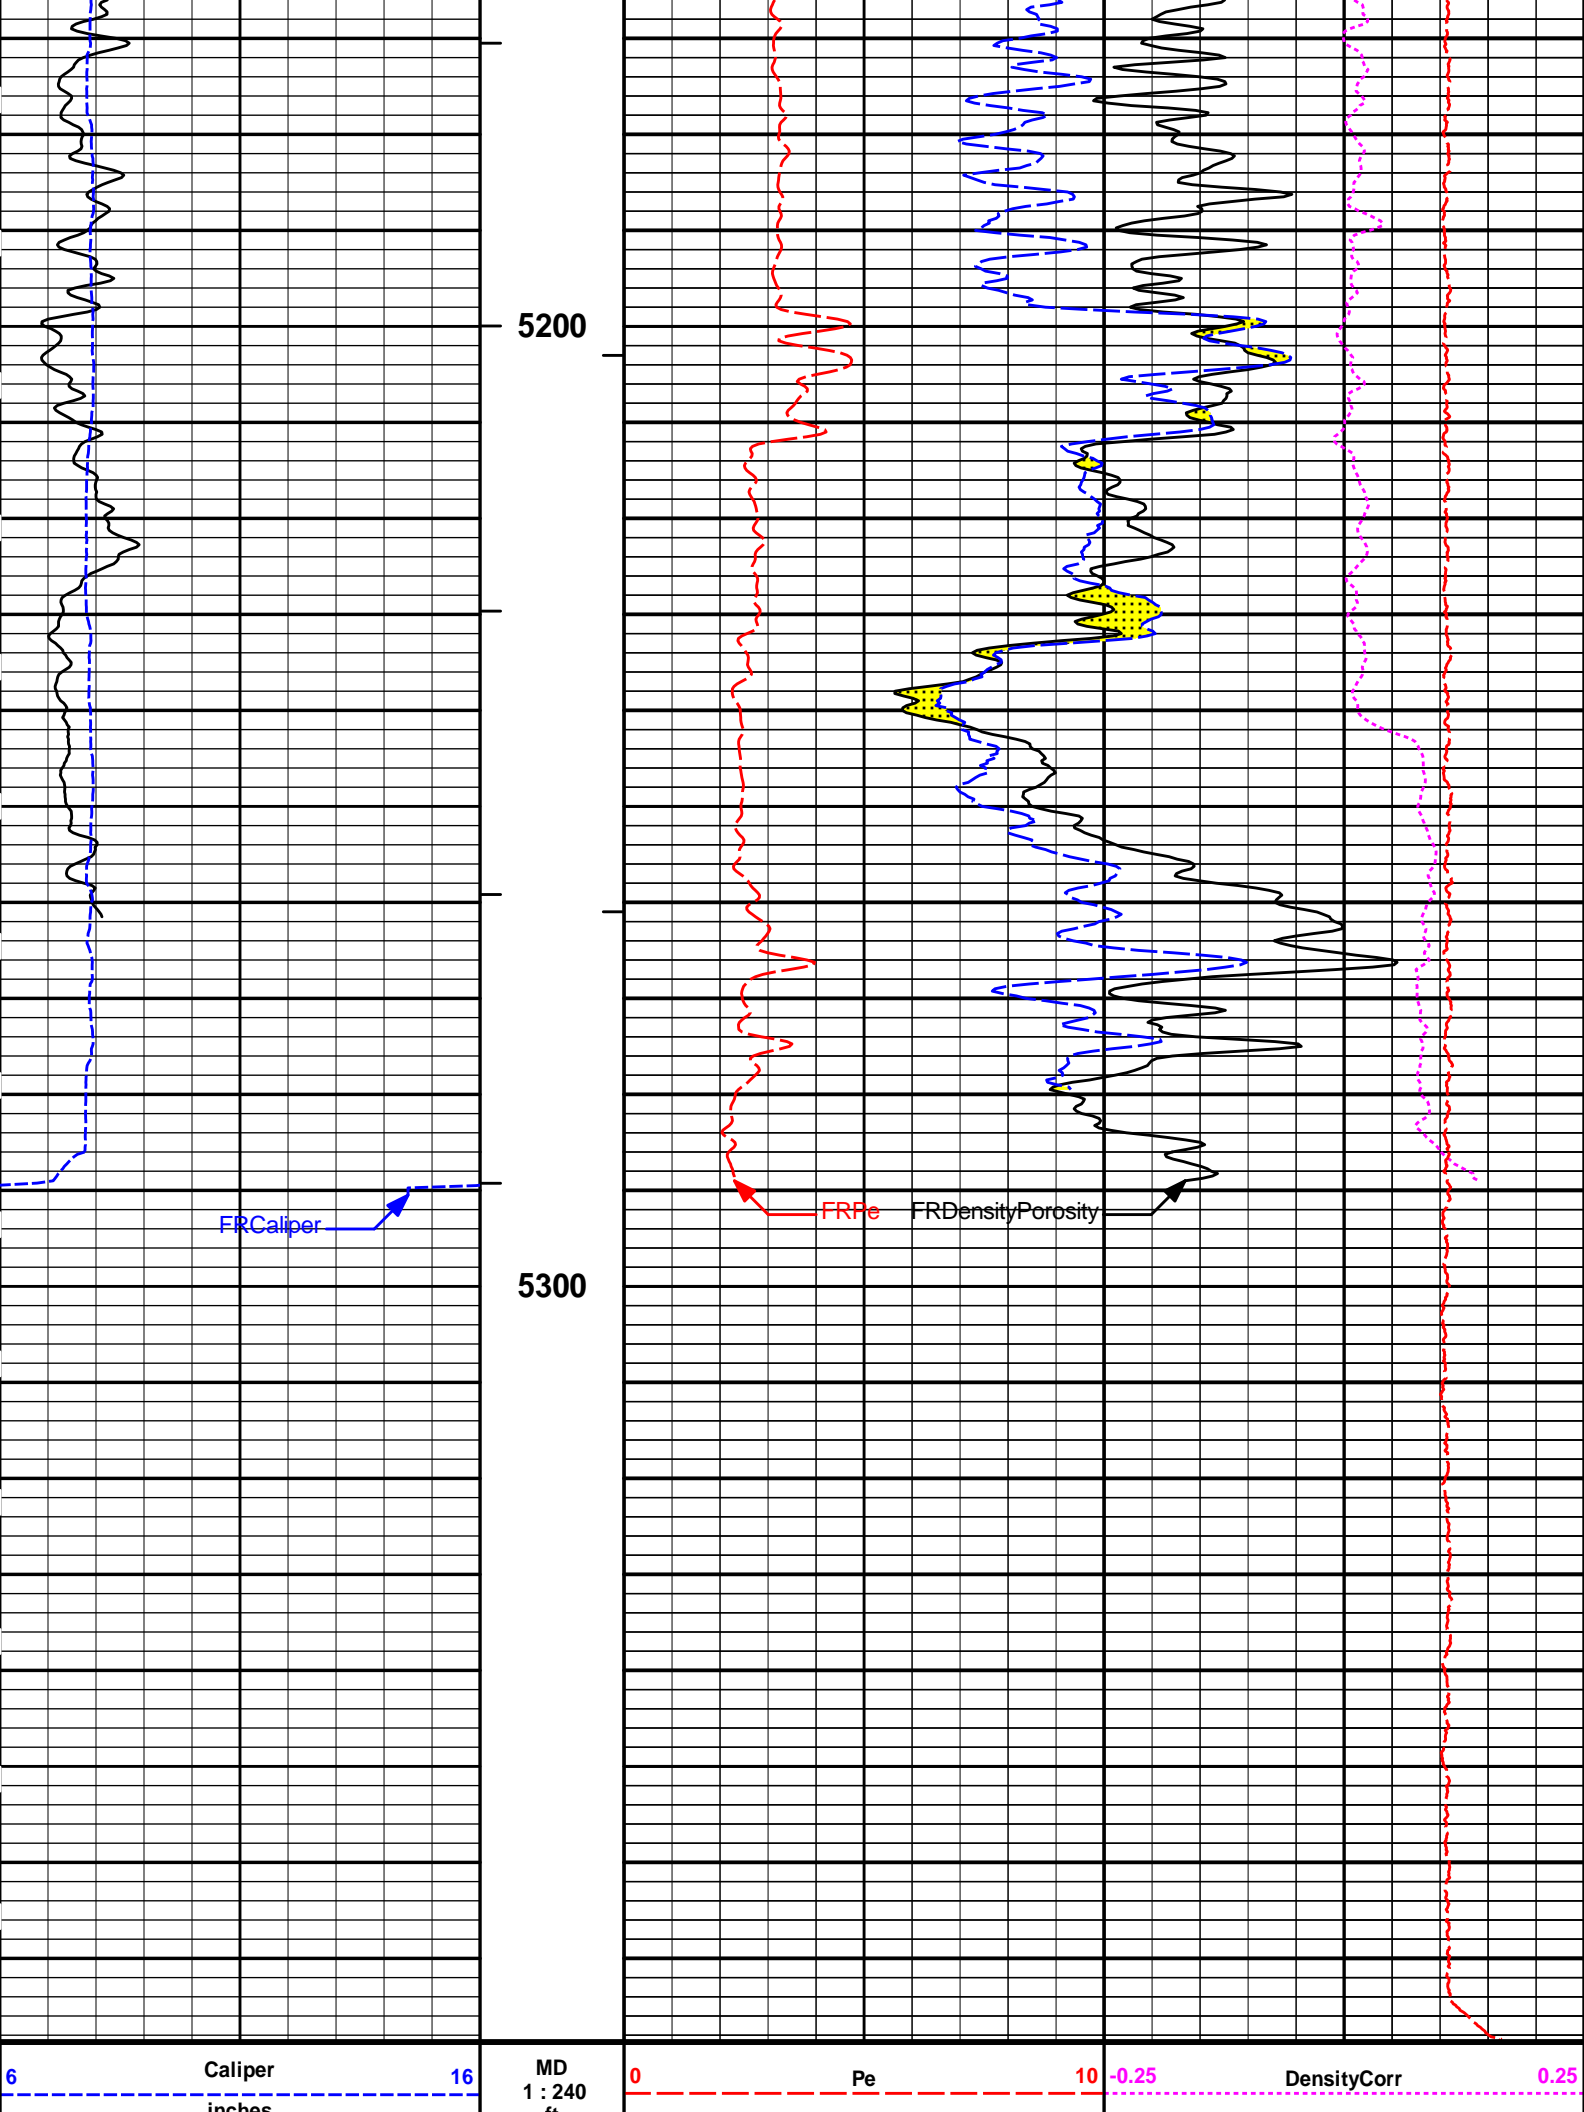

0	Gamma API	150	ft		15K	Tension	0
	api			AHVT		pounds	
	SHALE			BHVT	30	DensityPorosity	-10
						%	
					30	Neutron Porosity	-10
						%	
						CROSSOVER	

HALLIBURTON


Plot Time: 18-Apr-13 03:21:21
 Plot Range: 5044 ft to 5378.58 ft
 Data: PAMELA_2330_1-3\Well Based\DAQ-0001-002\
 Plot File: \\PORO\Poro_IQ_5_REP_LIB


REPEAT SECTION


HALLIBURTON


Plot Time: 18-Apr-13 03:21:21
 Plot Range: 340 ft to 5377.25 ft
 Data: PAMELA_2330_1-3\Well Based\DAQ-0001-003\
 Plot File: \\LOCAL-PAMELA_2330_1-3\0001 SP-GTET-DSN-SDL-XRMI-WSTT-ACRT-BNPPORO\BULKD_5_MAIN_LIB


5 INCH MAIN LOG

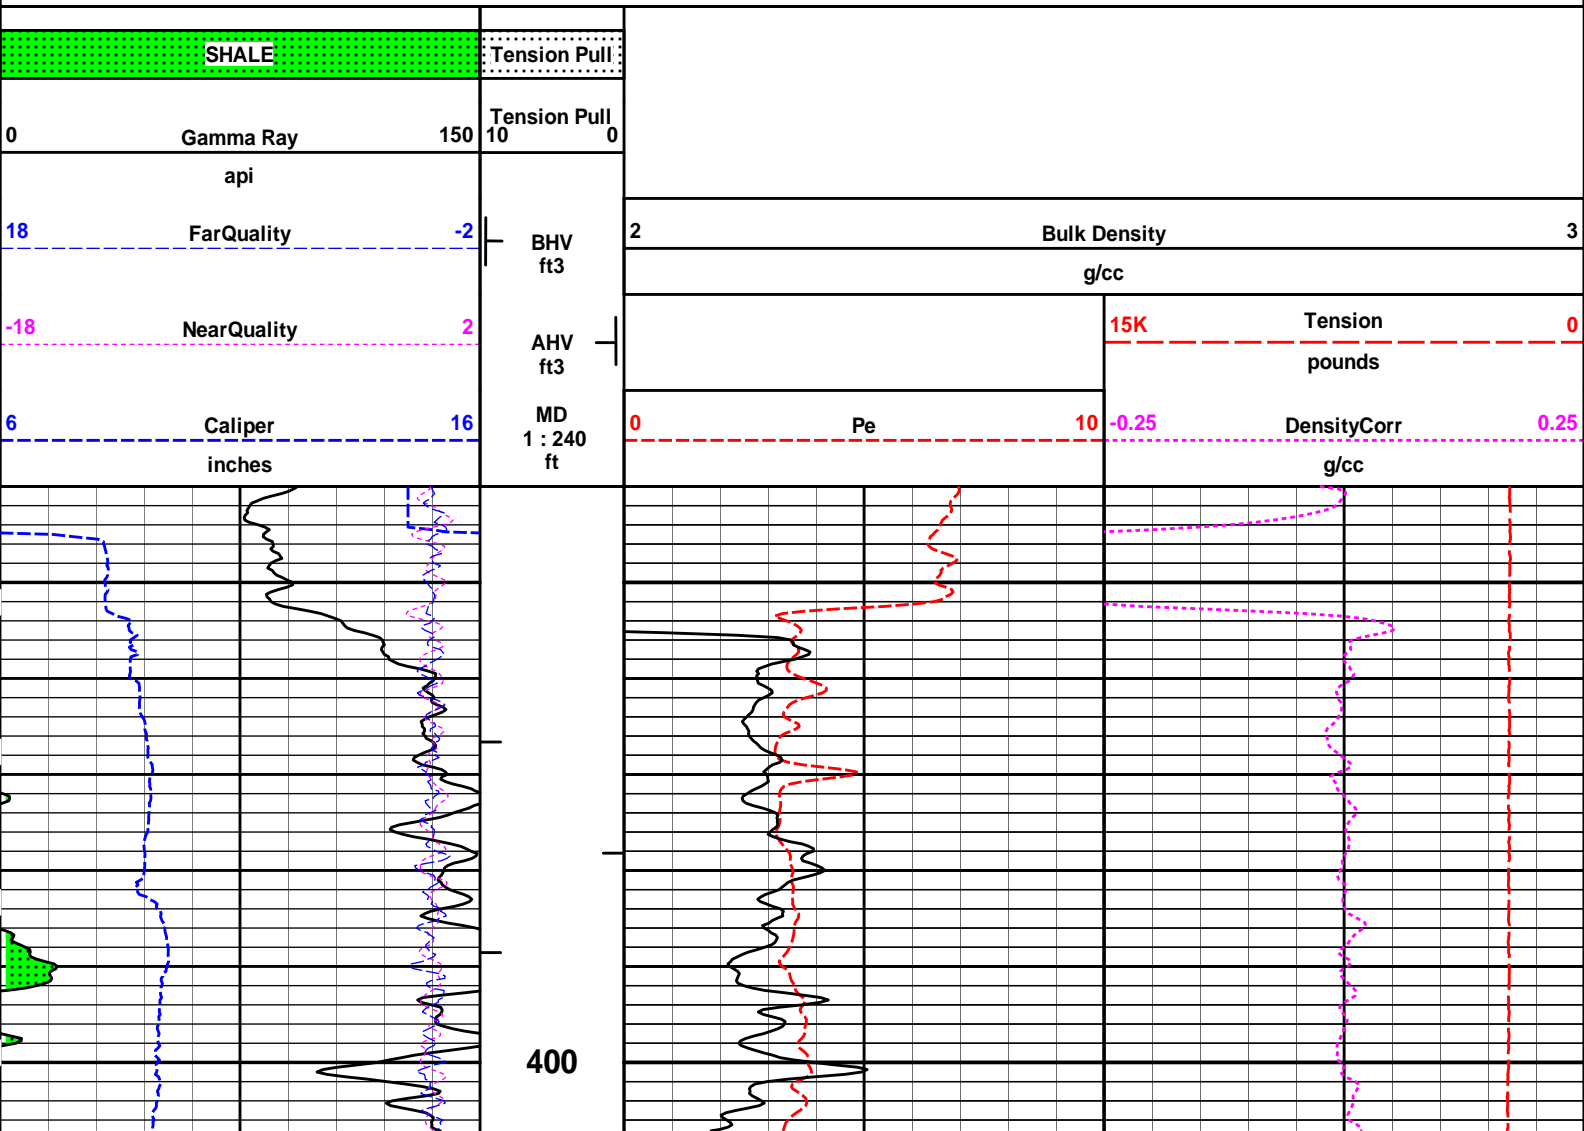


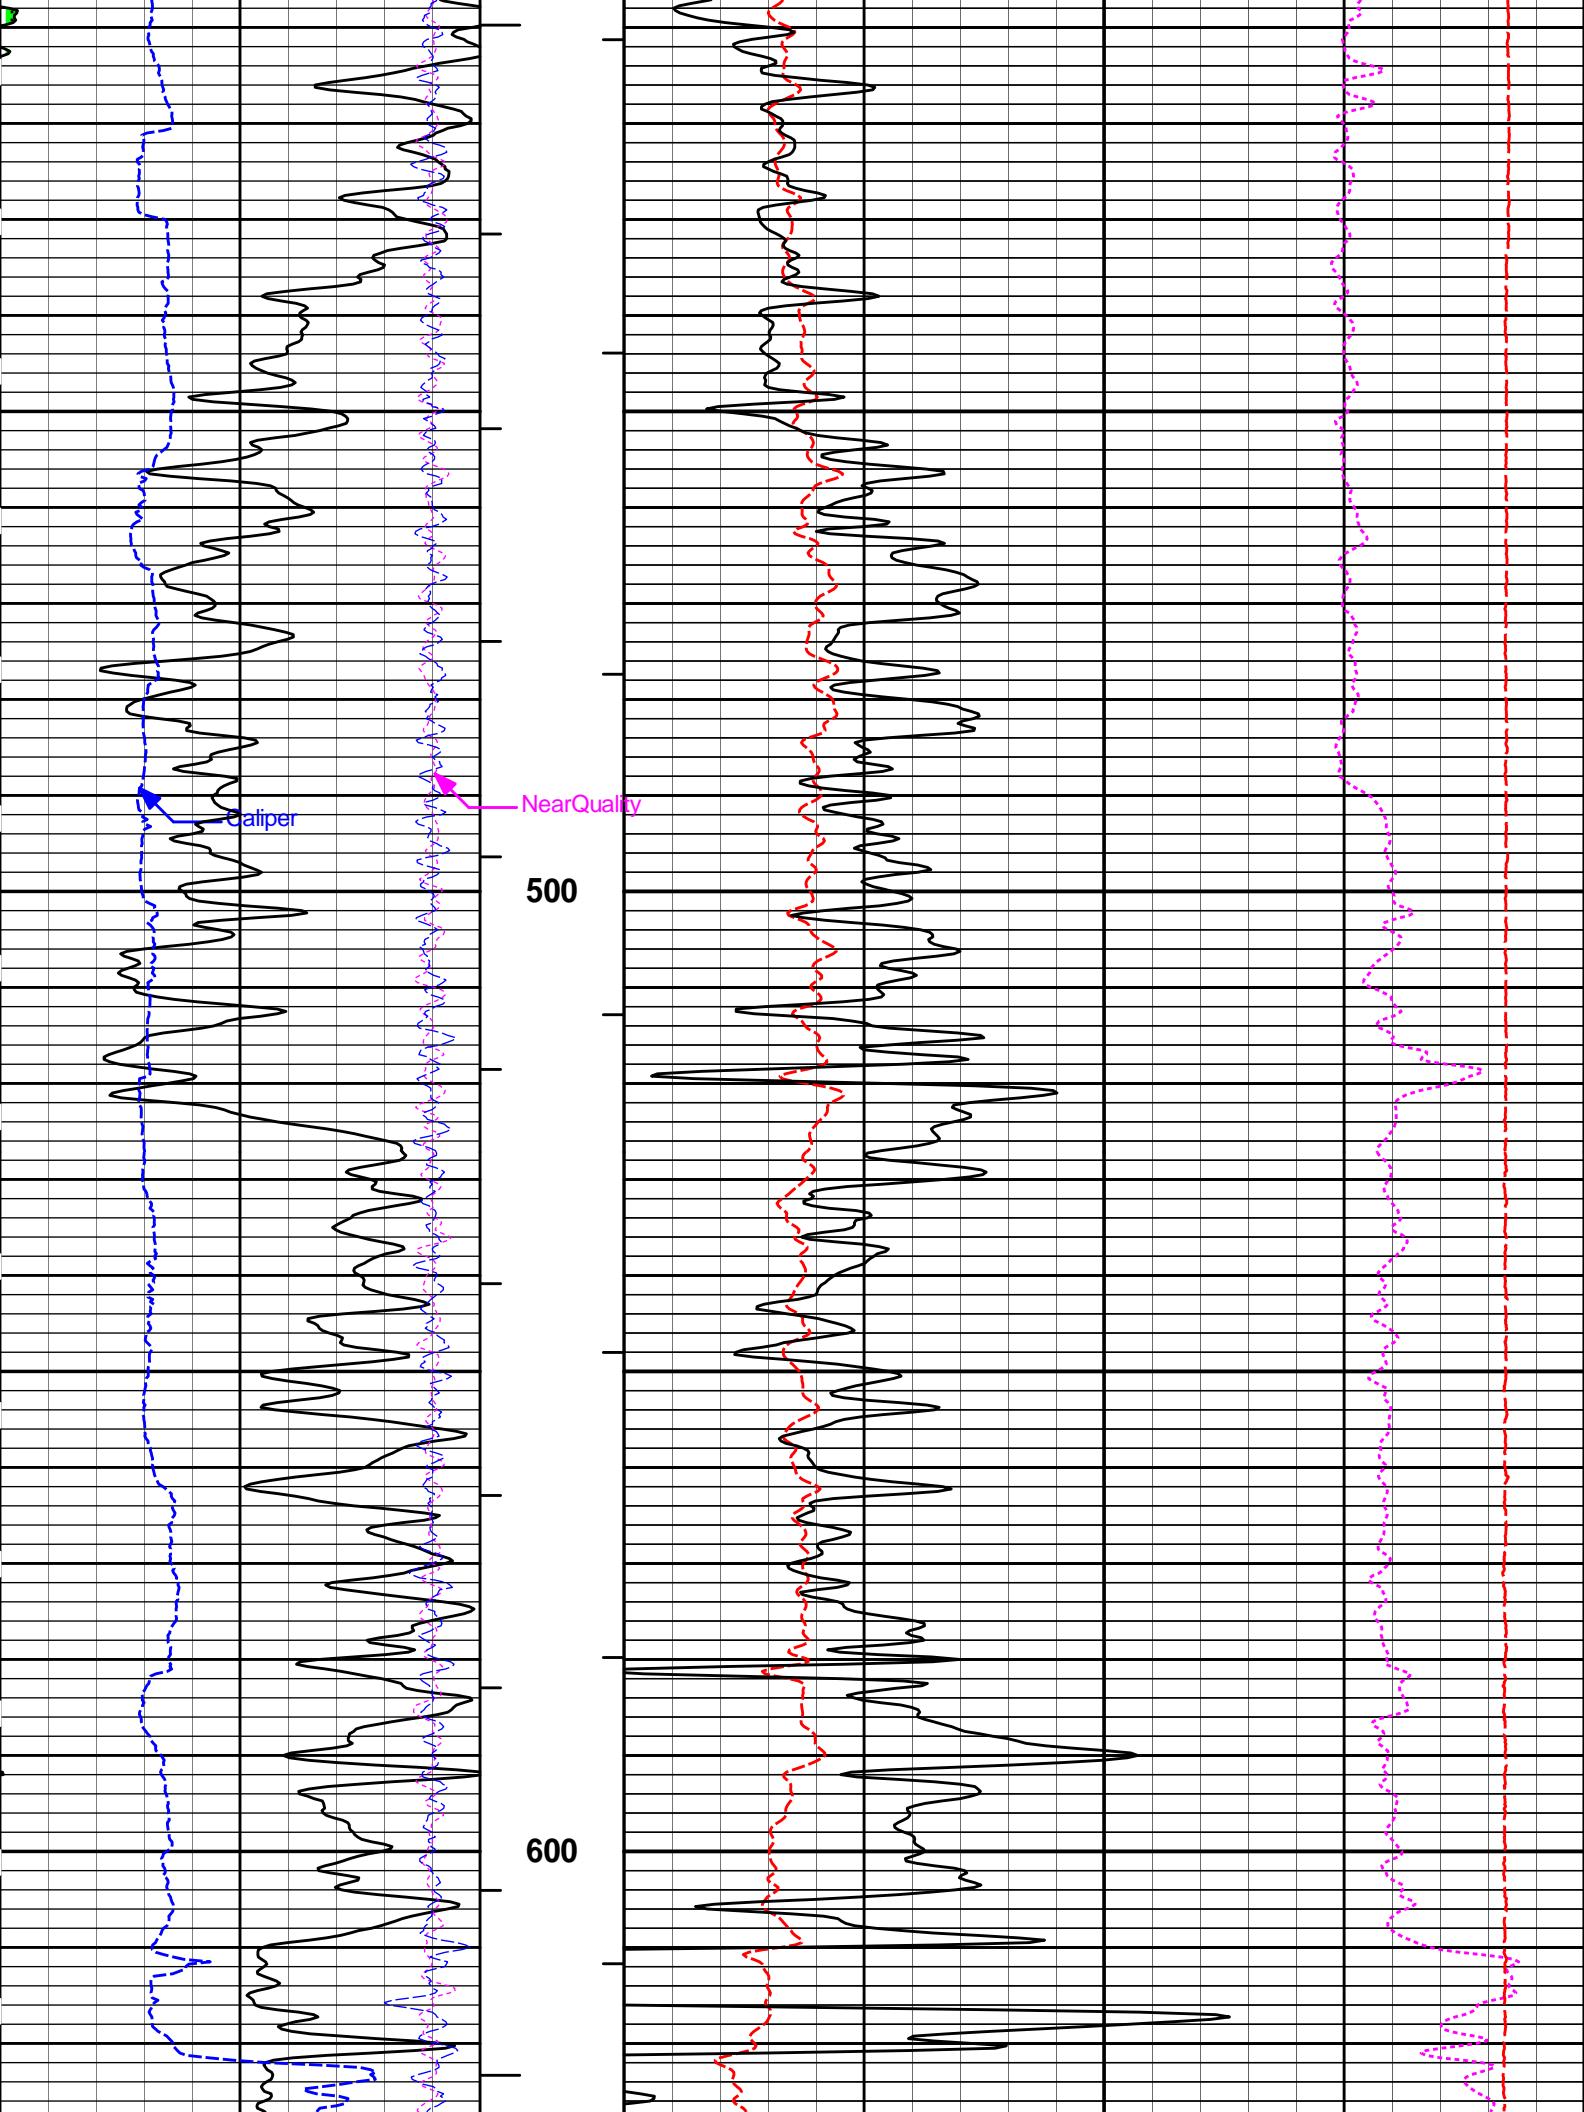


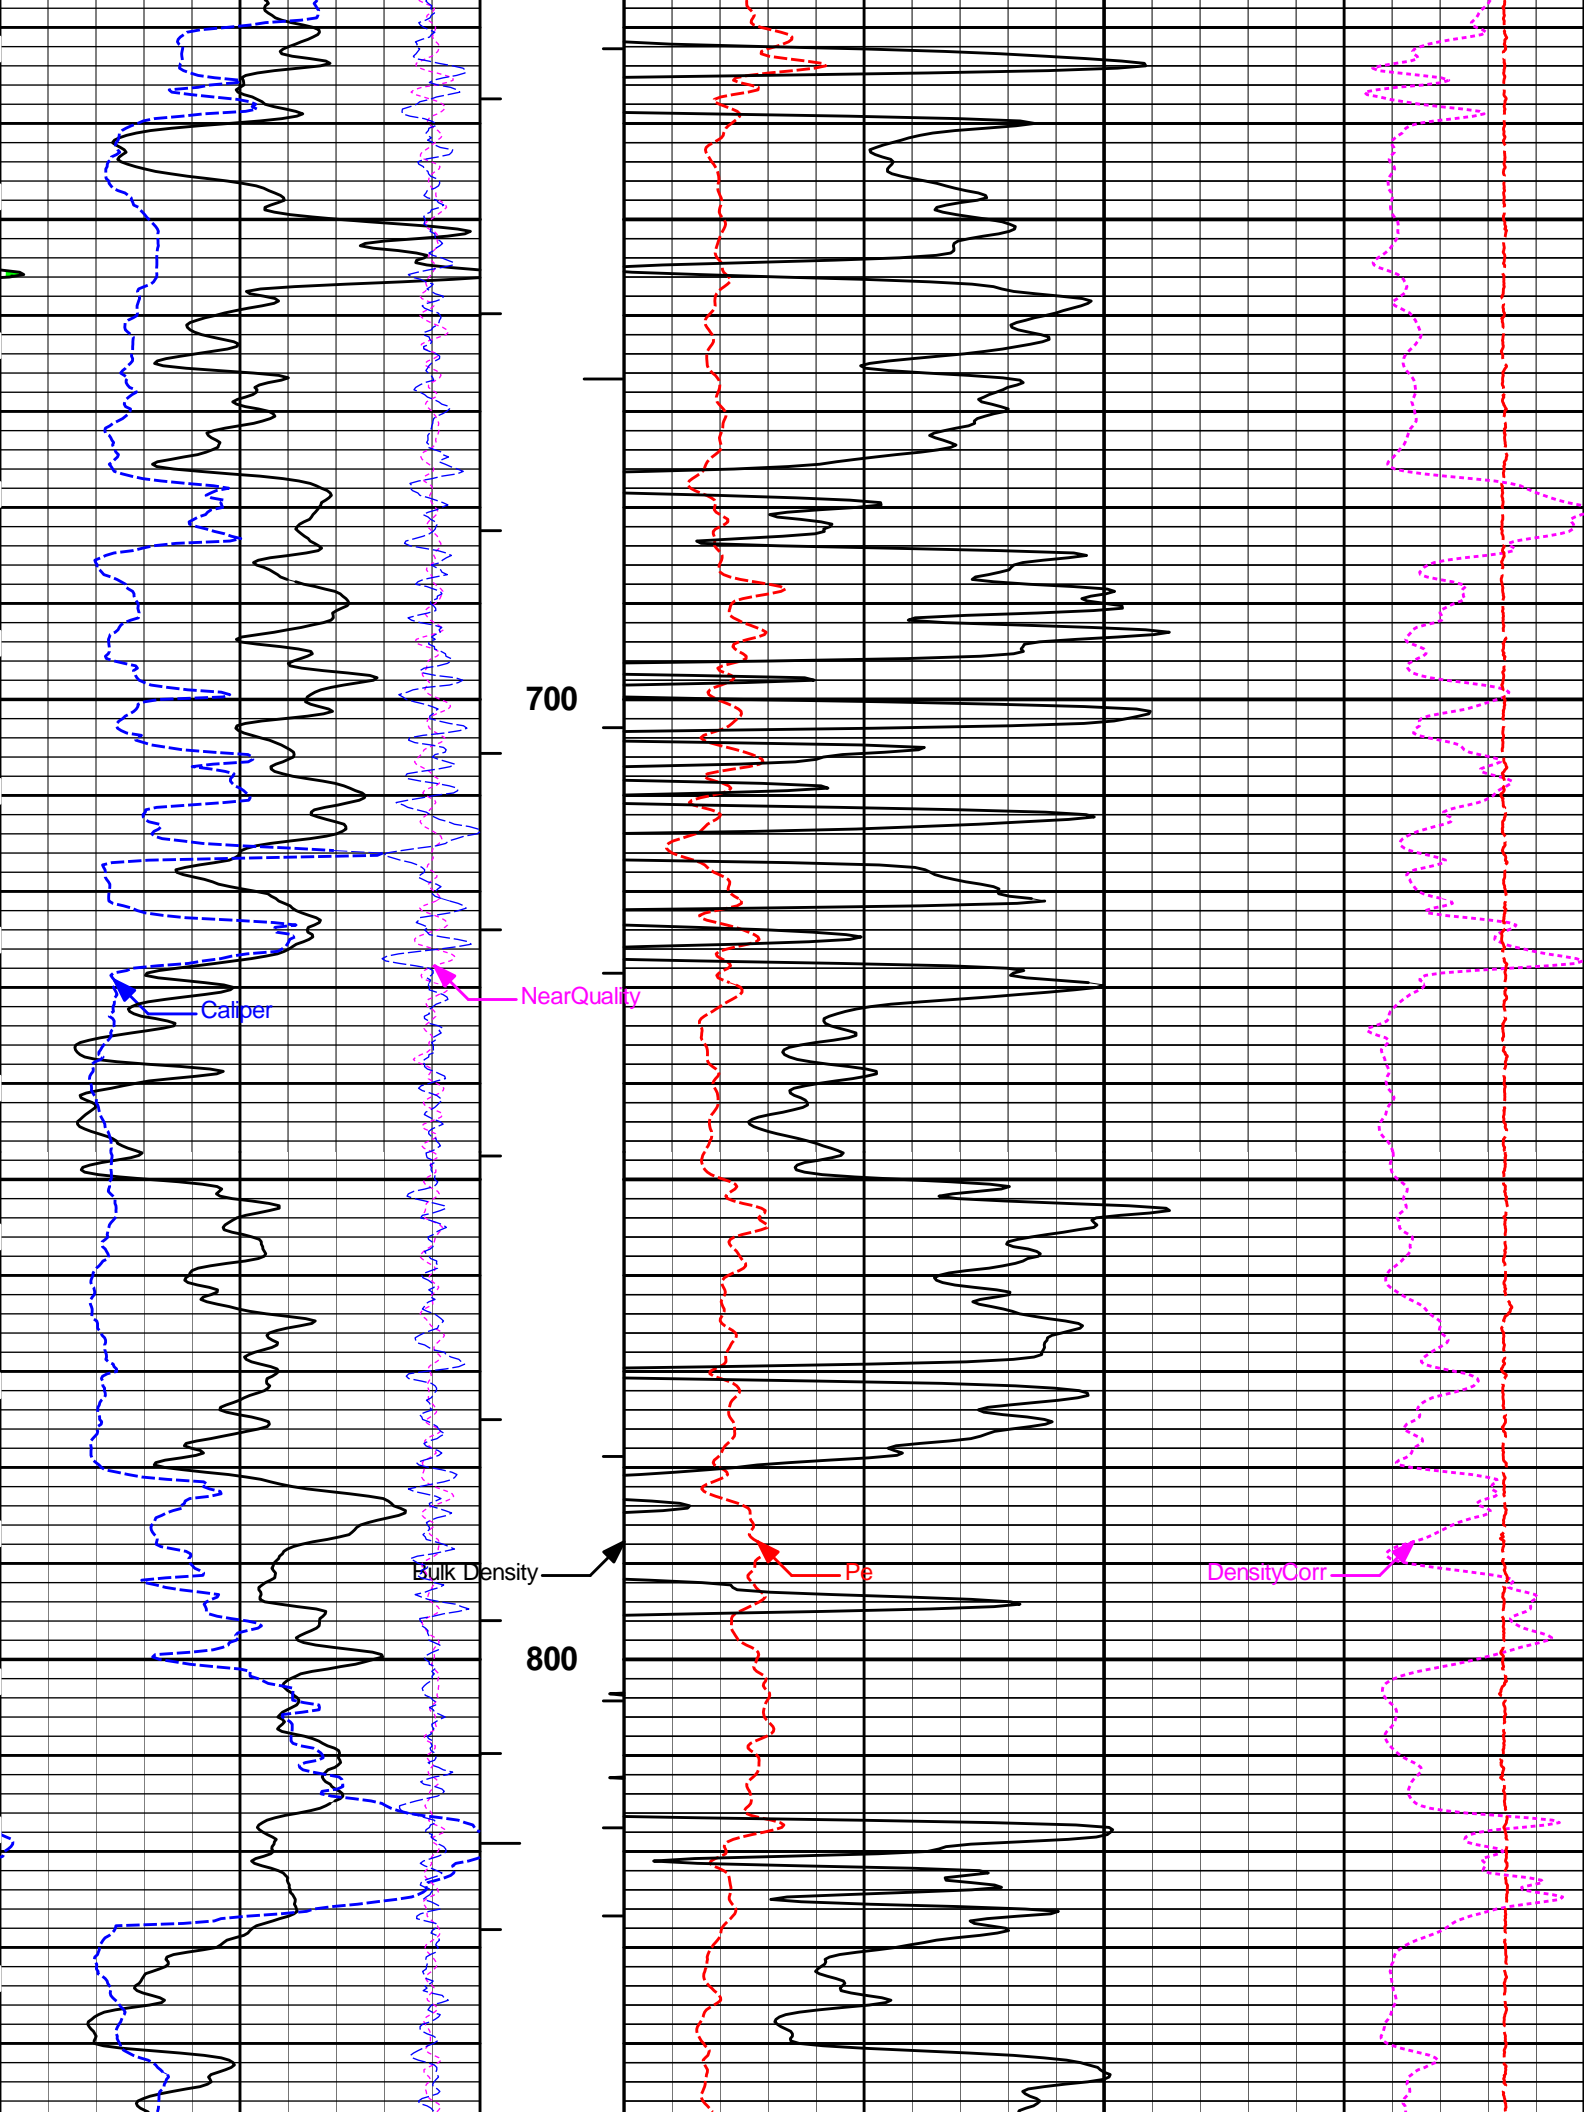


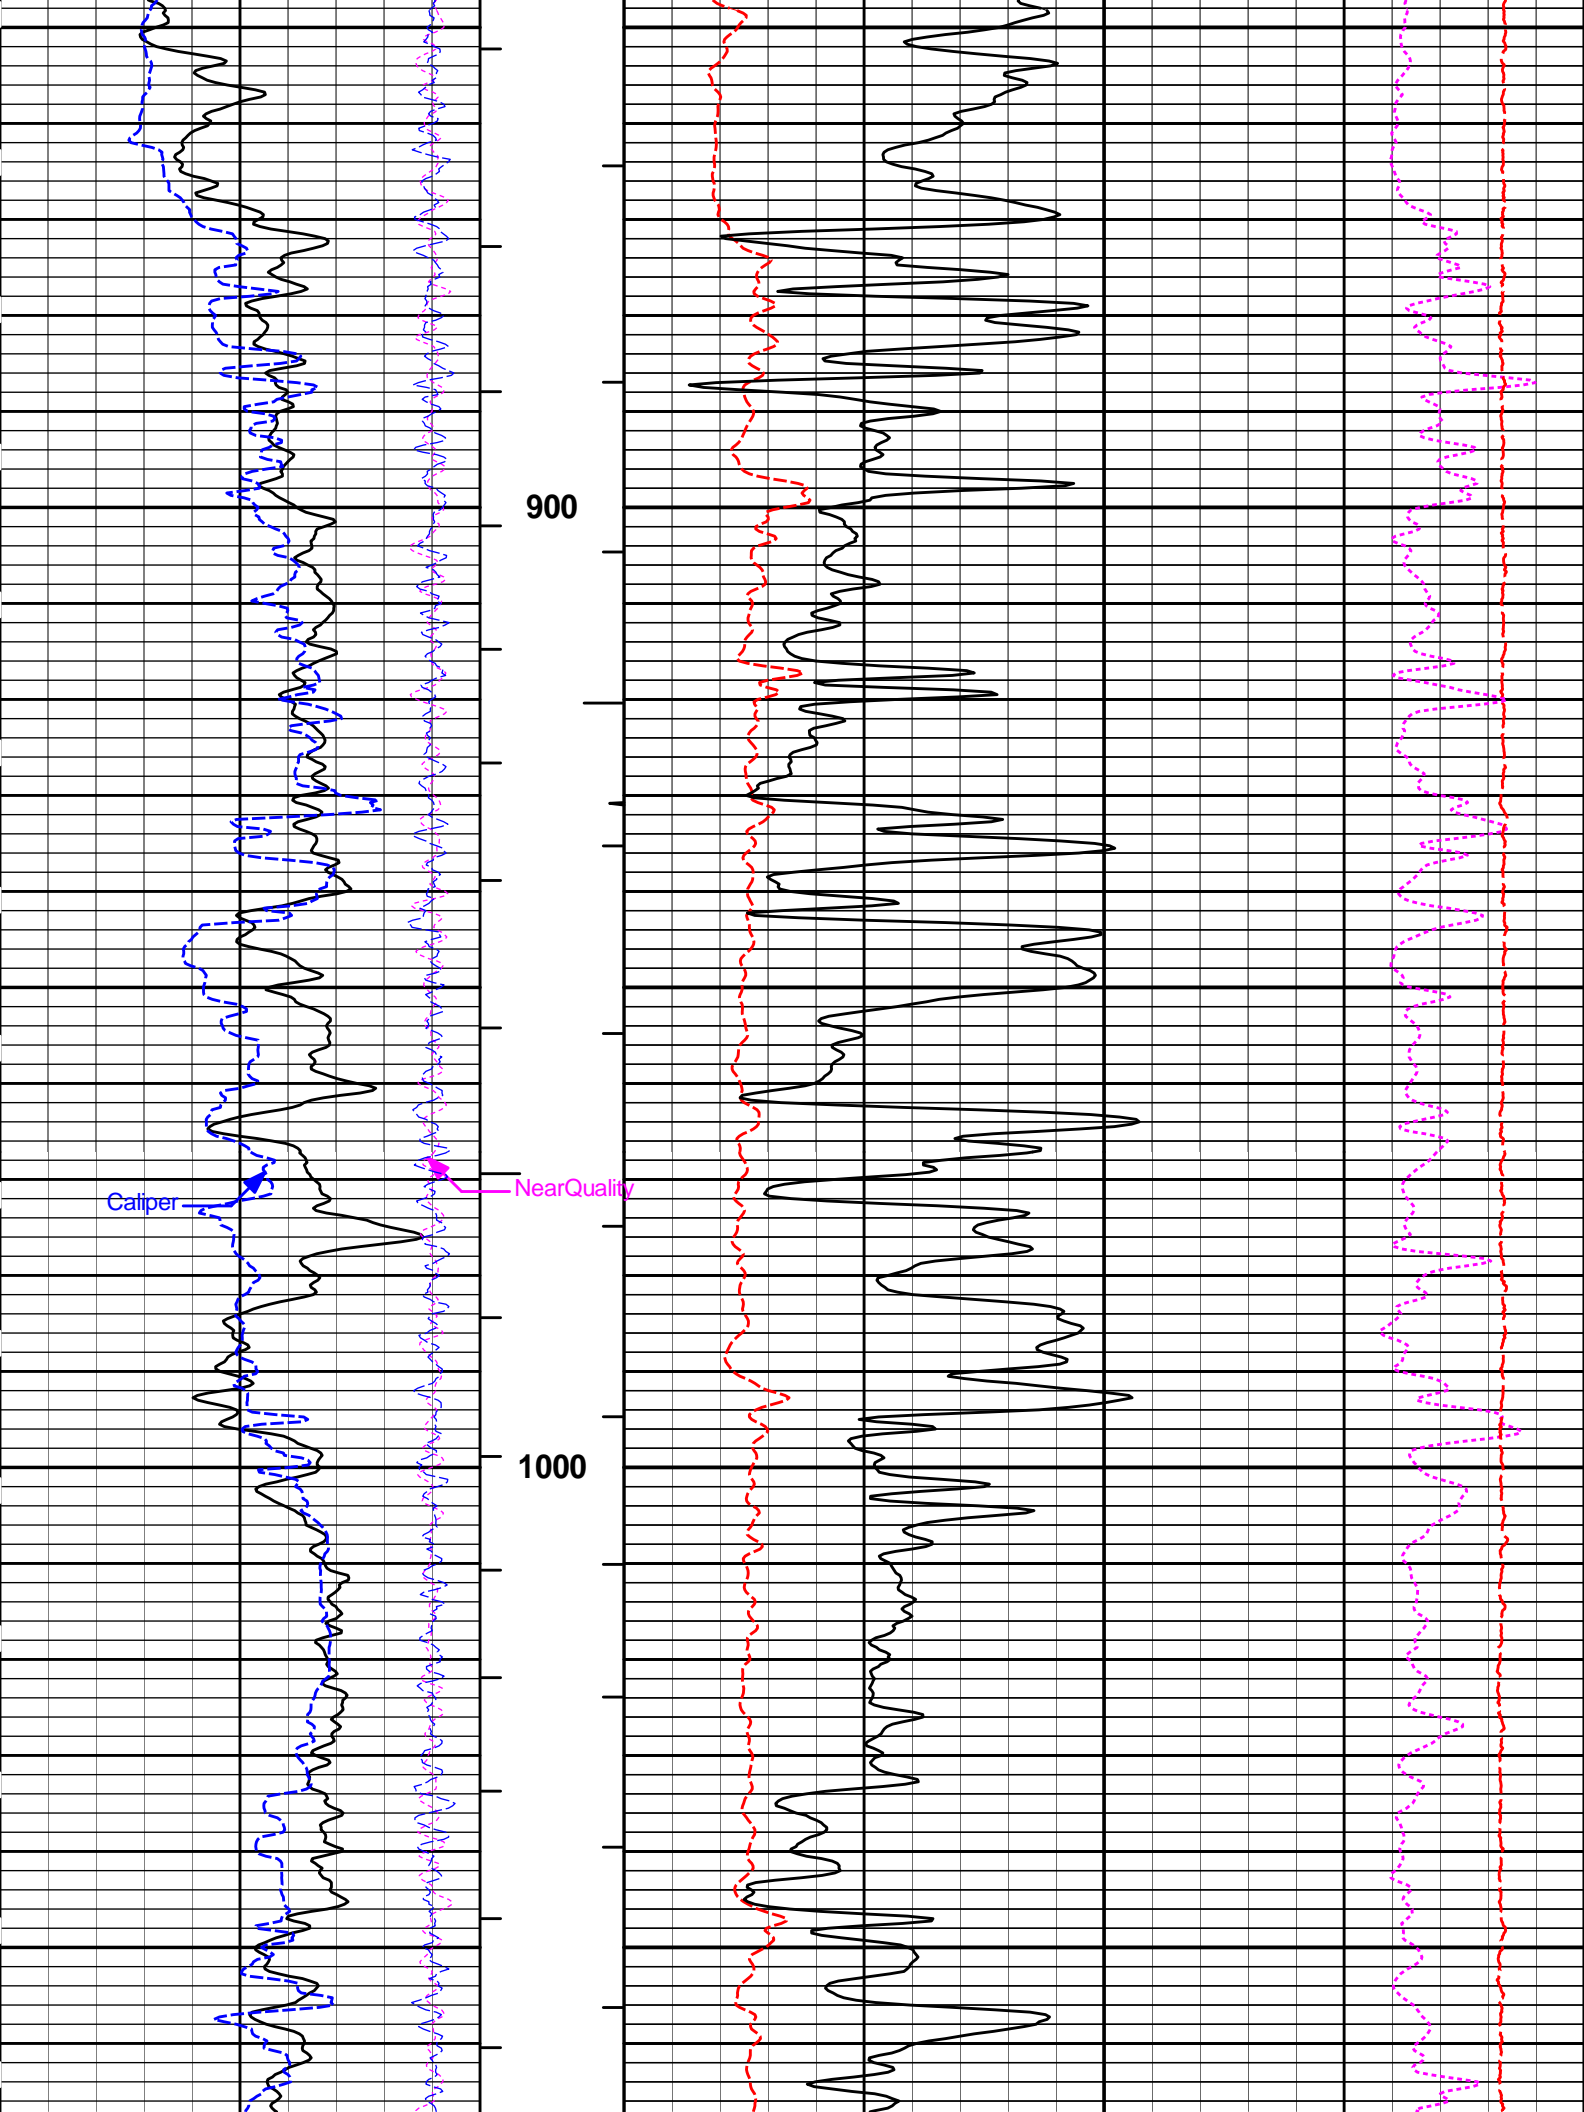


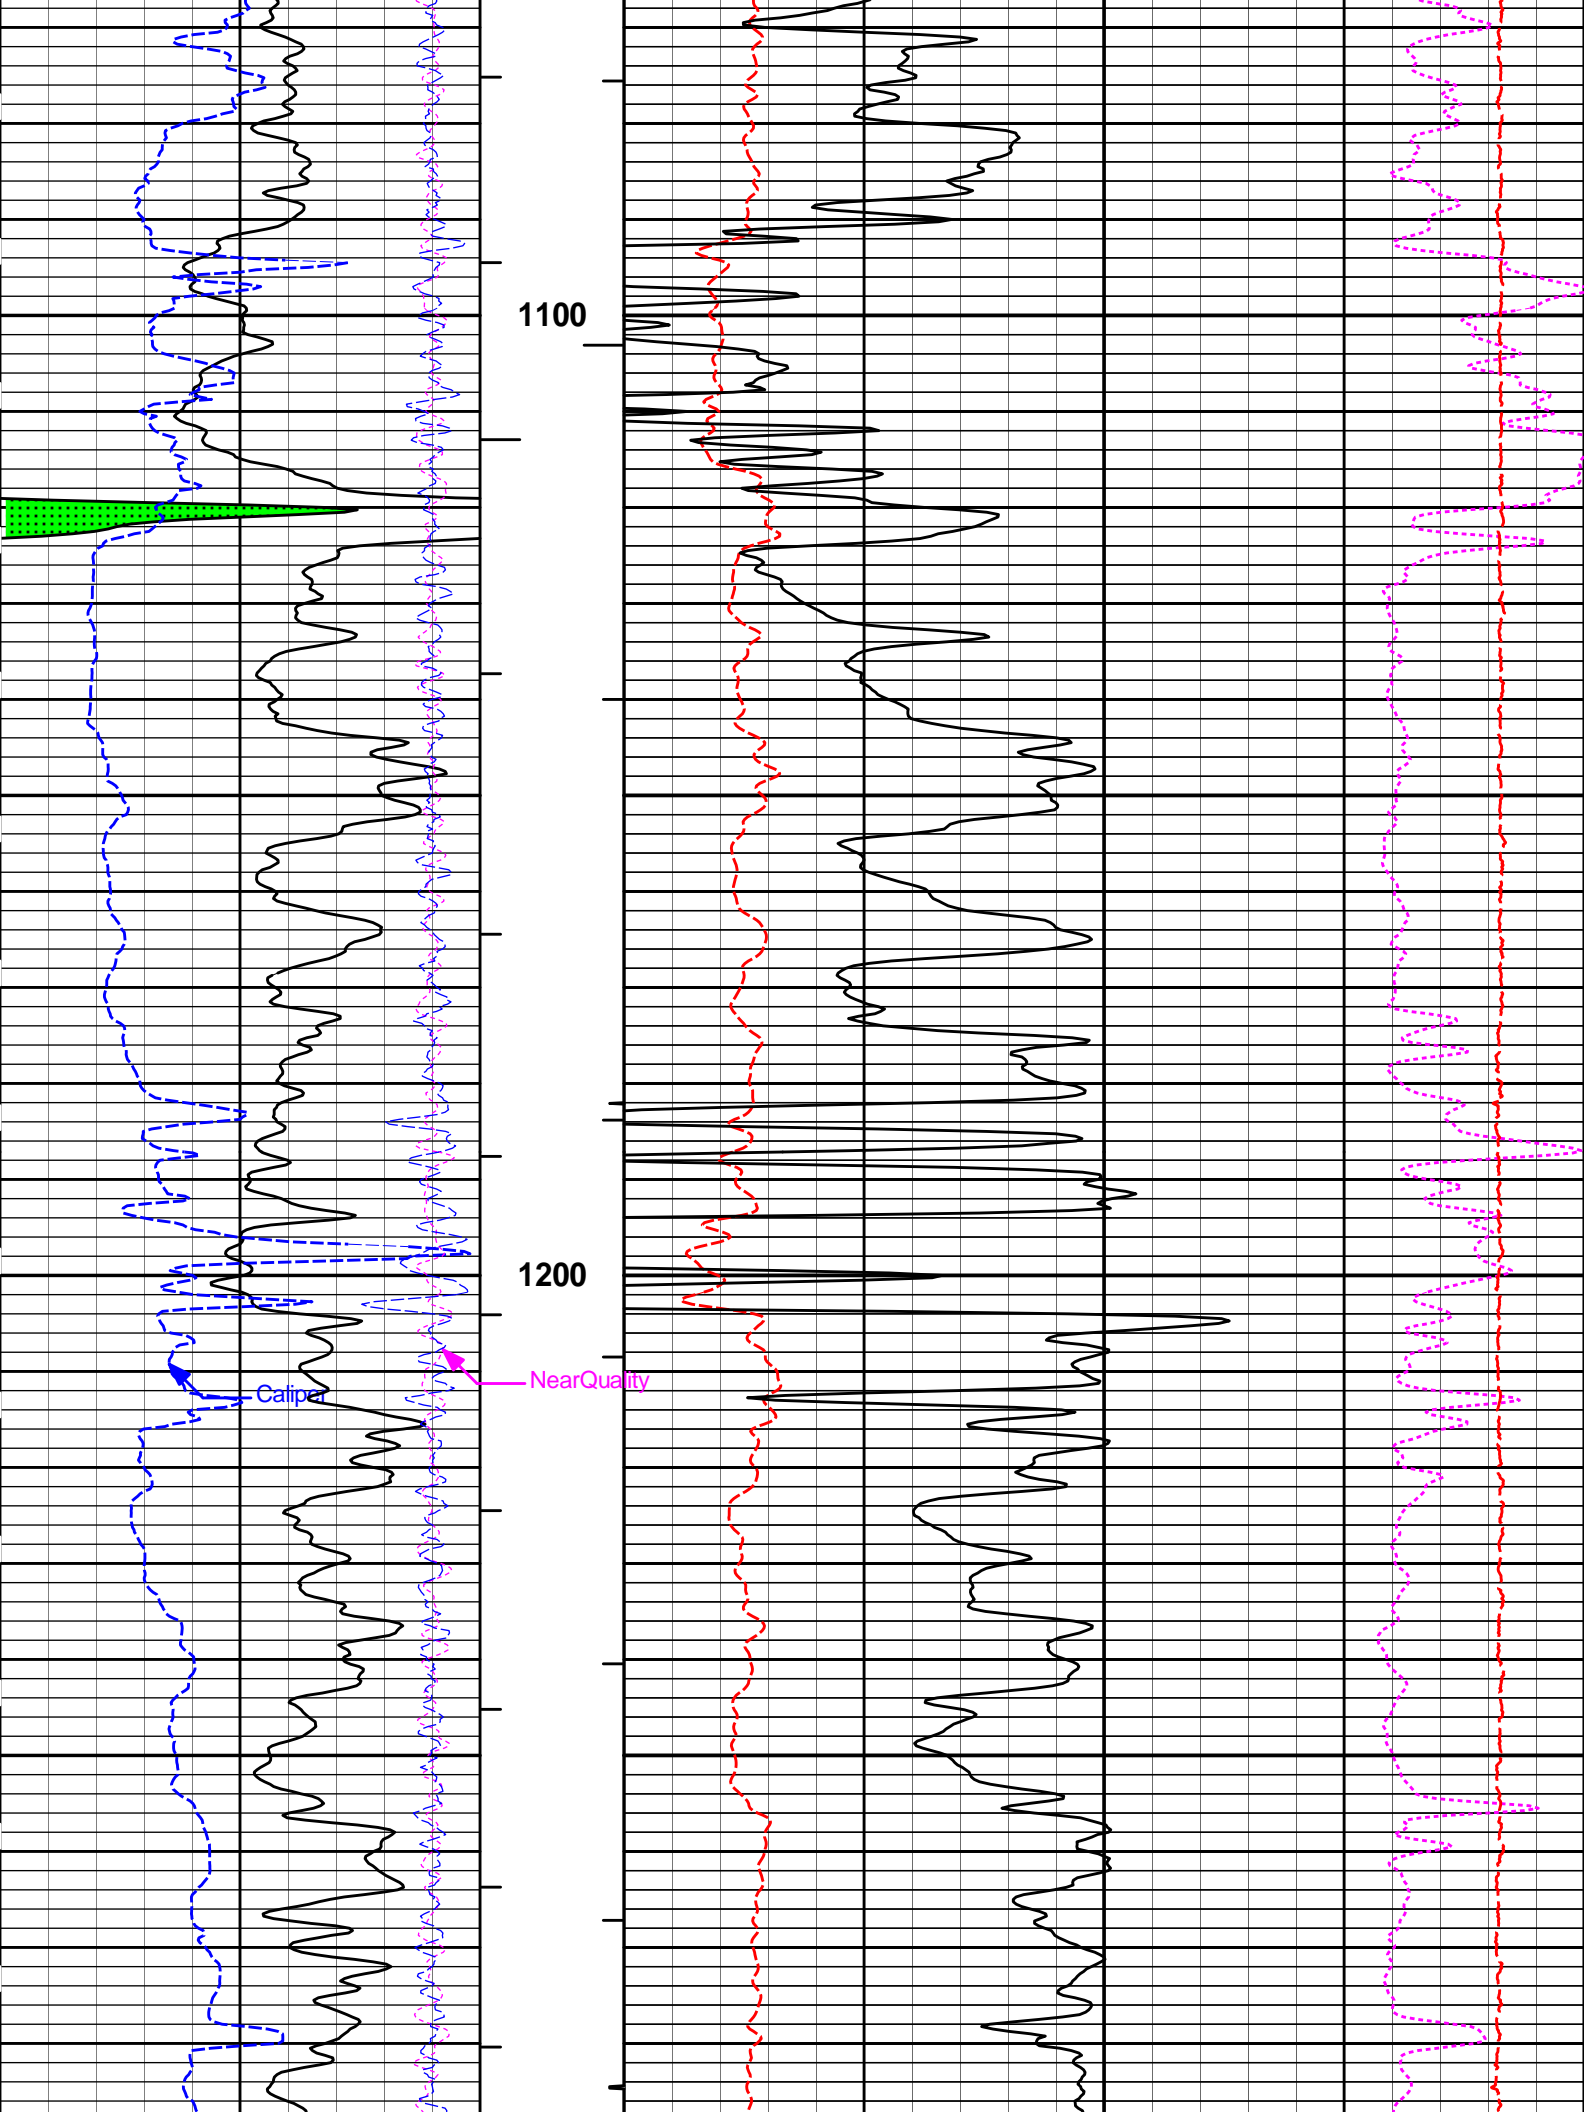


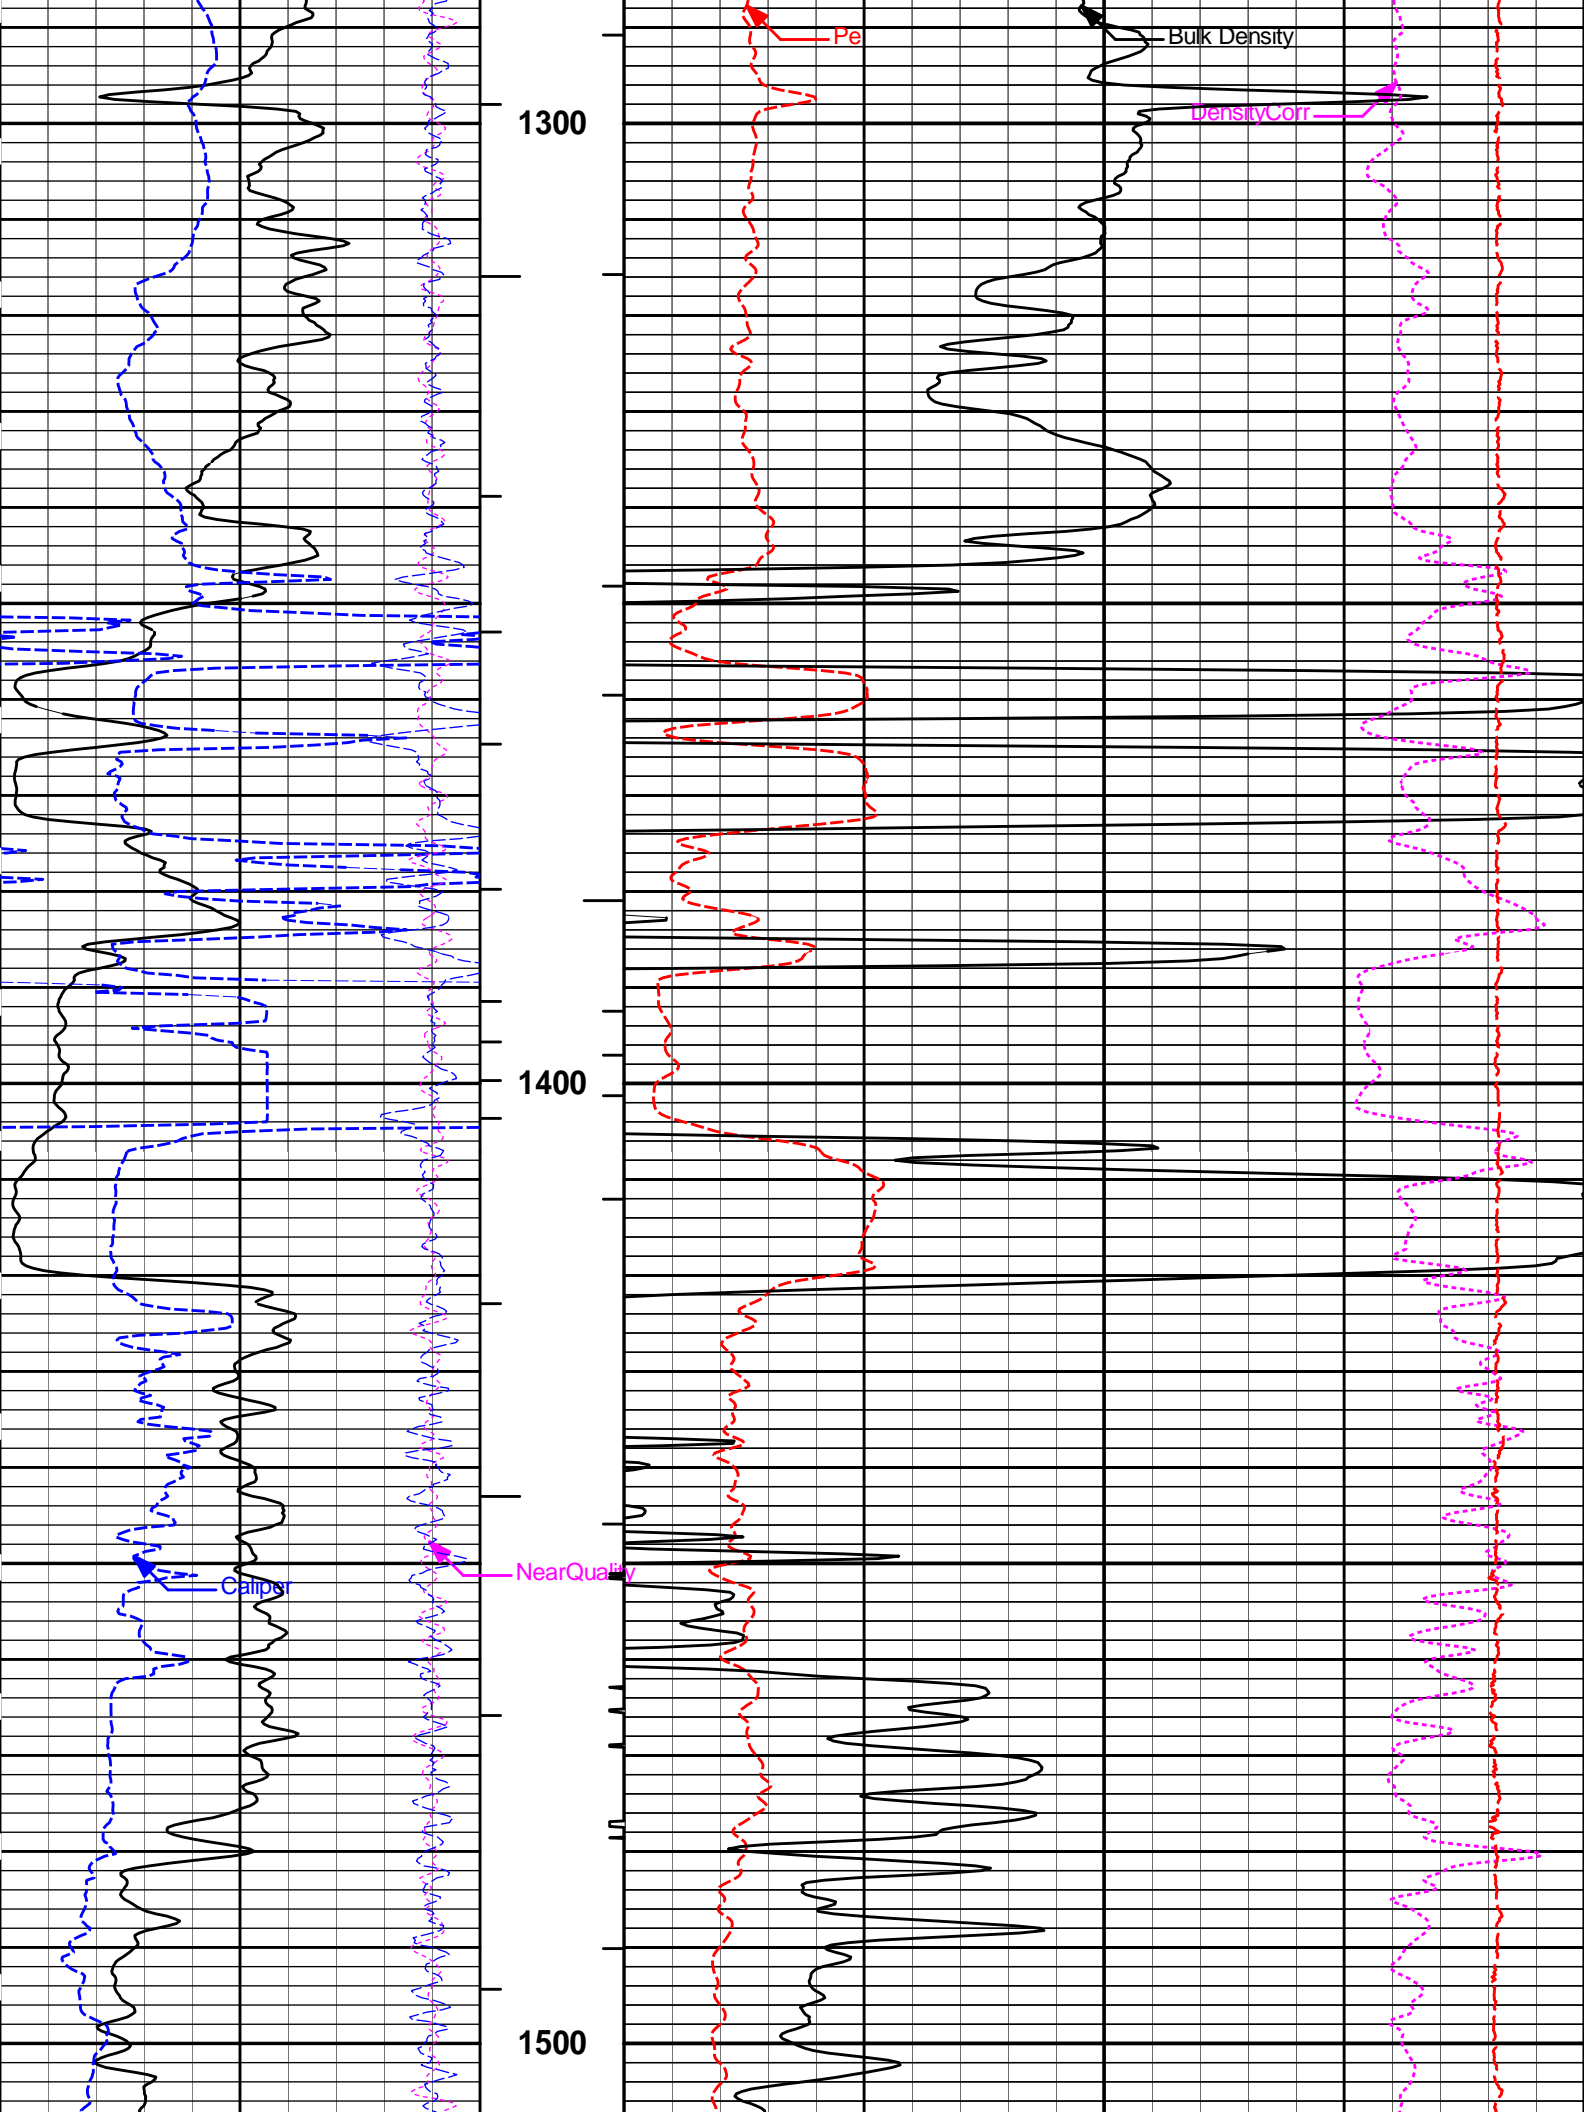


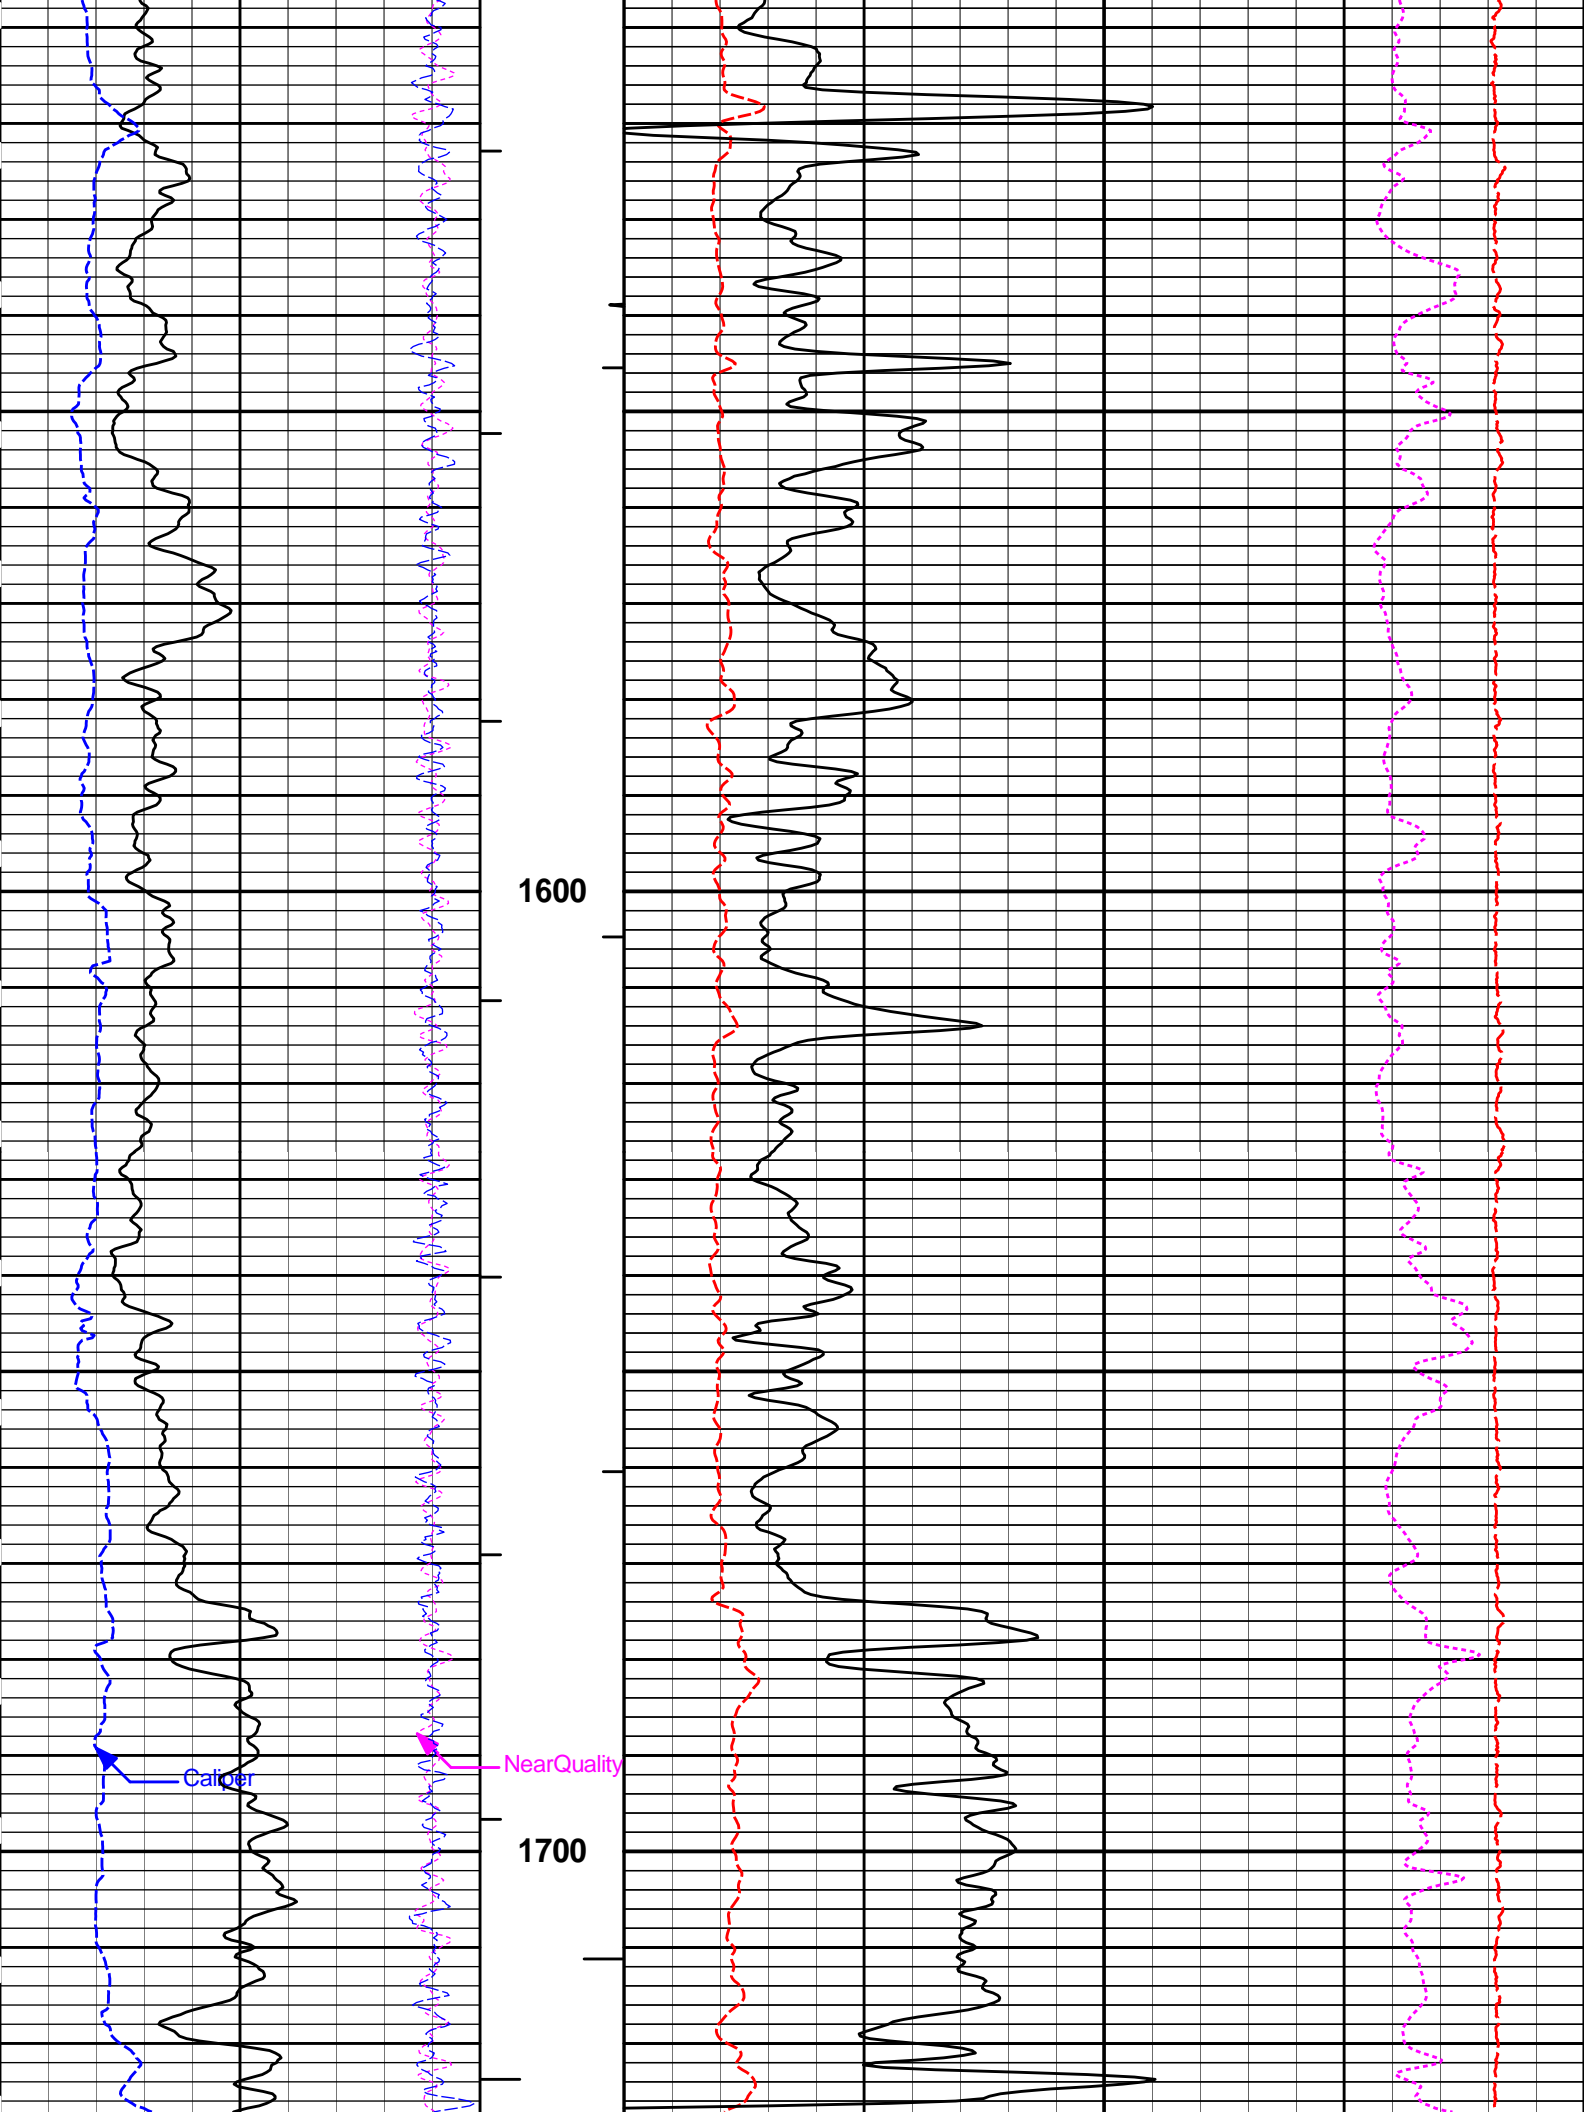


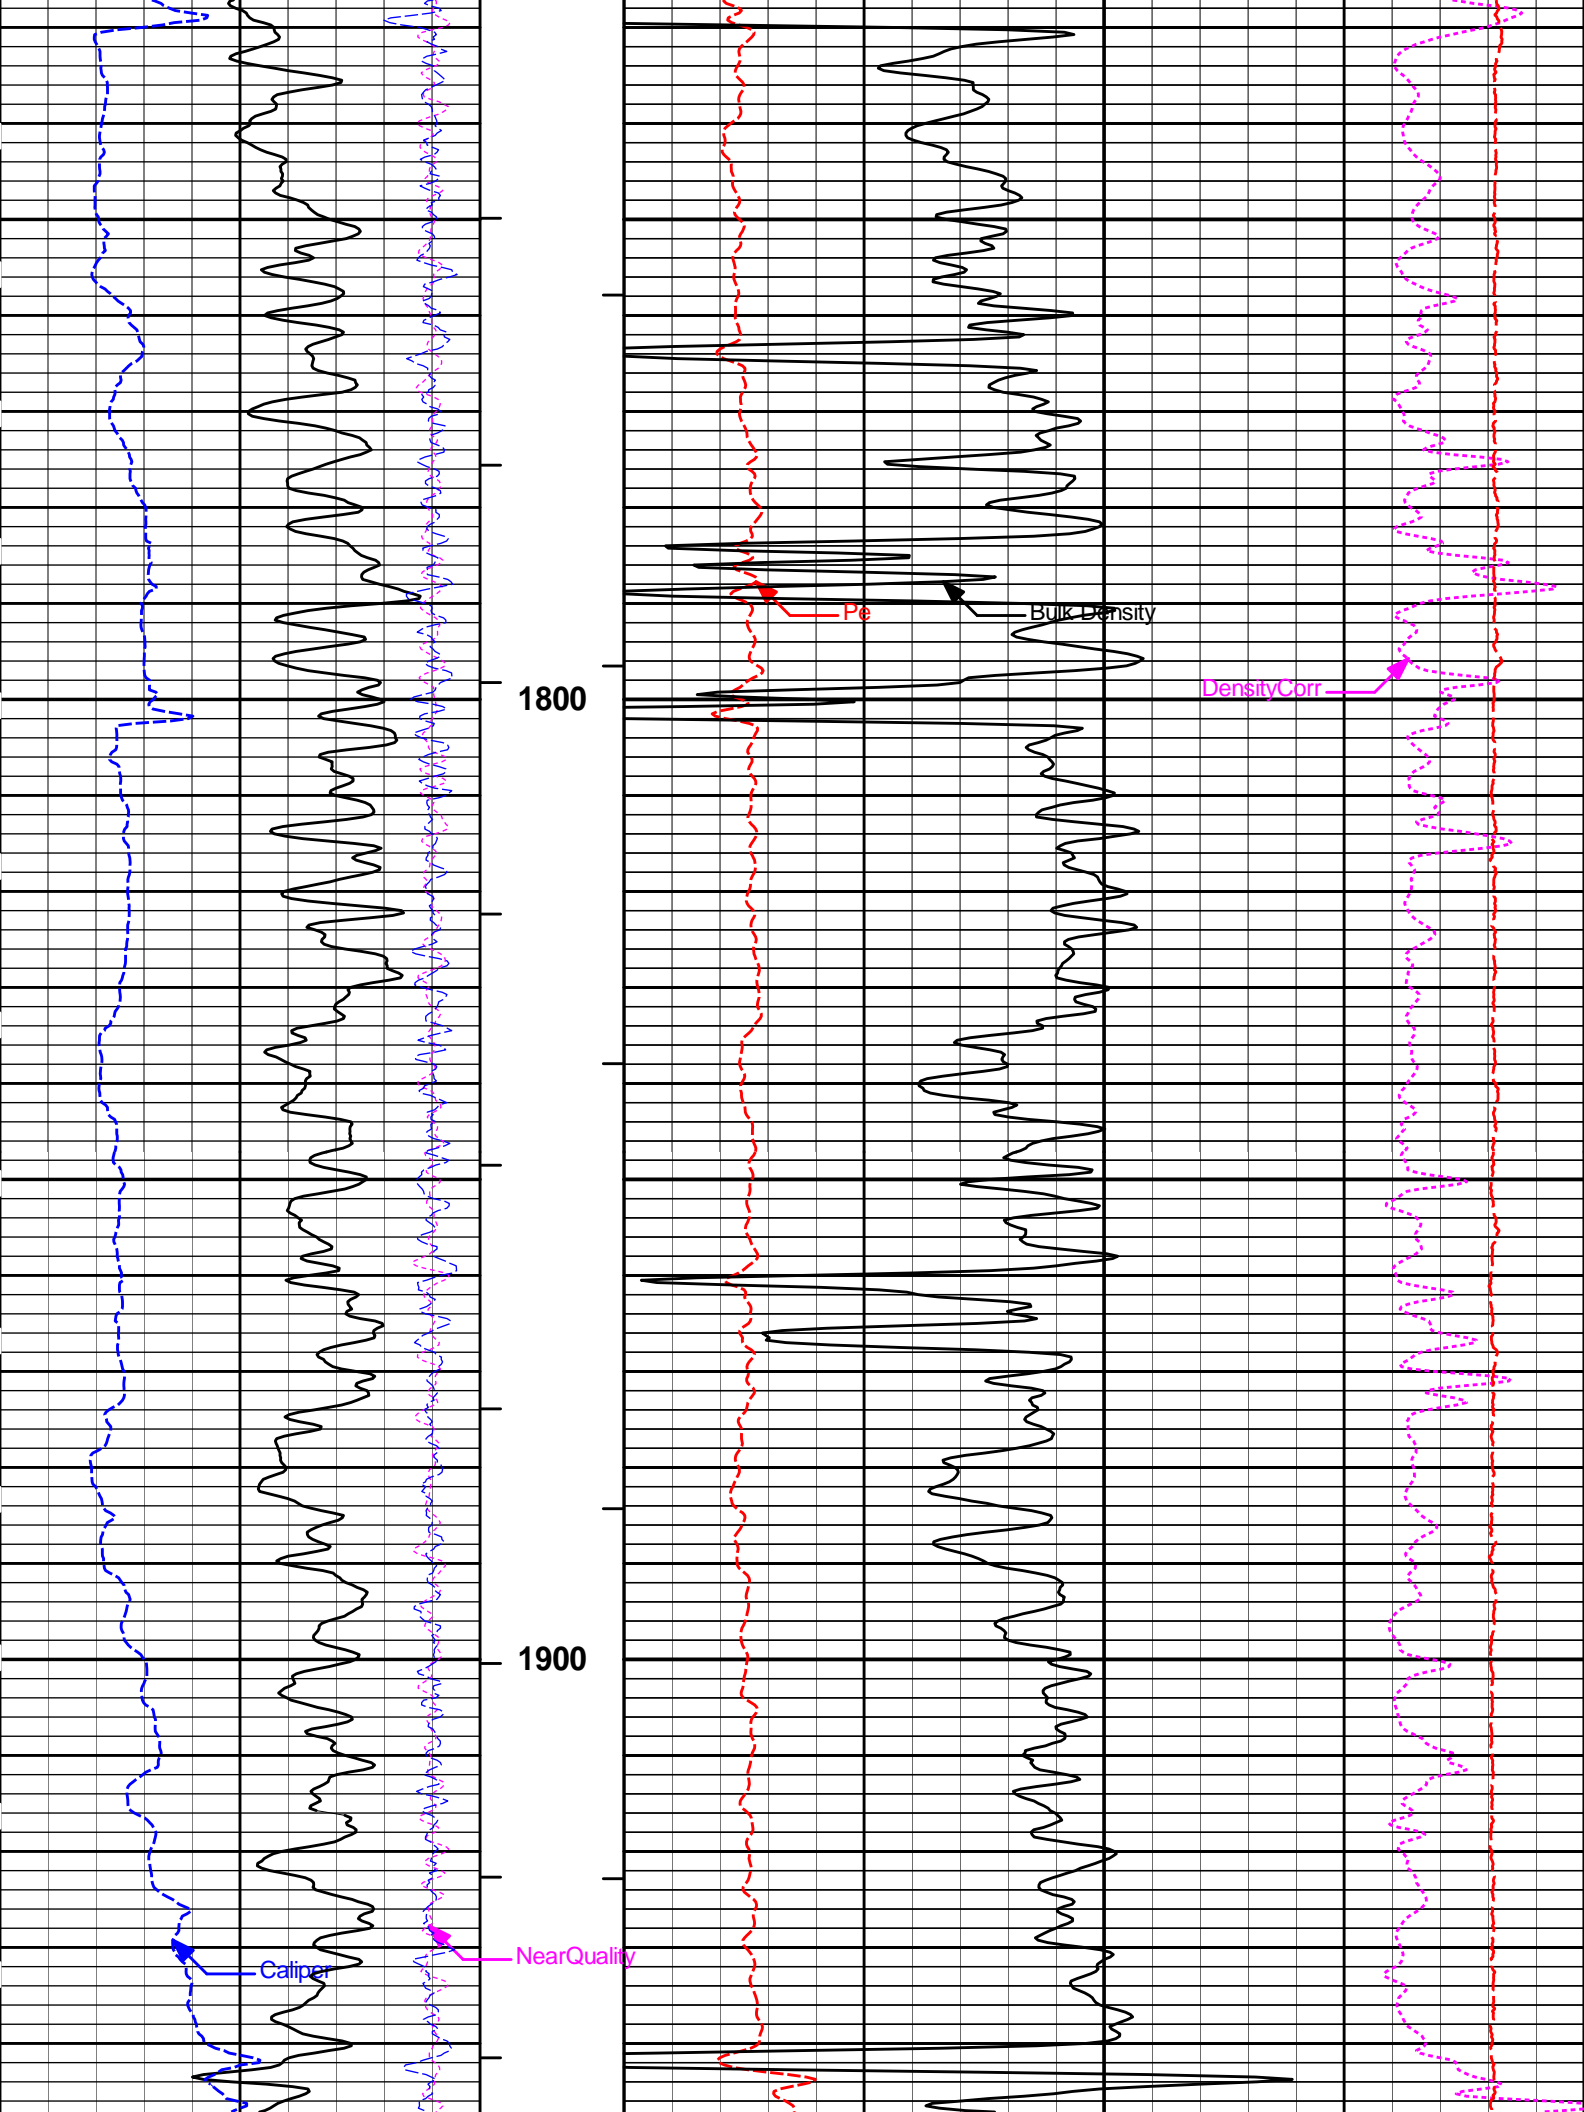


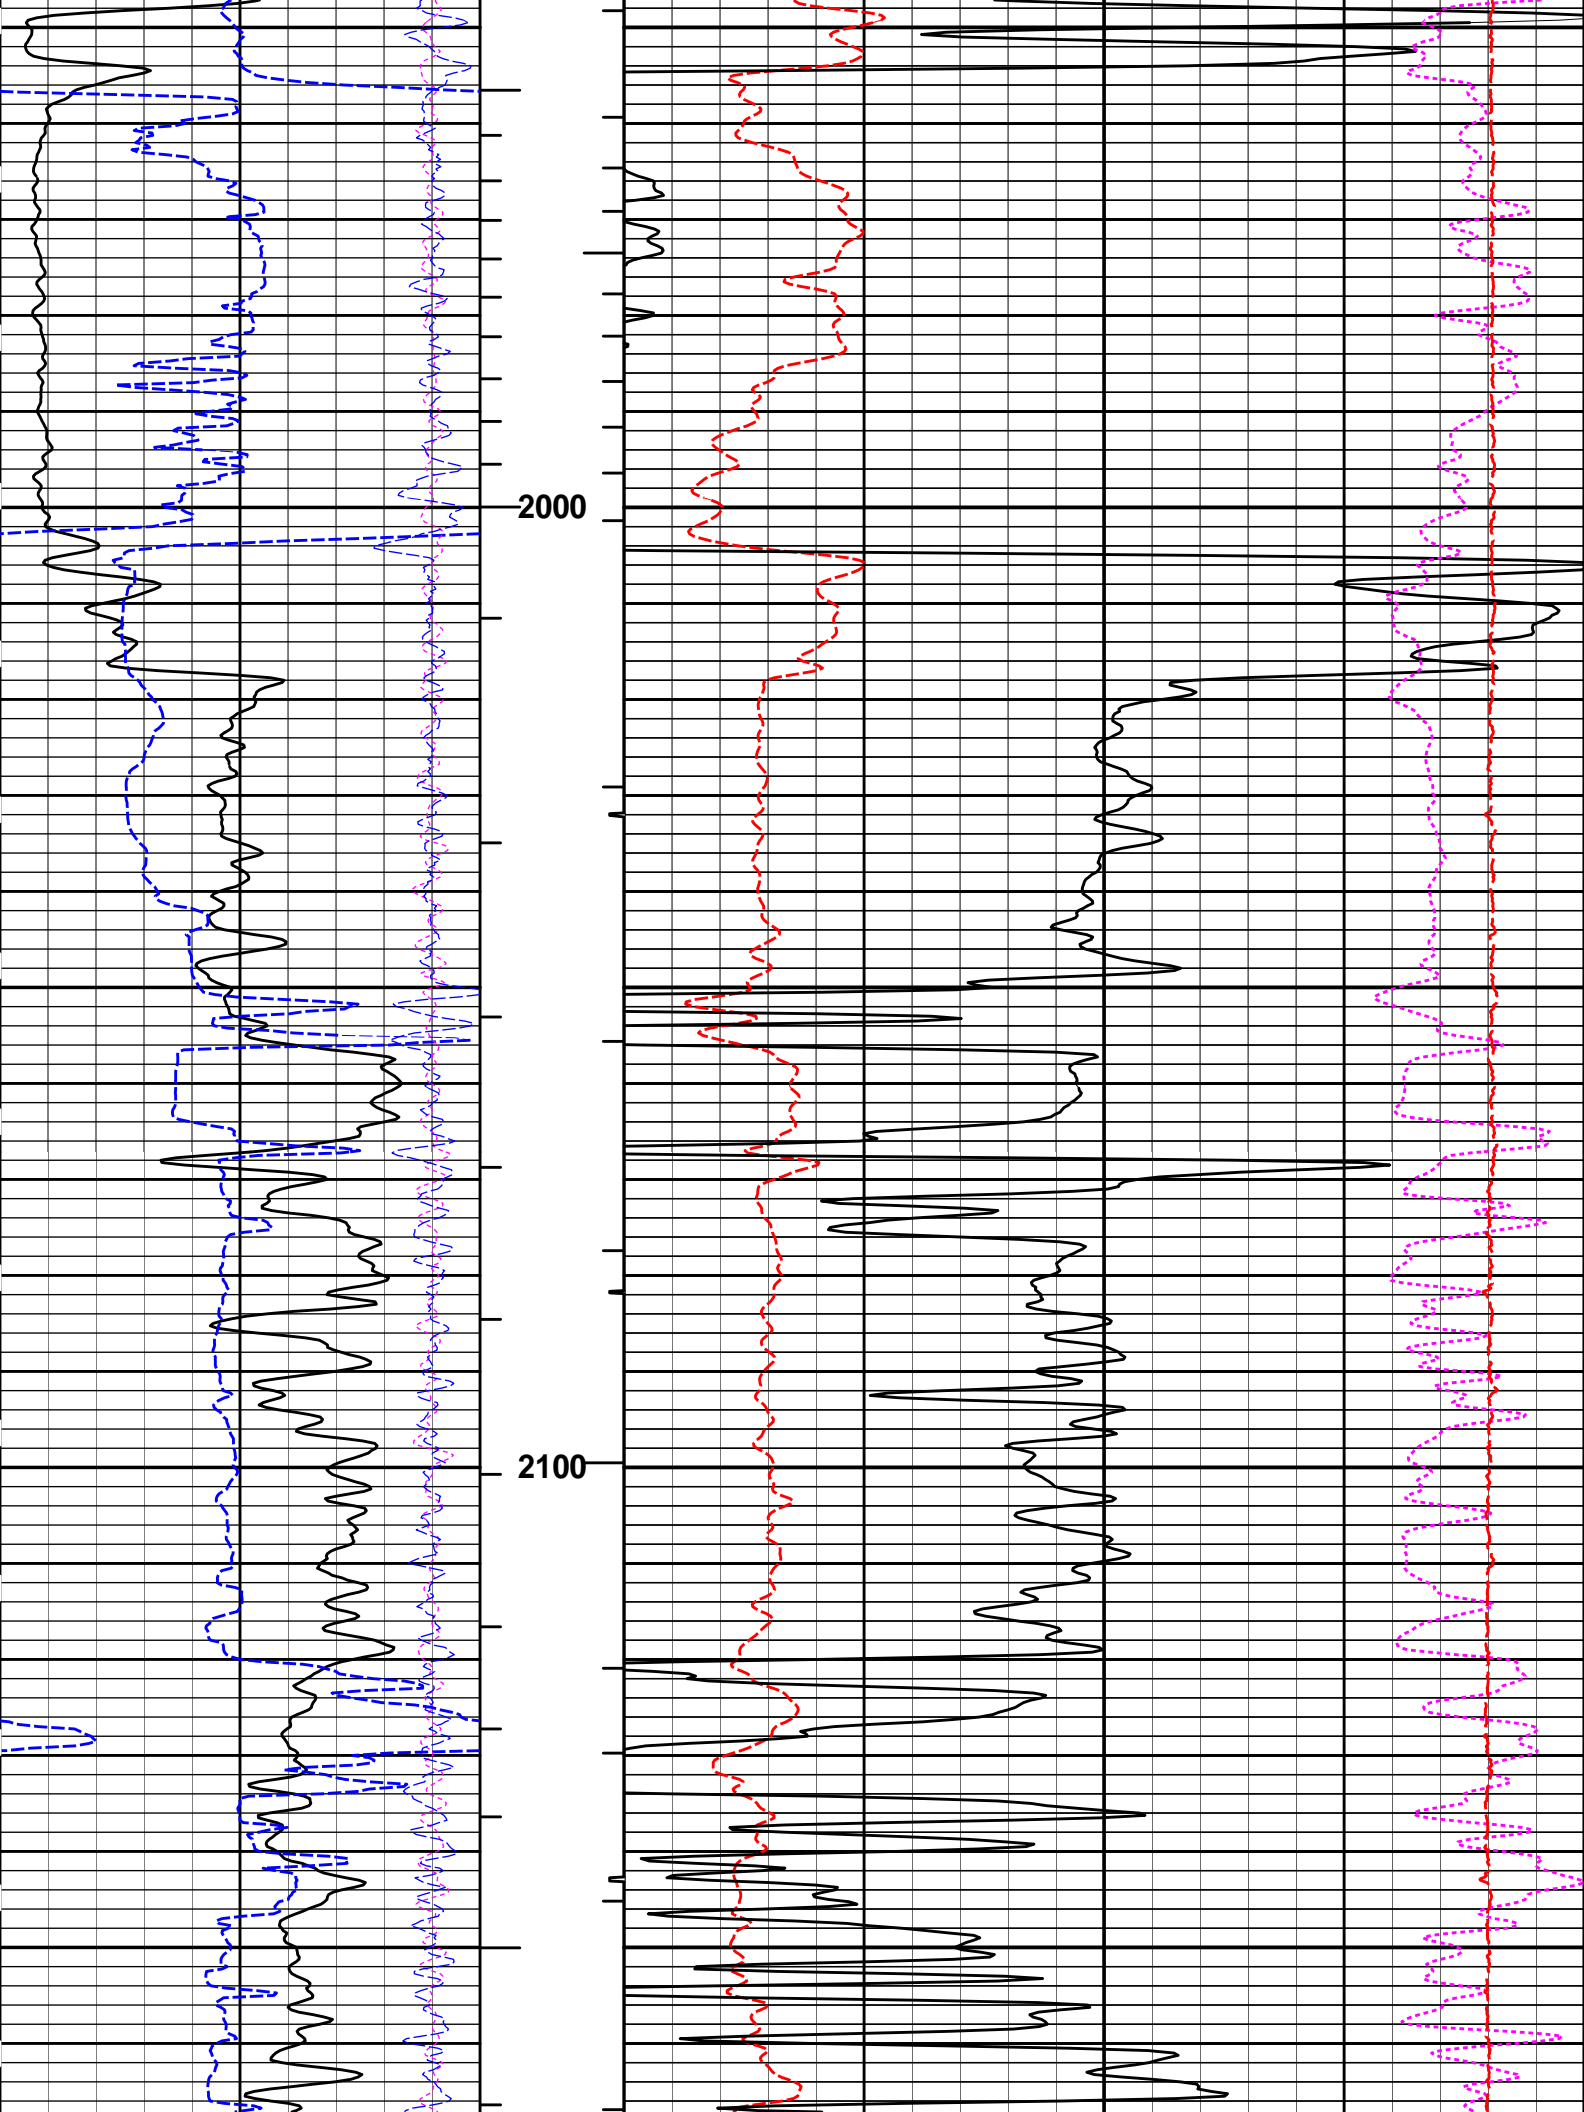


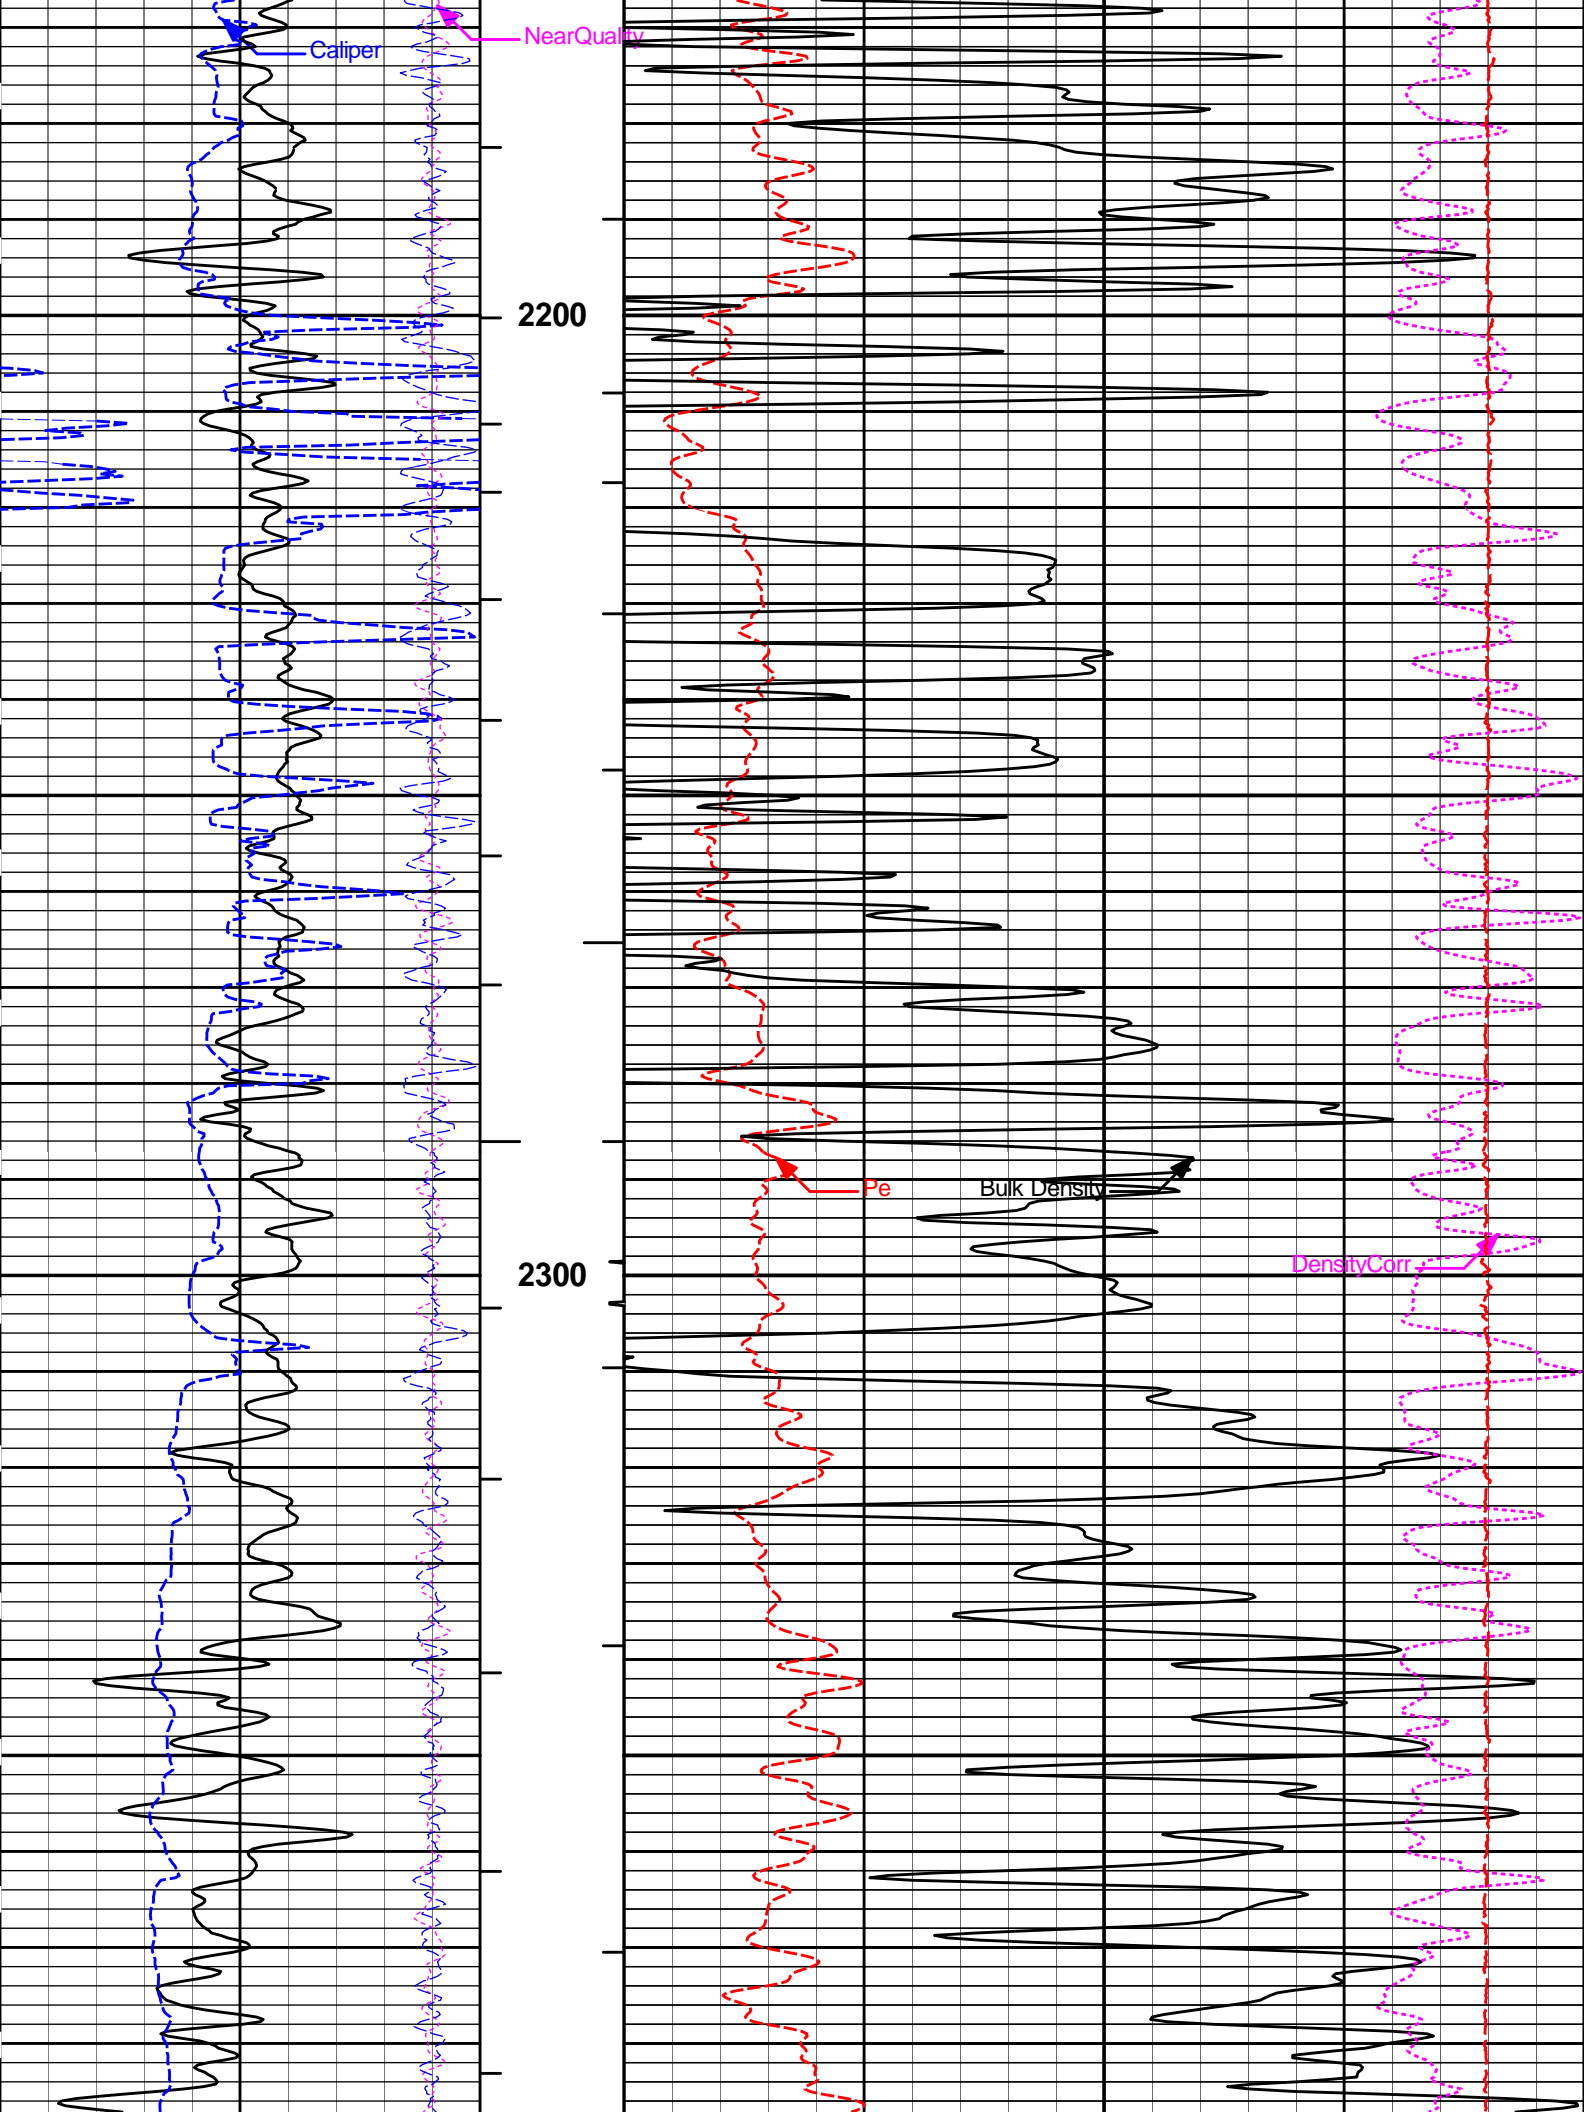


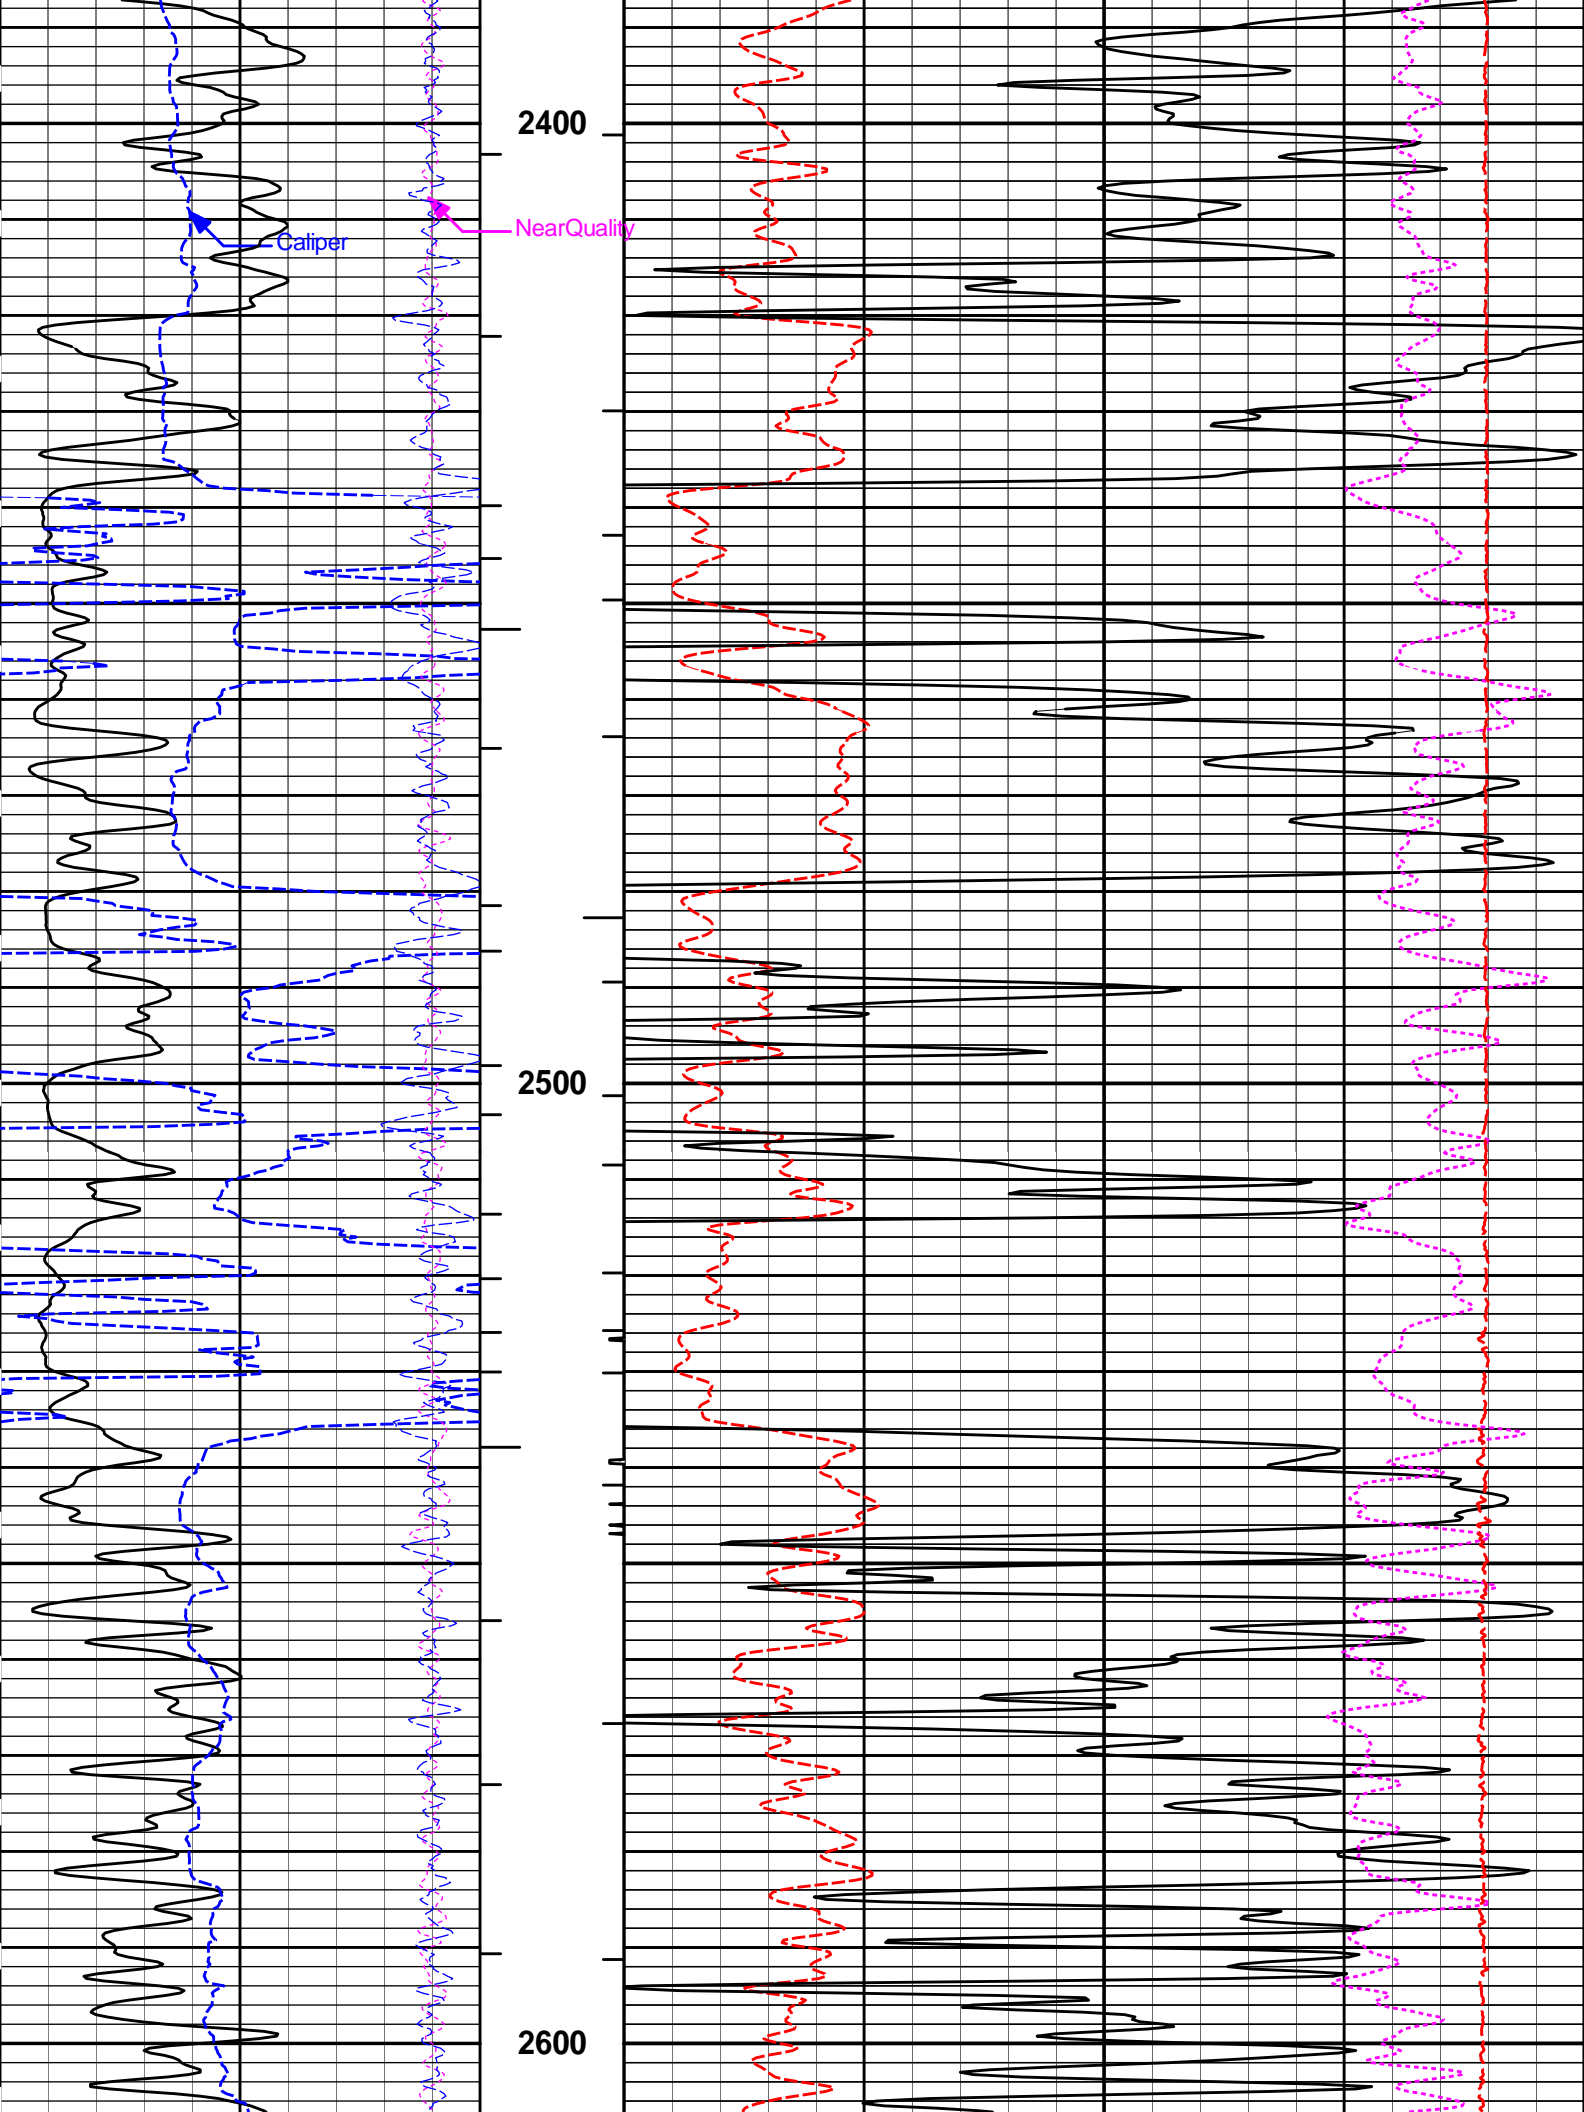


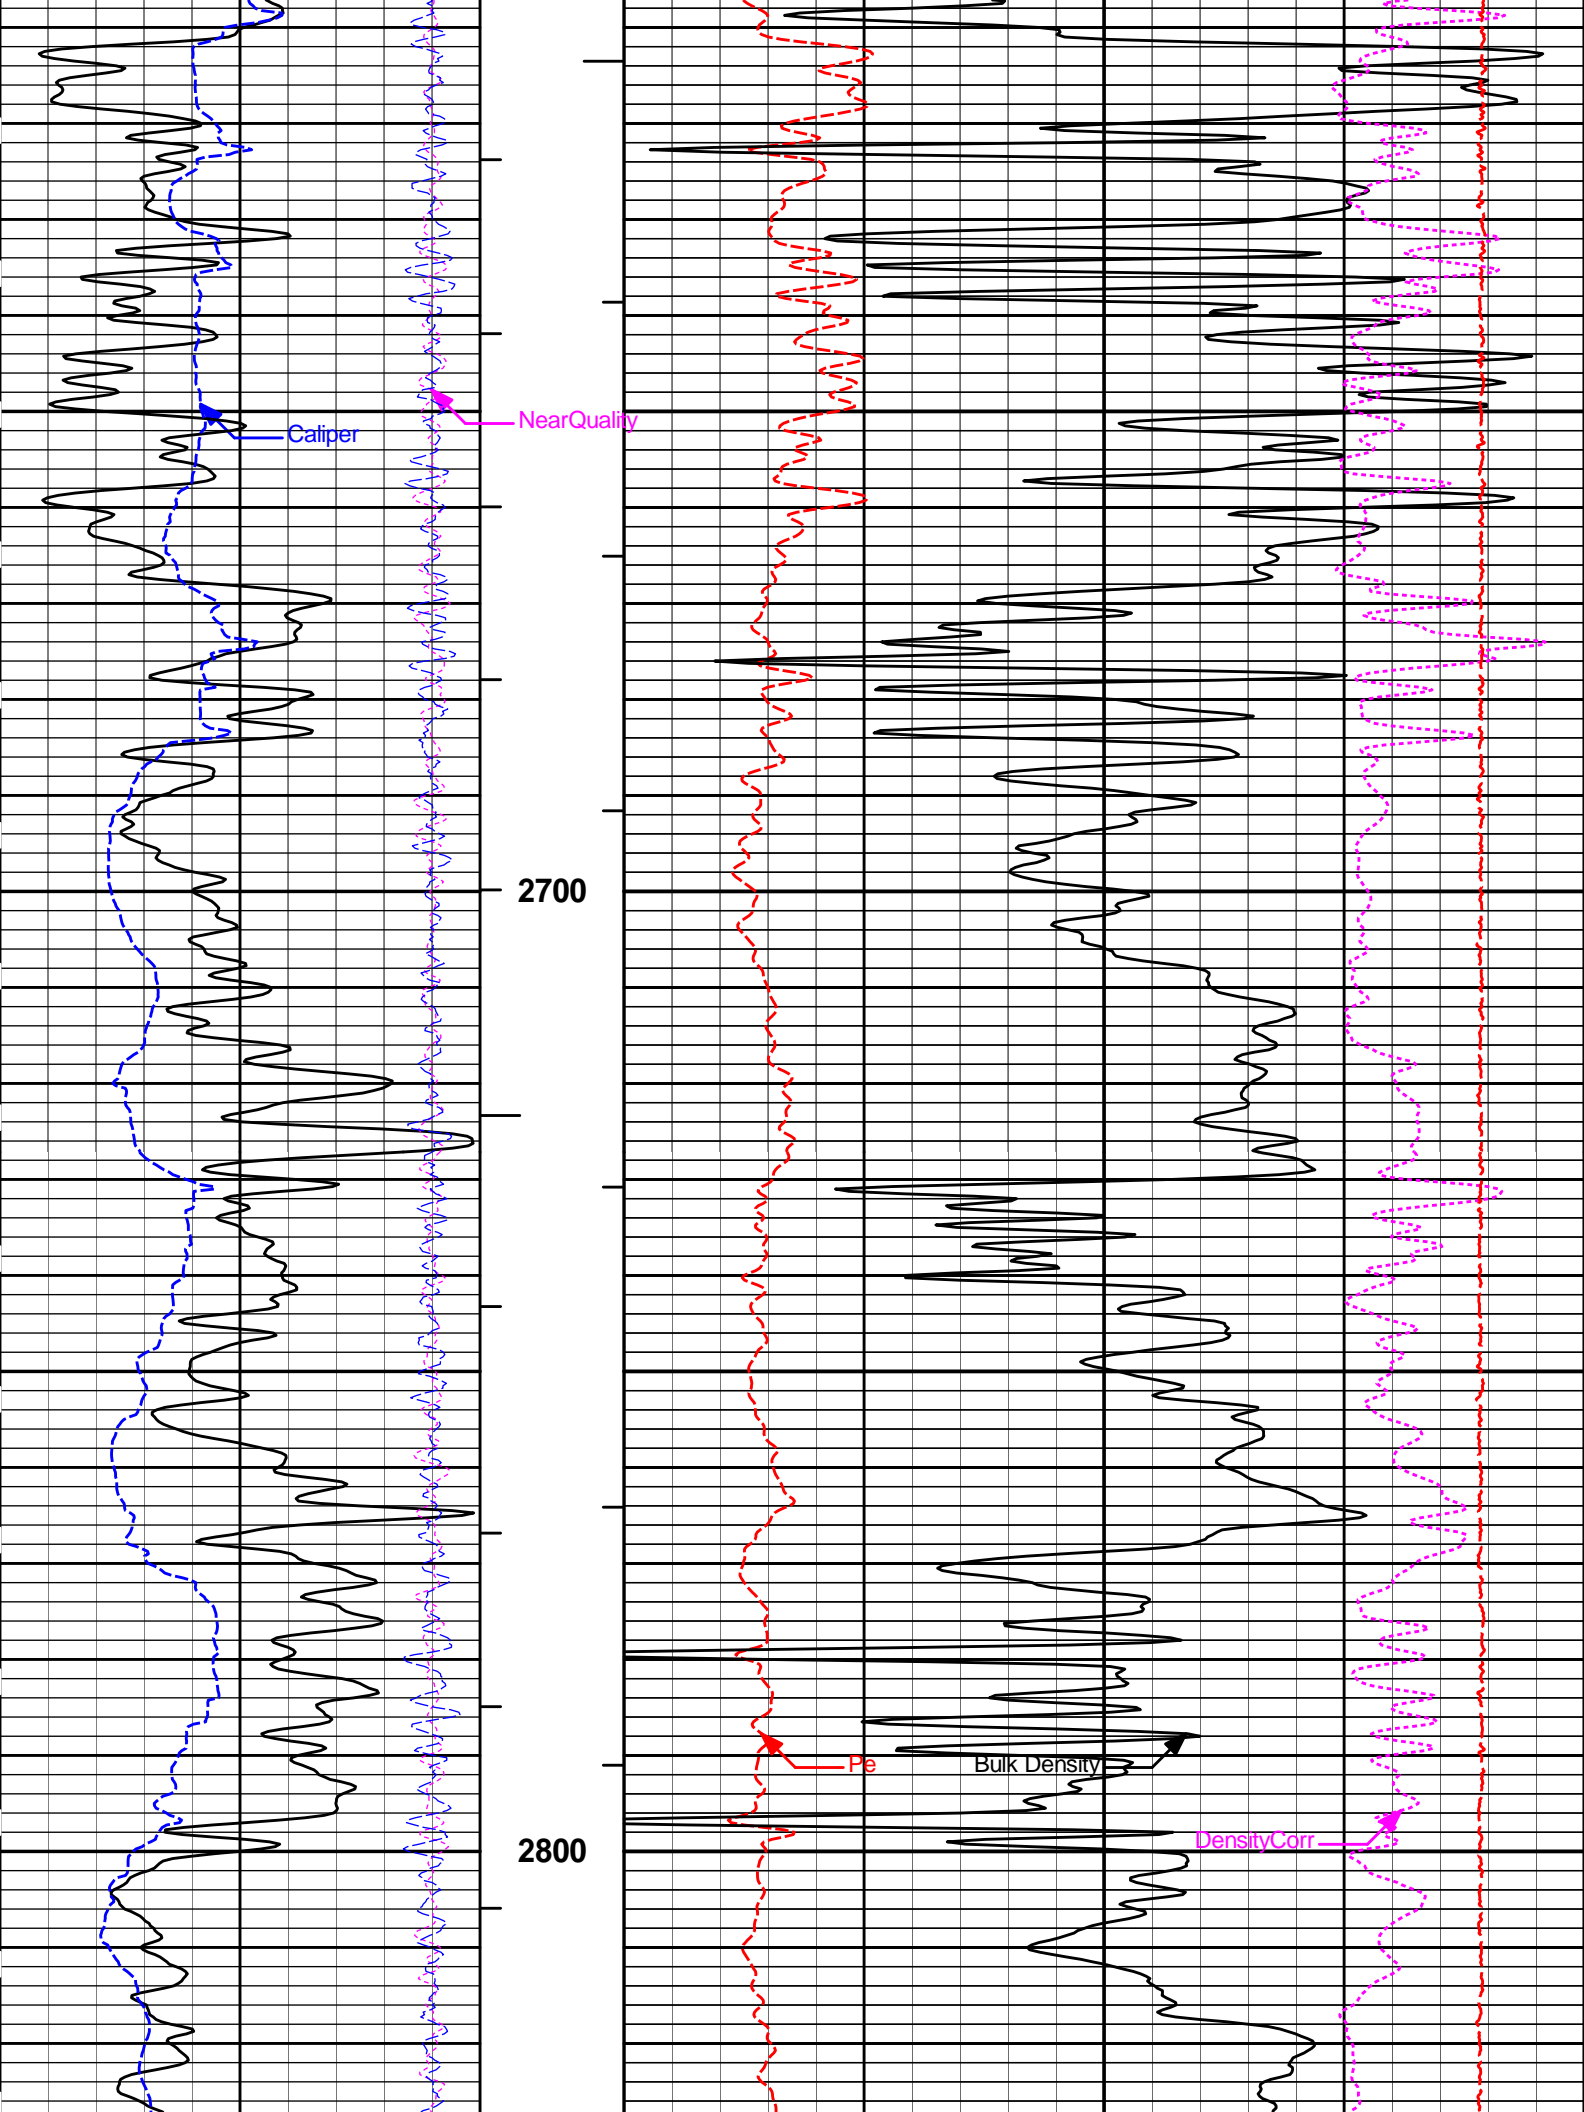


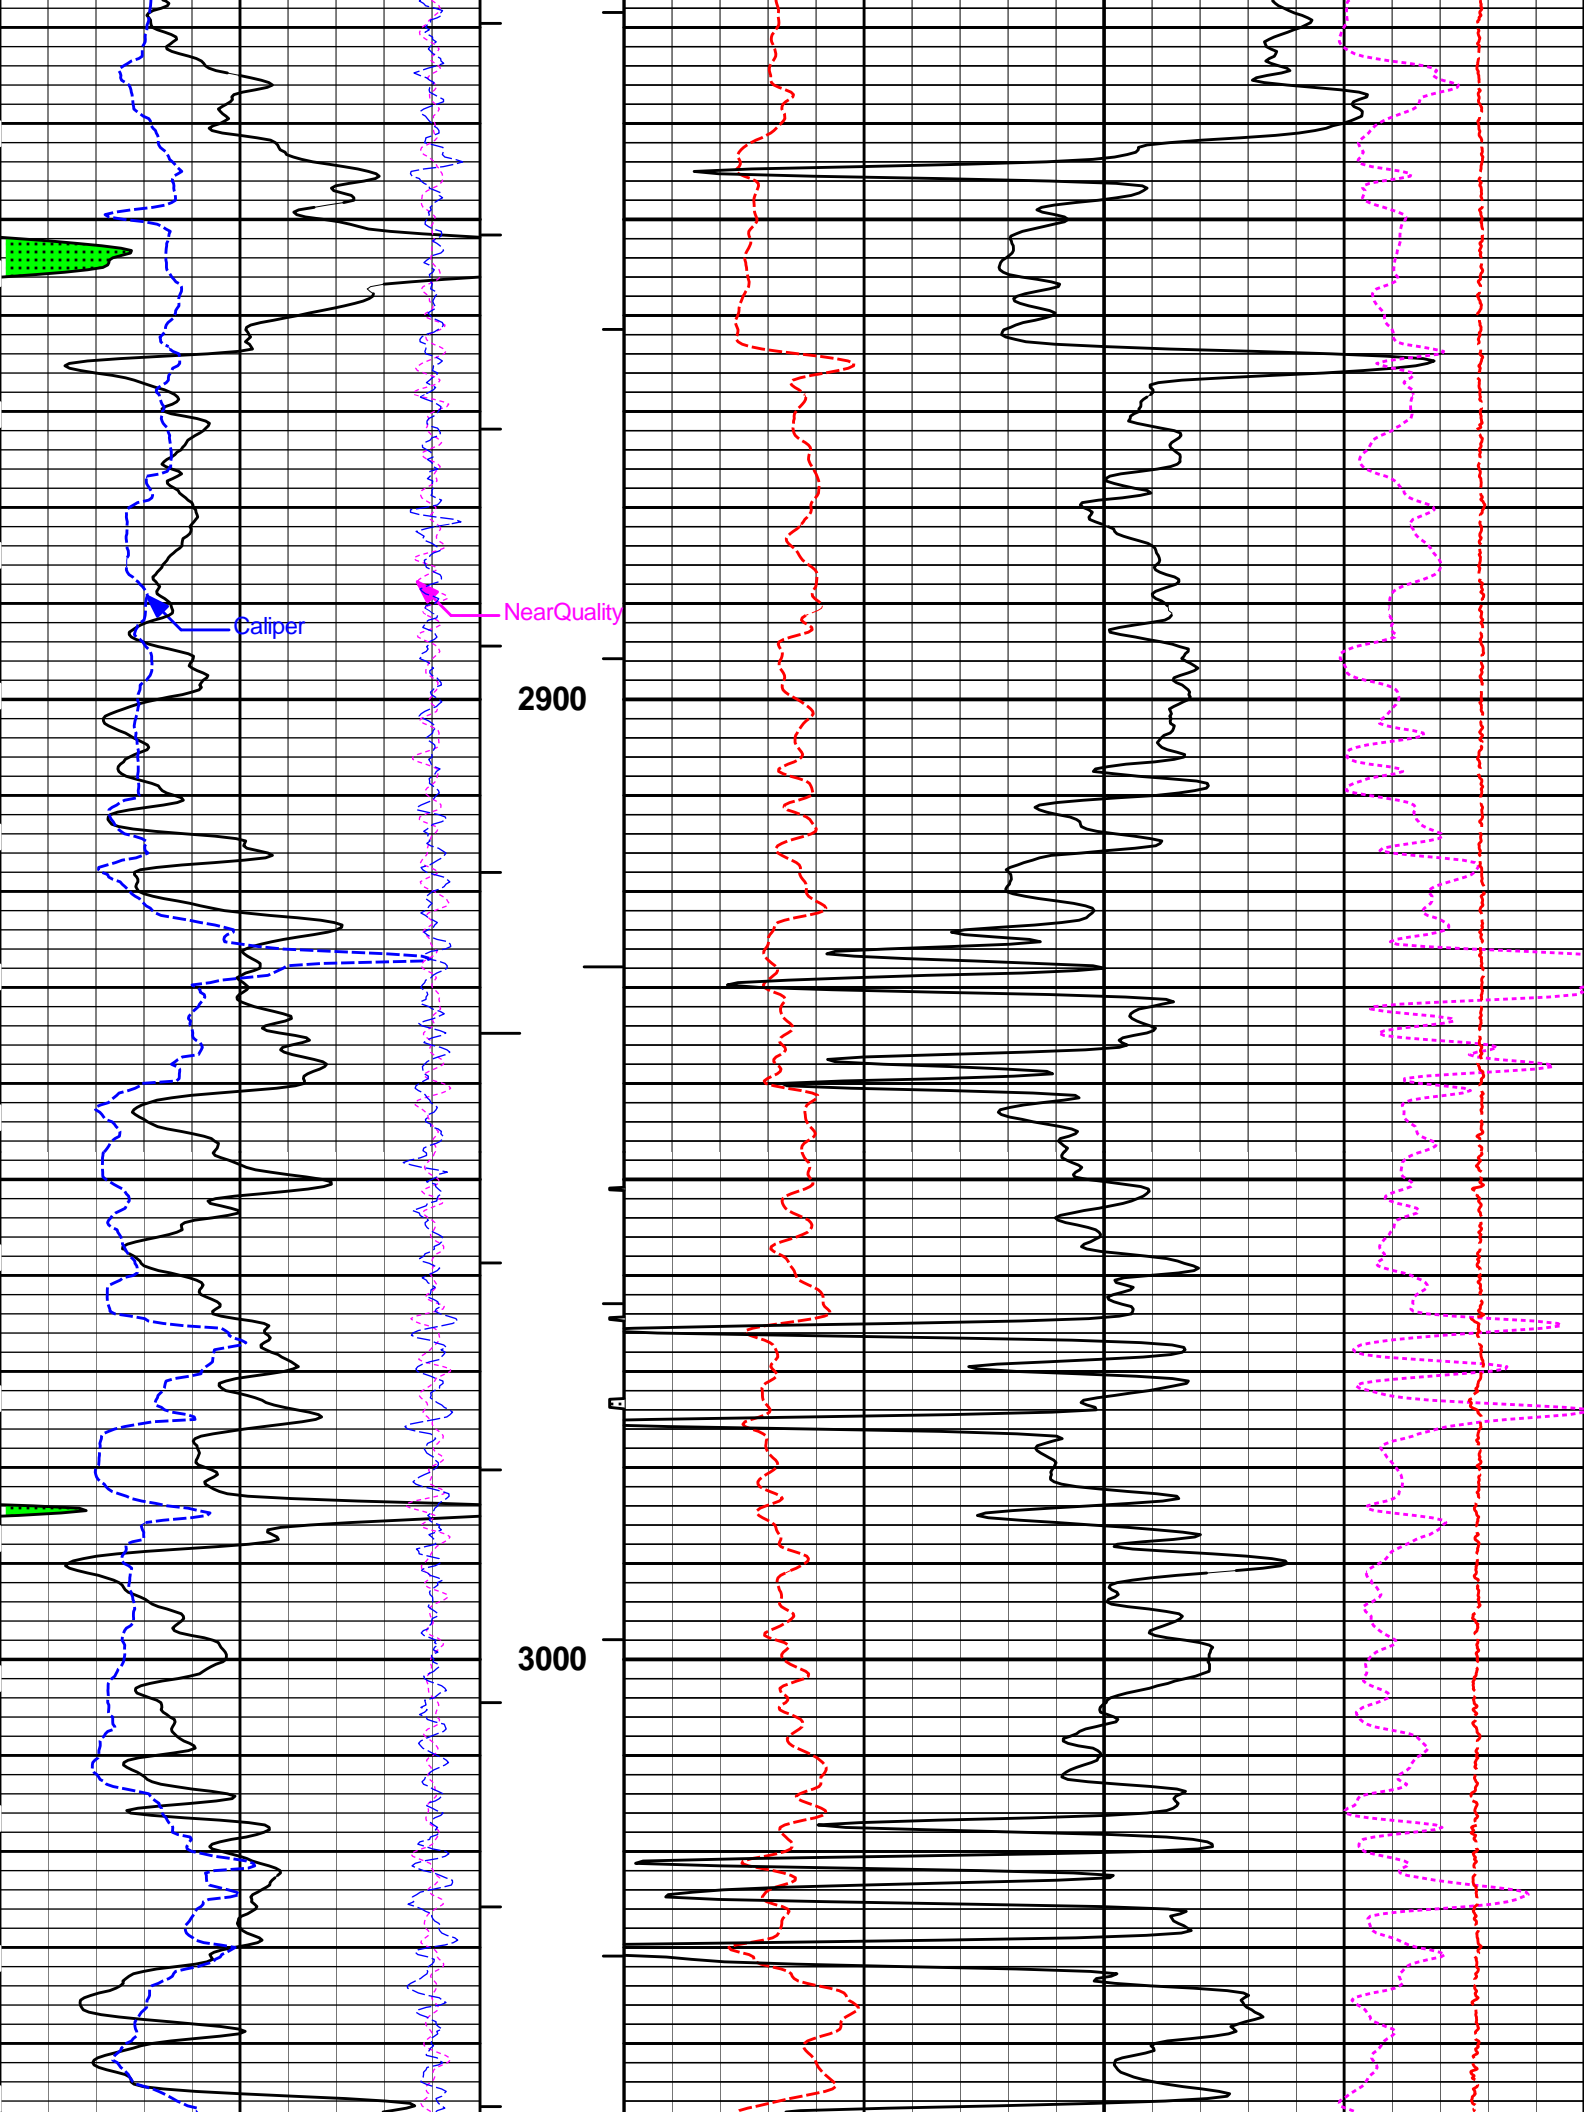


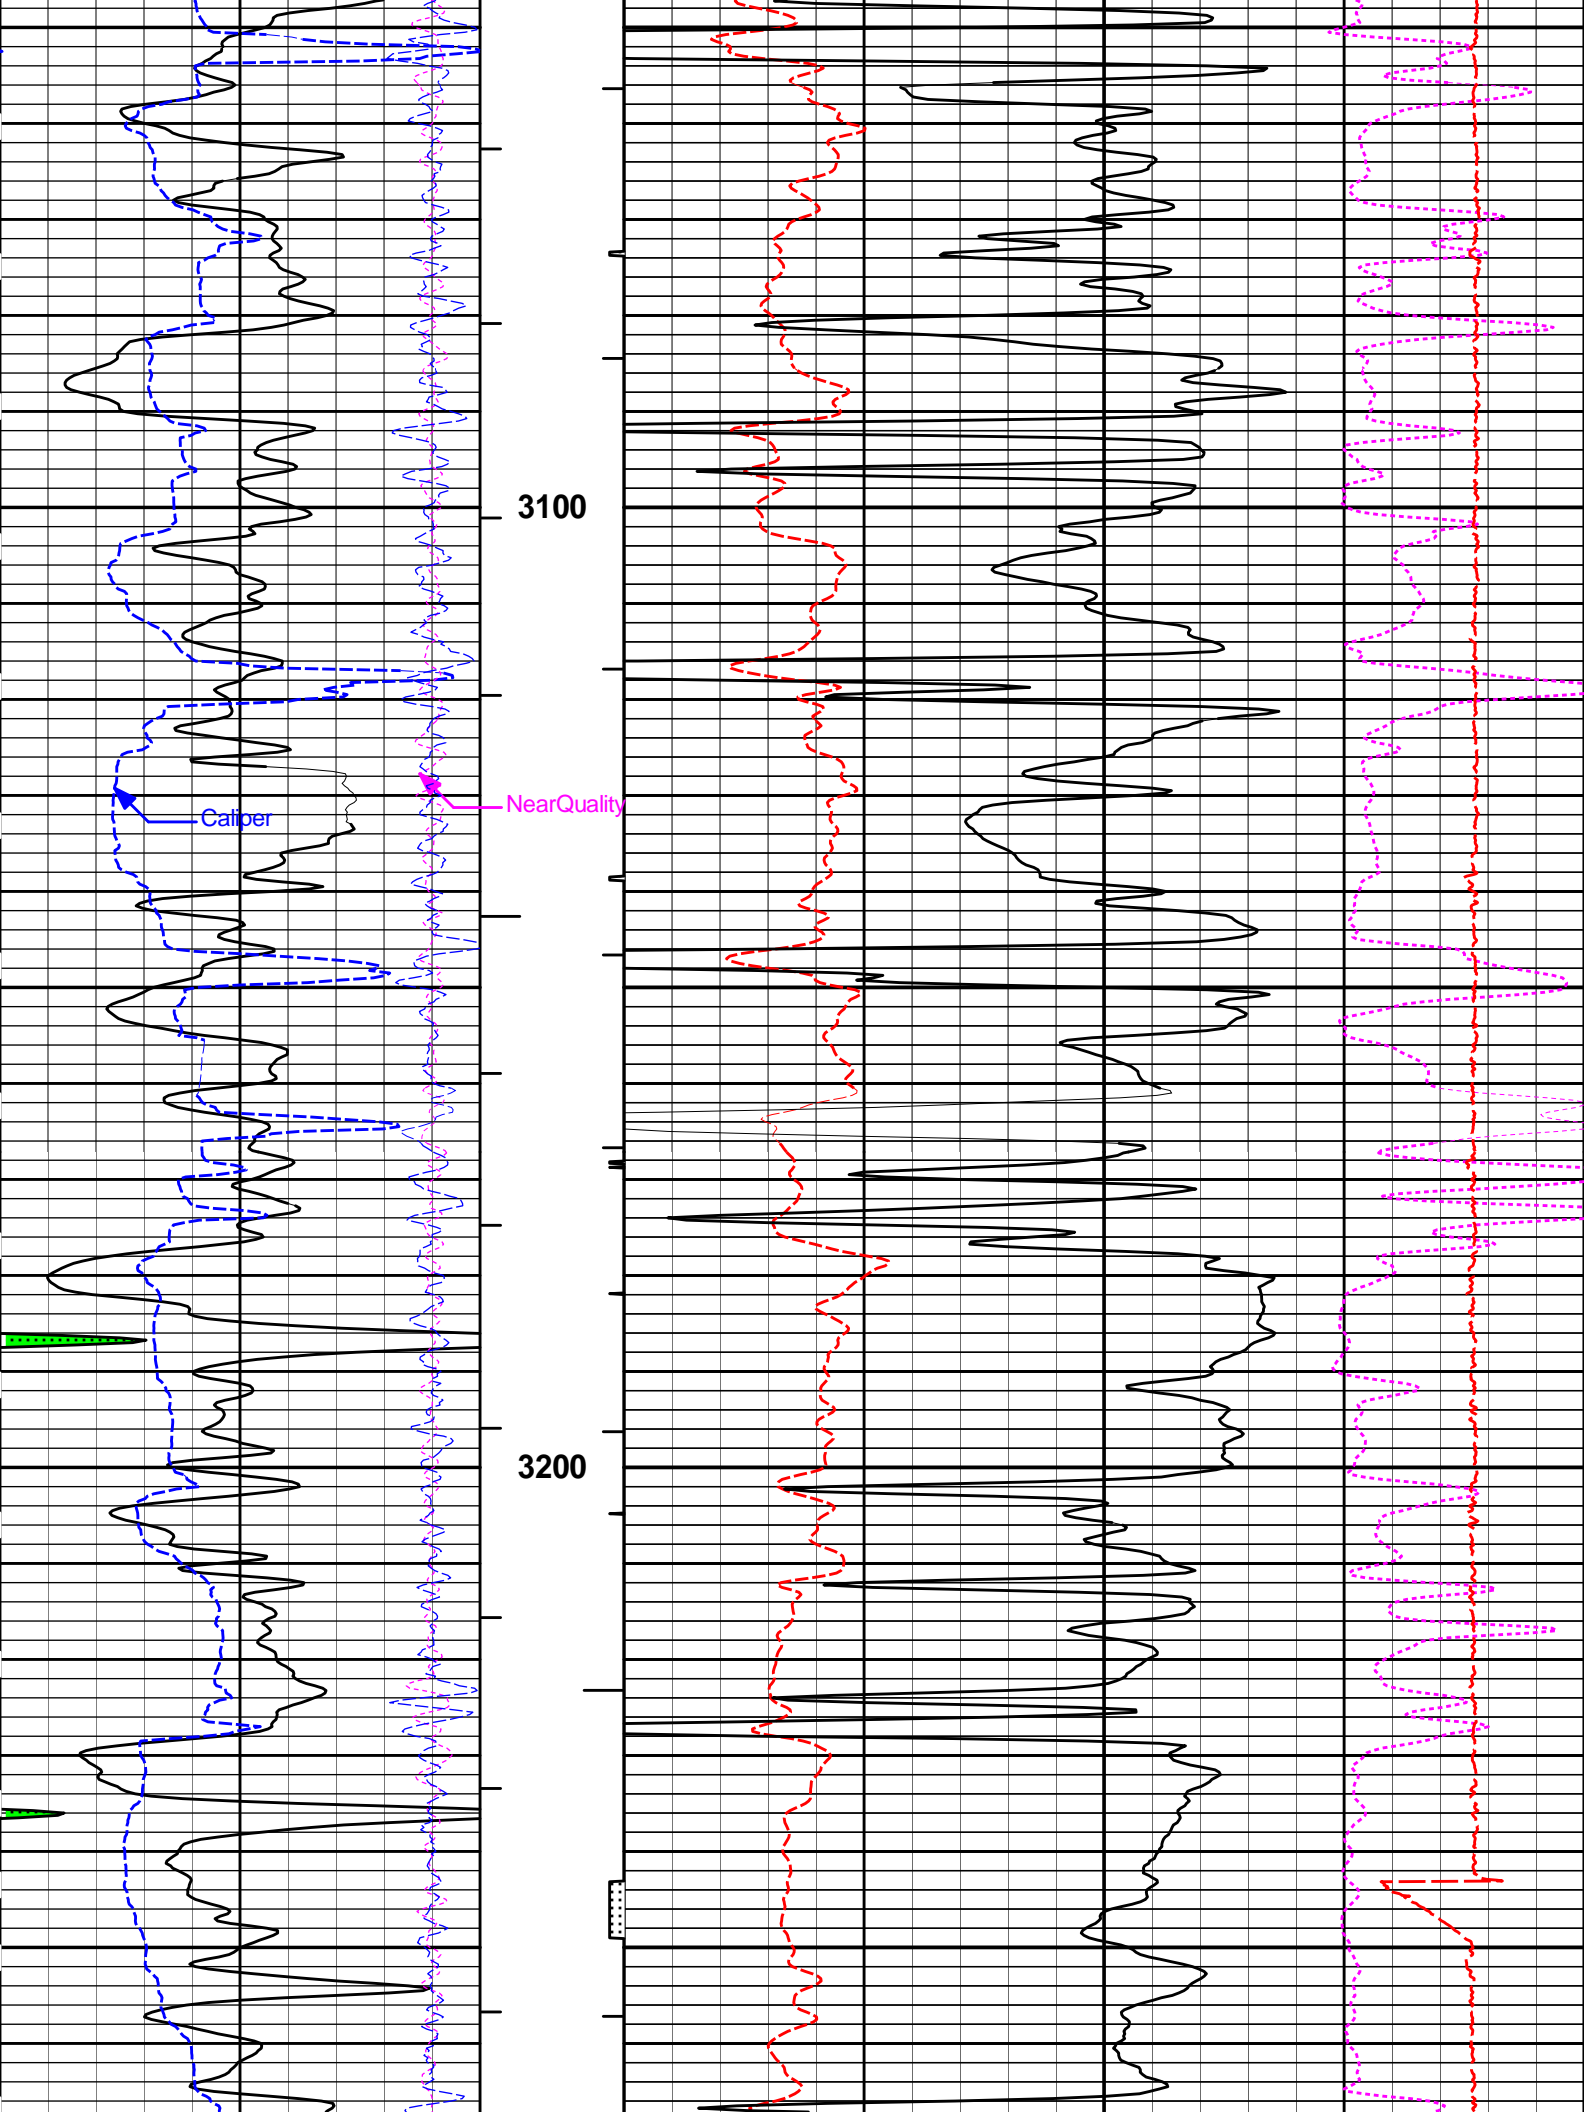


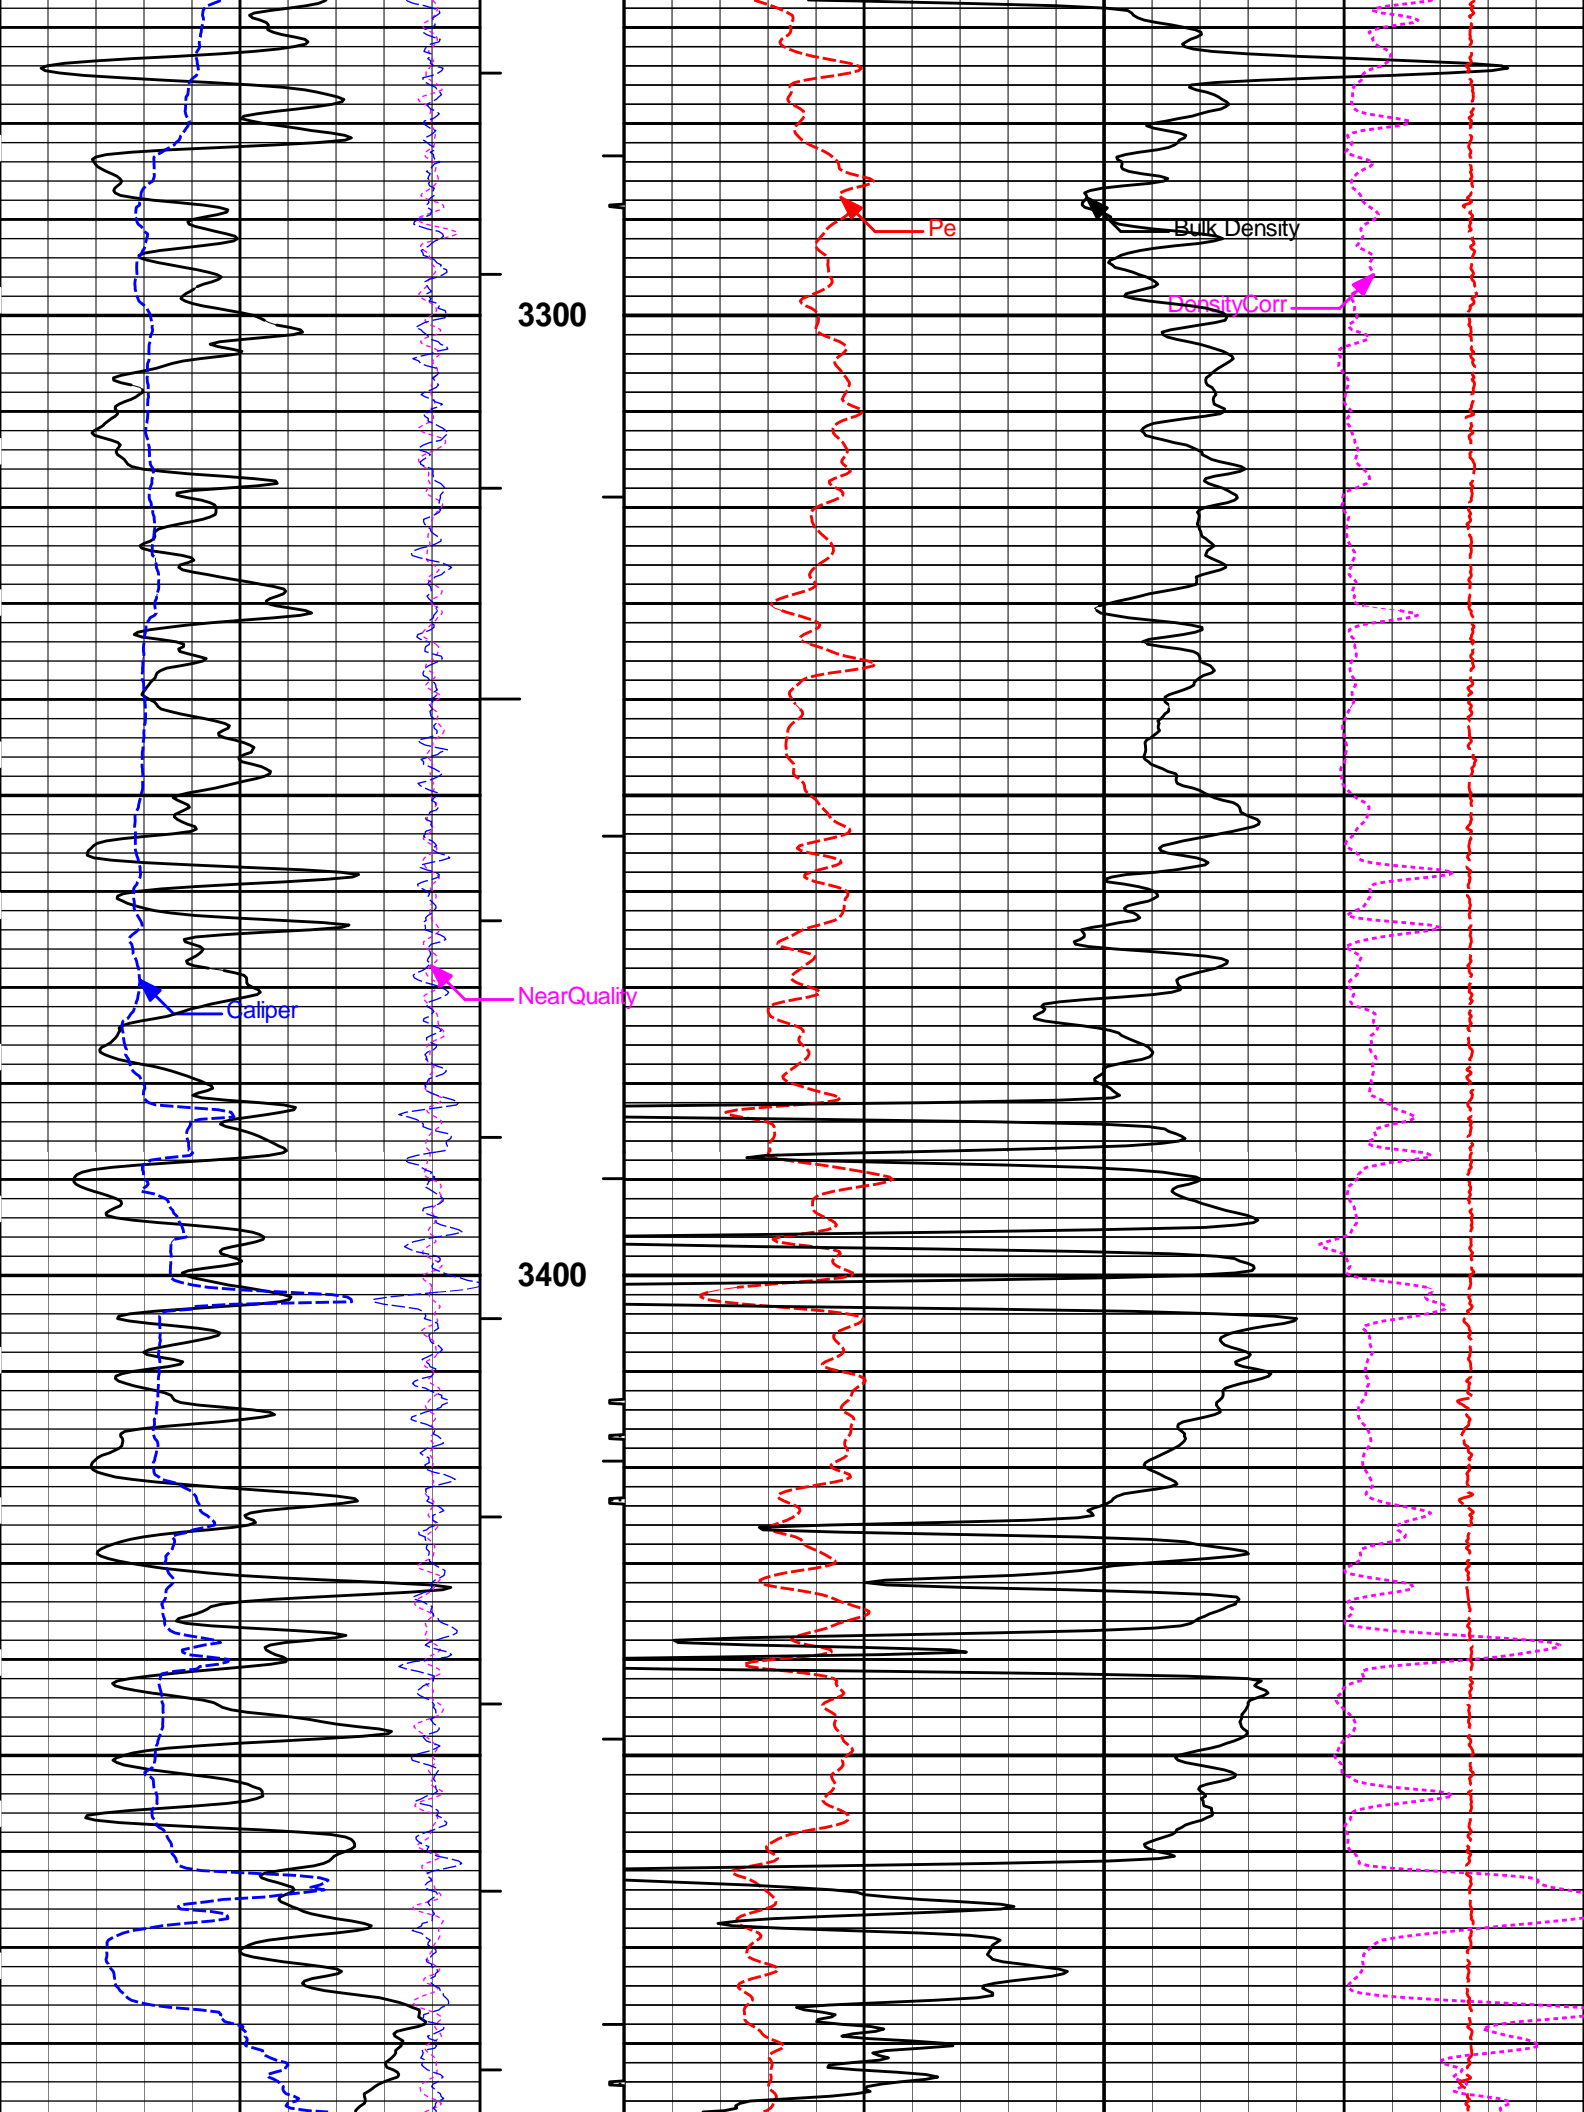


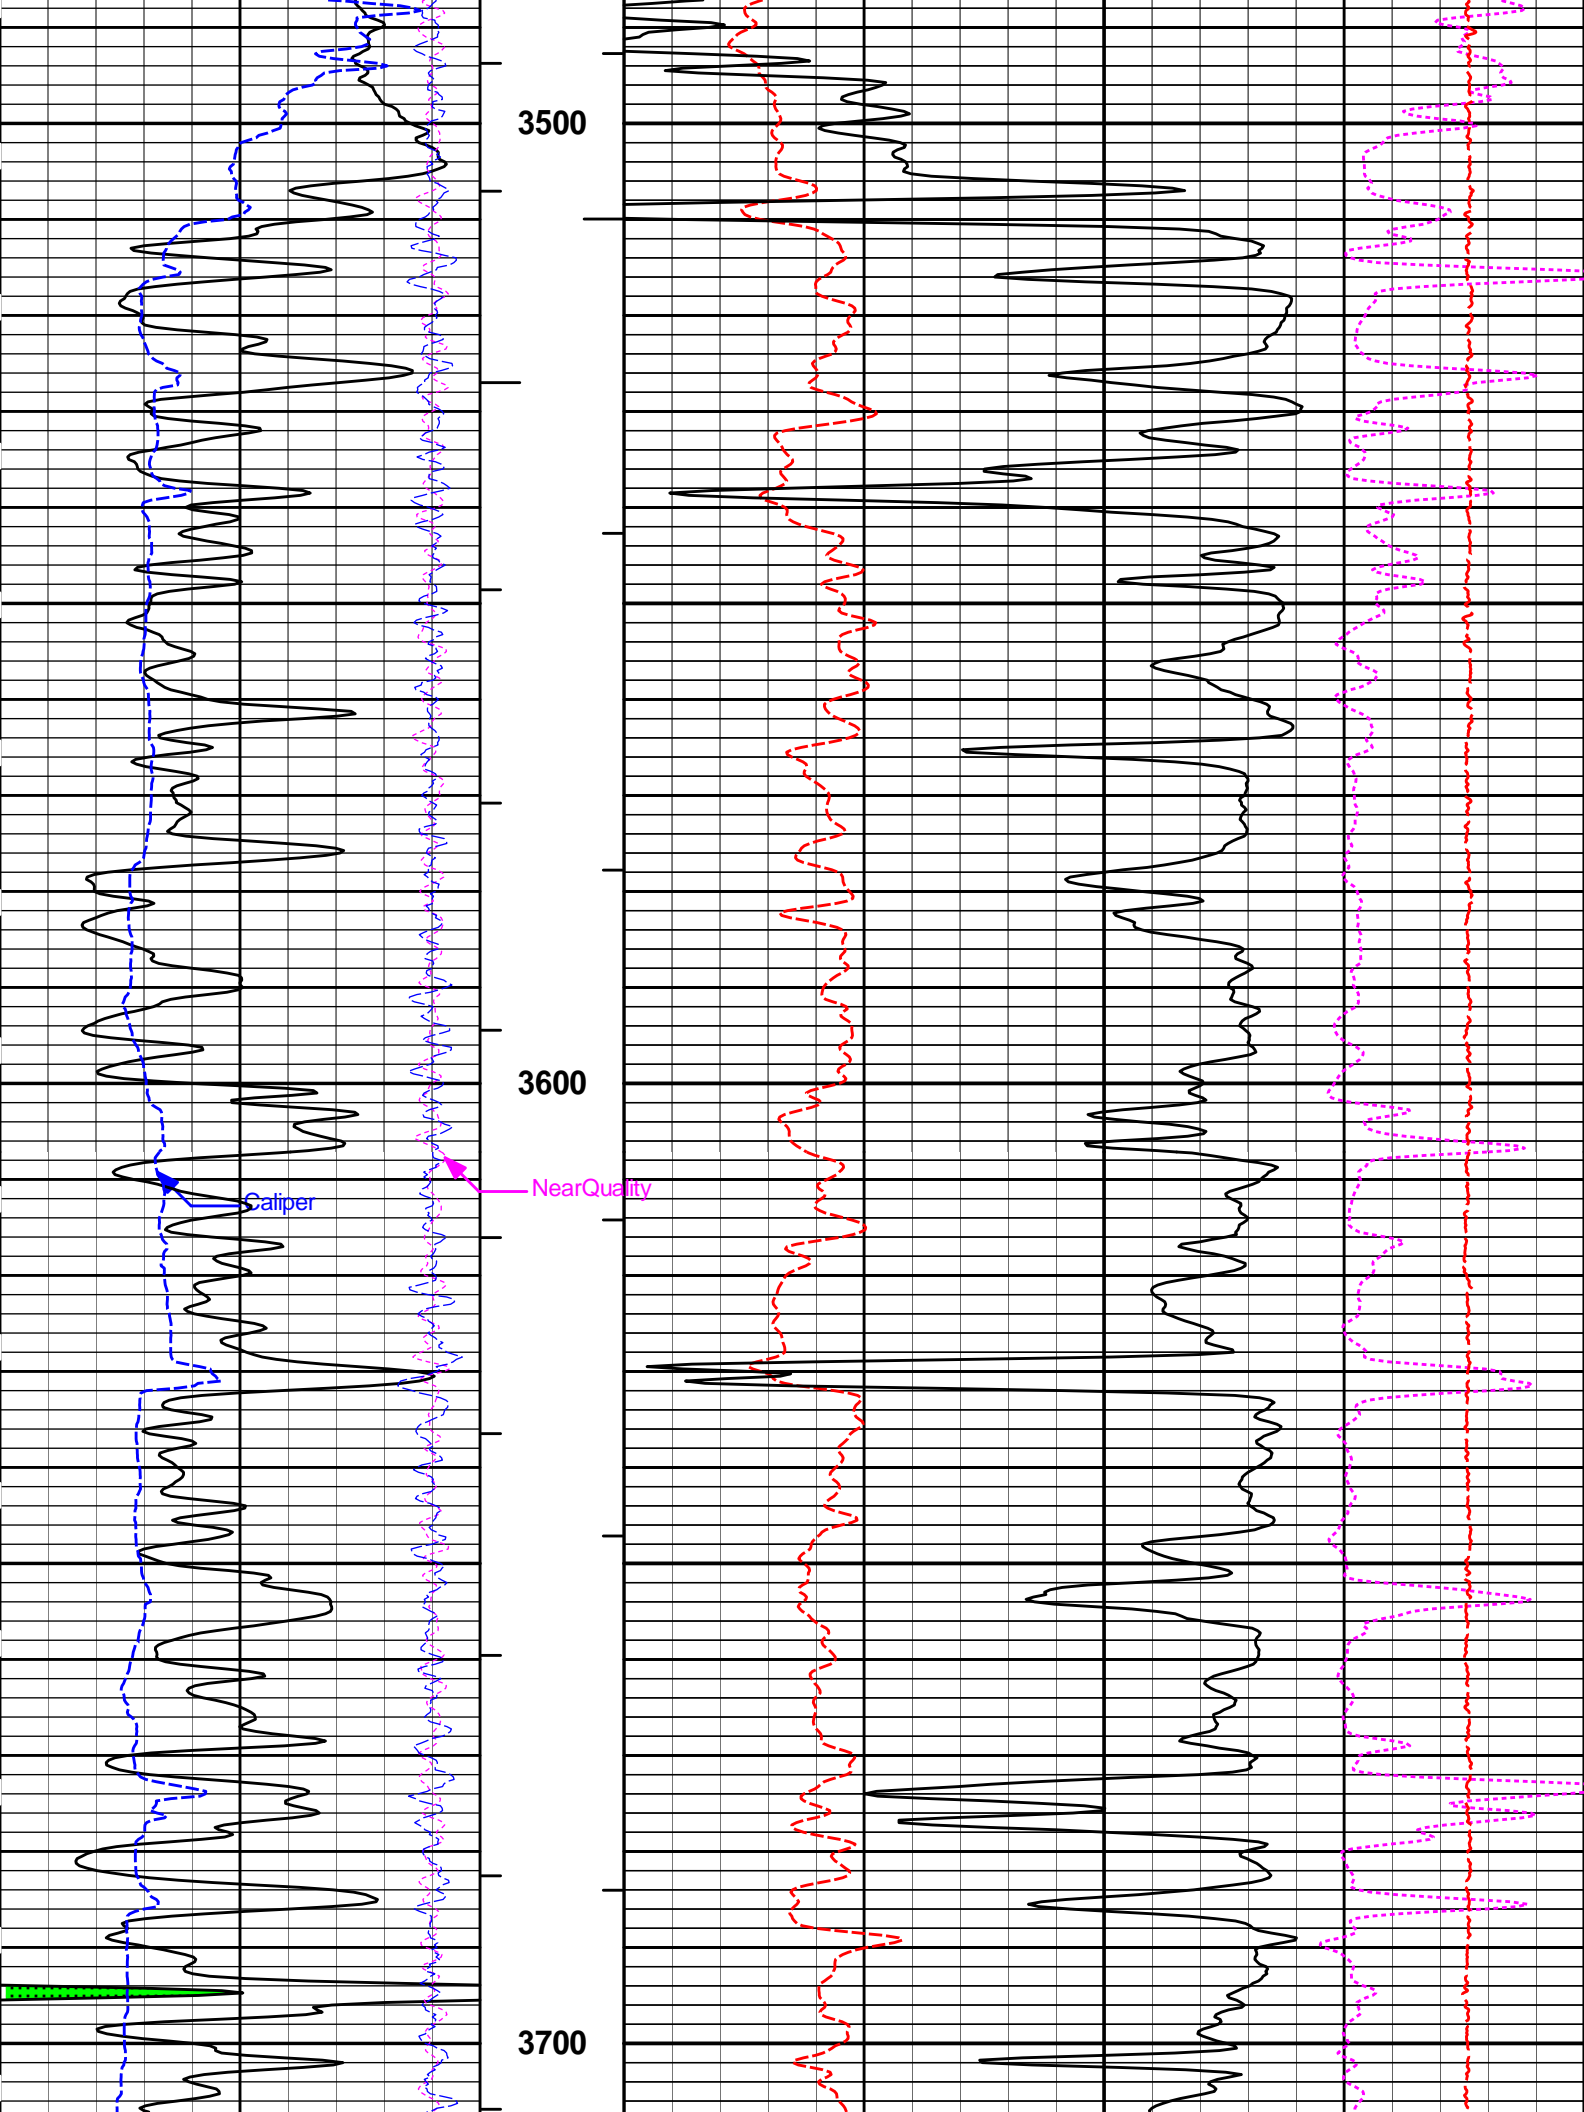


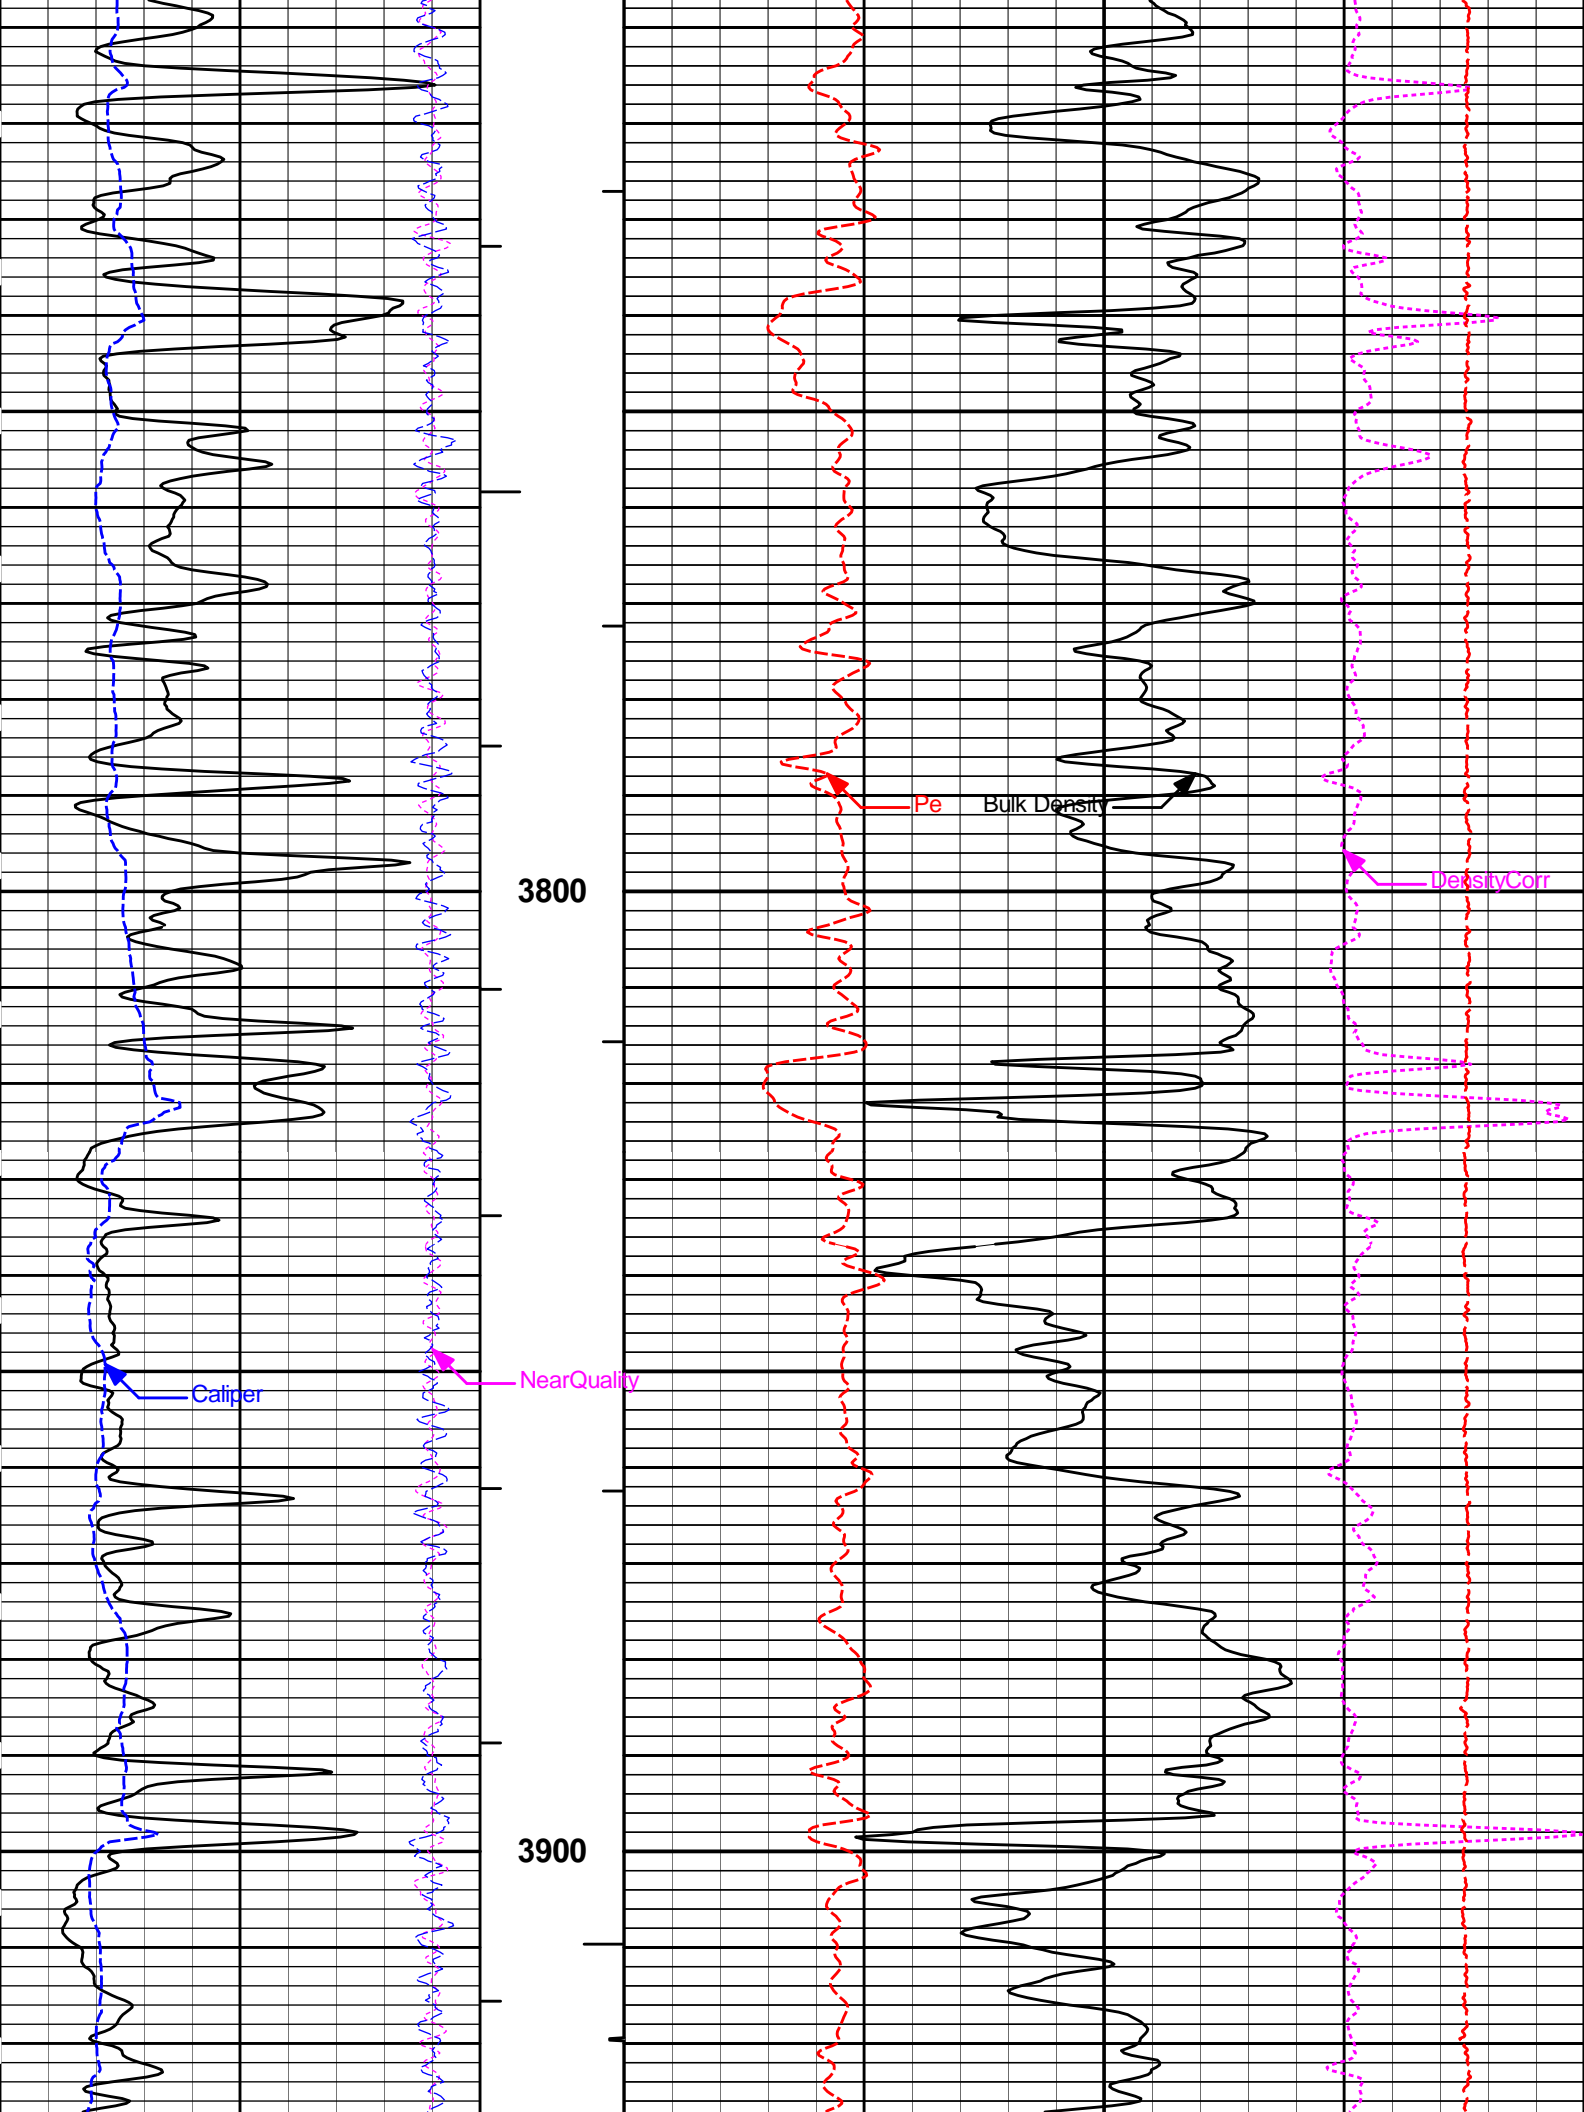


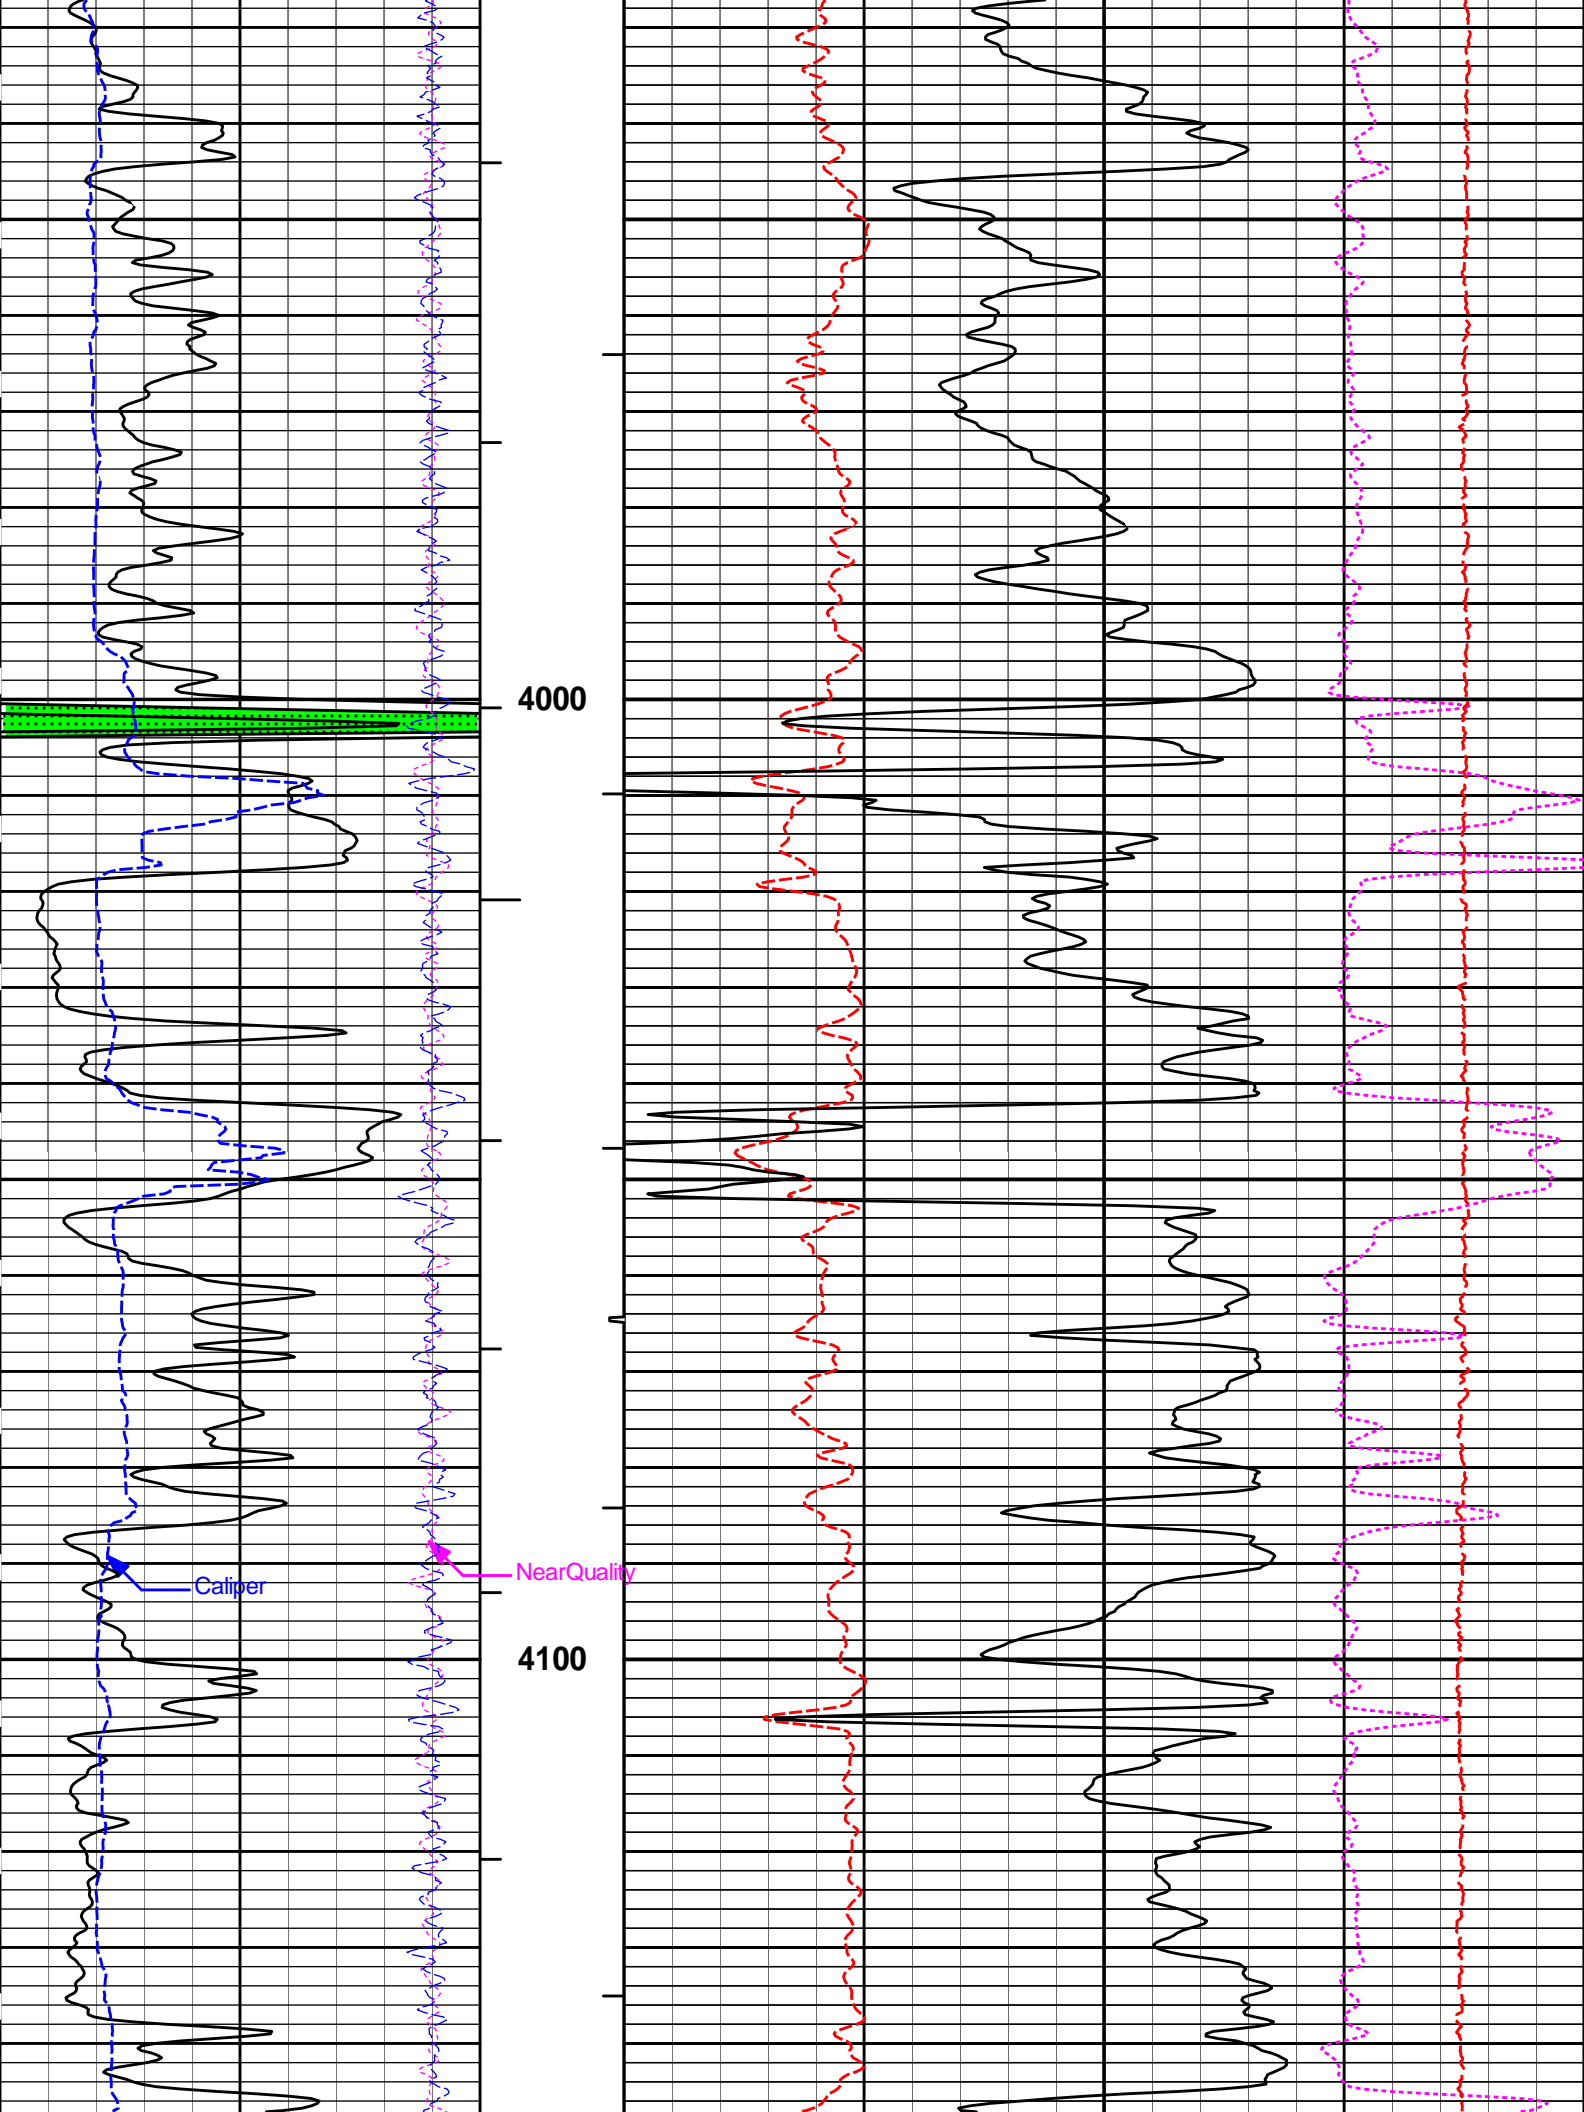


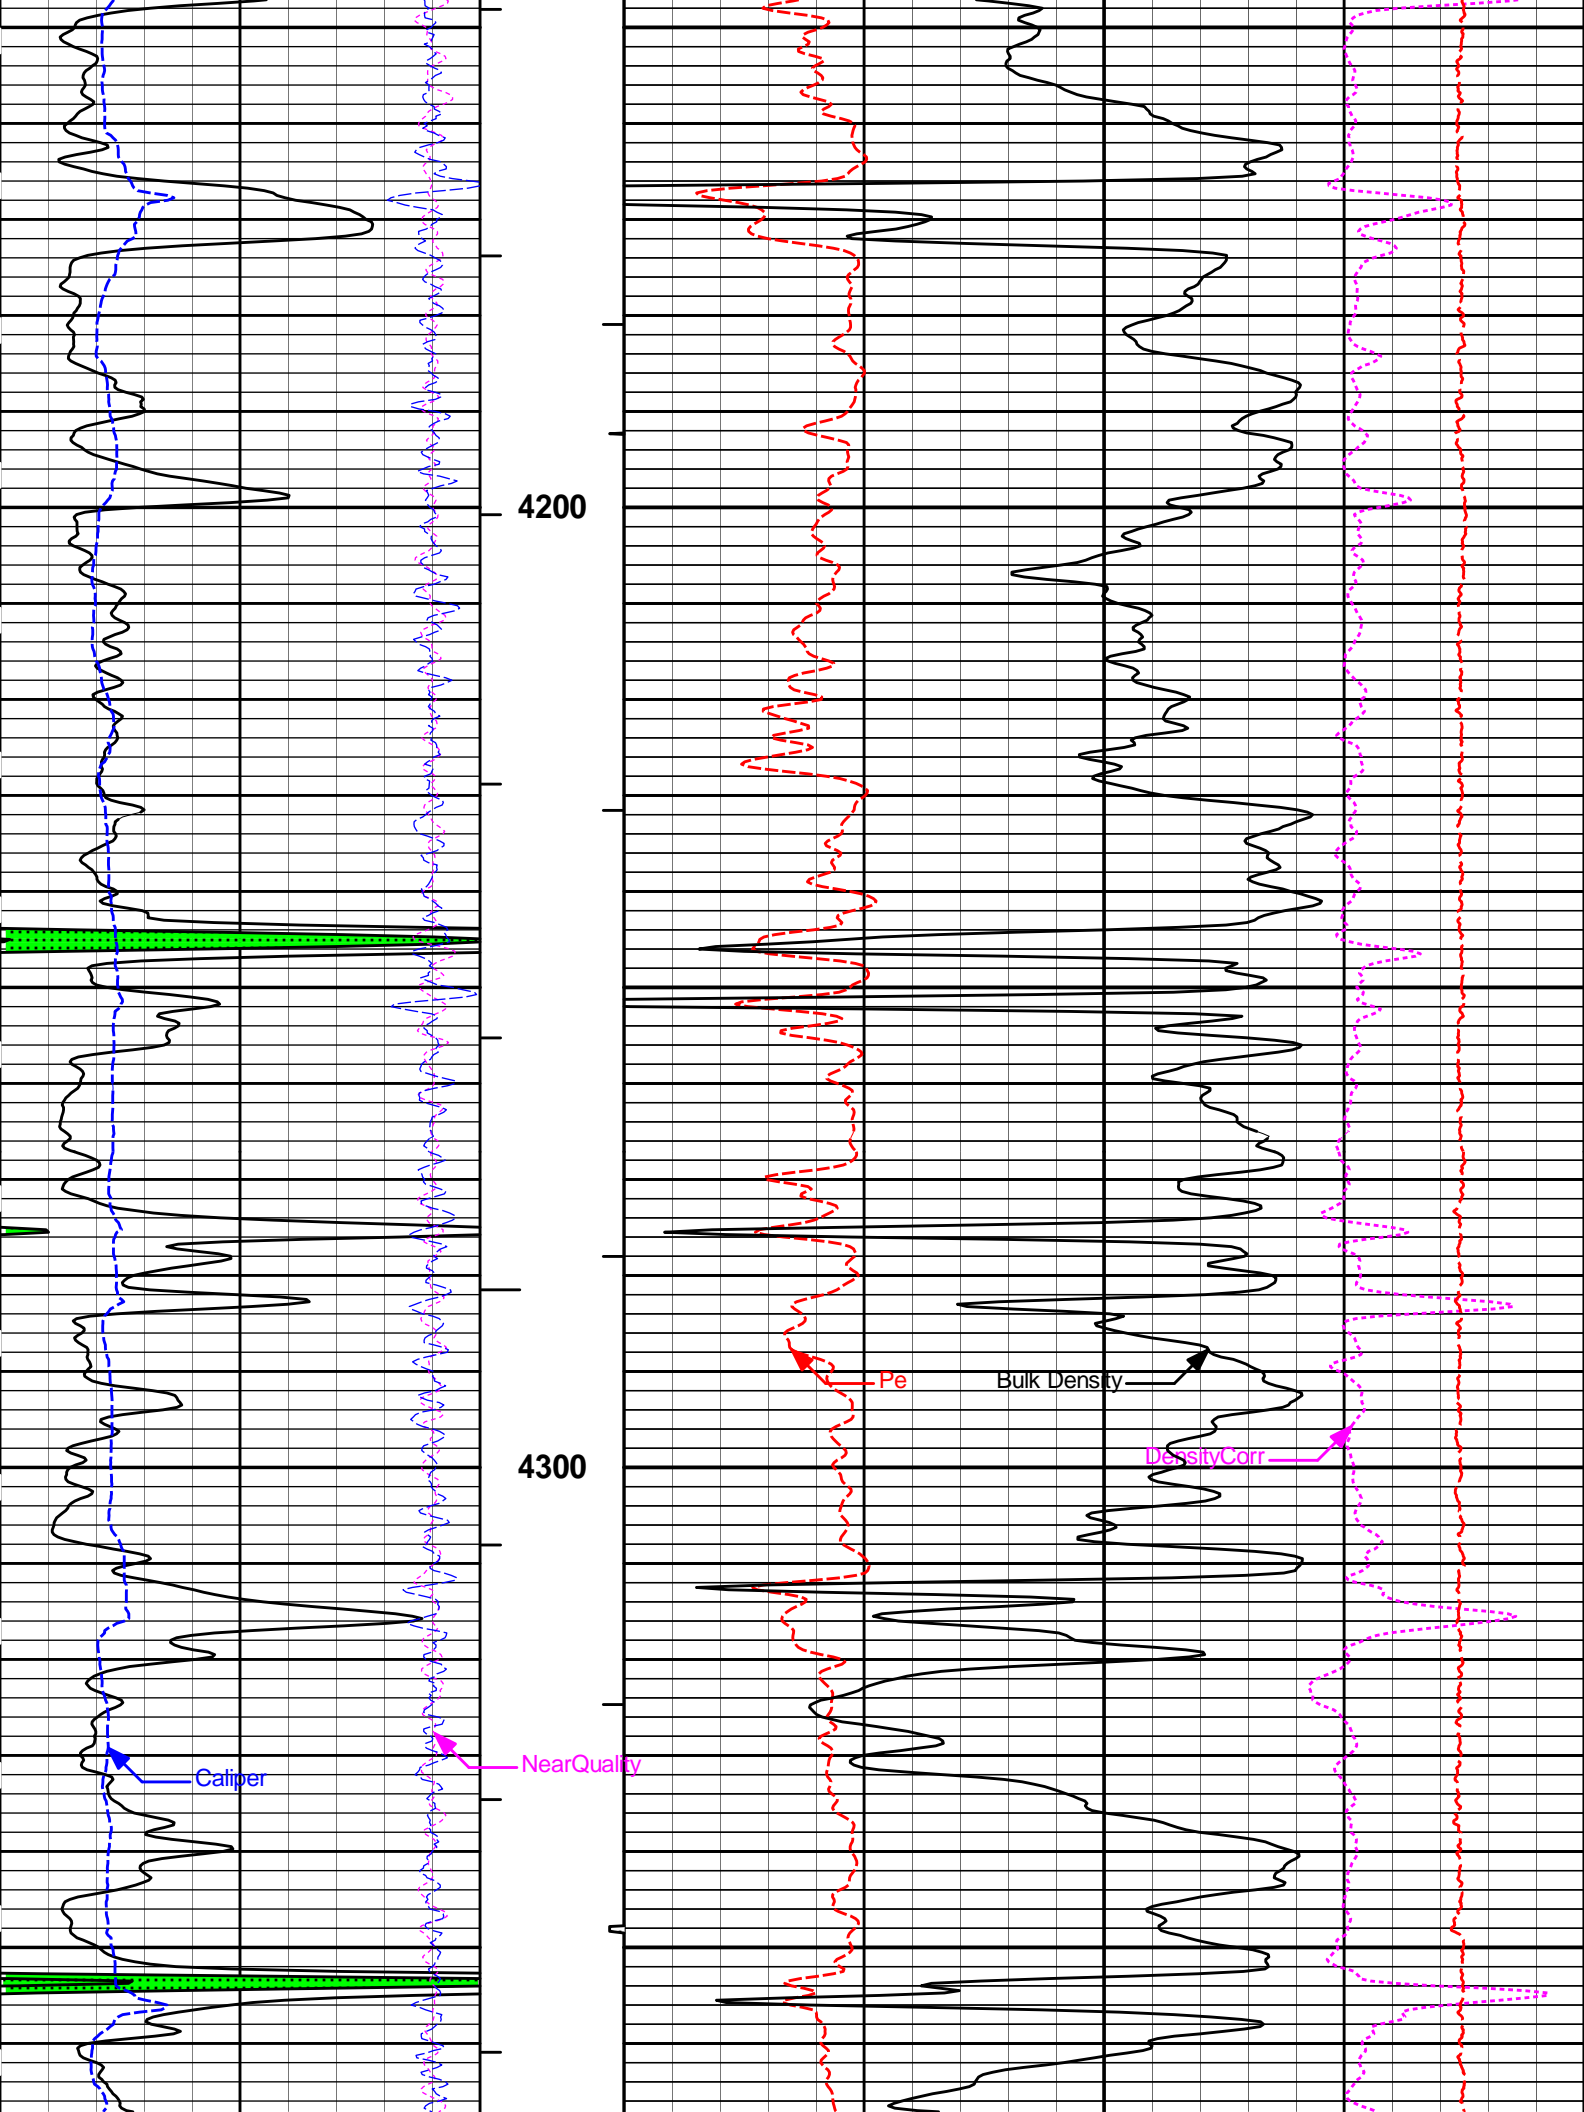


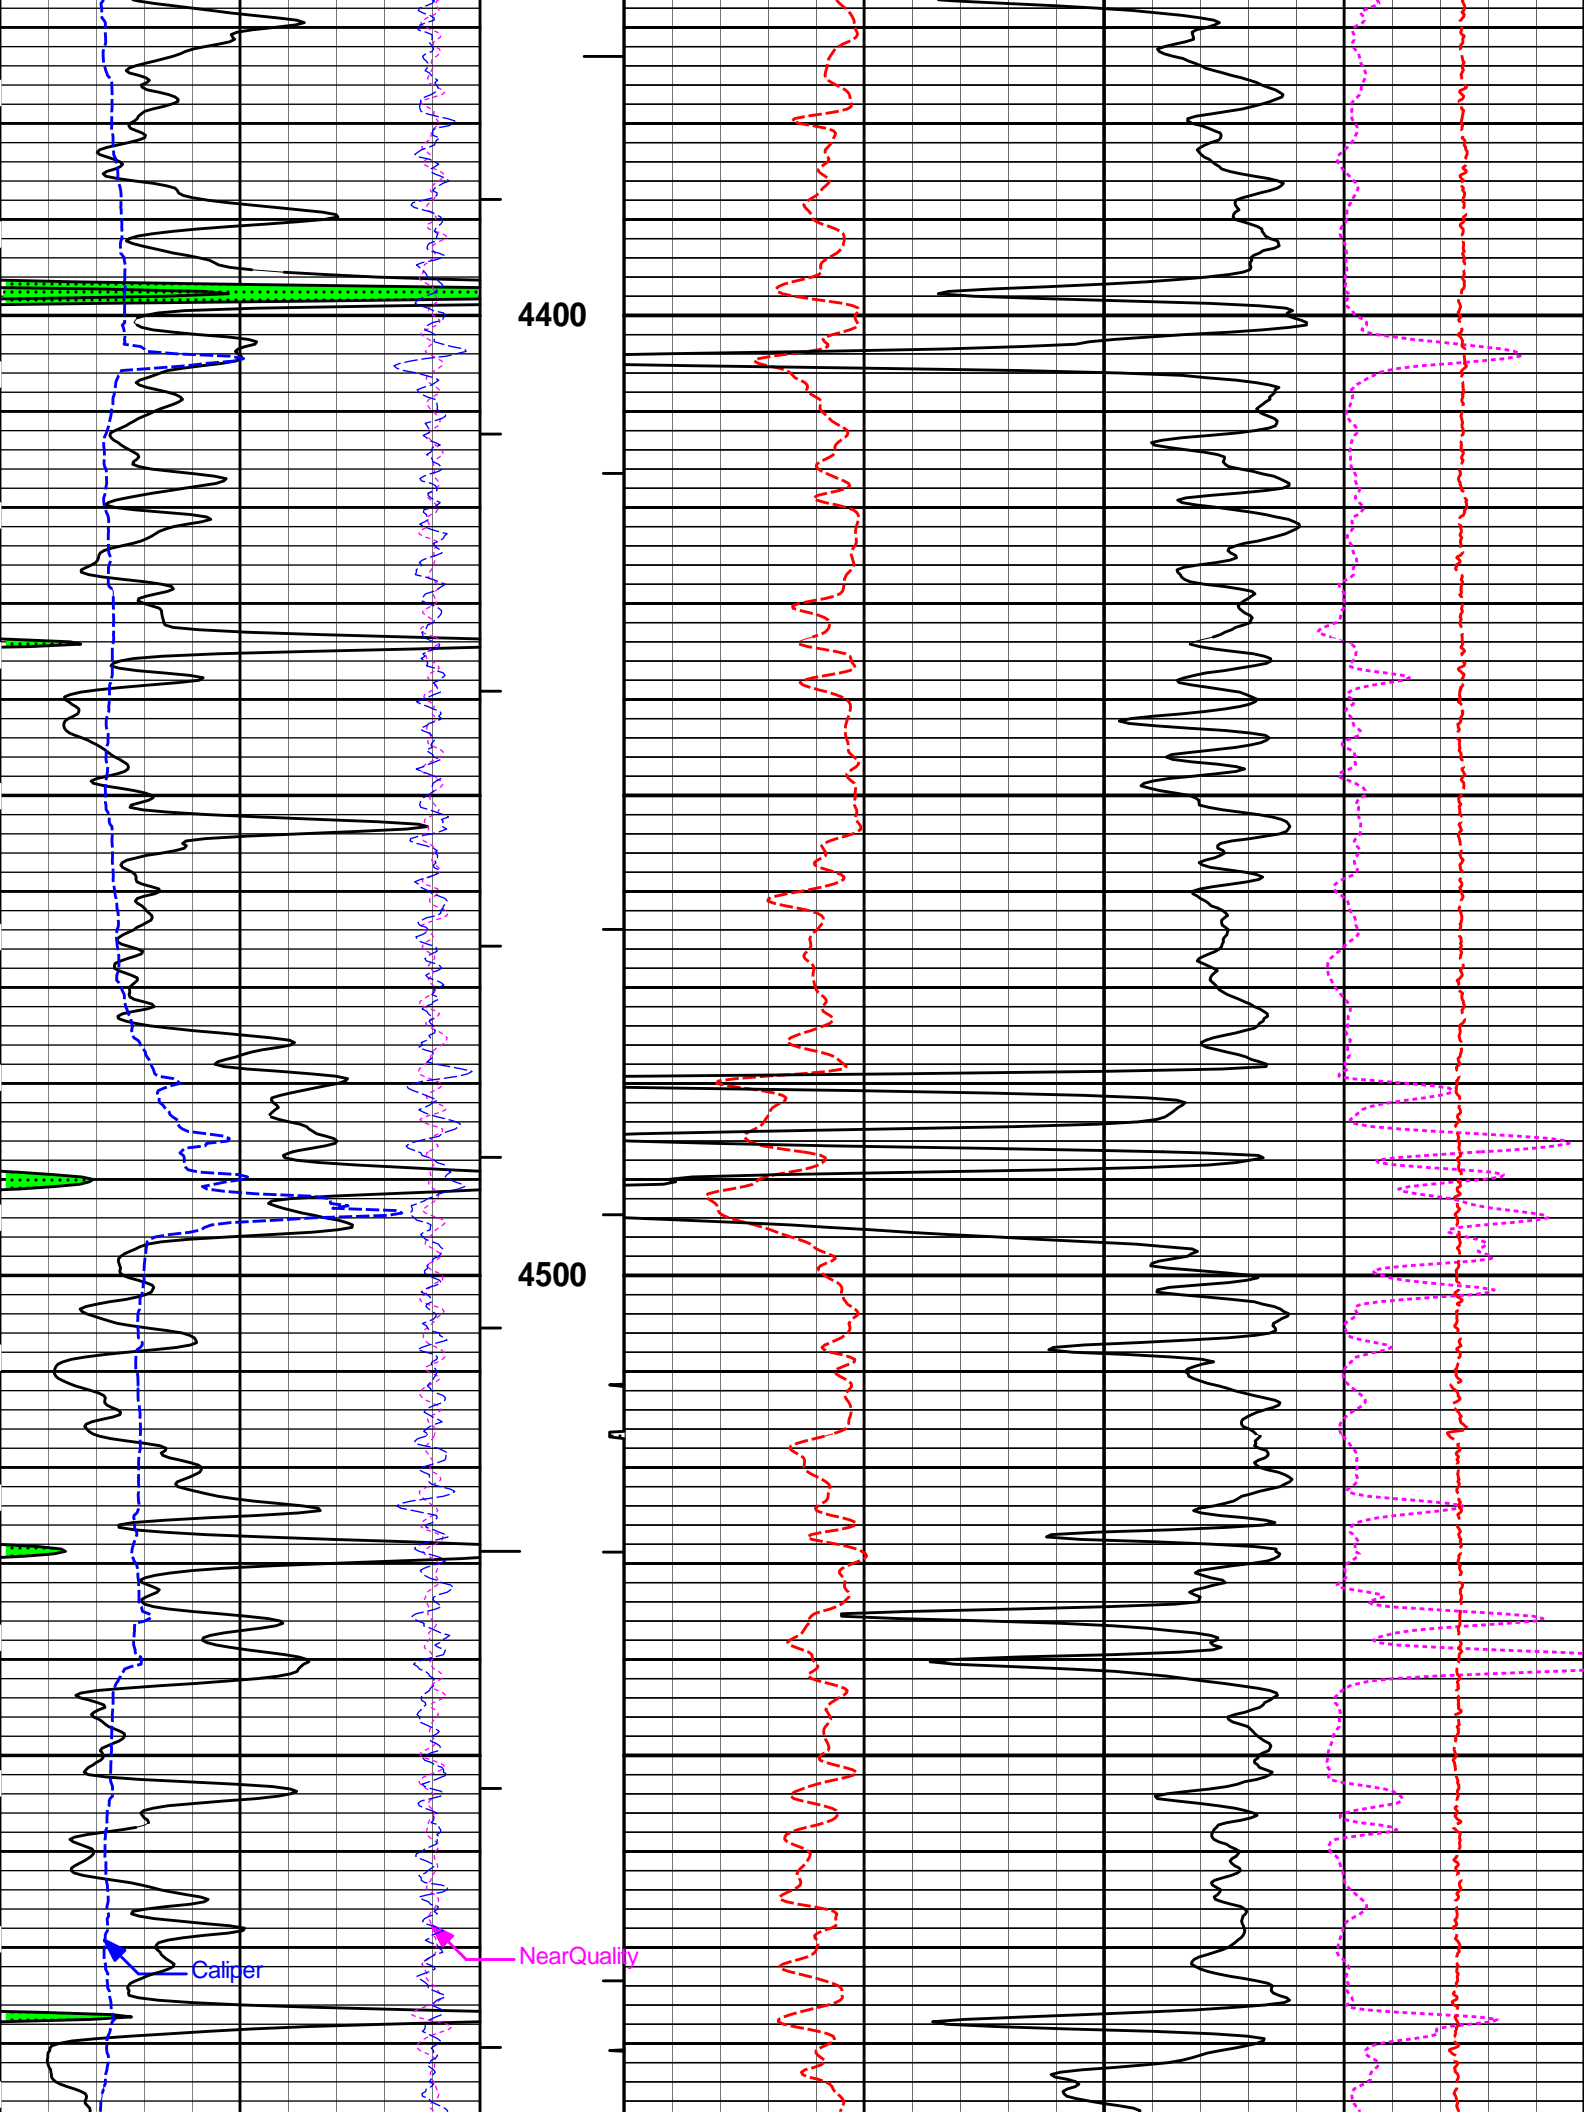

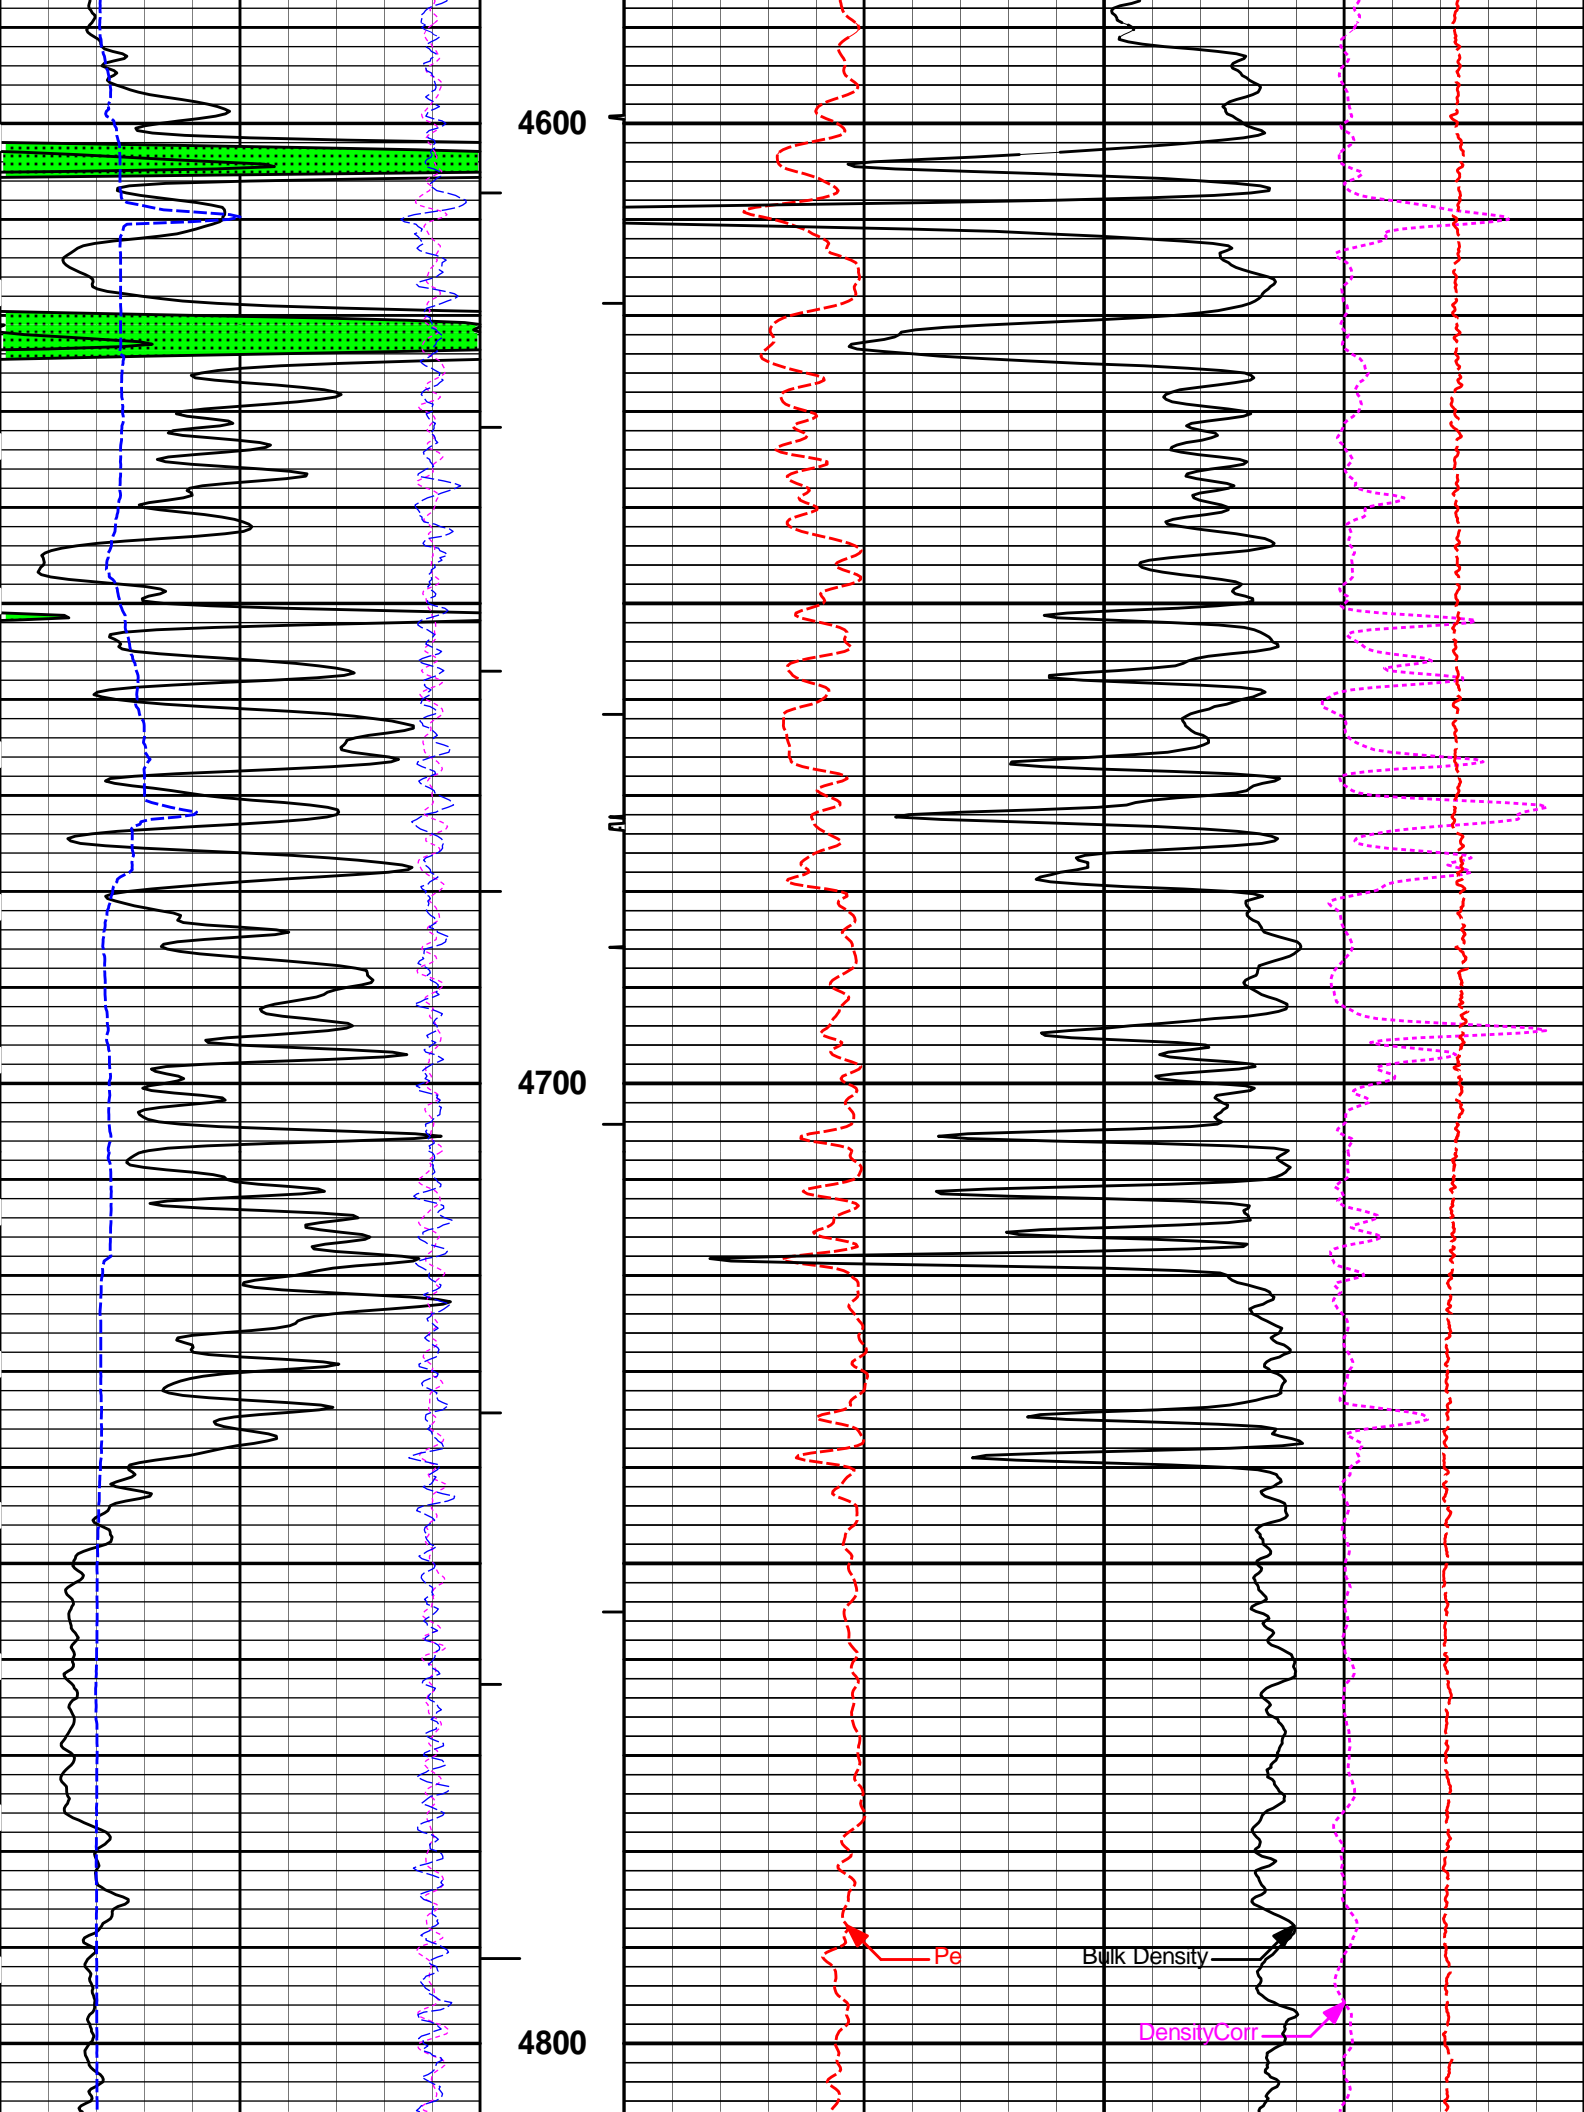

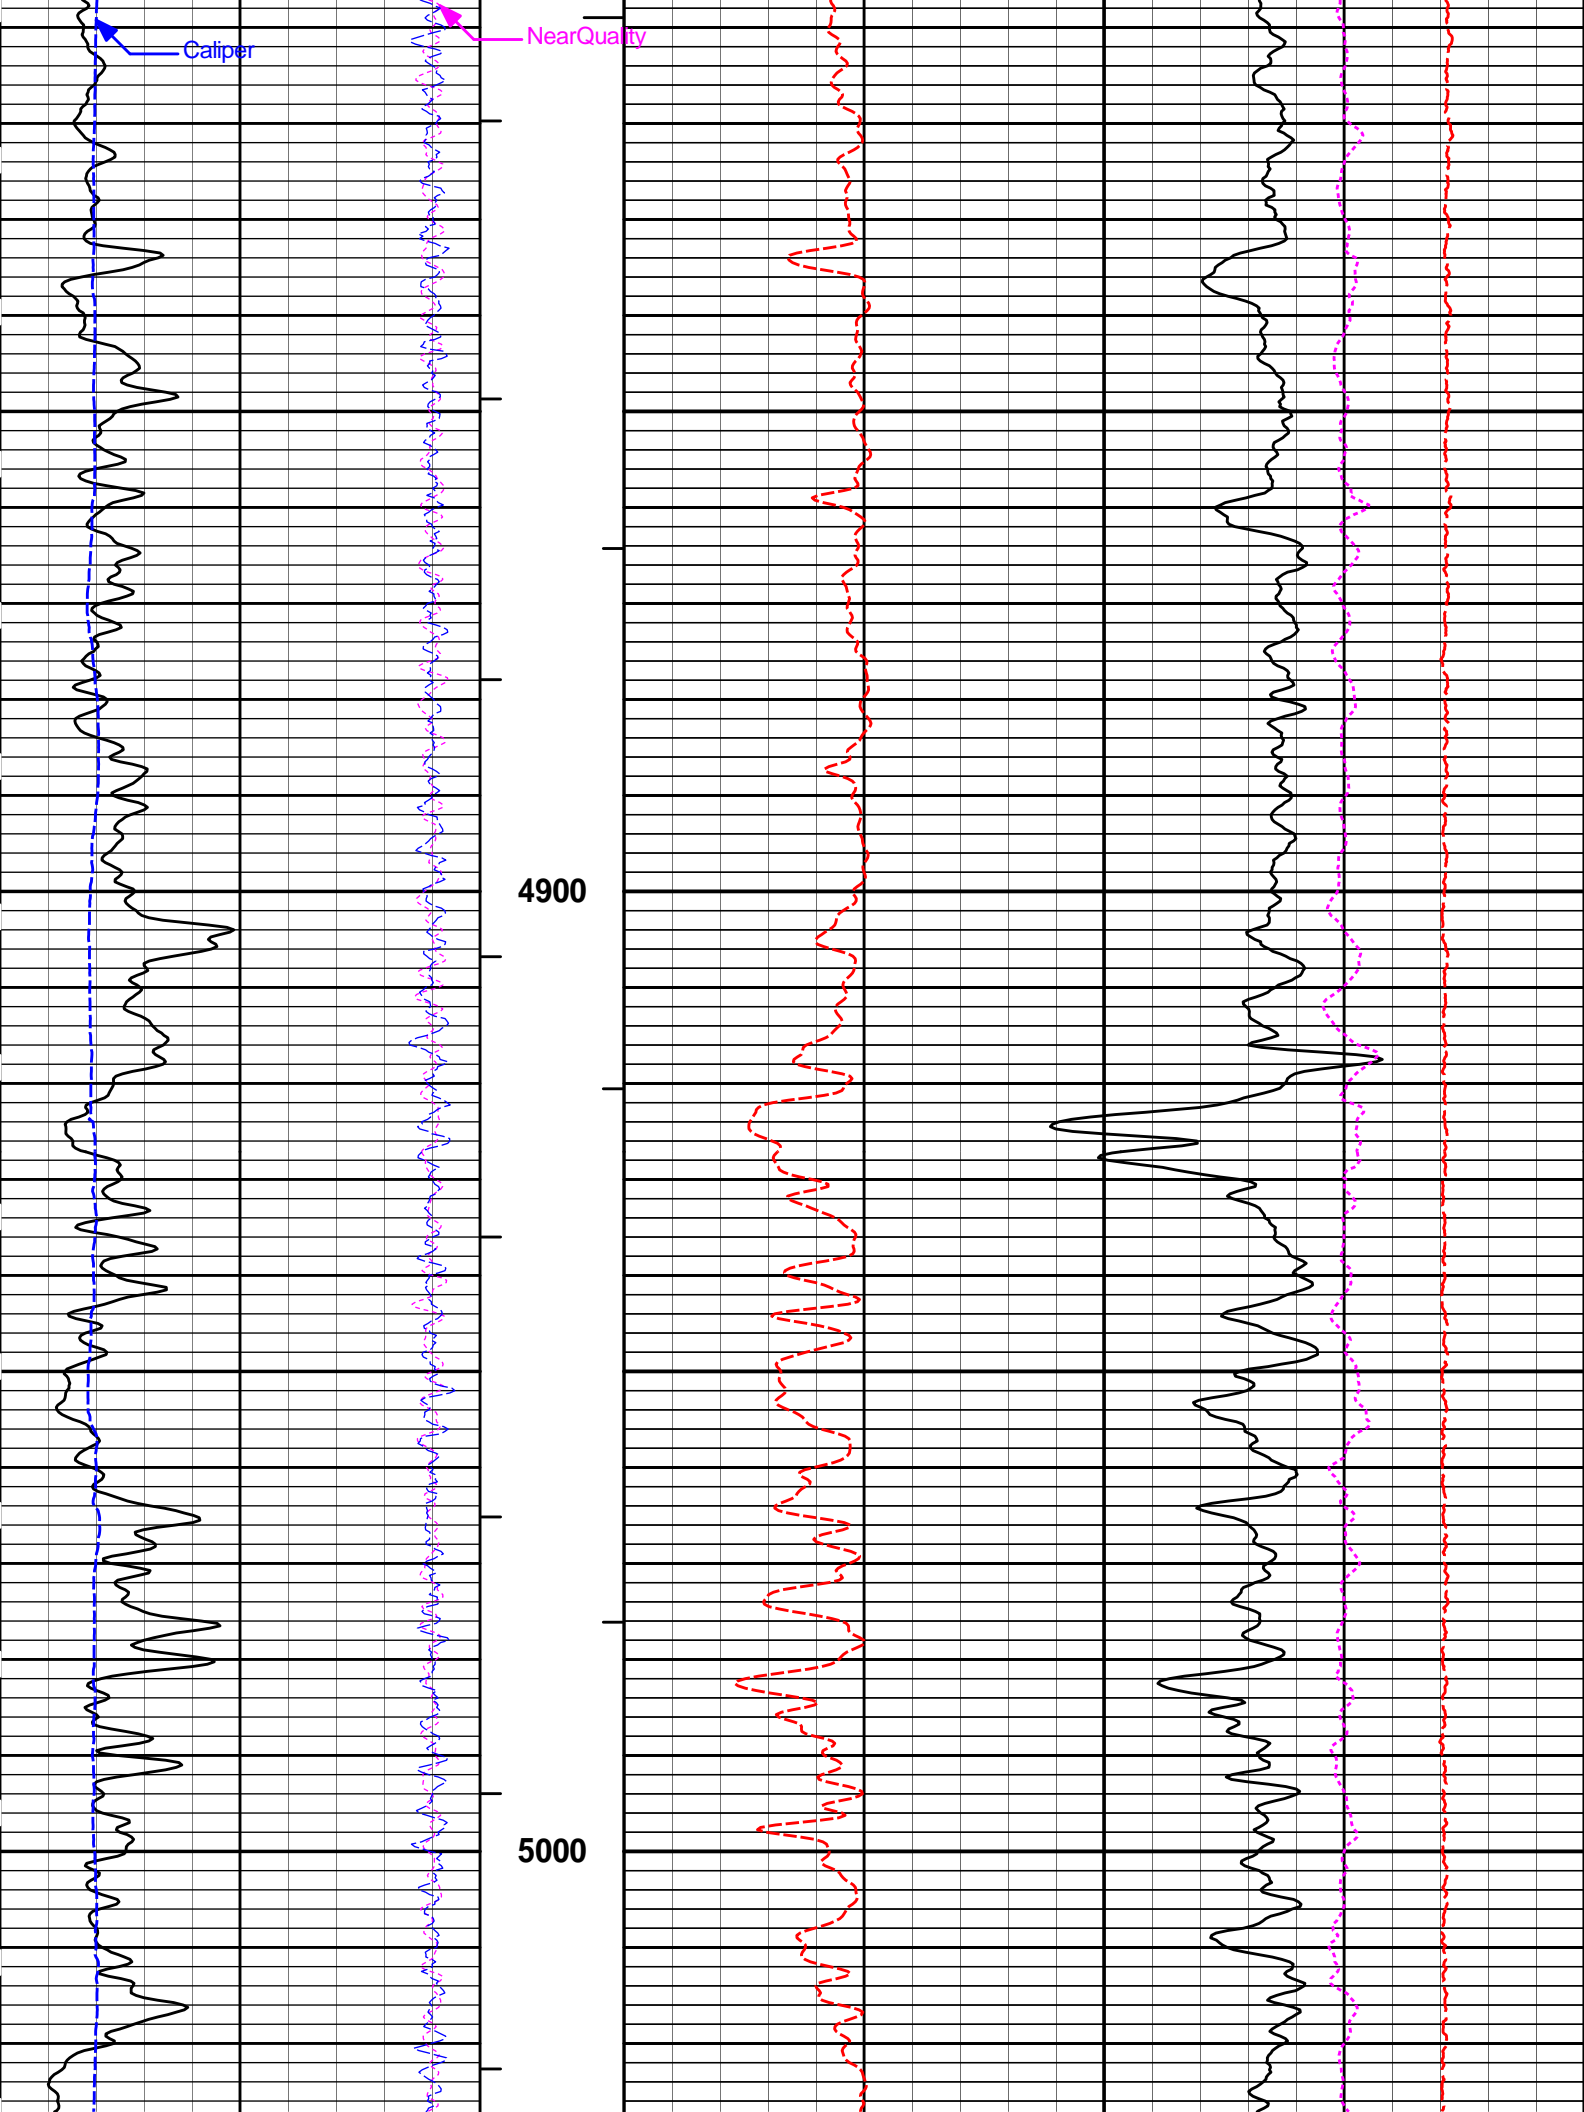

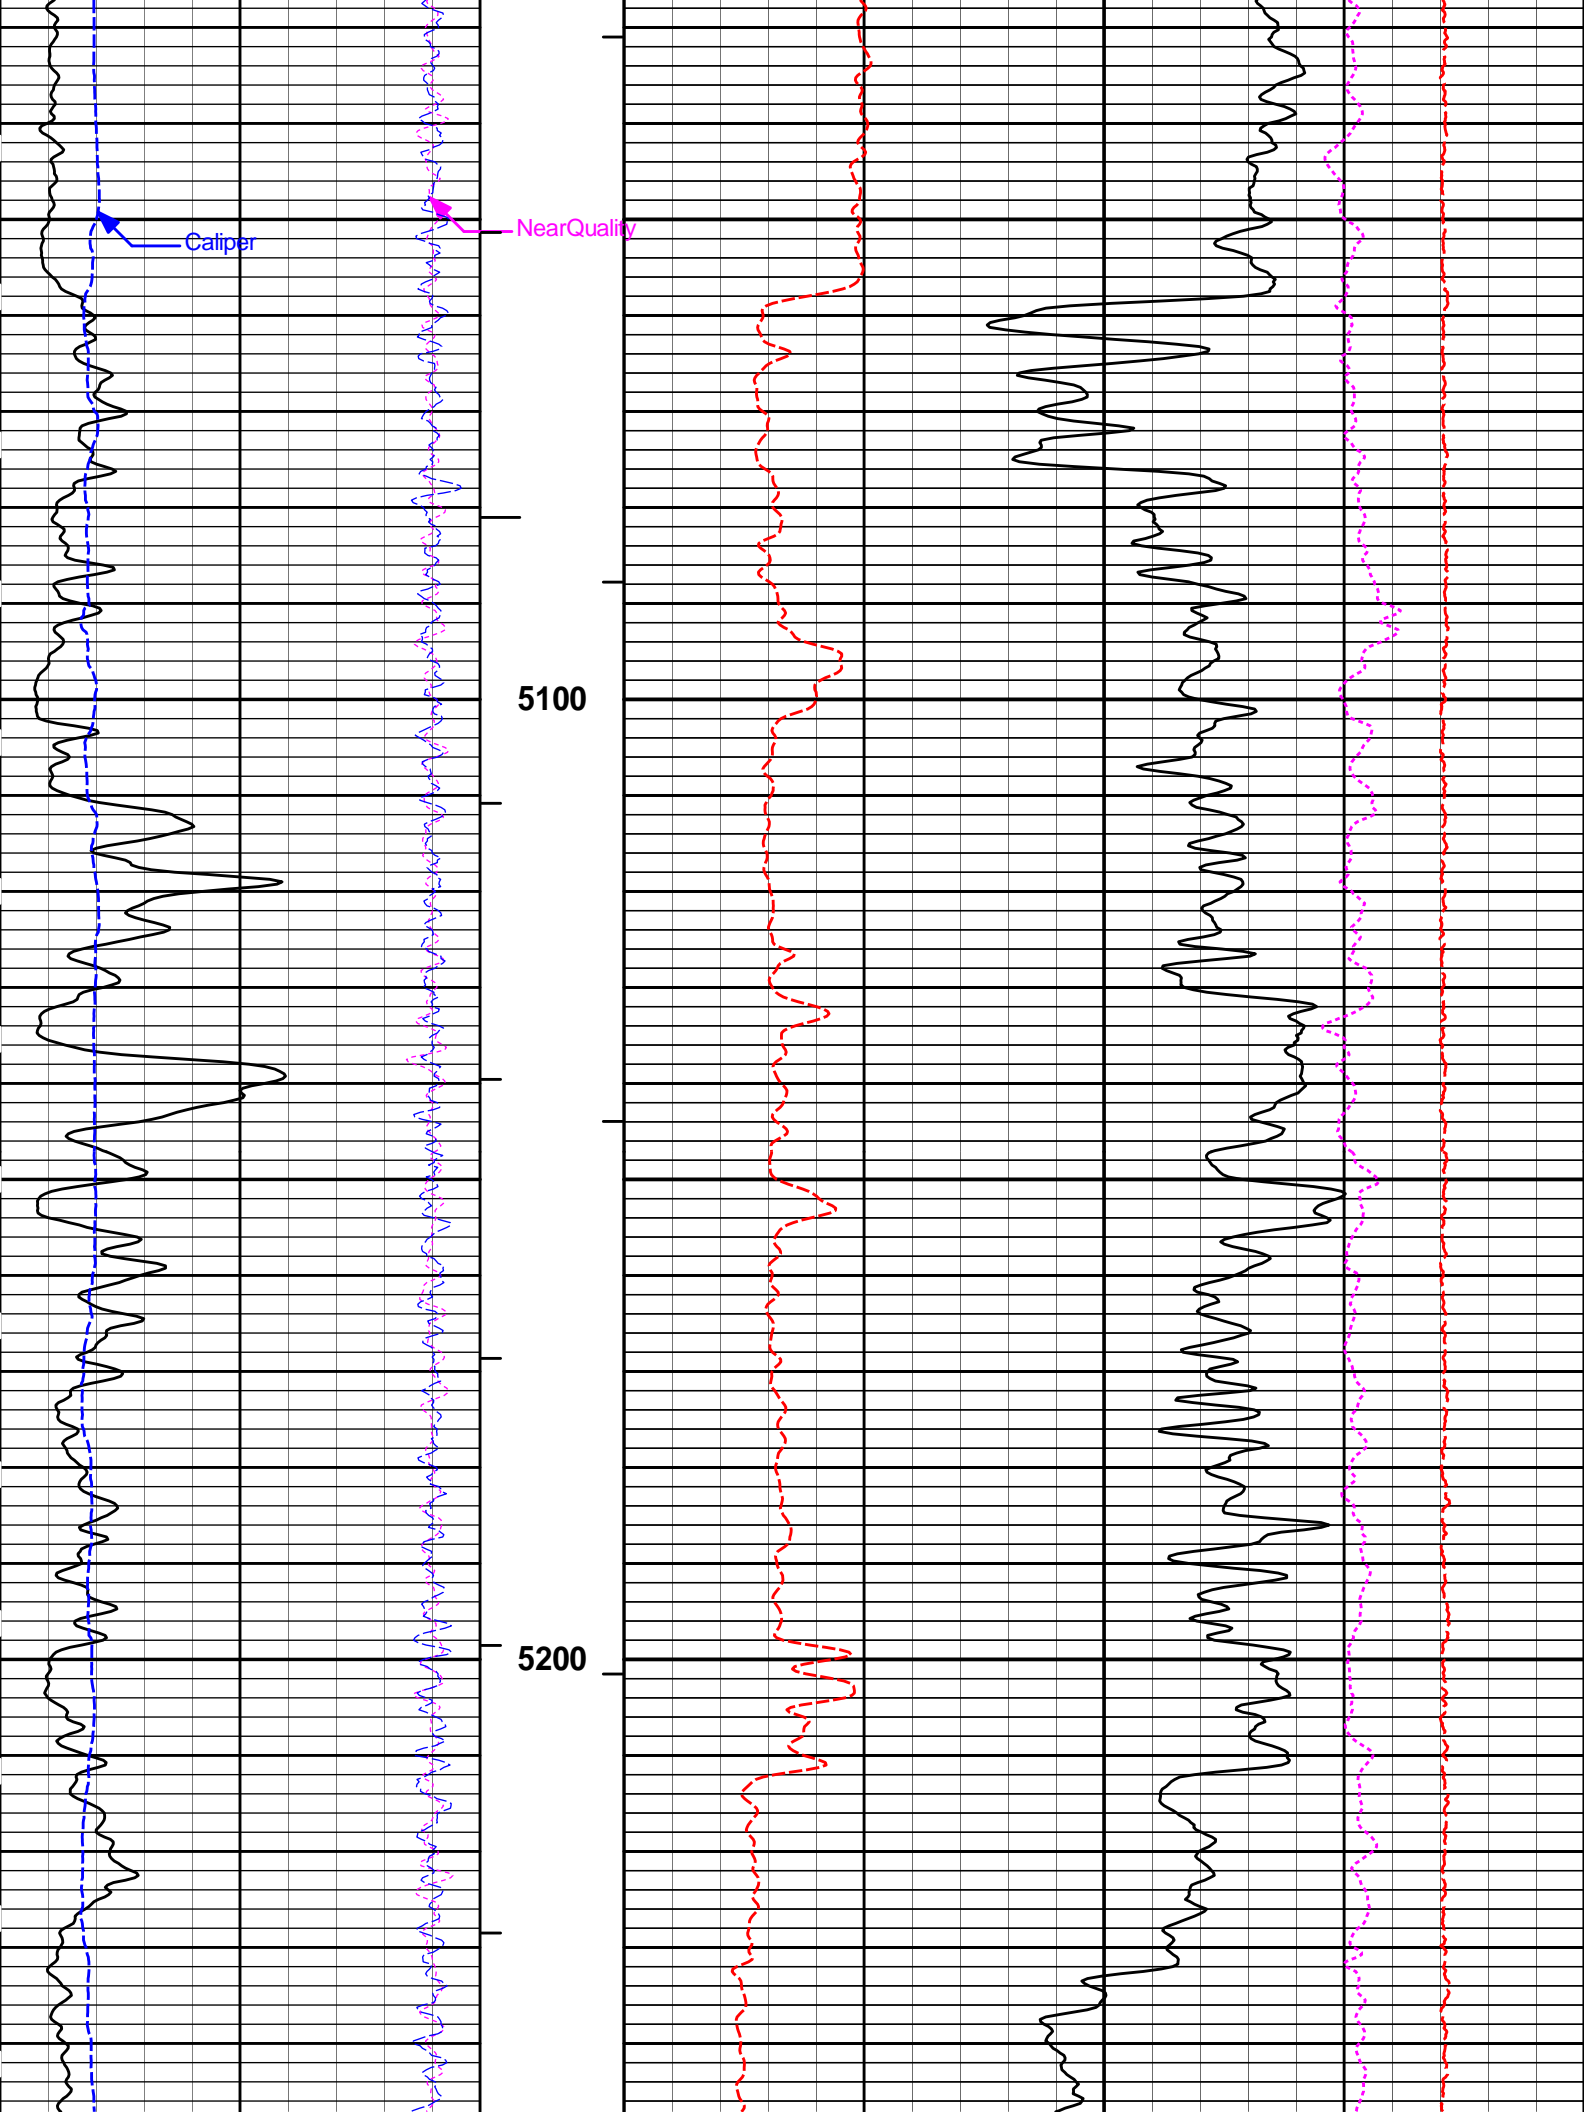

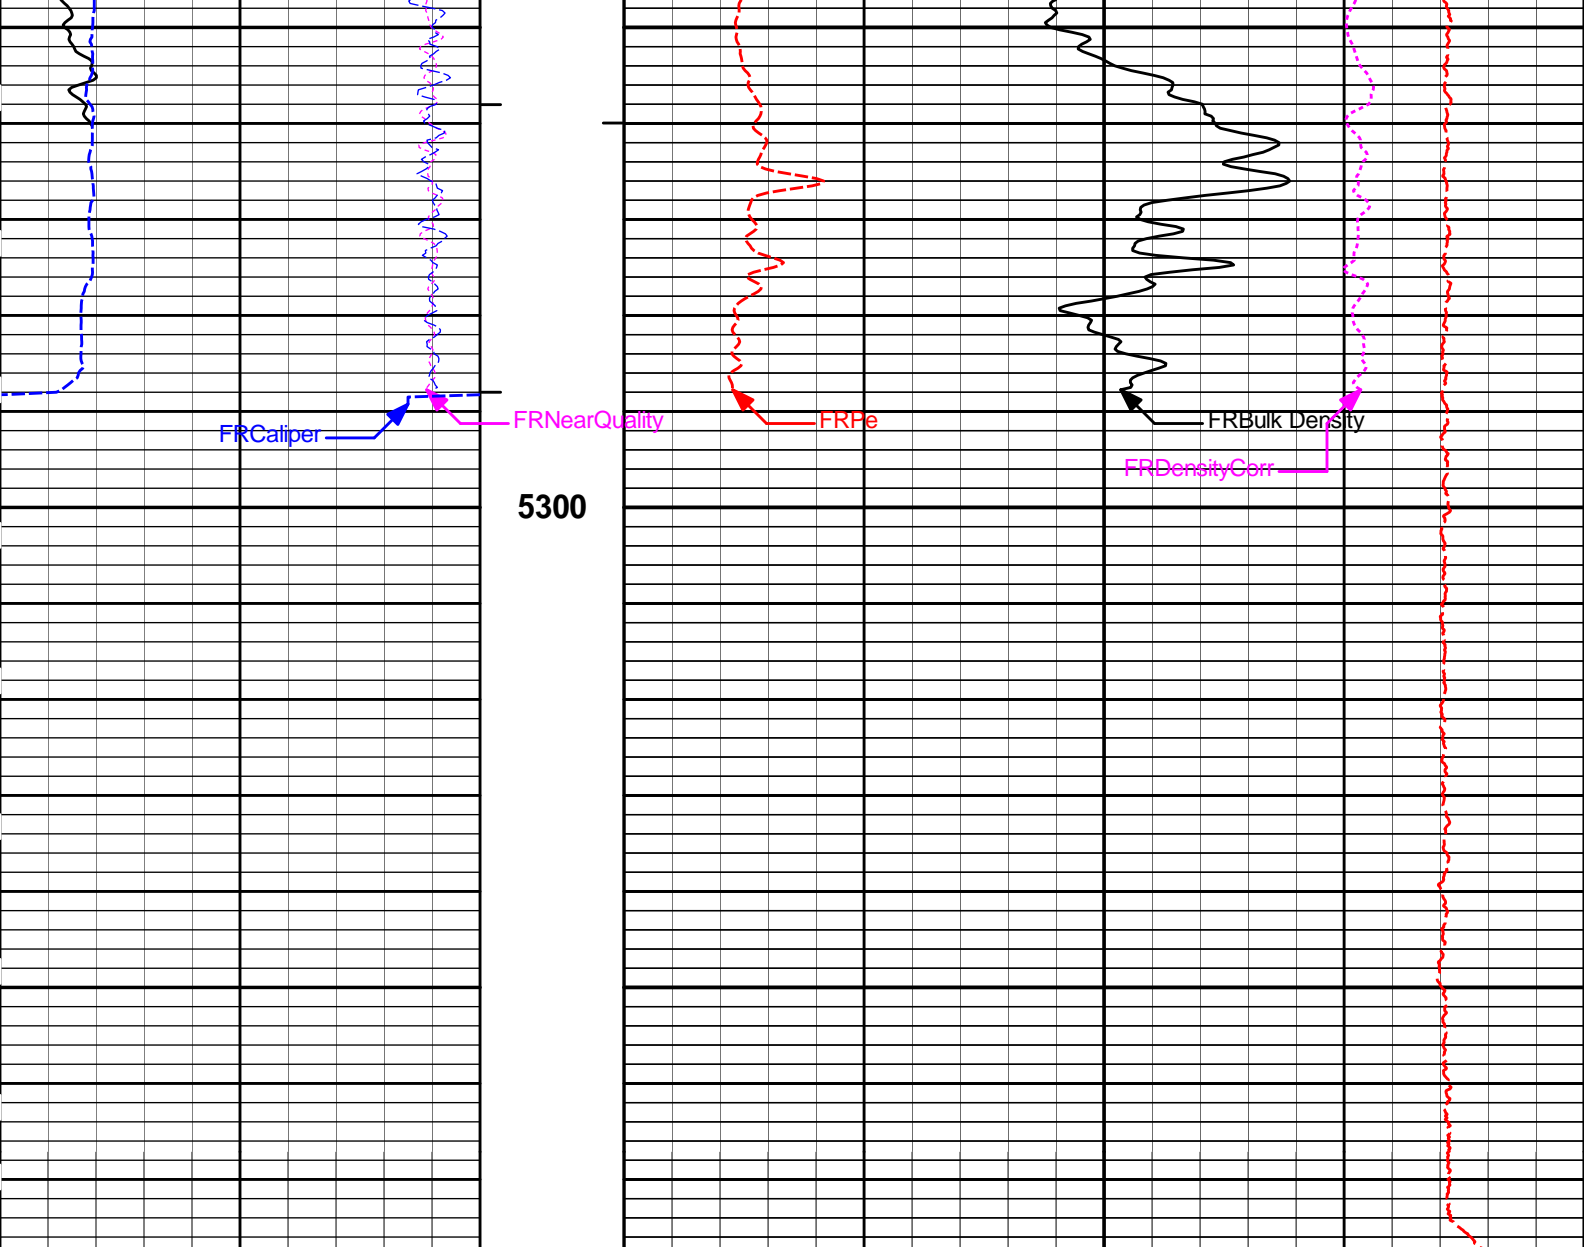

6	Caliper	16	MD	0	Pe	10	-0.25	DensityCorr	0.25
	inches		1 : 240					g/cc	
-18	NearQuality	2	AHV				15K	Tension	0
			ft3					pounds	
18	FarQuality	-2	BHV	2	Bulk Density				3
			ft3		g/cc				
0	Gamma Ray	150	Tension Pull						
	api		10						
SHALE			Tension Pull						

HALLIBURTON


Plot Time: 18-Apr-13 03:21:31
 Plot Range: 340 ft to 5377.25 ft
 Data: PAMELA_2330_1-3\Well Based\DAQ-0001-003\
 Plot File: \\LOCAL-IPAMELA_2330_1-3\0001 SP-GTET-DSN-SDL-XRMI-WSTT-ACRT-BMPORO\BULKD_5_MAIN_LIB


5 INCH MAIN LOG

HALLIBURTON

Plot Time: 18-Apr-13 03:21:31
 Plot Range: 5044 ft to 5378.58 ft
 Data: PAMELA_2330_1-3\Well Based\DAQ-0001-003\
 Plot File: \\LOCAL-IPAMELA_2330_1-3\0001 SP-GTET-DSN-SDL-XRMI-WSTT-ACRT-BMPORO\BULKD_5_MAIN_LIB

REPEAT SECTION

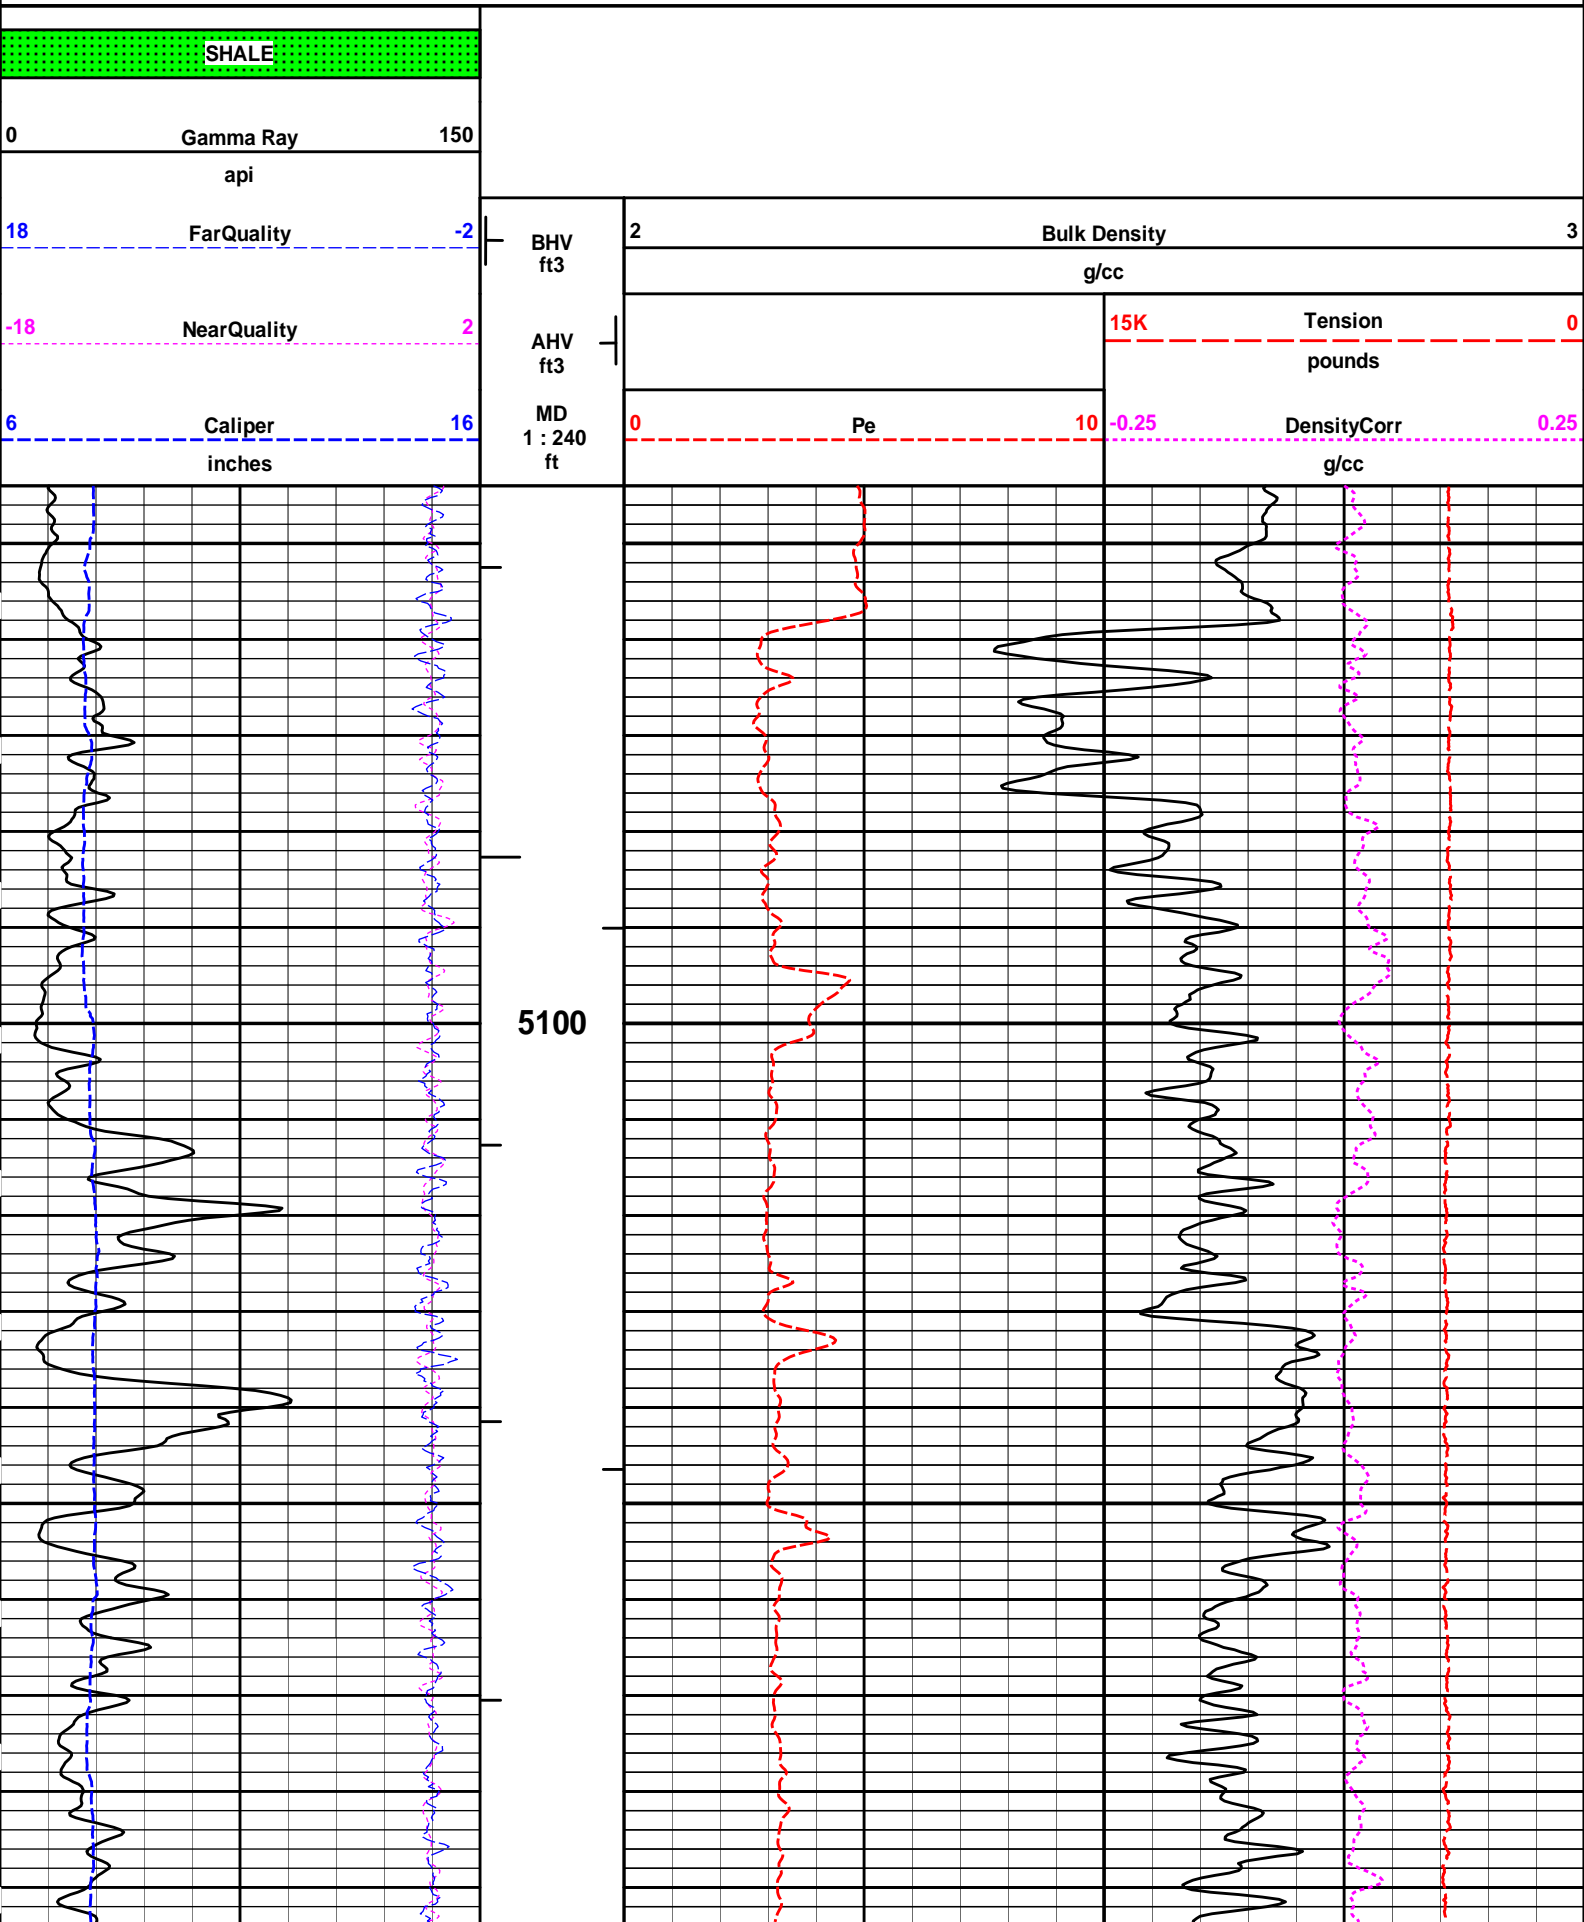

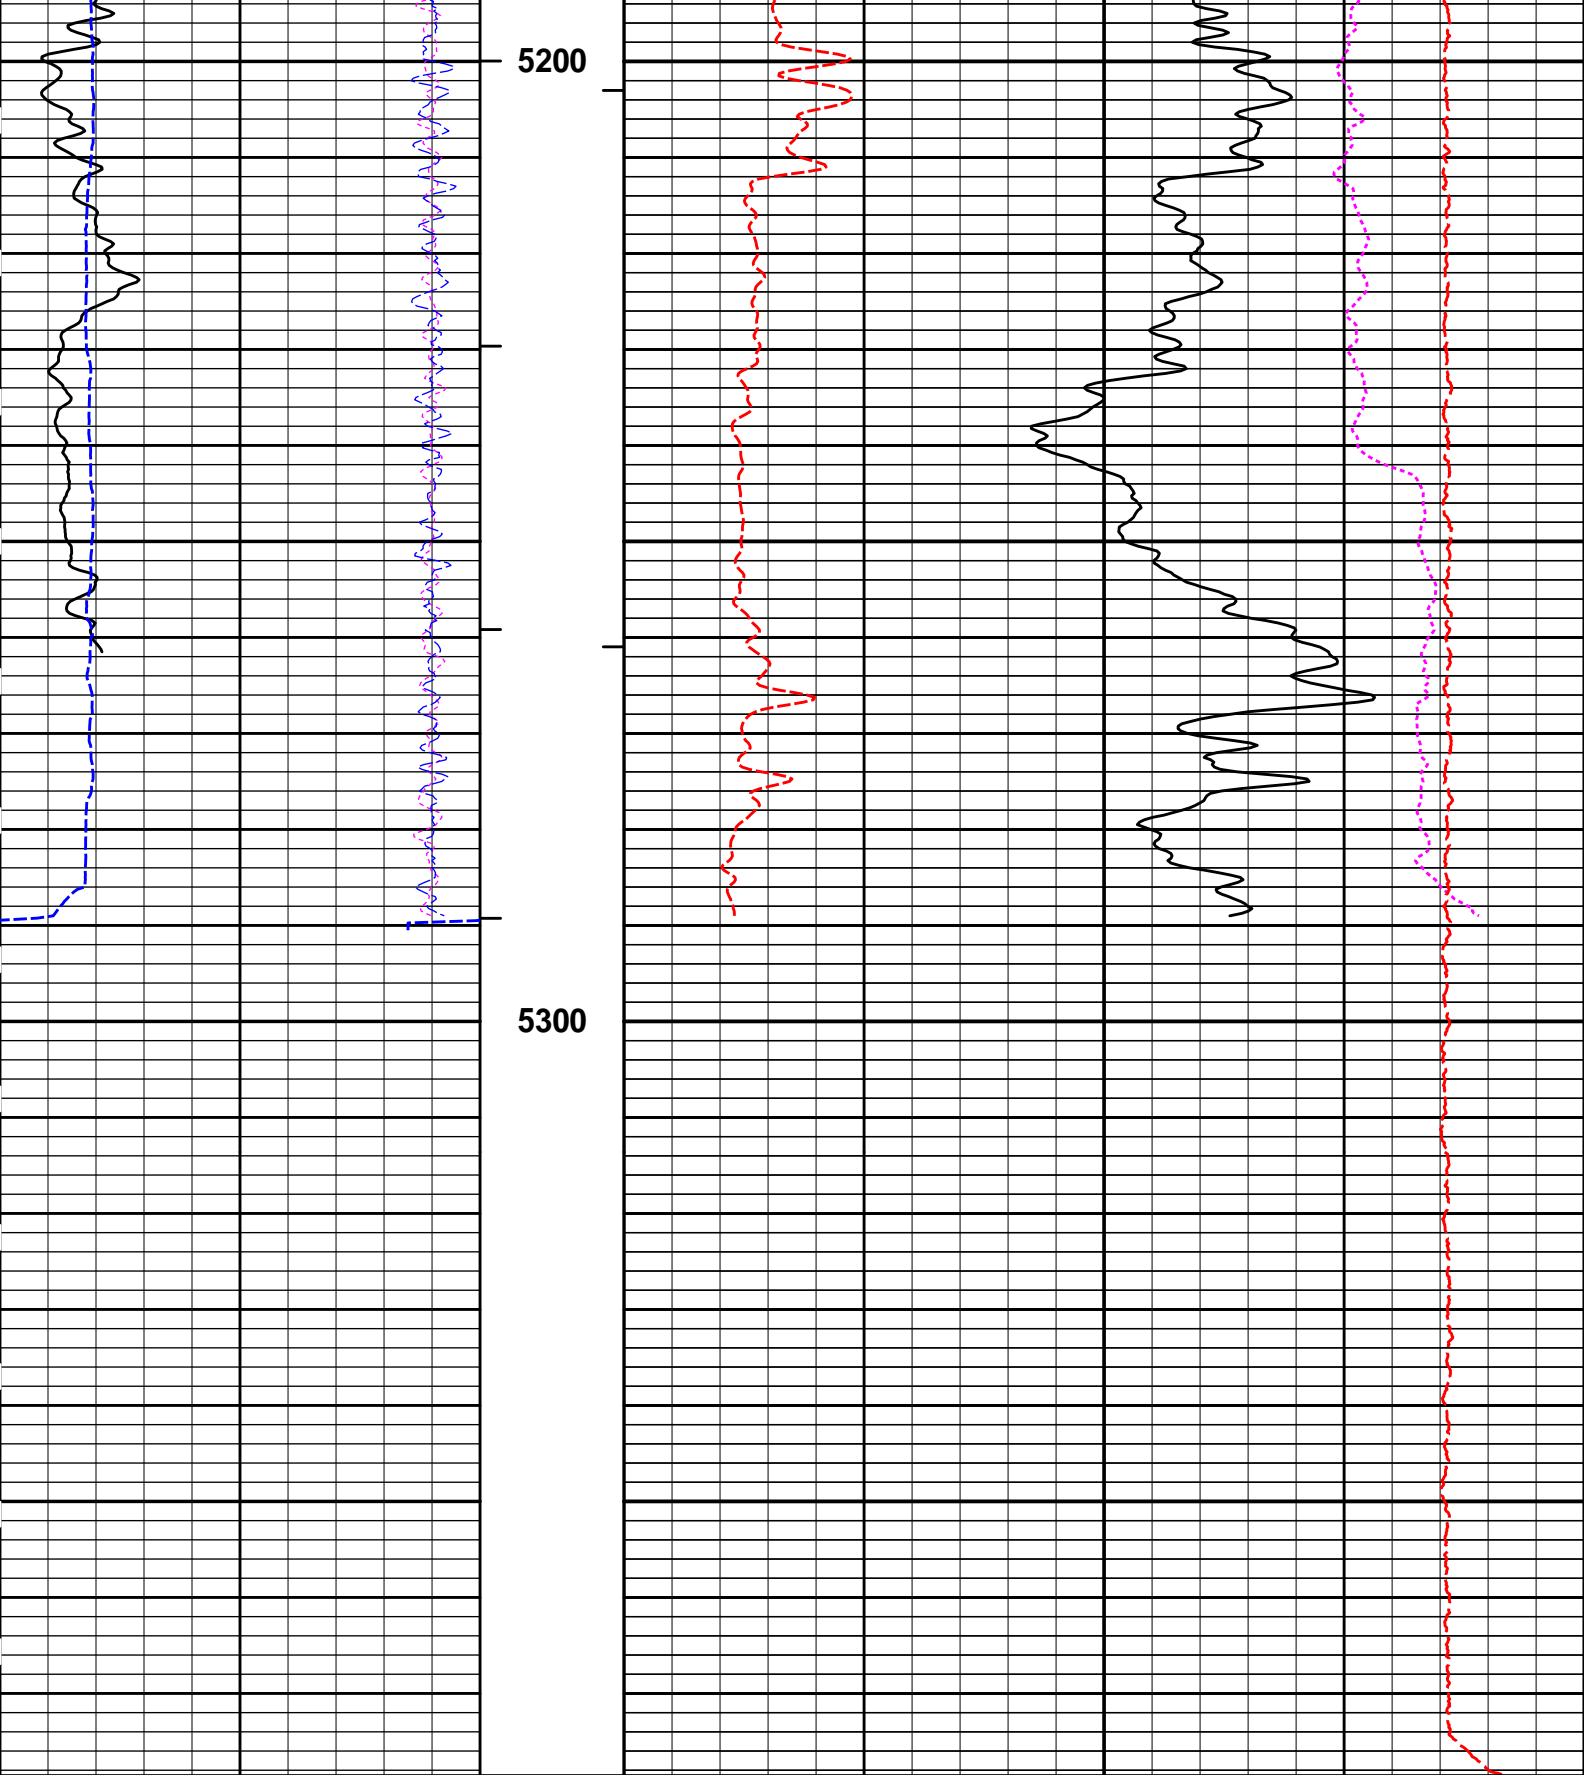

6	Caliper	16	MD	0	Pe	10	-0.25	DensityCorr	0.25
	inches		1 : 240					g/cc	
-18	NearQuality	2	AHV				15K	Tension	0
			ft3					pounds	
18	FarQuality	-2	BHV	2	Bulk Density				3
			ft3		g/cc				
0	Gamma Ray	150							

api

SHALE


HALLIBURTON


Plot Time: 18-Apr-13 03:21:33
Plot Range: 5044 ft to 5378.58 ft
Data: PAMELA_2330_1-3\Well Based\DAQ-0001-002\
Plot File: \\-LOCAL-PAMELA_2330_1-3\0001 SP-GTET-DSN-SDL-XRMI-WSTT-ACRT-BMPORO\BULKD_5_REP_LIB

REPEAT SECTION

HALLIBURTON

TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length	
Cable Head-00000021 30.00 lbs		Ø 3.625 in →			1.92 ft	127.88 ft	
SP Sub-11441455 60.00 lbs		Ø 3.625 in →		← SP @ 124.18 ft	3.74 ft	125.96 ft	
GTET-11039640 165.00 lbs		Ø 3.625 in →		← GammaRay @ 116.16 ft	8.52 ft	122.22 ft	
CSNG-10965402 114.00 lbs		Ø 3.625 in →		← CSNG @ 108.07 ft	8.17 ft	113.70 ft	
DSN Decentralizer-11005605 6.60 lbs		Ø 5.000 in* →					105.53 ft
	DSNT-11055304 174.00 lbs	Ø 3.625 in →		← DSN Far @ 98.60 ft ← DSN Near @ 97.85 ft	9.69 ft	95.85 ft	

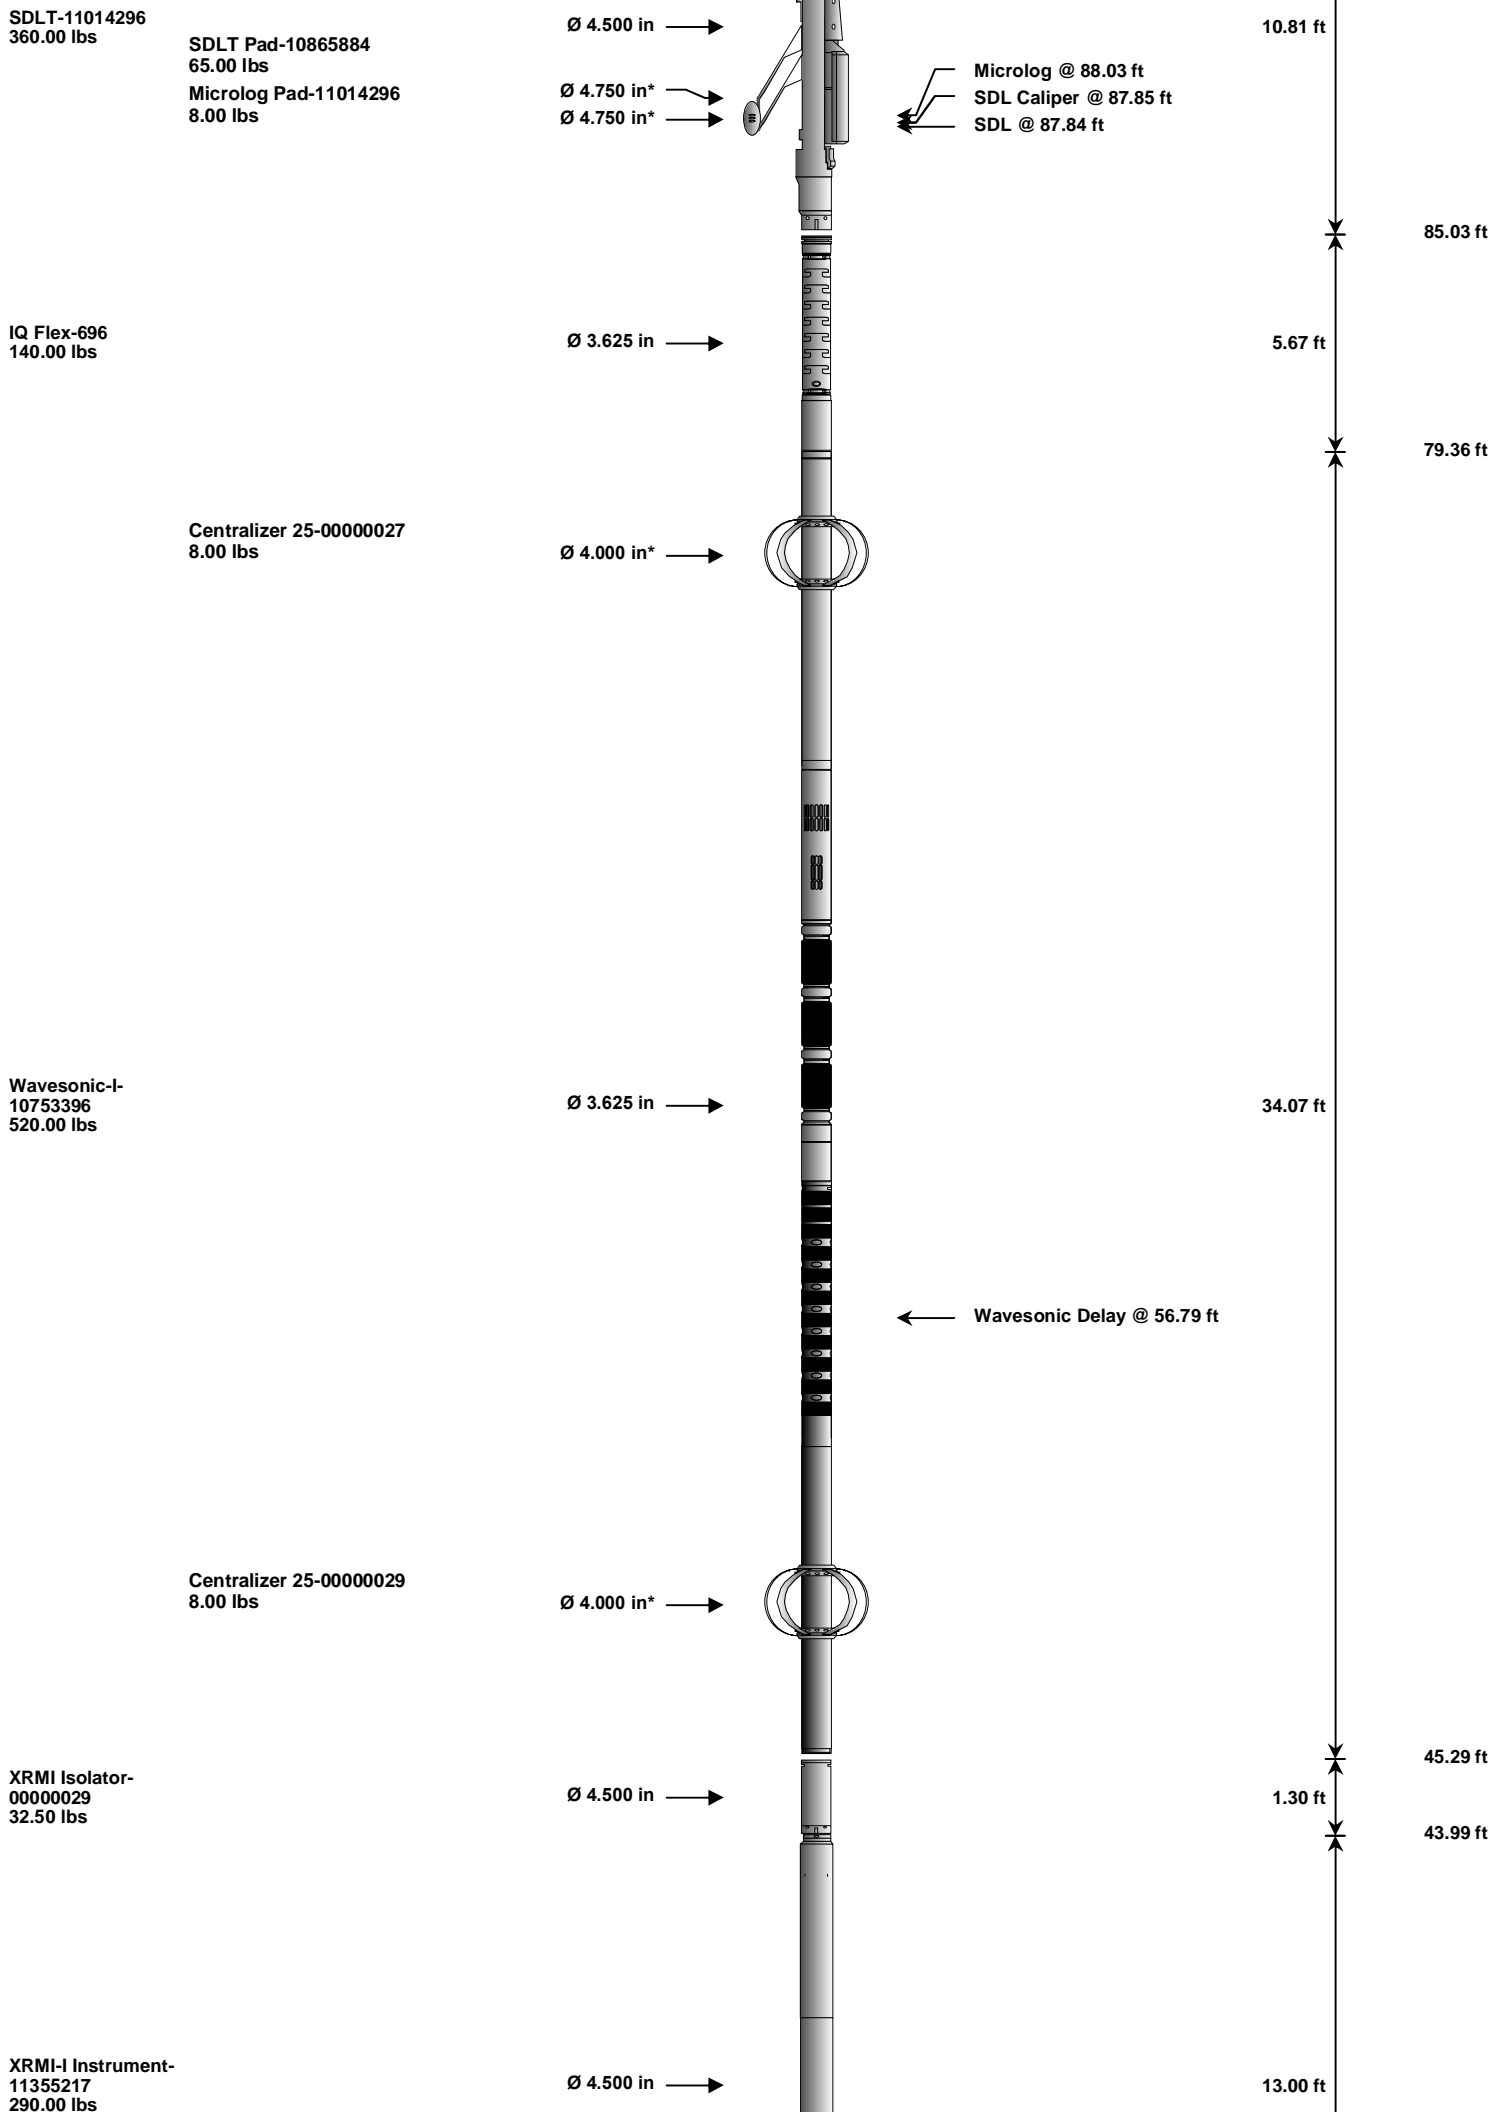

SDLT-11014296
360.00 lbs

SDLT Pad-10865884
65.00 lbs
Microlog Pad-11014296
8.00 lbs

Ø 4.500 in →

Ø 4.750 in* →
Ø 4.750 in* →

Microlog @ 88.03 ft
SDL Caliper @ 87.85 ft
SDL @ 87.84 ft

10.81 ft

85.03 ft

IQ Flex-696
140.00 lbs

Ø 3.625 in →

5.67 ft

79.36 ft

Centralizer 25-00000027
8.00 lbs

Ø 4.000 in* →

Wavesonic-I-
10753396
520.00 lbs

Ø 3.625 in →

34.07 ft

← Wavesonic Delay @ 56.79 ft

Centralizer 25-00000029
8.00 lbs

Ø 4.000 in* →

45.29 ft

XRMI Isolator-
00000029
32.50 lbs

Ø 4.500 in →


1.30 ft

43.99 ft

XRMI-I Instrument-
11355217
290.00 lbs

Ø 4.500 in →

13.00 ft

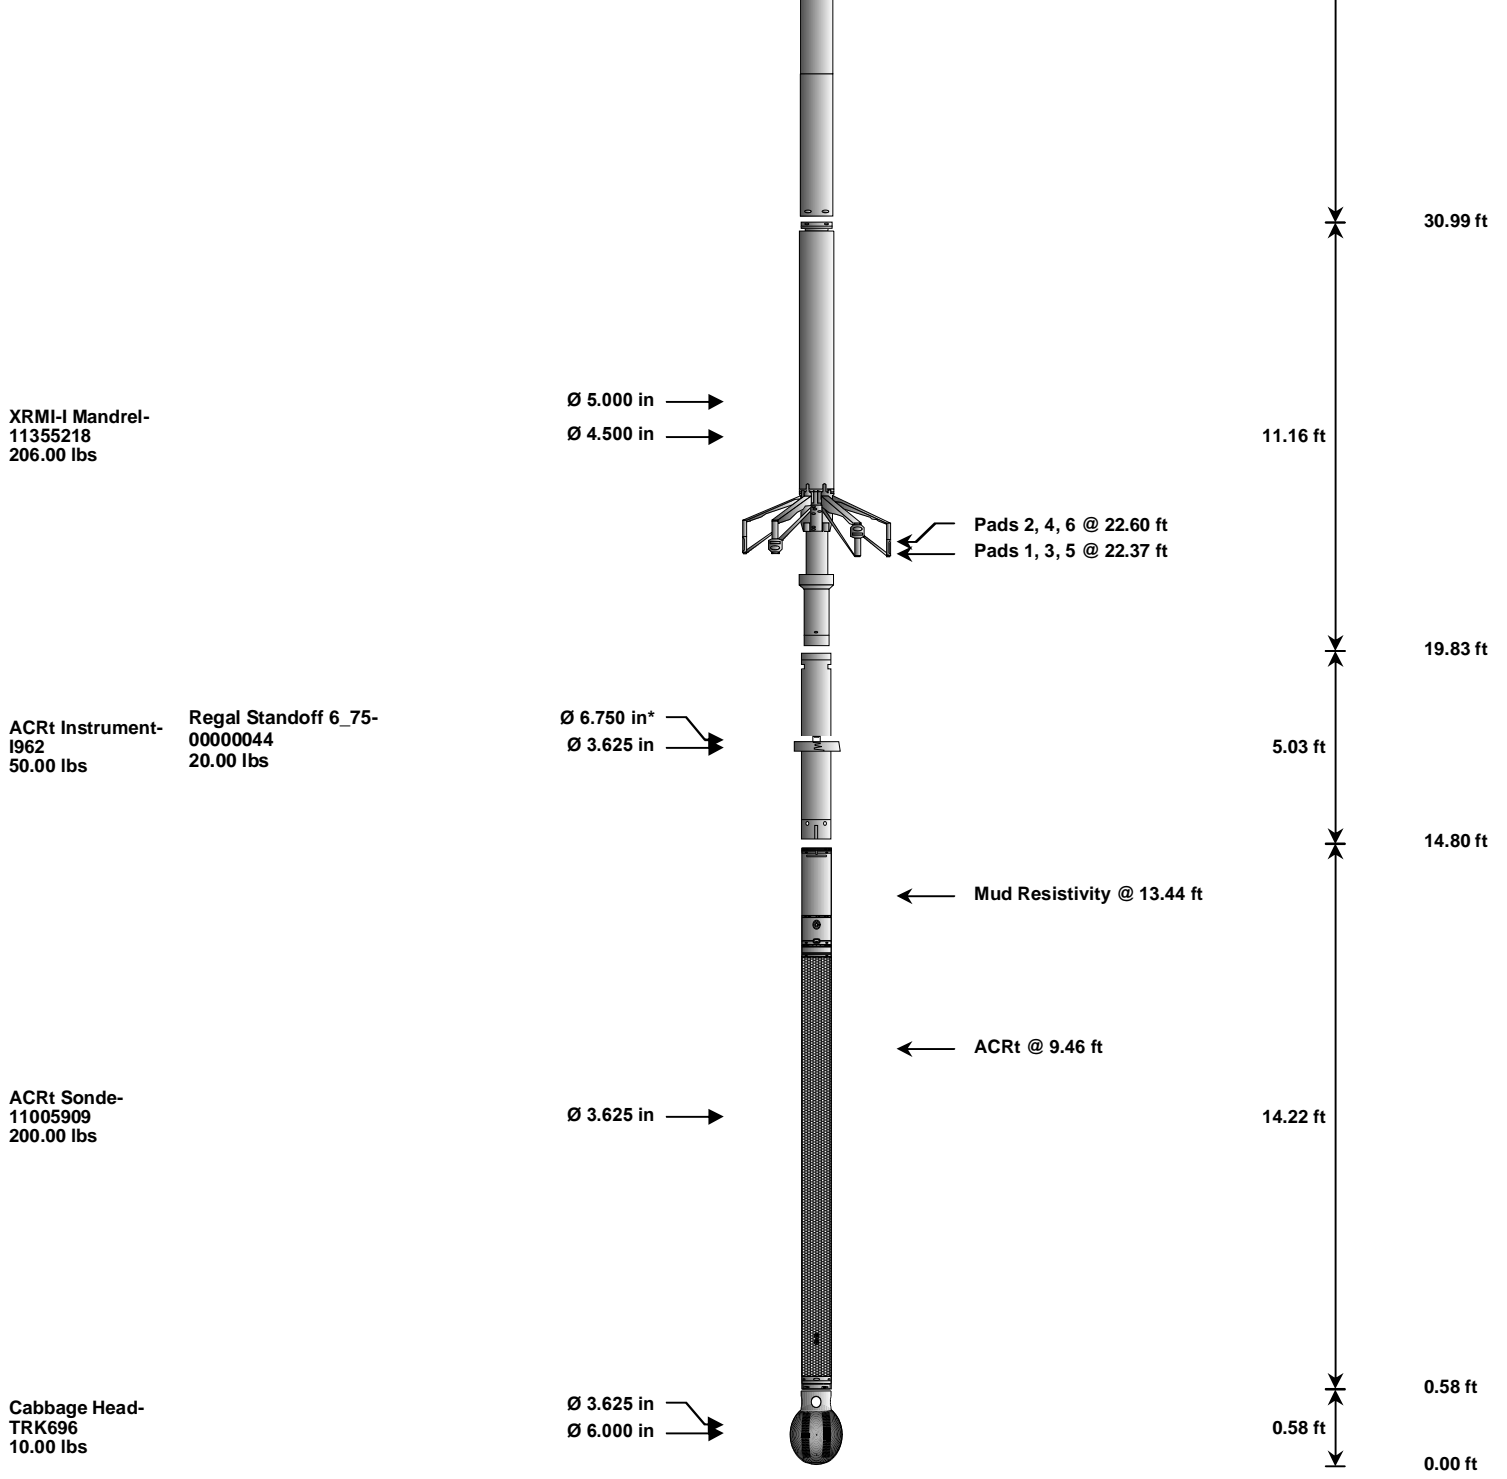

Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max. Log. Speed (fpm)
CH	Standard OH Cable Head	00000021	30.00	1.92	125.96	300.00
SP	SP Sub	11441455	60.00	3.74	122.22	300.00
GTET	Gamma Telemetry Tool	11039640	165.00	8.52	113.70	60.00
CSNG	Compensated Spectral Natural Gamma	10965402	114.00	8.17	105.53	15.00
DSNT	Dual Spaced Neutron	11055304	174.00	9.69	95.85	60.00
DCNT	DSN Decentralizer	11005605	6.60	5.13	* 99.18	300.00
SDLT	Spectral Density Tool	11014296	360.00	10.81	85.03	60.00
SDLP	Density Insite Pad	10865884	65.00	2.55	* 87.24	60.00
MICP	Microlog Pad	11014296	8.00	1.00	* 87.53	60.00
IQF	IQ Flex tool	696	140.00	5.67	79.36	300.00
WSTT	WaveSonic Insite	10753396	520.00	34.07	45.29	30.00
OBCEN	Centralizer - 25 in. Overbody	00000029	8.00	2.08	* 48.27	300.00
OBCEN	Centralizer - 25 in. Overbody	00000027	8.00	2.08	* 75.63	300.00
	Isolator for the XRMII tool	00000029	32.50	1.30	43.99	300.00
XRMI	XRMI Navigation - Insite	11355217	290.00	13.00	30.99	30.00
XRMI-I	XRMI Imager - Insite	11355218	206.00	11.16	19.83	30.00
ACRT	Array Compensated True Resistivity Instrument Section	I962	50.00	5.03	14.80	300.00

RSOF	Regal Standoff 6.75in	00000044	20.00	0.52 *	17.17	300.00
ACRt	Array Compensated True Resistivity Sonde Section	11005909	200.00	14.22	0.58	300.00
CBHD	Cabbage Head	TRK696	10.00	0.58	0.00	300.00

Total			2,467.10	127.88		
				* Not included in Total Length and Length Accumulation.		
Data: PAMELA_2330_1-3\0001 SP-GTET-DSN-SDL-XRMI-WSTT-ACRT-BNIDLE						Date: 17-Apr-13 19:44:24

HALLIBURTON

CALIBRATION REPORT

NATURAL GAMMA RAY TOOL SHOP CALIBRATION			
Tool Name:	GTET - 11039640	Reference Calibration Date:	13-Feb-13 13:51:32
Engineer:	J. BOLLLOM	Calibration Date:	09-Apr-13 14:30:02
Software Version:	WL INSITE R3.8.4 (Build 5)	Calibration Version:	1

Calibrator Source S/N: TB146
 Calibrator API Reference: 265.00 api
 Equivalent Calibrator API Reference: 269.6 api

Measurement	Measured	Calibrated	Units
Background	60.1	60.0	api
Background + Calibrator	330.0	329.7	api
Calibrator	269.9	269.6	api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION			
Tool Name:	GTET - 11039640	Reference Calibration Date:	09-Apr-13 14:30:02
Engineer:	THOMAS HYDE	Calibration Date:	17-Apr-13 19:58:13
Software Version:	WL INSITE R3.8.4 (Build 5)	Calibration Version:	1

Calibrator Source S/N: TB146
 Calibrator API Reference: 265.00 api
 Equivalent Calibrator API Reference: 269.6 api

Field Verification	Shop	Field	Units
Background	60.0	55.0	api
Background + Calibrator	329.7	332.6	api
Calibrator	269.6	277.6	api

Shop	Field	Difference	Tolerance
269.6	277.6	-8.0	+/- 9.00

DUAL SPACED NEUTRON SHOP CALIBRATION			
Tool Name:	DSNT - 11055304	Reference Calibration Date:	09-Apr-13 14:04:47
Engineer:	J. BOLLLOM	Calibration Date:	09-Apr-13 14:20:14
Software Version:	WL INSITE R3.8.4 (Build 5)	Calibration Version:	1

Logging Source S/N: 696
 Tank Serial Number: LIBERAL_NEUTRON
 Reference value assigned to Tank: 51.680
 Snow Block S/N: 696
 Calibration Tank Water Temperature: 60 degF
 Min. Tool Housing Outside Diameter: 3.620 in

CALIBRATION CONSTANTS

Control Limit On New

Measurement	Prev. Value	New Value	Control Limit On New Value
Gain:	0.980	0.982	0.900 - 1.100

WATER TANK SUMMARY (Horizontal Water Tank)				
Measurement	Current Reading (Previous Coef.)	Calibrated (New Coef.)	Change	Control Limit On Change
Porosity (decp):	0.2102	0.2106	0.0004	+/- 0.0020
Calibrated Ratio:	9.70	9.72	0.015	+/- 0.050

VERIFIER		
Measurement	Value	Control Limit
Snow-Block Porosity (decp):	0.0658	0.02000 - 0.09000

PASS/FAIL SUMMARY	
Background Check:	Passed
Gain-Range Check:	Passed
Snow-Block Check:	Passed

DUAL SPACED NEUTRON FIELD CALIBRATION			
Tool Name:	DSNT - 11055304	Reference Calibration Date:	09-Apr-13 14:20:14
Engineer:	THOMAS HYDE	Calibration Date:	17-Apr-13 19:54:44
Software Version:	WL INSITE R3.8.4 (Build 5)	Calibration Version:	1

Logging Source S/N: 696
Snow Block S/N: 696

NEUTRON FIELD-CHECK SUMMARY				
	Shop	Field	Difference	Control Limit On Change
Snow-Block Porosity (decp):	0.0658	0.0659	0.0001	+/- 0.0150

PASS/FAIL SUMMARY	
Block Change Check:	Passed
Snow Block Stat Check:	Passed
Temperature Check:	Passed

DENSITY CALIPER SHOP CALIBRATION			
Tool Name:	SDLT - 11014296	Reference Calibration Date:	16-Apr-13 08:24:55
Engineer:	THOMAS HYDE	Calibration Date:	16-Apr-13 08:29:16
Software Version:	WL INSITE R3.8.4 (Build 5)	Calibration Version:	1
Host Tool Name:	DSNT - 11055304		

CALIBRATION COEFFICIENTS			
Measurement	Previous Value	New Value	Control Limit On New Value
Pad Offset	-4332.28	-4390.41	-7000.00 - -1000.00
Pad Gain	0.0003885	0.0003927	0.000200 - 0.000600
Arm Offset	-2610.24	-2117.94	-5000.00 - 3000.00
Arm Gain	0.0004950	0.0004920	0.000300 - 0.000700
Arm Power	-0.000002982	-0.000003440	-0.000010000 - 0.000010000

The ring diameter is computed from: $DIAMETER = PAD\ EXTENSION + ARM\ EXTENSION + TOOL\ DIAMETER$
Tool Diameter: 4.50 in

CALIBRATION RINGS				
Measurement	Current Reading (Previous Coeff.)	Calibrated (New Coeff.)	Change	Control Limit On New Value

PAD EXTENSION:

Small Ring (in)	2.00	2.00	0.00	+/- 0.20
Medium Ring (in)	3.73	3.75	0.02	+/- 0.20

RING DIAMETER:

Small Ring (in)	6.31	6.50	0.19	+/- 0.20
Medium Ring (in)	8.08	8.25	0.17	+/- 0.20
Large Ring (in)	15.00	15.00	0.00	+/- 0.20

PASS/FAIL SUMMARY

Calibration-Coefficients Range Check:	Passed
Ring-Measurement Check:	Passed

PASS/FAIL SUMMARY

Calibration-Coefficients Range Check:	Passed
---------------------------------------	--------

SDLT CALIPER FIELD CALIBRATIONTool Name: **SDLT - 11014296**Reference Calibration Date: **16-Apr-13 08:29:16**Engineer: **THOMAS HYDE**Calibration Date: **17-Apr-13 19:52:30**Software Version: **WL INSITE R3.8.4 (Build 5)**Calibration Version: **1****MEASURED CALIPER VALUES**

Measurement	Shop	Field	Change	Control Limit On New Value
Pad Extension	3.75	3.77	0.02	+/- 0.10
Ring Diameter	8.25	8.14	-0.11	+/- 0.15

PASS/FAIL SUMMARY

Pad Extension Check:	Passed
Diameter Check:	Passed

SPECTRAL DENSITY SHOP CALIBRATIONTool Name: **SDLT Pad - 10865884**Reference Calibration Date: **13-Feb-13 10:47:49**Engineer: **J. BOLLUM**Calibration Date: **09-Apr-13 11:34:03**Software Version: **WL INSITE R3.8.4 (Build 5)**Calibration Version: **1**

Logging Source S/N: 5168GW

Aluminum Block S/N: LIBERAL

Density: 2.598g/cc

Pe: 3.170

Magnesium Block S/N: LIBERAL

Density: 1.684g/cc

Pe: 2.598

DENSITY CALIBRATION SUMMARY

Measurement	Previous Value	New Value	Control Limit
Near Bar Gain	1.0409	1.0458	0.90 - 1.10
Near Dens Gain	1.0144	1.0099	0.90 - 1.10
Near Peak Gain	1.0045	1.0073	0.90 - 1.10
Near Lith Gain	0.9897	0.9733	0.90 - 1.10
Far Bar Gain	1.0119	1.0117	0.90 - 1.10
Far Dens Gain	1.0002	1.0020	0.90 - 1.10
Far Peak Gain	0.9961	0.9931	0.90 - 1.10
Far Lith Gain	0.9709	0.9700	0.90 - 1.10

Near Bar Offset	-0.1754	-0.2172	NONE
Near Dens Offset	0.0332	0.0802	NONE
Near Peak Offset	0.0950	0.0793	NONE
Near Lith Offset	0.1786	0.3210	NONE
Far Bar Offset	0.0343	0.0401	NONE
Far Dens Offset	0.1120	0.0981	NONE

Far Dens Offset	0.1130	0.0981	NONE
Far Peak Offset	0.1196	0.1441	NONE
Far Lith Offset	0.2809	0.2803	NONE
<hr/>			
Near Bar Background	829.24	829.86	700 - 1450
Near Dens Background	275.13	274.06	230 - 480
Near Peak Background	119.99	120.83	100 - 210
Near Lith Background	146.82	147.93	125 - 260
Far Bar Background	513.05	510.54	450 - 900
Far Dens Background	200.66	200.45	175 - 345
Far Peak Background	79.48	78.57	70 - 140
Far Lith Background	82.22	81.79	75 - 145

CALIBRATION BLOCK SUMMARY				
Measurement	Current Reading (Previous Coef)	Calibrated (New Coef)	Change	Control Limit On Change
MAGNESIUM				
Density (g/cc)	1.679	1.684	0.005	+/- 0.015
Pe	2.559	2.555	-0.004	+/- 0.150
ALUMINUM				
Density (g/cc)	2.593	2.598	0.005	+/- 0.01500
Pe	3.149	3.124	-0.025	+/- 0.150

TOOL SUMMARY				
Measurement	Near Detector		Far Detector	
	Value	Control Limits	Value	Control Limits
QUALITY				
Background	-0.0001	+/- 0.0110	-0.0004	+/- 0.0140
Magnesium Block	-0.0004	+/- 0.0110	-0.0001	+/- 0.0140
Aluminum Block	0.0008	+/- 0.0110	0.0000	+/- 0.0140
Resolution	9.08	6.00 - 11.50	8.87	6.00 - 11.50
Internal Verifier(B+D+P+L)	1373	1200 - 2700	871	800 - 1700

PASS/FAIL SUMMARY	
Background Quality Check:	Passed
Background Range Check:	Passed
Background Resolution Check:	Passed
Background Verification Check:	Passed
Magnesium Quality Check:	Passed
Aluminum Quality Check:	Passed
Gains Check:	Passed
Changes in Calibration Blocks:	Passed

SPECTRAL DENSITY FIELD CHECK			
Tool Name:	SDLT Pad - 10865884	Reference Calibration Date:	09-Apr-13 11:34:03
Engineer:	THOMAS HYDE	Calibration Date:	17-Apr-13 03:50:13
Software Version:	WL INSITE R3.8.4 (Build 5)	Calibration Version:	1

Pad Temperature: 68.2 degF

DENSITY FIELD CALIBRATION SUMMARY				
Measurement	Shop	Field	Change	Control Limit +/-
Near (B+D+P+L) cps	1372.694	1376.232	3.538	14.972
Far (B+D+P+L)	274.050	272.707	-1.343	10.100

Far (B+D+P+L) cps	871.352	873.707	2.355	16.132
Near Resolution	9.08	9.12	0.040	0.50
Far Resolution	8.87	9.09	0.220	1.00

PASS/FAIL SUMMARY

Bkg Quality Check:	Passed
Bkg Resolution Check:	Passed
Bkg Verification Check:	Passed

CALIBRATION SUMMARY

Sensor	Shop	Field	Post	Difference	Tolerance	Units
GTET-11039640						
Gamma Ray Calibrator	269.6	277.6	-----	-8.0	+/- 9.00	api
DSNT-11055304						
Snow-Block Porosity	0.0658	0.0659	-----	-0.0001	+/- 0.0150	decg
SDLT-11014296						
Pad Extension	3.75	3.77	-----	-0.02	+/-0.10	in
Ring Diameter	8.25	8.14	-----	0.11	+/-0.15	in
SDLT Pad-10865884						
Near(B+D+P+L)	1372.694	1376.232	-----	-3.538	+/-14.972	cps
Far(B+D+P+L)	871.352	873.707	-----	-2.355	+/-16.132	cps

Data: PAMELA 2330 1-3\0001 SP-GTET-DSN-SDI-XRMI-WSIT-ACRT-BNIDLE Date: 17-Apr-13 20:28:42



PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.100	ppg
	SHARED	WAGT	Weighting Agent	Natural	
	SHARED	BSAL	Borehole salinity	0.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	2.000	ohmm
	SHARED	TRM	Temperature of Mud	75.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in
	SHARED	ST	Surface Temperature	75.0	degF
	SHARED	TD	Total Well Depth	5420.00	ft
	SHARED	BHT	Bottom Hole Temperature	200.0	degF
	SHARED	SVTM	Navigation and Survey Master Tool	XRMI-I Instrument	
	SHARED	AZTM	High Res Z Accelerometer Master Tool	XRMI-I Instrument	
	SHARED	TEMM	Temperature Master Tool	NONE	
	SHARED	BHSM	Borehole Size Master Tool	NONE	
	Rwa / CrossPlot	XPOK	Process Crossplot?	Yes	
	Rwa / CrossPlot	FCHO	Select Source of F	Automatic	
	Rwa / CrossPlot	AFAC	Archie A factor	0.6200	
	Rwa / CrossPlot	MFAC	Archie M factor	2.1500	

CrossPlot	Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
	Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF
	Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
	Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
	GTET	GROK	Process Gamma Ray?	Yes	
	GTET	GRSO	Gamma Tool Standoff	0.000	in
	GTET	GEOK	Process Gamma Ray EVR?	No	
	GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
	CSNG	CGOK	Process CSNG Data?	Yes	
	CSNG	CENT	Is Tool Centralized?	No	
	CSNG	GBOK	Gamma Enviromental Corrections?	Yes	
	CSNG	BARF	Barite Correction Factor	1.00	
	CSNG	ORDG	Use Fixed Gain	No	
	CSNG	ORDO	Use Fixed Offset	No	
	CSNG	ORDR	Use Fixed Resolution Degradation Factor	No	
	DSNT	DNOK	Process DSN?	Yes	
	DSNT	DEOK	Process DSN EVR?	No	
	DSNT	NLIT	Neutron Lithology	Limestone	
	DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
	DSNT	DNTP	Temperature Correction Type	None	
	DSNT	DPRS	DSN Pressure Correction Type	None	
	DSNT	SHCO	View More Correction Options	No	
	DSNT	UTVD	Use TVD for Gradient Corrections?	No	
	DSNT	LHWT	Logging Horizontal Water Tank?	No	
	SDLT	CLOK	Process Caliper Outputs?	Yes	
	Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
	SDLT Pad	DNOK	Process Density?	Yes	
	SDLT Pad	DNOK	Process Density EVR?	No	
	SDLT Pad	CB	Logging Calibration Blocks?	No	
	SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
	SDLT Pad	DTWN	Disable temperature warning	No	
	SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
	SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
	Wavesonic-I	WSOK	Process WSTT?	Yes	
	Wavesonic-I	AFIL	Adaptive Filtering?	No	
	Wavesonic-I	PINT	Process 1 Sample and Skip	0	
	Wavesonic-I	PROM	Process Mode: M=1,MX=2,MY=3,MXY=4	4	
	Wavesonic-I	DTSH	Delta -T Shale	100.00	uspf
	Wavesonic-I	DTMT	Delta -T Matrix Type	User define	
	Wavesonic-I	DTMA	Delta -T Matrix	47.60	uspf
	Wavesonic-I	DTFL	Delta -T Fluid	189.00	uspf
	Wavesonic-I	RHOM	Matrix Density	2.7100	g/cc
	Wavesonic-I	RHOF	Fluid Density	1.0000	g/cc
	Wavesonic-I	SMTH	Semblance Threshold	0.25	
	Wavesonic-I	VPVS	VPVS Ratio for Porosity	1.40	
	Wavesonic-I	APEQ	Acoustic Porosity Equation	Wylie	
	Wavesonic-I	NAVS	Navigation Source Tool	XRMI-I Instrument	
	XRMI-I Instrument	WRTI	Survey Writing Interval	30	ft
	XRMI-I Instrument	SOPT	Smoothing Option	None	
	XRMI-I Mandrel	DIMG	Process XRMI?	No	
	XRMI-I Mandrel	DIPE	Process Dipmeter Calculations?	Yes	
	XRMI-I Mandrel	BHCS	Process Borehole Corrections?	Yes	

XRMI-I Mandrel	BHCS	Process Borehole Corrections?	Yes	
XRMI-I Mandrel	CLOK	Process Caliper Outputs?	Yes	
XRMI-I Mandrel	CMAX	Caliper Maximum Limit	100.0	in
XRMI-I Mandrel	CMIN	Caliper Mimimum Limit	3.5	in
XRMI-I Mandrel	NAVS	Navigation Source Tool	XRMI-I Instrument	
XRMI-I Mandrel	BHVC	Radius type for borehole volume calcuations	Elliptical	
ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Upr	
ACRt Sonde	TPOS	Tool Position	Free Hanging	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMIN	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	
ACRt Sonde	MRFX	Fixed mud resistivity	2000	ohmm

BOTTOM

Data: PAMELA_2330_1-3\0001 SP-GTET-DSN-SDL-XRMI-WSTT-ACRT-BNIDLE

Date: 17-Apr-13 20:28:55

HALLIBURTON

INPUTS, DELAYS AND FILTERS TABLE

Mnemonic	Input Description	Delay (ft)	Filter Type	Filter Length (ft)
Depth Panel				
TENS	Tension	0.00	NO	
SP Sub				
PLTC	Plot Control Mask	124.18	NO	
SP	Spontaneous Potential	124.18	BLK	1.250
SPR	Raw Spontaneous Potential	124.18	NO	
SPO	Spontaneous Potential Offset	124.18	NO	
GTET				
TPUL	Tension Pull	116.16	NO	
GR	Natural Gamma Ray API	116.16	TRI	1.750
GRU	Unfiltered Natural Gamma Ray API	116.16	NO	
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution	116.16	W	1.416 , 0.750
ACCZ	Accelerometer Z	0.00	BLK	0.083
DEVI	Inclination	0.00	NO	
CSNG				
TPUL	Tension Pull	108.07	NO	
STAT	Status	108.07	NO	
FRMC	Tool Frame Count	108.07	BLK	0.250
TFRM	Total Frames	108.07	NO	
LSPD	Line Speed	108.07	BLK	0.250
CTIM	Accumulation time for sample	108.07	BLK	0.250
NOIS	Spectral Noise	108.07	BLK	0.250
STAB	Stabilizer Voltage in mv	108.07	BLK	0.250
STBP	Stabilizer 60 KEV Peak	108.07	BLK	0.250
AMER	Americium	108.07	BLK	0.250
FTMP	Flask PCB Temperature	108.07	BLK	0.250
SPEL	Low Energy Spectrum	108.07	BLK	0.250
SPEH	High Energy Spectrum	108.07	BLK	0.250

SSP	Stabilization Energy Spectrum	108.07	BLK	0.250
CSPC	CSNG Lo Hi Spectrum Data	108.07	NO	
DSNT				
TPUL	Tension Pull	97.75	NO	
RNDS	Near Detector Telemetry Counts	97.85	BLK	1.417
RFDS	Far Detector Telemetry Counts	98.60	TRI	0.583
DNTT	DSN Tool Temperature	97.85	NO	
DSNS	DSN Tool Status	97.75	NO	
ERND	Near Detector Telemetry Counts EVR	97.85	BLK	0.000
ERFD	Far Detector Telemetry Counts EVR	98.60	BLK	0.000
ENTM	DSN Tool Temperature EVR	97.85	NO	
SDLT				
TPUL	Tension Pull	87.85	NO	
PCAL	Pad Caliper	87.85	TRI	0.250
ACAL	Arm Caliper	87.85	TRI	0.250
Wavesonic-I				
TPUL	Tension Pull	56.79	NO	
DPSX	Dipole Source X StructureI	45.29	NO	
DPSY	Dipole Source Y StructureI	45.29	NO	
DPSM	Monopole Source Structure	45.29	NO	
WVST	Wavesonic Compressed Data	56.79	NO	
TPUL	Tension Pull	56.79	NO	
XMS1	Wave Sonic Status Word 1	45.29	NO	
XMS2	Wave Sonic Status Word 2	45.29	NO	
XMS1	Wave Sonic XMITStatus Word 1	45.29	NO	
XMS1	Wave Sonic XMITStatus Word 2	45.29	NO	
F1HA	Dipole 1 HV After	45.29	NO	
F1HB	Dipole 1 HV Before	45.29	NO	
F2HA	Dipole 2 HV After	45.29	NO	
F2HB	Dipole 2 HV Before	45.29	NO	
F3HA	Monopole HV After	45.29	NO	
F3HB	Monopole HV Before	45.29	NO	
INVT	Input Voltage	45.29	NO	
5VOL	5 Volts	45.29	NO	
MI5A	Minus 5 Volts Analog	45.29	NO	
ITMP	Instrument Temperature	45.29	NO	
PL5A	Plus 5 Volts Analog	45.29	NO	
5VD	Plus 5 Volts Digital	45.29	NO	
TCUR	Tool Current	45.29	NO	
SUPV	Supply Voltage	45.29	NO	
PRVT	Preregulated voltage	45.29	NO	
PRVT	Pre-regulated voltage Xmter	45.29	NO	
TEMP	Temperature	45.29	NO	
ACQN	Acquisition Number	45.29	NO	
XDP	Delay Reference	56.79	NO	
MITM	MIT Mode	56.79	NO	
VERS	Version	45.29	NO	
D1CT	Dipole 1 Compressed Word Count	56.79	NO	
D2CT	Dipole 2 Compressed Word Count	56.79	NO	
MCNT	Monopole Compressed Word Count	56.79	NO	
SEQN	Sequence Number	45.29	NO	
FREV	Firmware Revision	45.29	NO	
MSMP	Monopole Sample Rate	45.29	NO	

MSM	Monopole Sample Rate	45.29	NO
MSMP	Dipole Sample Rate	45.29	NO
MFWF	Monopole Firing Waveform	45.29	NO
MFRQ	Monopole Frequency	45.29	NO
MDLY	Monopole Delay	45.29	NO
DXWF	Dipole X Firing Waveform	45.29	NO
XFRQ	Dipole X Frequency	45.29	NO
XDLY	Dipole X Delay	45.29	NO
DYWF	Dipole Y Firing Waveform	45.29	NO
YFRQ	Dipole Y Frequency	45.29	NO
YDLY	Dipole Y Delay	45.29	NO
DPSX	Dipole Source X Structure	45.29	NO
DPSY	Dipole Source Y Structure	45.29	NO
DPSM	Monopole Source Structure	45.29	NO
WVST	Wavesonic Compressed Data	56.79	NO
AUTM	Auto Mode	45.29	NO
SONM	tool mode for sonic - 0 for normal or 3 for calibration	45.29	NO
MSL	Monopole Lower Travel Time	56.79	NO
MSH	Monopole Upper Travel Time	56.79	NO
MLFC	Monopole-1 Lower Filter Bandpass Frequency Cut-off	45.29	NO
MUFC	Monopole-1 Upper Filter Bandpass Frequency Cut-off	45.29	NO
DLTT	Dipole Lower Travel Time	45.29	NO
DUTT	Dipole Upper Travel Time	45.29	NO
DLFC	Dipole Lower Filter Bandpass Frequency Cut-off	45.29	NO
DUFC	Dipole Upper Filter Bandpass Frequency Cut-off	45.29	NO
MUTE	WaveSonic Mute/Enable Channels and Sides map	45.29	NO
MUTS	Mute/Enable Sides	45.29	NO
WSRB	Relative Bearing	56.79	NO
WSAZ	WSX Azimuth Pad 1	56.79	NO
TPUL	Tension Pull	56.79	NO
WMP	Summed array of Monopole for SIDES - A,B,C,D	56.79	NO
WXX	Dipole X for SIDES - A-C	56.79	NO
WYY	Dipole Y for SIDES - B-D	56.79	NO
WXY	Dipole X for SIDES - B-D	56.79	NO
WYX	Dipole Y for SIDES - A-C	56.79	NO
TPUL	Tension Pull	56.79	NO
WMA	Monopole Waveform Side A - Channel 1 to Channel 8 Receivers	56.79	NO
WMB	Monopole Waveform Side B - Channel 1 to Channel 8 Receivers	56.79	NO
WMC	Monopole Waveform Side C - Channel 1 to Channel 8 Receivers	56.79	NO
WMD	Monopole Waveform Side D - Channel 1 to Channel 8 Receivers	56.79	NO
WXA	Dipole X Waveform Side A - Channel 1 to Channel 8 Receivers	56.79	NO
WXB	Dipole X Waveform Side B - Channel 1 to Channel 8 Receivers	56.79	NO
WXC	Dipole X Waveform Side C - Channel 1 to Channel 8 Receivers	56.79	NO
WXD	Dipole X Waveform Side D - Channel 1 to Channel 8 Receivers	56.79	NO
WYA	Dipole Y Waveform Side A - Channel 1 to Channel 8 Receivers	56.79	NO
WYB	Dipole Y Waveform Side B - Channel 1 to Channel 8 Receivers	56.79	NO
WYC	Dipole Y Waveform Side C - Channel 1 to Channel 8 Receivers	56.79	NO
WYD	Dipole Y Waveform Side D - Channel 1 to Channel 8 Receivers	56.79	NO
GAR1	Gain Side A Receiver 1	45.29	NO
GAR2	Gain Side A Receiver 2	45.29	NO

GAR2	Gain Side A Receiver 2	45.29	NO
GAR3	Gain Side A Receiver 3	45.29	NO
GAR4	Gain Side A Receiver 4	45.29	NO
GAR5	Gain Side A Receiver 5	45.29	NO
GAR6	Gain Side A Receiver 6	45.29	NO
GAR7	Gain Side A Receiver 7	45.29	NO
GAR8	Gain Side A Receiver 8	45.29	NO
GBR1	Gain Side B Receiver 1	45.29	NO
GBR2	Gain Side B Receiver 2	45.29	NO
GBR3	Gain Side B Receiver 3	45.29	NO
GBR4	Gain Side B Receiver 4	45.29	NO
GBR5	Gain Side B Receiver 5	45.29	NO
GBR6	Gain Side B Receiver 6	45.29	NO
GBR7	Gain Side B Receiver 7	45.29	NO
GBR8	Gain Side B Receiver 8	45.29	NO
GCR1	Gain Side C Receiver 1	45.29	NO
GCR2	Gain Side C Receiver 2	45.29	NO
GCR3	Gain Side C Receiver 3	45.29	NO
GCR4	Gain Side C Receiver 4	45.29	NO
GCR5	Gain Side C Receiver 5	45.29	NO
GCR6	Gain Side C Receiver 6	45.29	NO
GCR7	Gain Side C Receiver 7	45.29	NO
GCR8	Gain Side C Receiver 8	45.29	NO
GDR1	Gain Side D Receiver 1	45.29	NO
GDR2	Gain Side D Receiver 2	45.29	NO
GDR3	Gain Side D Receiver 3	45.29	NO
GDR4	Gain Side D Receiver 4	45.29	NO
GDR5	Gain Side D Receiver 5	45.29	NO
GDR6	Gain Side D Receiver 6	45.29	NO
GDR7	Gain Side D Receiver 7	45.29	NO
GDR8	Gain Side D Receiver 8	45.29	NO

XRMI-I Mandrel

TPUL	Tension Pull	22.60	NO
PAD1	XRMI Pad 1 values	22.36	NO
PAD2	XRMI Pad 2 values	22.36	NO
PAD3	XRMI Pad 3 values	22.36	NO
PAD4	XRMI Pad 4 values	22.36	NO
PAD5	XRMI Pad 5 values	22.36	NO
PAD6	XRMI Pad 6 values	22.36	NO
OD1	EMI Odd Button Values Pad 1	22.36	NO
OD2	EMI Odd Button Values Pad 2	22.60	NO
OD3	EMI Odd Button Values Pad 3	22.36	NO
OD4	EMI Odd Button Values Pad 4	22.60	NO
OD5	EMI Odd Button Values Pad 5	22.36	NO
OD6	EMI Odd Button Values Pad 6	22.60	NO
EV1	EMI Even Button Values Pad 1	22.39	NO
EV2	EMI Even Button Values Pad 2	22.57	NO
EV3	EMI Even Button Values Pad 3	22.39	NO
EV4	EMI Even Button Values Pad 4	22.57	NO
EV5	EMI Even Button Values Pad 5	22.39	NO
EV6	EMI Even Button Values Pad 6	22.57	NO
ITMP	Instrument Temperature	19.83	NO
EMIM	Tool Mode	19.83	NO
HAZI	Hole Azimuth	22.11	NO
HAZI	Hole Azimuth - Down Delay	22.61	NO

ZACC	Accelerometer Z	22.36	NO	
TPUL	Tension Pull	22.60	NO	
FIR1	Current Button R - Pad 1	22.36	NO	
FIR2	Current Button R - Pad 2	22.60	NO	
FIR3	Current Button R - Pad 3	22.36	NO	
FIR4	Current Button R - Pad 4	22.60	NO	
FIR5	Current Button R - Pad 5	22.36	NO	
FIR6	Current Button R - Pad 6	22.60	NO	
FIX1	Current Button X - Pad 1	22.36	NO	
FIX2	Current Button X - Pad 2	22.60	NO	
FIX3	Current Button X - Pad 3	22.36	NO	
FIX4	Current Button X - Pad 4	22.60	NO	
FIX5	Current Button X - Pad 5	22.36	NO	
FIX6	Current Button X - Pad 6	22.60	NO	
SIR1	Current Slow Button R - Pad 1	22.36	BLK	3.000
SIR2	Current Slow Button R - Pad 2	22.60	BLK	3.000
SIR3	Current Slow Button R - Pad 3	22.36	BLK	3.000
SIR4	Current Slow Button R - Pad 4	22.60	BLK	3.000
SIR5	Current Slow Button R - Pad 5	22.36	BLK	3.000
SIR6	Current Slow Button R - Pad 6	22.60	BLK	3.000
SIX1	Current Slow Button X - Pad 1	22.36	BLK	3.000
SIX2	Current Slow Button X - Pad 2	22.60	BLK	3.000
SIX3	Current Slow Button X - Pad 3	22.36	BLK	3.000
SIX4	Current Slow Button X - Pad 4	22.60	BLK	3.000
SIX5	Current Slow Button X - Pad 5	22.36	BLK	3.000
SIX6	Current Slow Button X - Pad 6	22.60	BLK	3.000
EMMR	Phasor Voltage - Real Part	22.36	NO	
EMMX	Phasor Voltage - Imaginary Part	22.36	NO	
PADV	Pad Voltage	19.83	BLK	0.250
ITMP	Instrument Temperature	19.83	BLK	0.000
CON1	Conductivity Pad 1	22.36	BLK	3.000
CON2	Conductivity Pad 2	22.60	BLK	3.000
CON3	Conductivity Pad 3	22.36	BLK	3.000
CON4	Conductivity Pad 4	22.60	BLK	3.000
CON5	Conductivity Pad 5	22.36	BLK	3.000
CON6	Conductivity Pad 6	22.60	BLK	3.000
UIR2	Current Button R No Delay - Pad 2	22.36	NO	
UIR4	Current Button R No Delay - Pad 4	22.36	NO	
UIR6	Current Button R No Delay - Pad 6	22.36	NO	
UIX2	Current Button X No Delay - Pad 2	22.36	NO	
UIX4	Current Button X No Delay - Pad 4	22.36	NO	
UIX6	Current Button X No Delay - Pad 6	22.36	NO	
TPUL	Tension Pull	22.60	NO	
ARM1	Caliper 1 measurement	22.36	BLK	0.000
ARM2	Caliper 2 measurement	22.36	BLK	0.000
ARM3	Caliper 3 measurement	22.36	BLK	0.000
ARM4	Caliper 4 measurement	22.36	BLK	0.000
ARM5	Caliper 5 measurement	22.36	BLK	0.000
ARM6	Caliper 6 measurement	22.36	BLK	0.000
MOTV	Motor Voltage Monitor 1	22.36	BLK	0.000
PRES	Caliper percentage of total compression of the spring	19.83	BLK	0.000
HAZI	Hole Azimuth	22.36	NO	
RB	Relative Bearing	22.36	NO	
AZI1	PAD1 Azimuth	22.36	NO	
DEVI	Inclination	22.36	NO	

ACRt Sonde

TPUL	Tension Pull	2.97	NO	
F1R1	ACRT 12KHz - 80in R value	9.22	BLK	0.000
F1X1	ACRT 12KHz - 80in X value	9.22	BLK	0.000
F1R2	ACRT 12KHz - 50in R value	6.72	BLK	0.000
F1X2	ACRT 12KHz - 50in X value	6.72	BLK	0.000
F1R3	ACRT 12KHz - 29in R value	5.22	BLK	0.000
F1X3	ACRT 12KHz - 29in X value	5.22	BLK	0.000
F1R4	ACRT 12KHz - 17in R value	4.22	BLK	0.000
F1X4	ACRT 12KHz - 17in X value	4.22	BLK	0.000
F1R5	ACRT 12KHz - 10in R value	3.72	BLK	0.000
F1X5	ACRT 12KHz - 10in X value	3.72	BLK	0.000
F1R6	ACRT 12KHz - 6in R value	3.47	BLK	0.000
F1X6	ACRT 12KHz - 6in X value	3.47	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	9.22	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	9.22	BLK	0.000
F2R2	ACRT 36KHz - 50in R value	6.72	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.72	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	5.22	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	5.22	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	4.22	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	4.22	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.72	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.72	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.47	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.47	BLK	0.000
F3R1	ACRT 72KHz - 80in R value	9.22	BLK	0.000
F3X1	ACRT 72KHz - 80in X value	9.22	BLK	0.000
F3R2	ACRT 72KHz - 50in R value	6.72	BLK	0.000
F3X2	ACRT 72KHz - 50in X value	6.72	BLK	0.000
F3R3	ACRT 72KHz - 29in R value	5.22	BLK	0.000
F3X3	ACRT 72KHz - 29in X value	5.22	BLK	0.000
F3R4	ACRT 72KHz - 17in R value	4.22	BLK	0.000
F3X4	ACRT 72KHz - 17in X value	4.22	BLK	0.000
F3R5	ACRT 72KHz - 10in R value	3.72	BLK	0.000
F3X5	ACRT 72KHz - 10in X value	3.72	BLK	0.000
F3R6	ACRT 72KHz - 6in R value	3.47	BLK	0.000
F3X6	ACRT 72KHz - 6in X value	3.47	BLK	0.000
RMUD	Mud Resistivity	12.76	BLK	0.000
F1RT	Transmitter Current Raw 12K X Receiver	2.97	BLK	0.000
F1XT	Transmitter Reference 12 KHz Imaginary Signal	2.97	BLK	0.000
F2RT	Transmitter Reference 36 KHz Real Signal	2.97	BLK	0.000
F2XT	Transmitter Reference 36 KHz Imaginary Signal	2.97	BLK	0.000
F3RT	Transmitter Reference 72 KHz Real Signal	2.97	BLK	0.000
F3XT	Transmitter Reference 72 KHz Imaginary Signal	2.97	BLK	0.000
TFPU	Upper Feedpipe Temperature Calculated	2.97	BLK	0.000
TFPL	Lower Feedpipe Temperature Calculated	2.97	BLK	0.000
ITMP	Instrument Temperature	2.97	BLK	0.000
TCVA	Temperature Correction Values Loop Off	2.97	NO	
TIDV	Instrument Temperature Derivative	2.97	NO	
TUDV	Upper Temperature Derivative	2.97	NO	
TLDV	Lower Temperature Derivative	2.97	NO	
TRBD	Receiver Board Temperature	2.97	NO	

Microlog Pad

TPUL	Tension Pull	88.03	NO	
MINV	Microlog Lateral	88.03	BLK	0.750
MNOR	Microlog Normal	88.03	BLK	0.750


SDLT Pad


TPUL	Tension Pull	87.84	NO	
NAB	Near Above	87.66	BLK	0.920
NHI	Near Cesium High	87.66	BLK	0.920
NLO	Near Cesium Low	87.66	BLK	0.920
NVA	Near Valley	87.66	BLK	0.920
NBA	Near Barite	87.66	BLK	0.920
NDE	Near Density	87.66	BLK	0.920
NPK	Near Peak	87.66	BLK	0.920
NLI	Near Lithology	87.66	BLK	0.920
NBAU	Near Barite Unfiltered	87.66	BLK	0.250
NLIU	Near Lithology Unfiltered	87.66	BLK	0.250
FAB	Far Above	88.01	BLK	0.250
FHI	Far Cesium High	88.01	BLK	0.250
FLO	Far Cesium Low	88.01	BLK	0.250
FVA	Far Valley	88.01	BLK	0.250
FBA	Far Barite	88.01	BLK	0.250
FDE	Far Density	88.01	BLK	0.250
FPK	Far Peak	88.01	BLK	0.250
FLI	Far Lithology	88.01	BLK	0.250
PTMP	Pad Temperature	87.85	BLK	0.920
NHV	Near Detector High Voltage	87.24	NO	
FHV	Far Detector High Voltage	87.24	NO	
ITMP	Instrument Temperature	87.24	NO	
DDHV	Detector High Voltage	87.24	NO	


Data: PAMELA_2330_1-3\0001 SP-GTET-DSN-SDL-XRMI-WSTT-ACRT-BNIDLE Date: 17-Apr-13 20:29:09


HALLIBURTON	Plot Time: 18-Apr-13 03:21:34
	Plot Range: 340 ft to 5377.25 ft
	Data: PAMELA_2330_1-3\Well Based\DAQ-0001-003\
	Plot File: \\-LOCAL-IPAMELA_2330_1-3\0001 SP-GTET-DSN-SDL-XRMI-WSTT-ACRT-BNIPORO\AHV_2_IQ_LIB


ANNULAR HOLE VOLUME PLOT

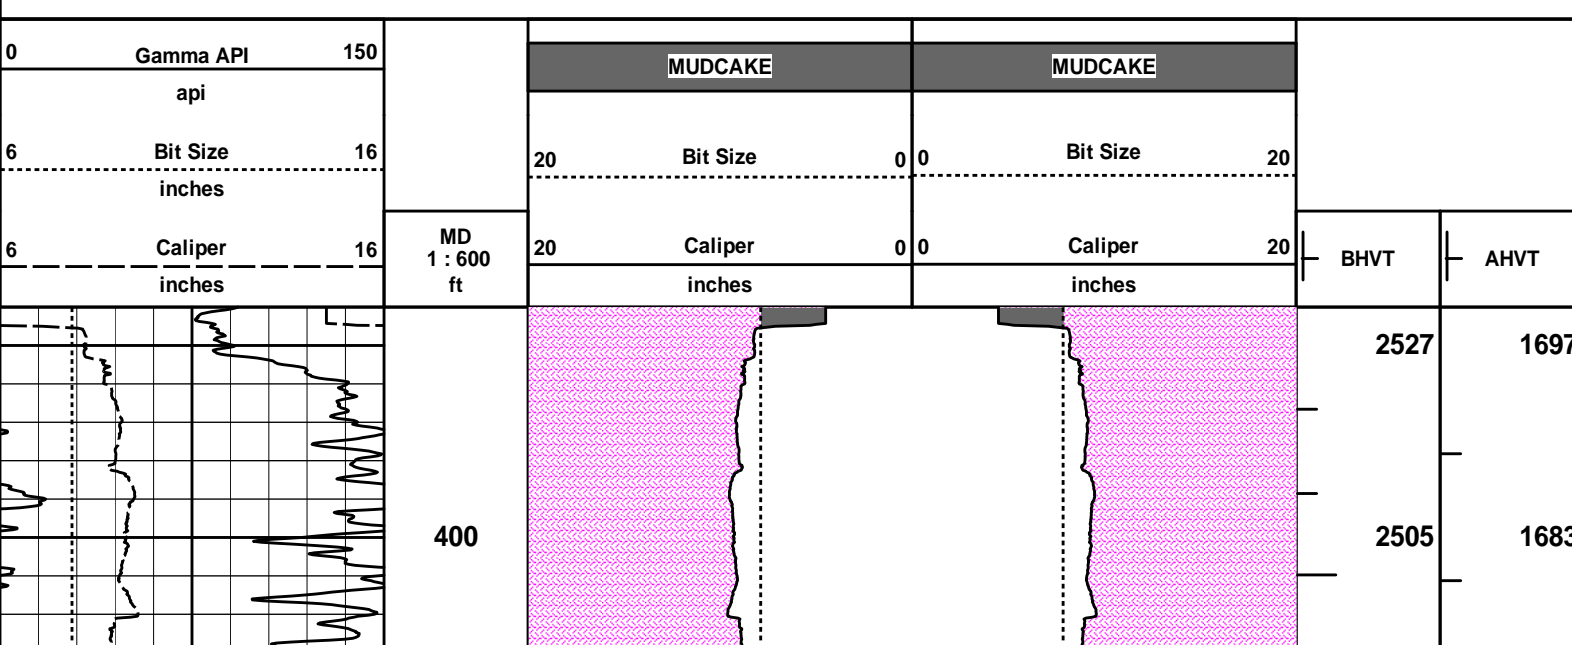


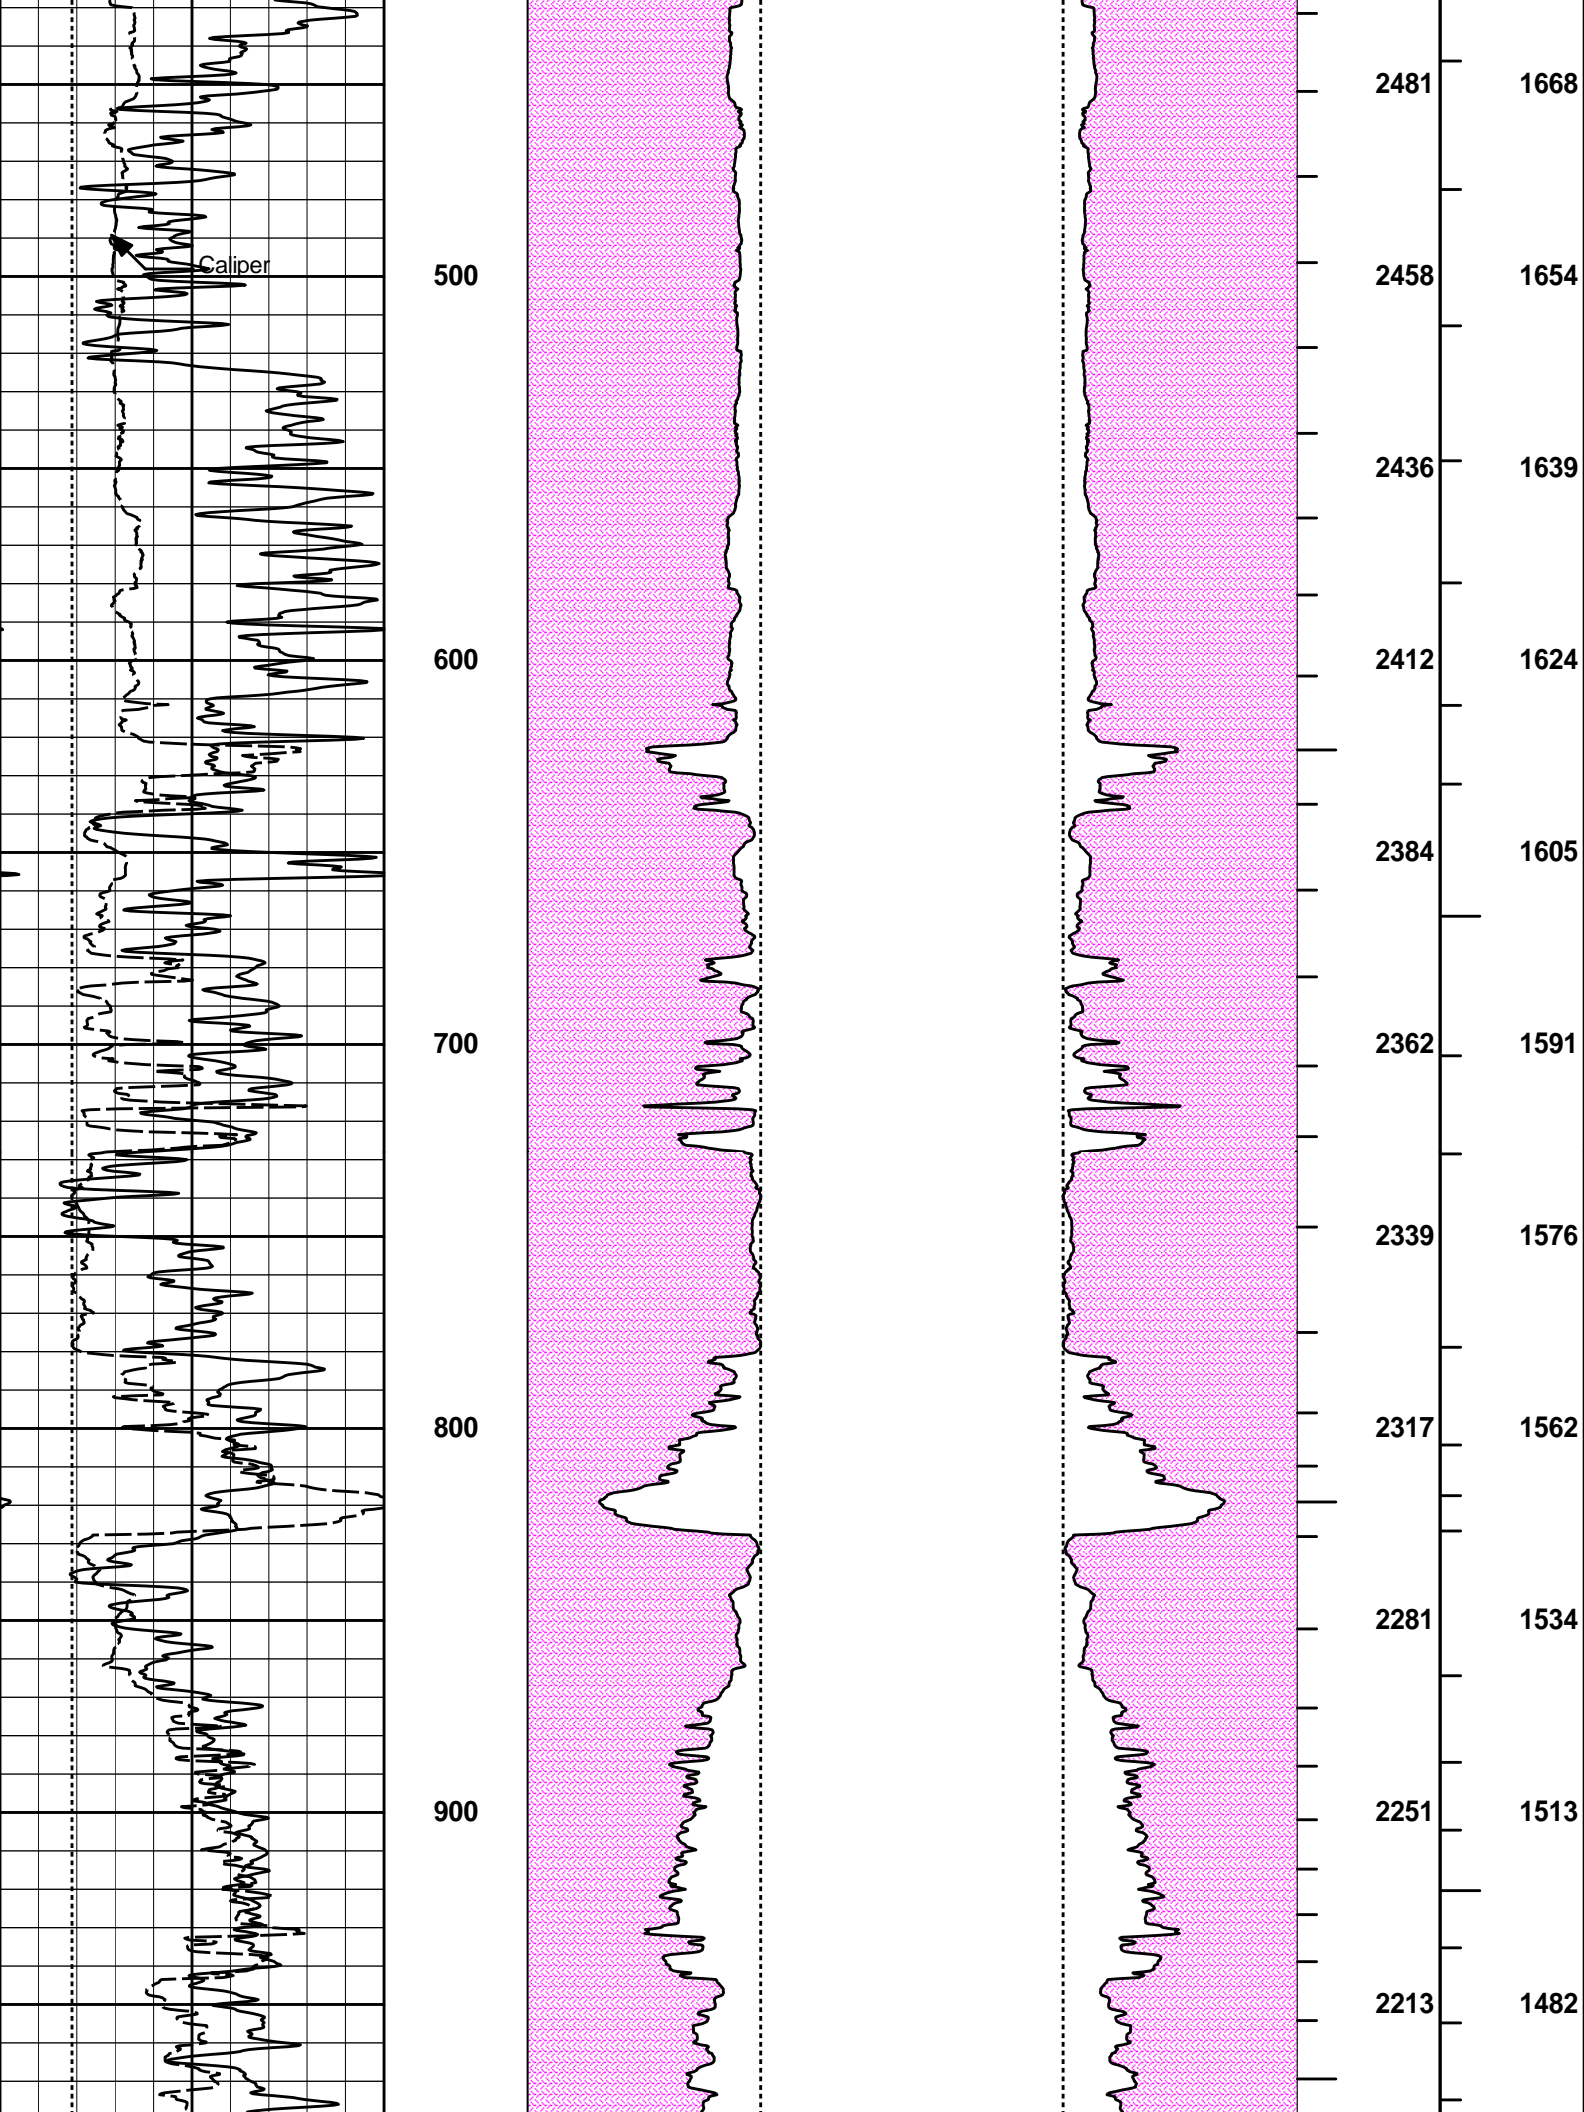


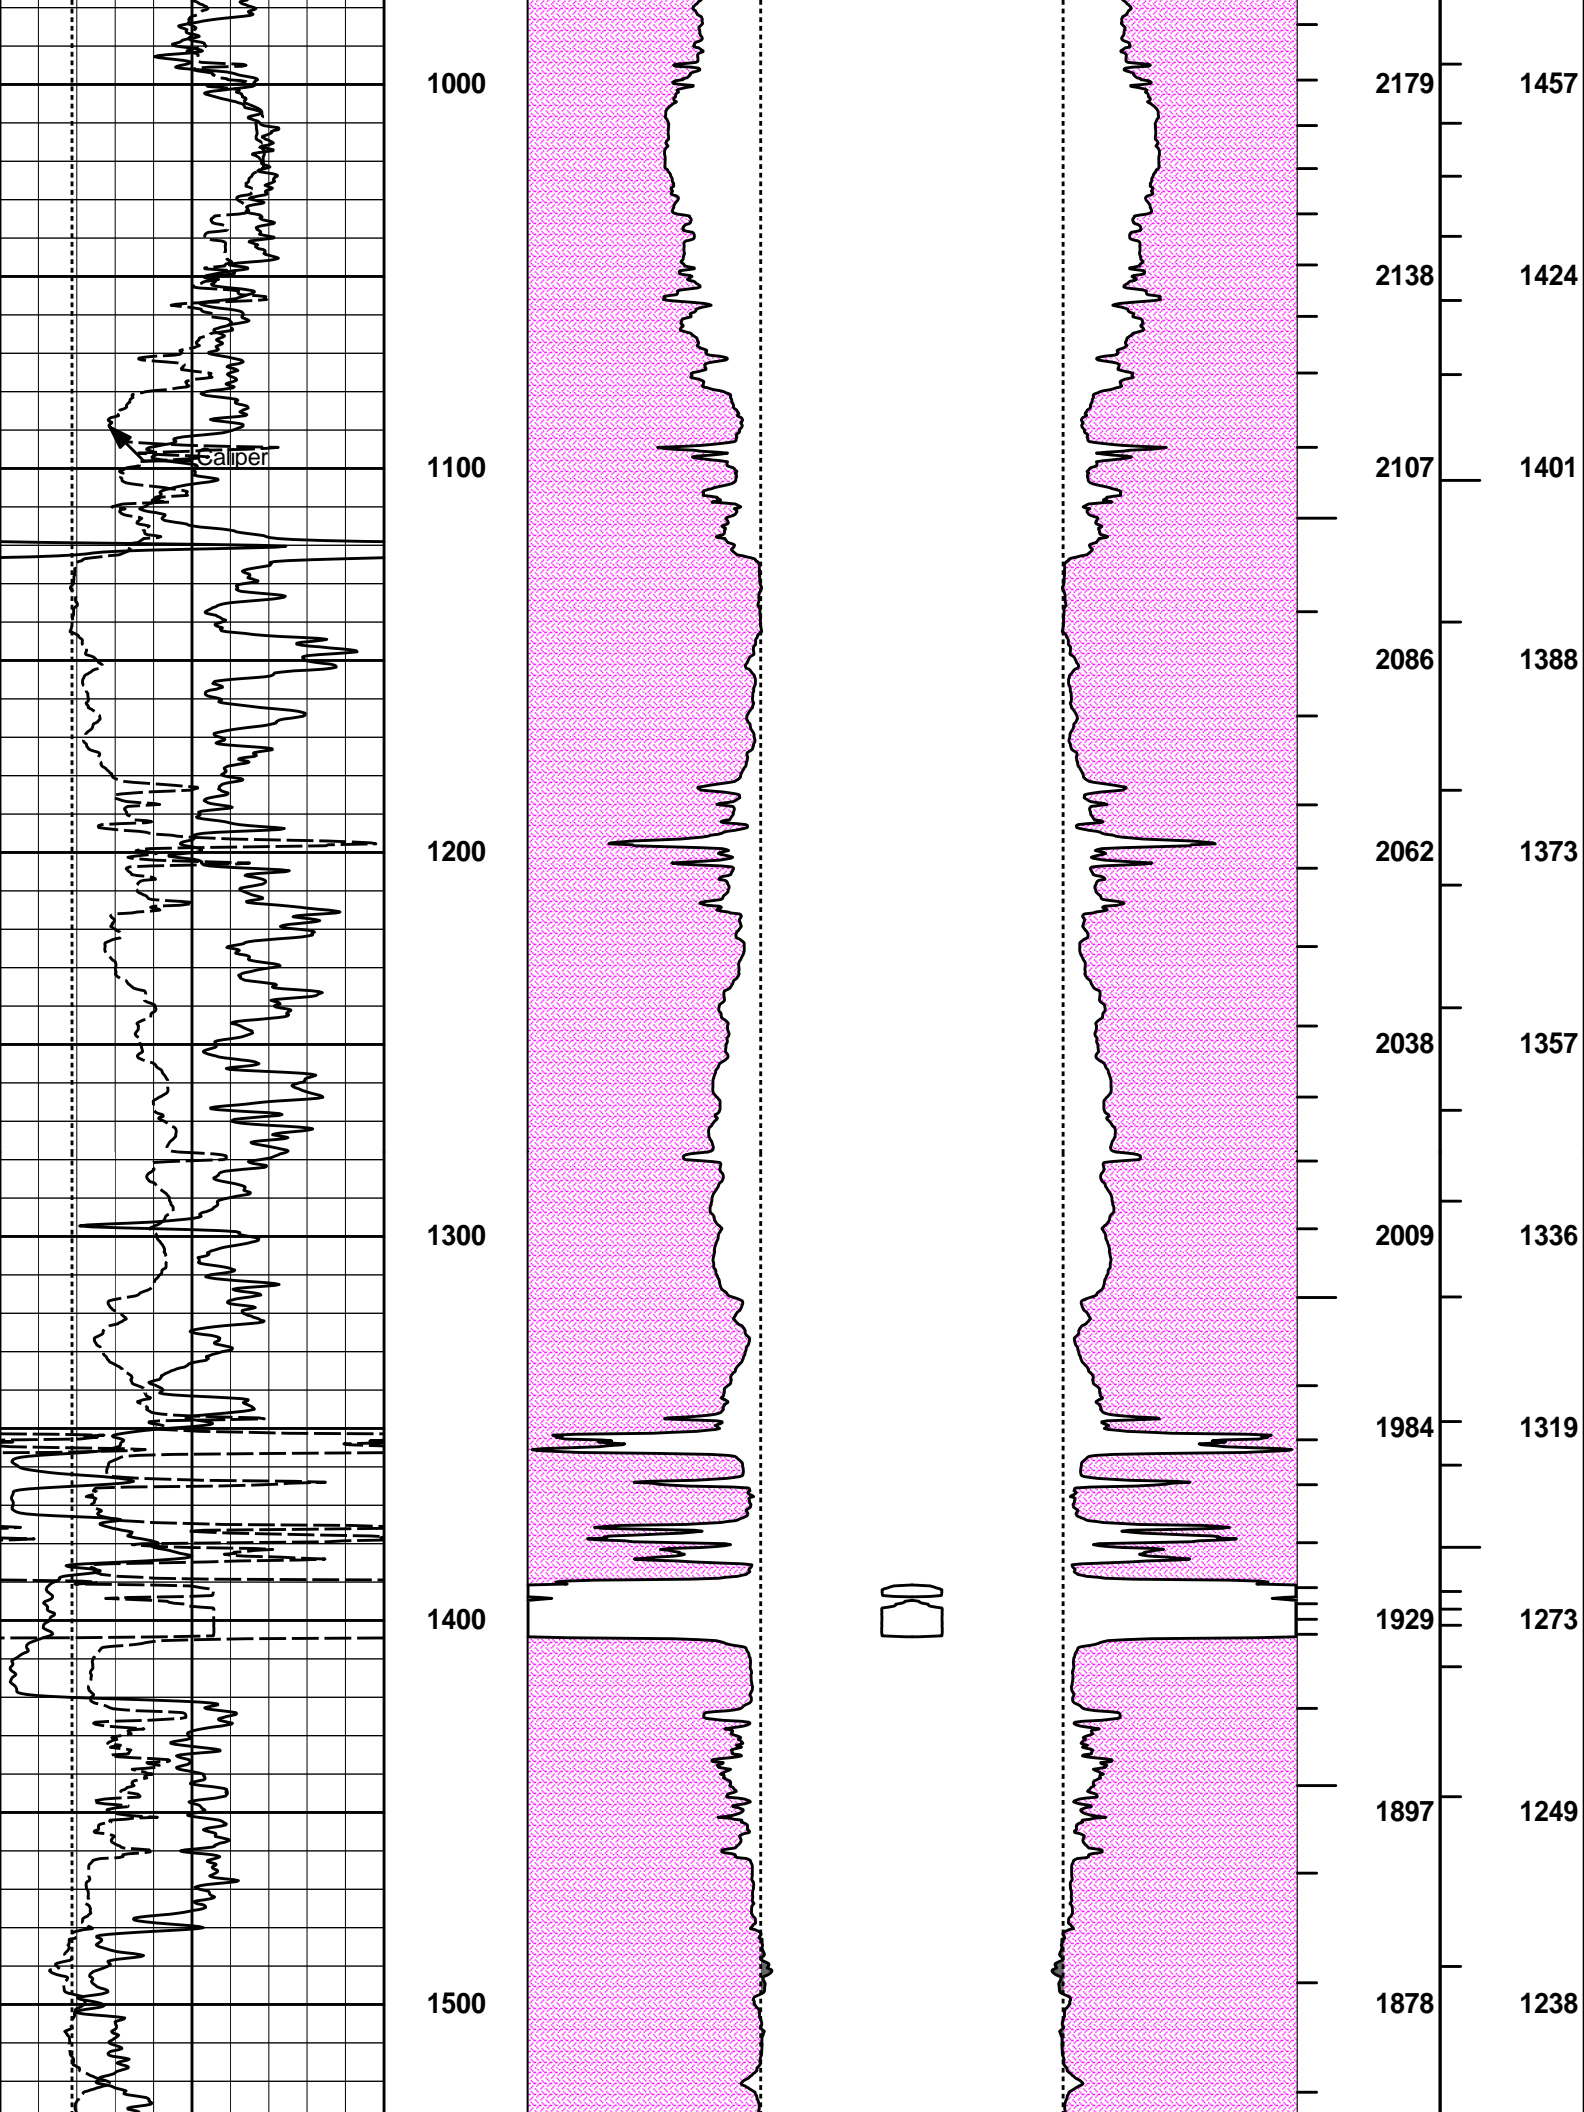


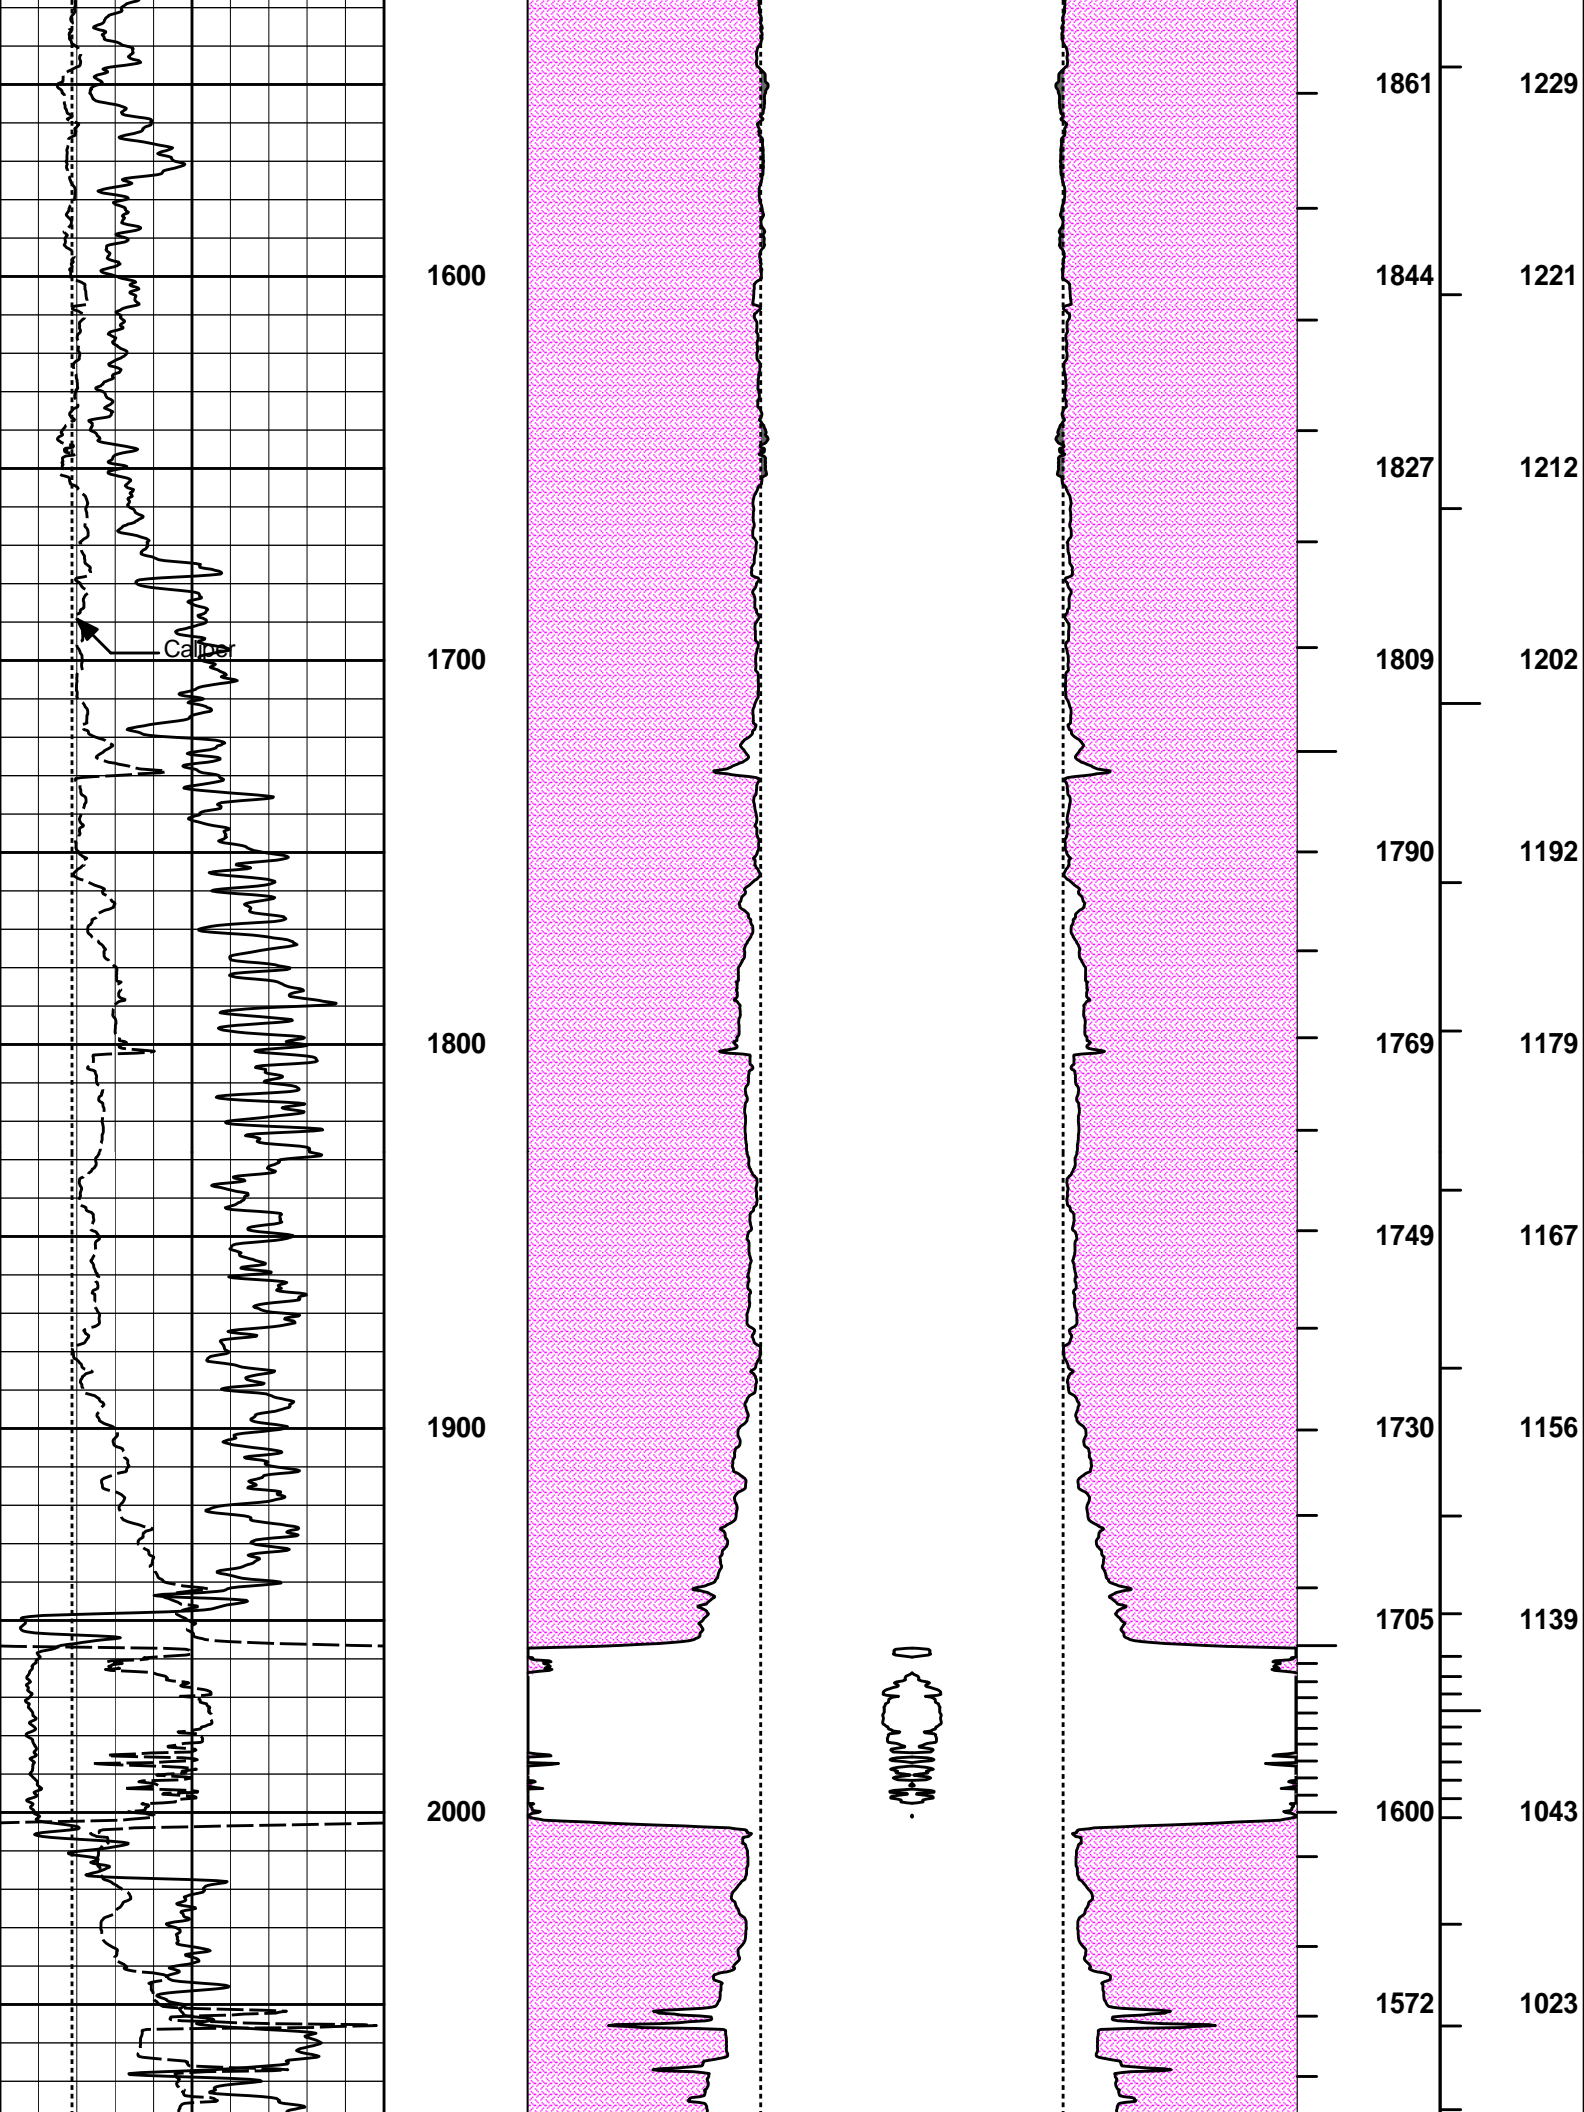


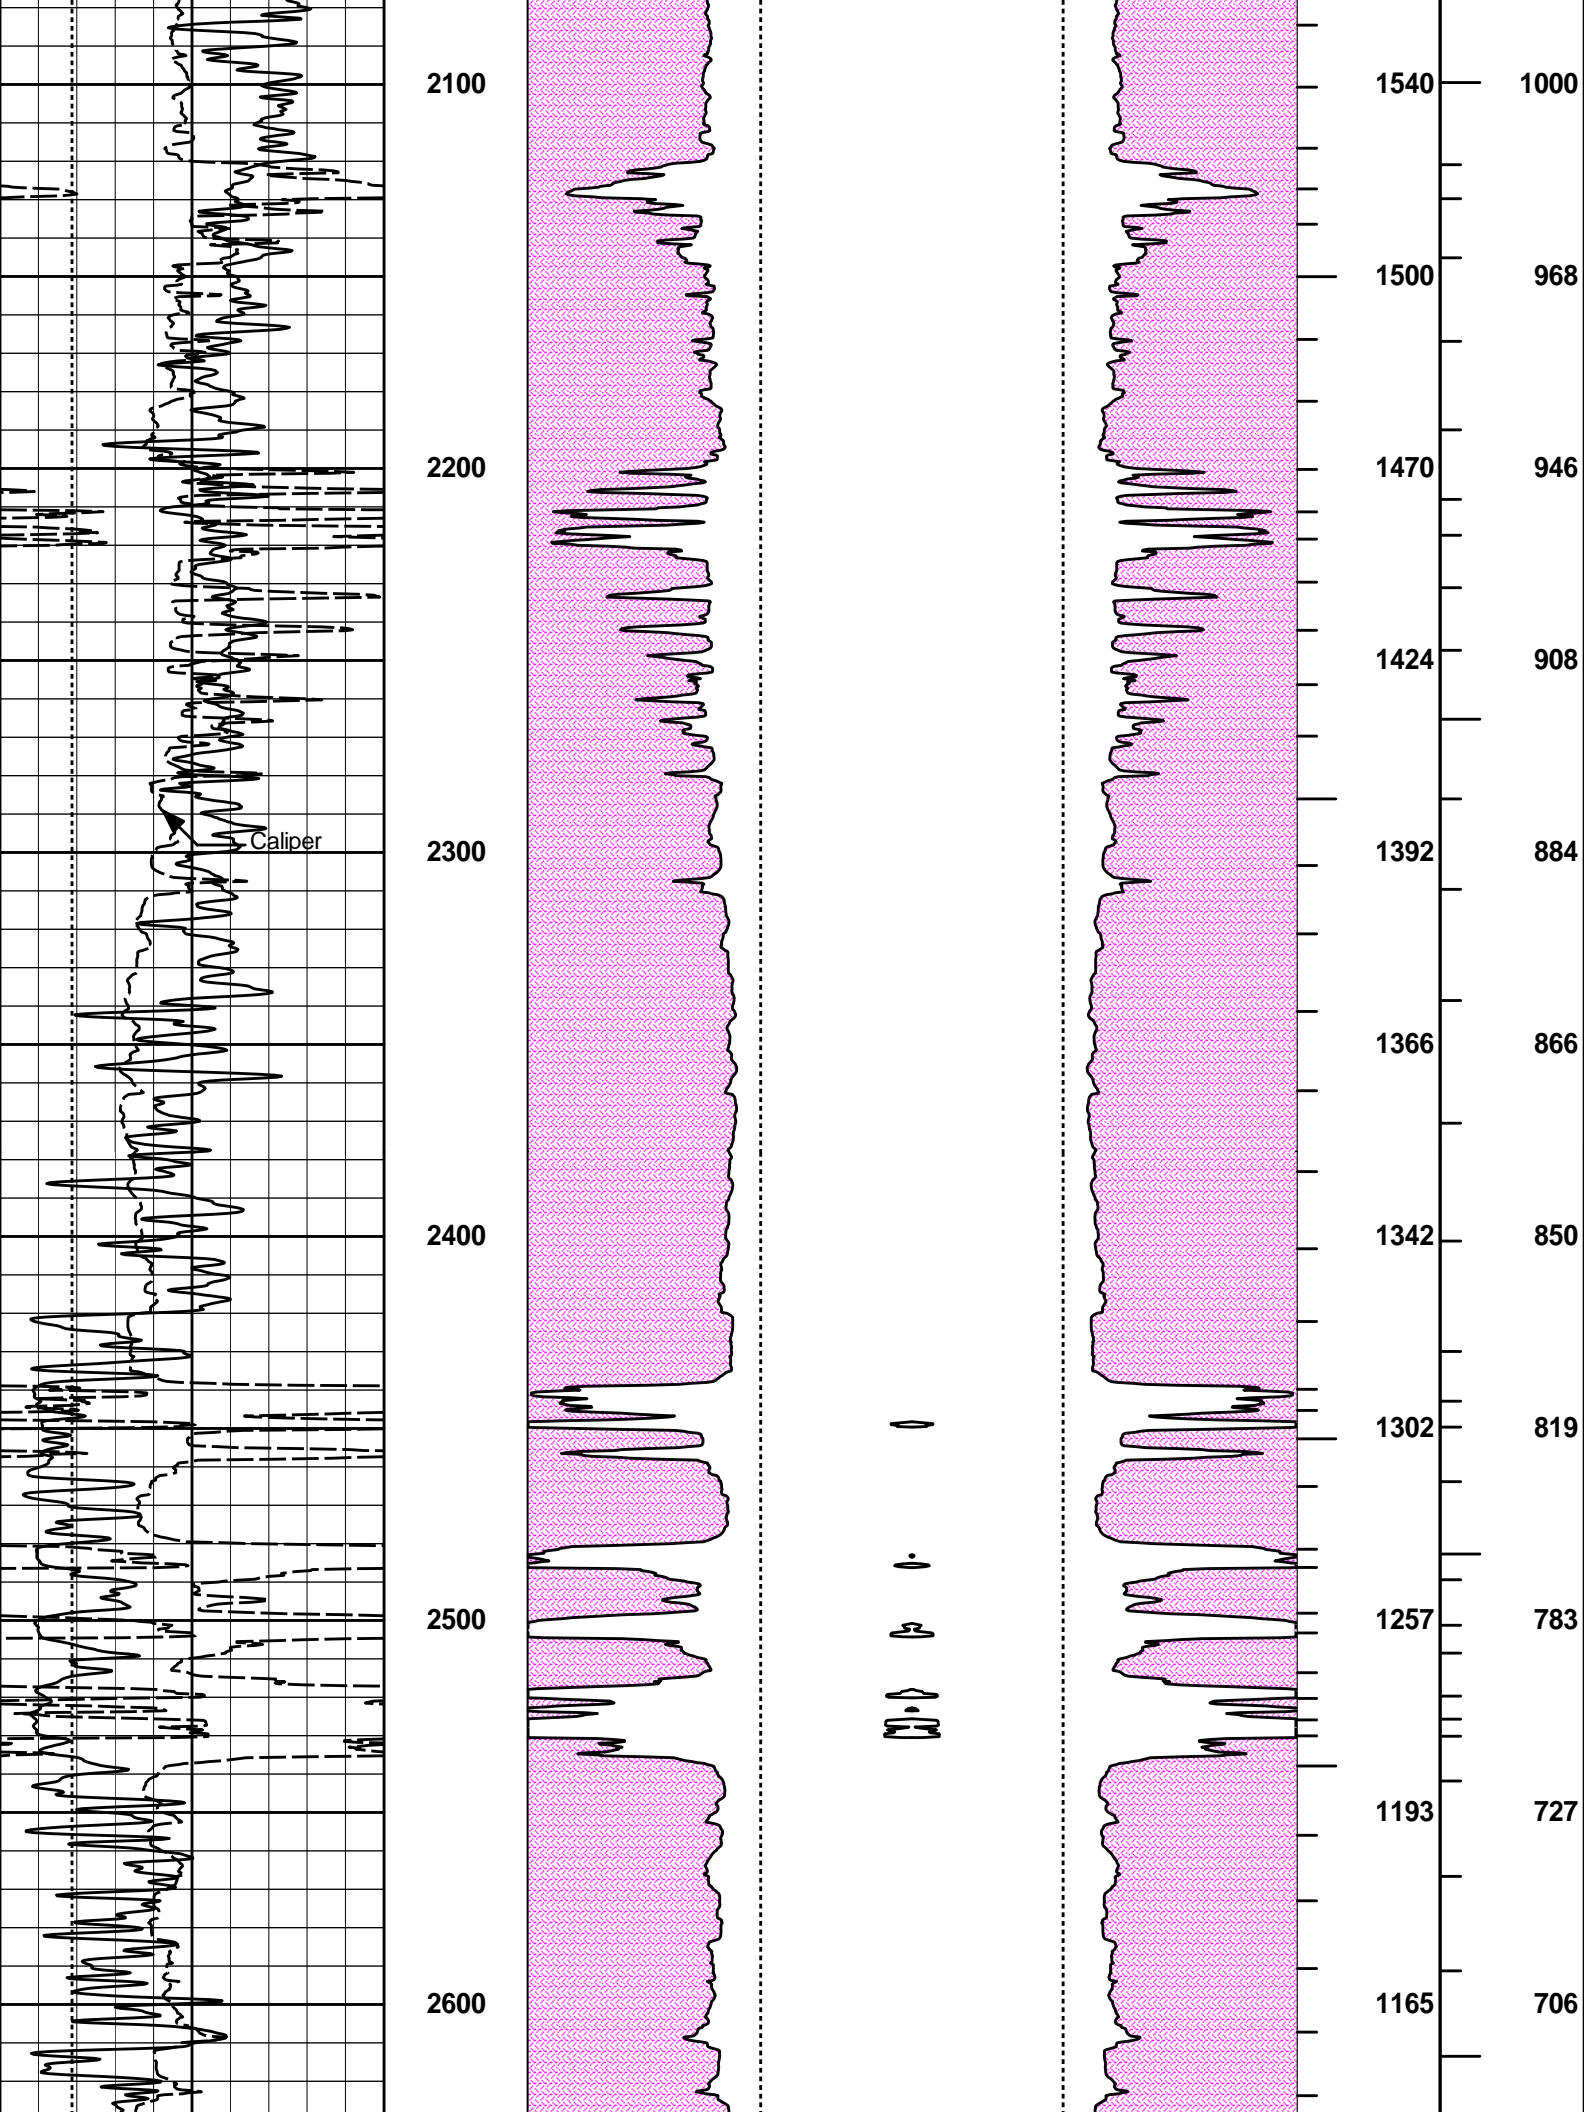


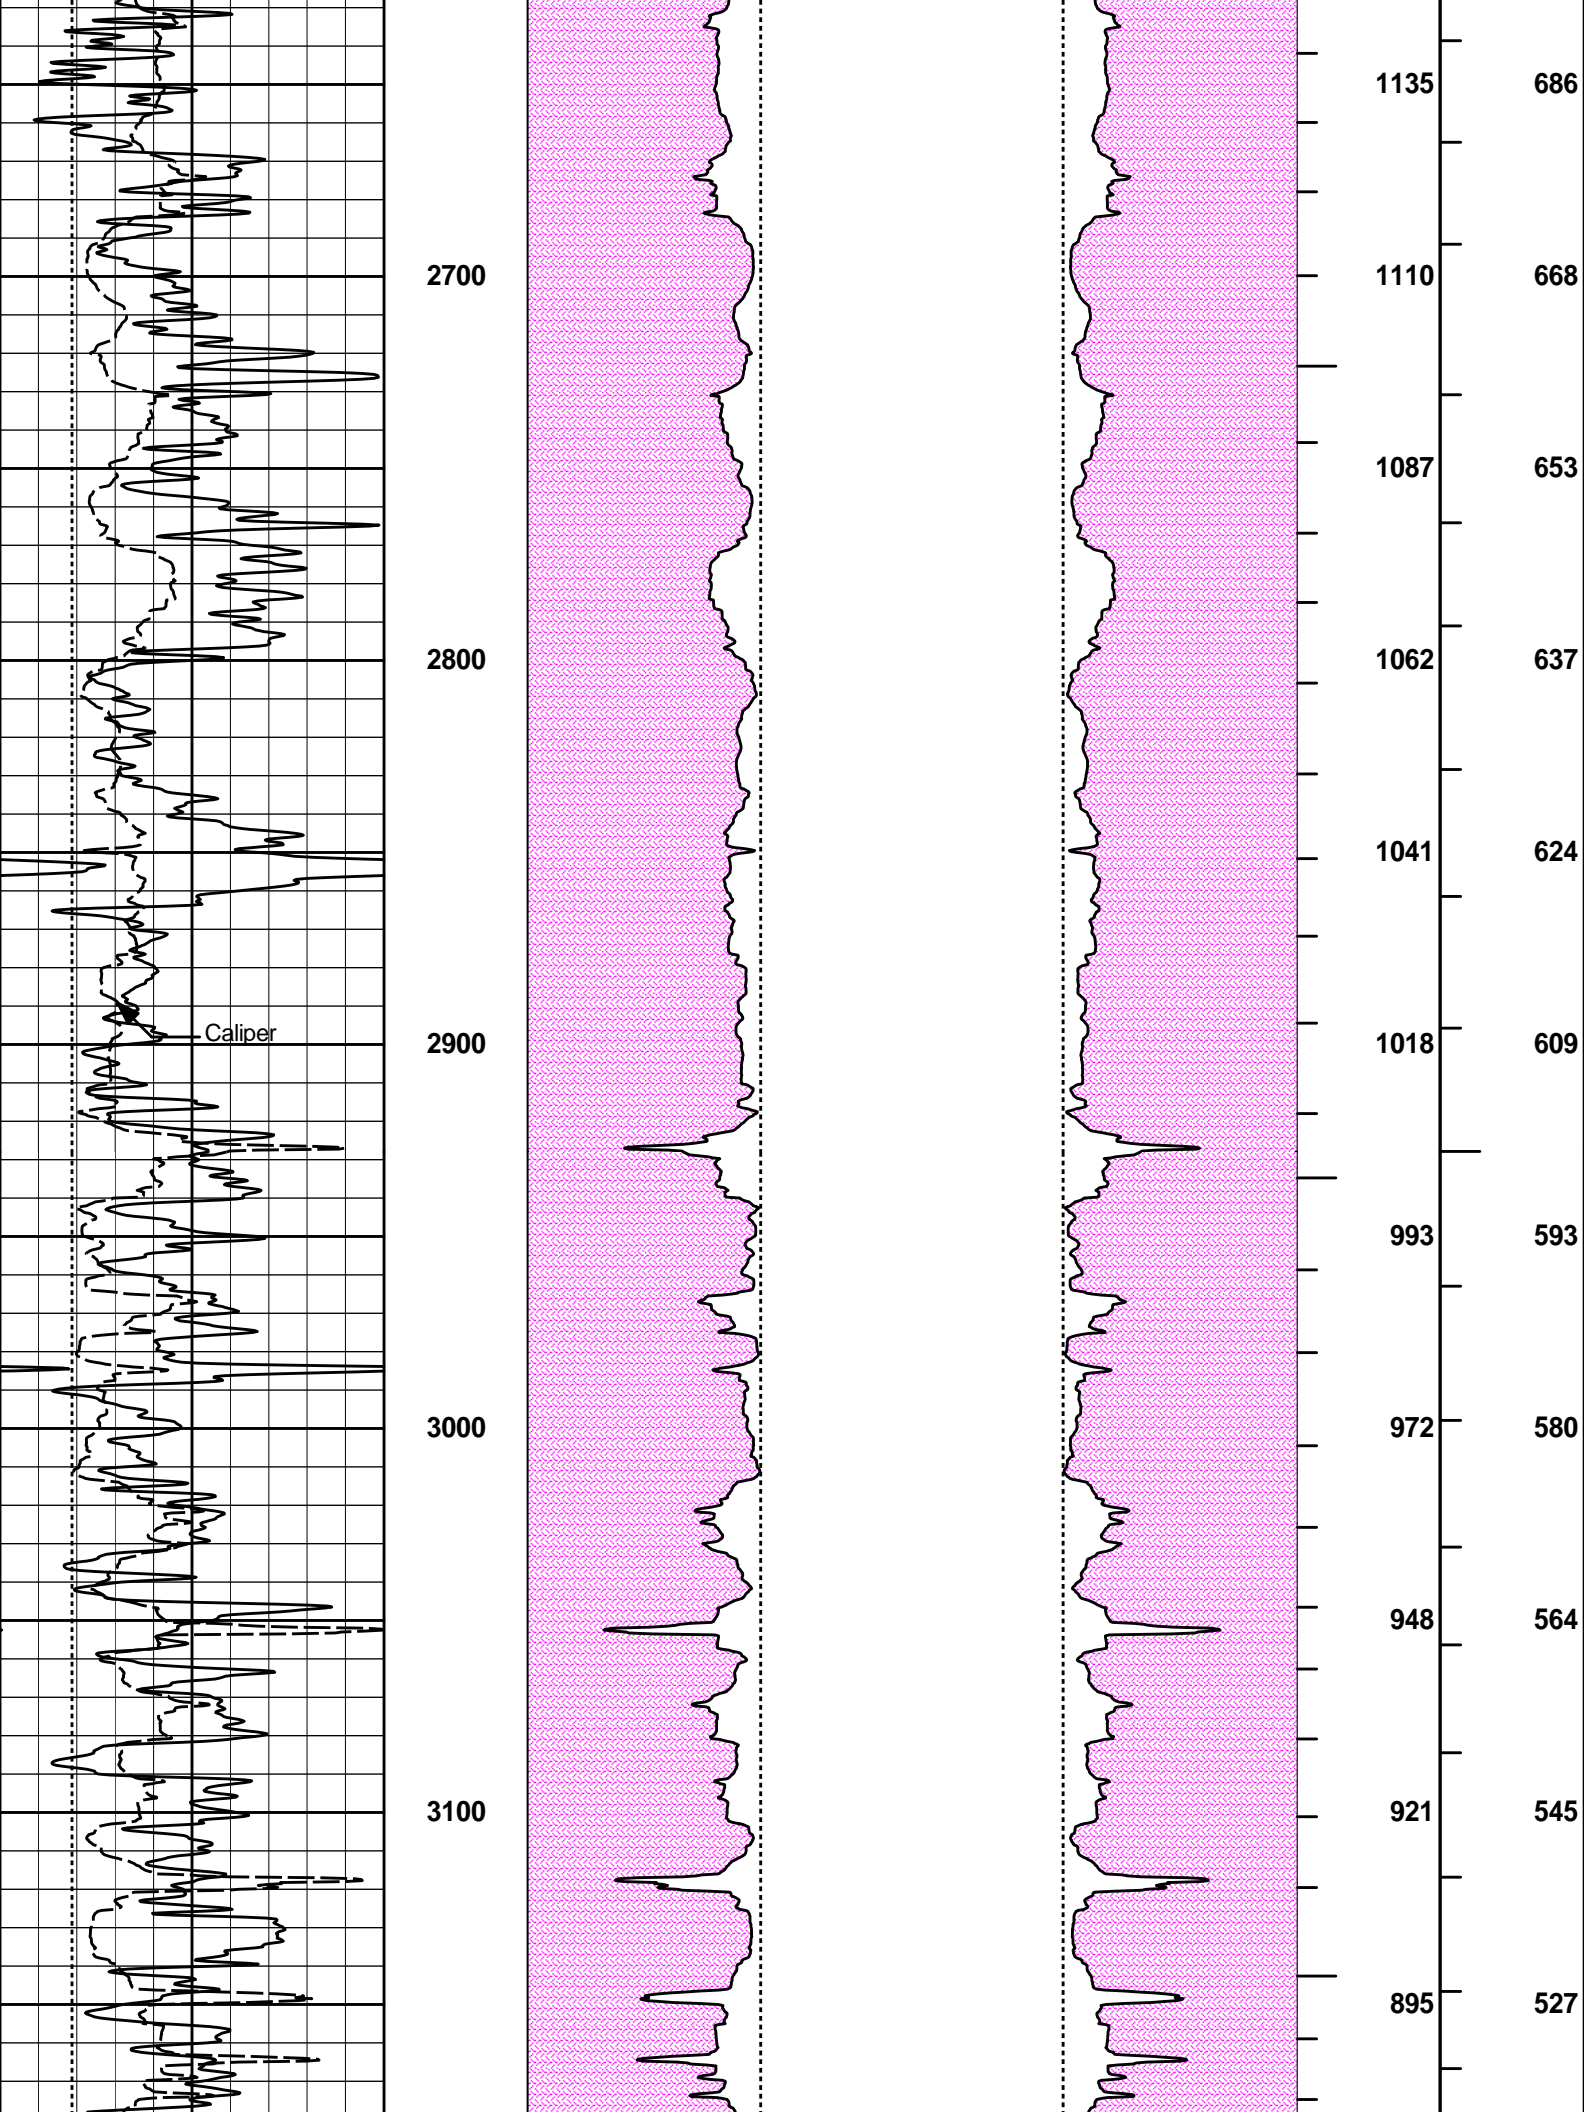

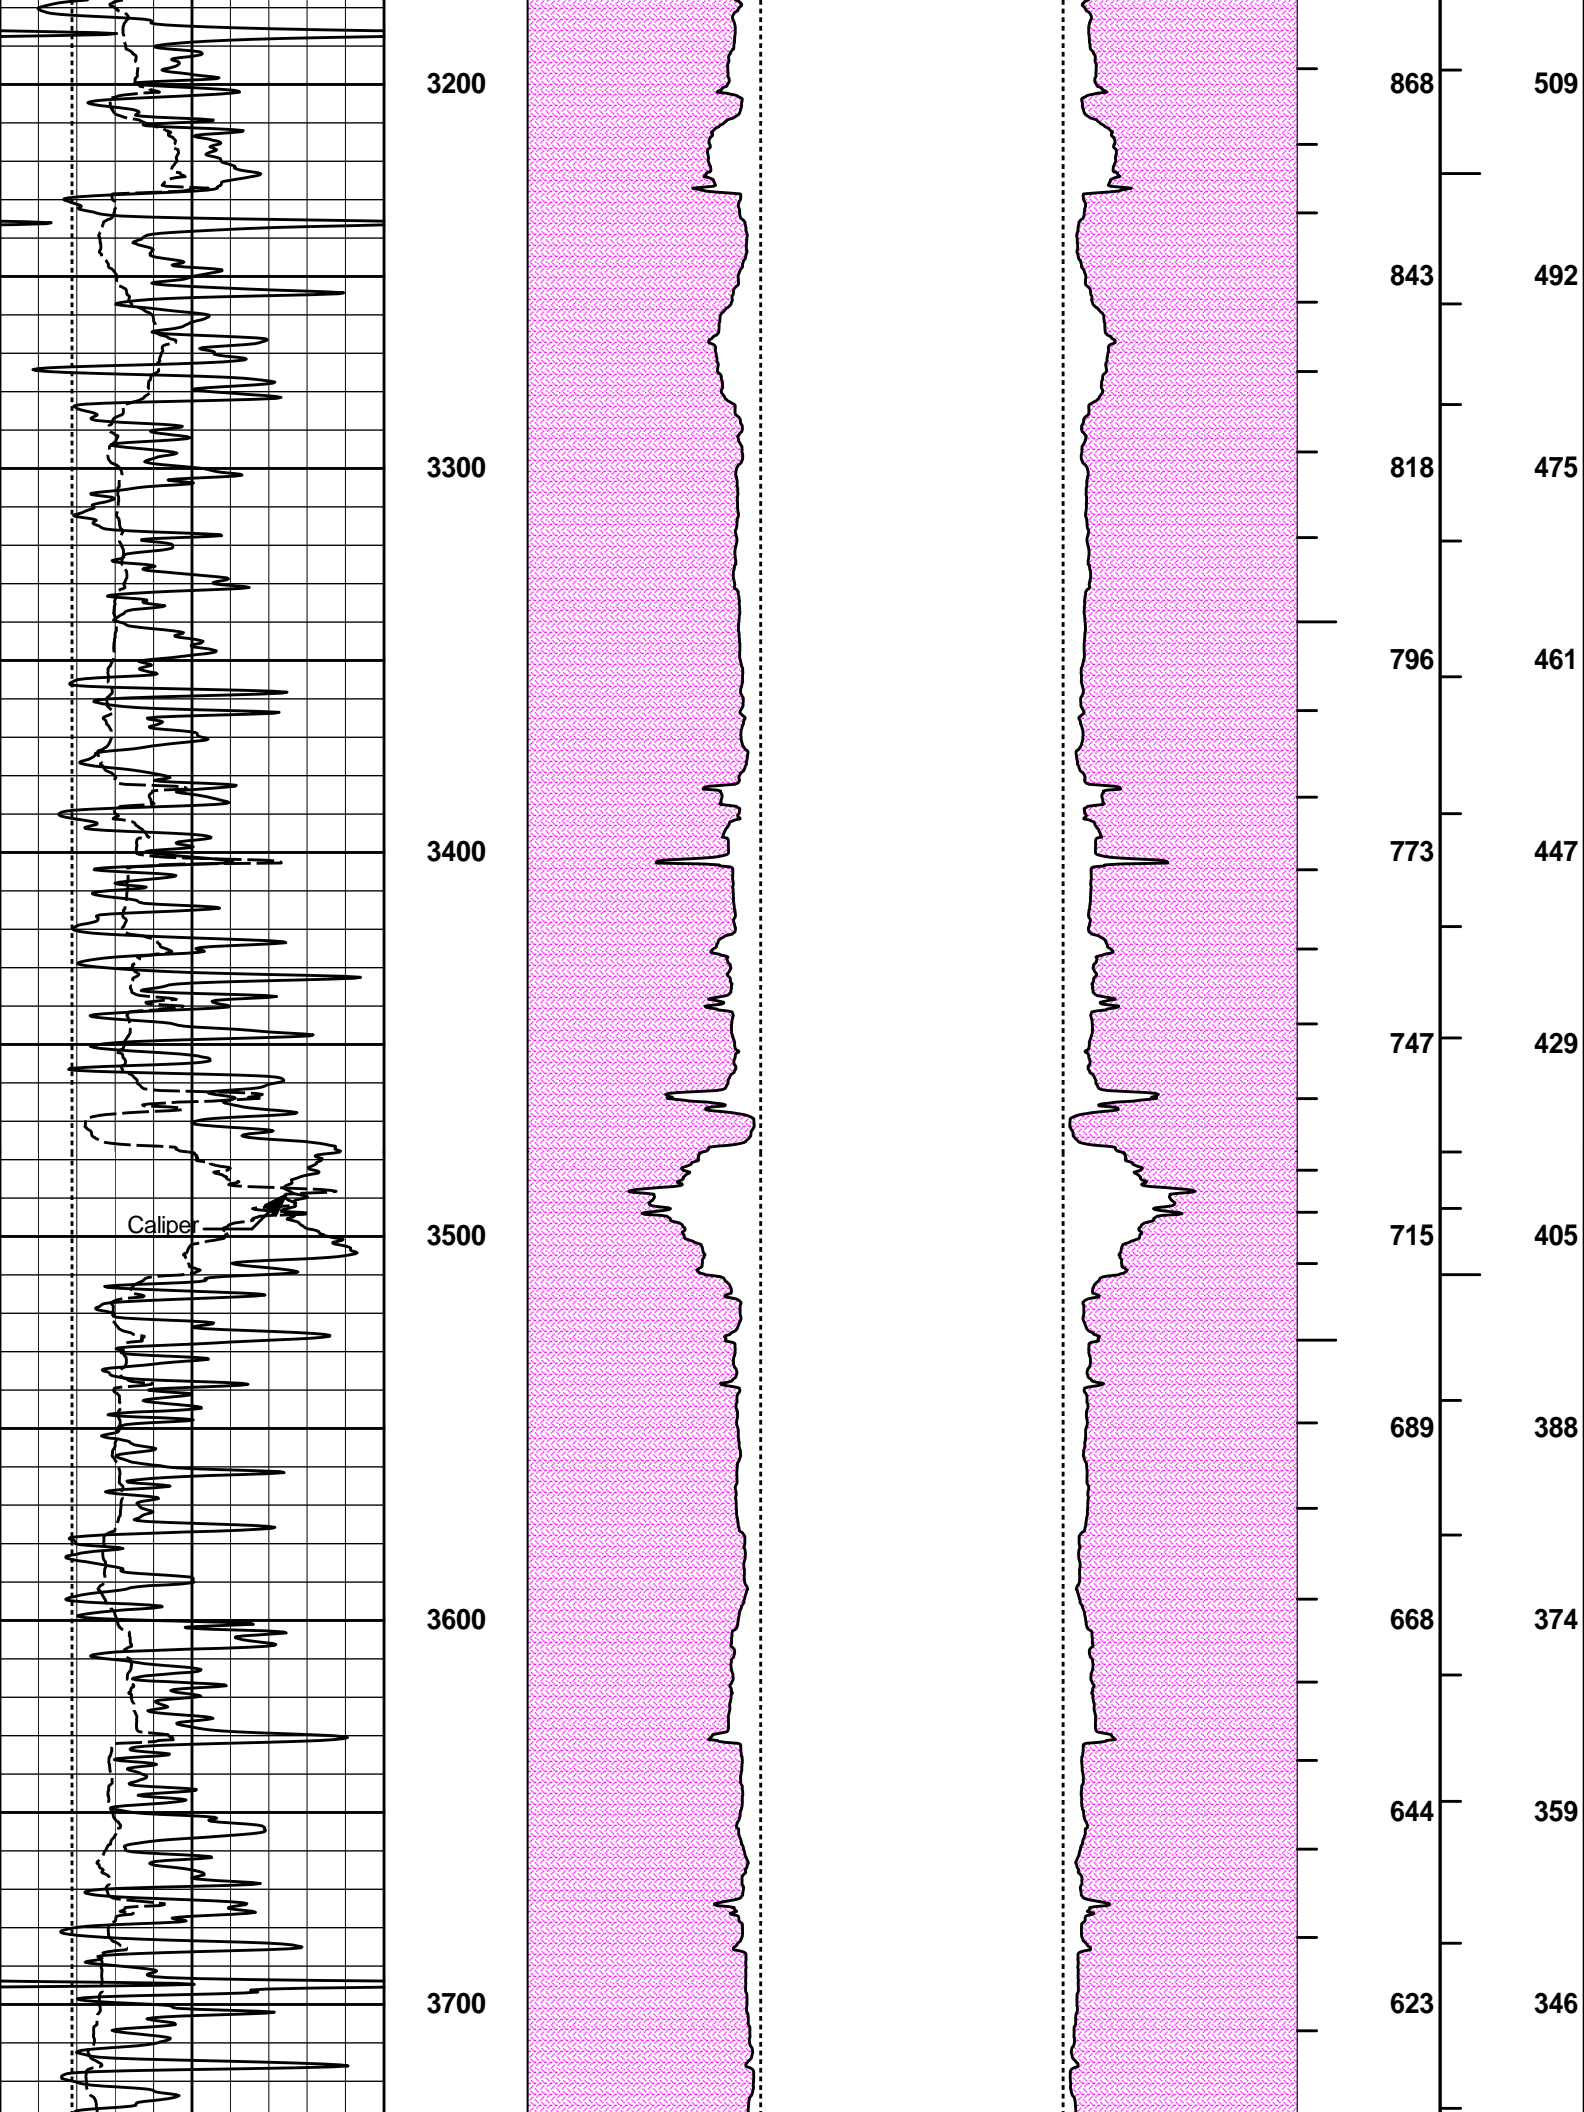

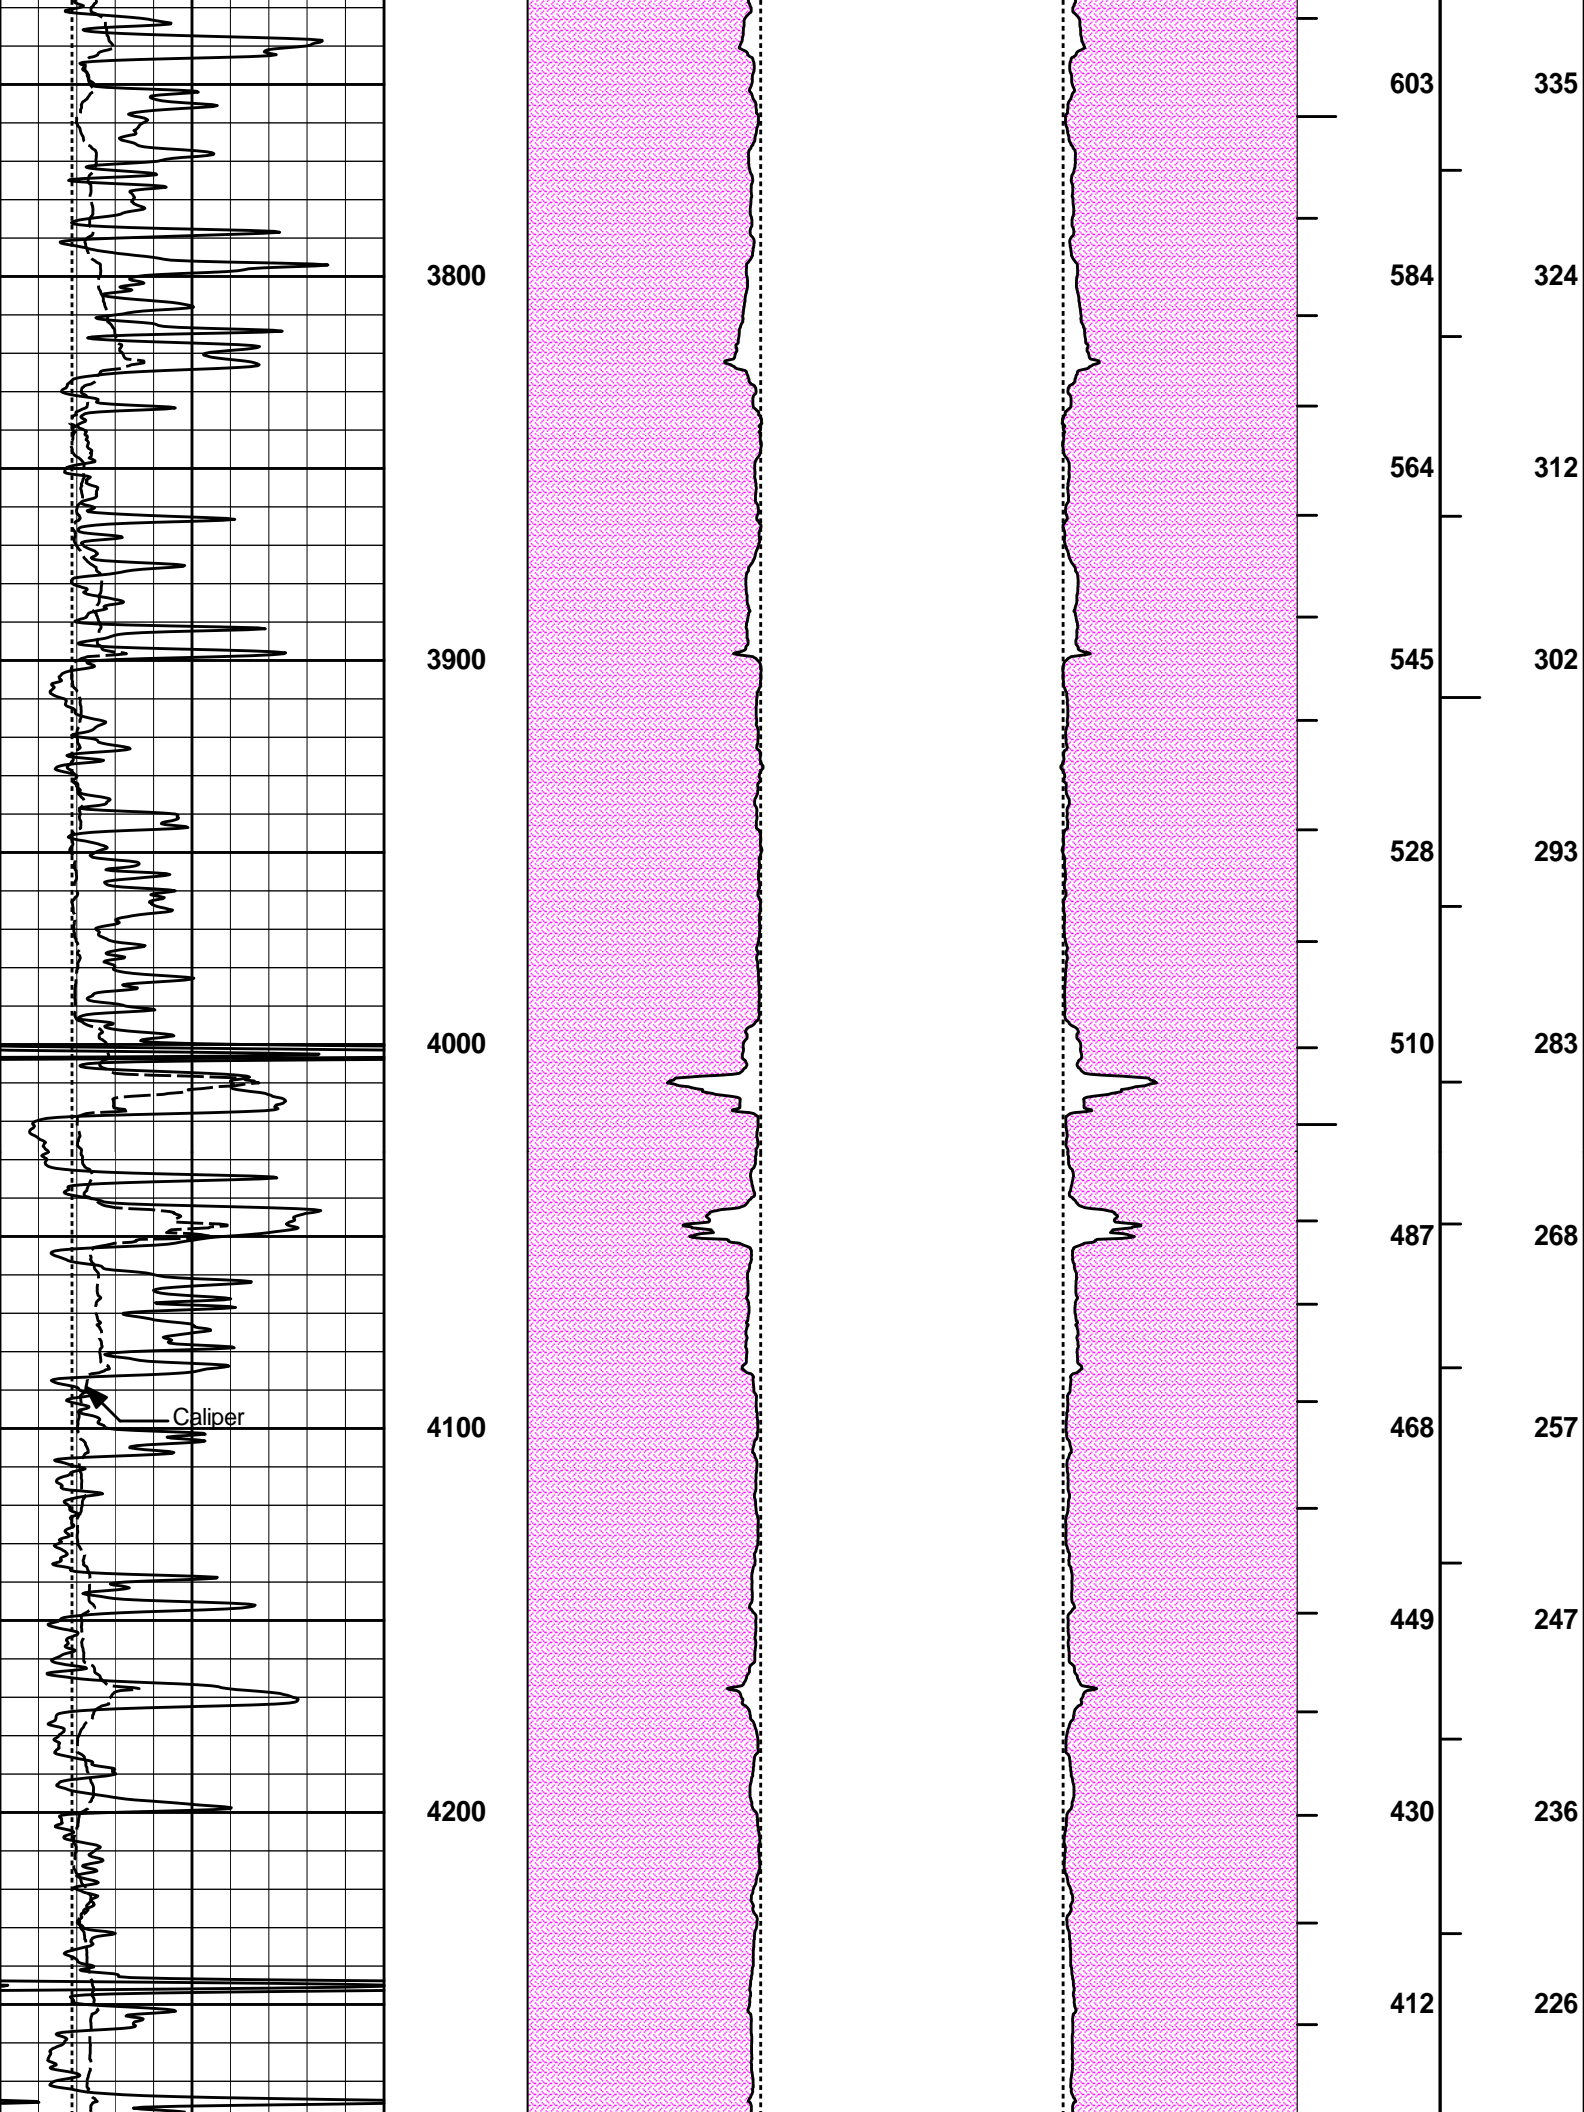

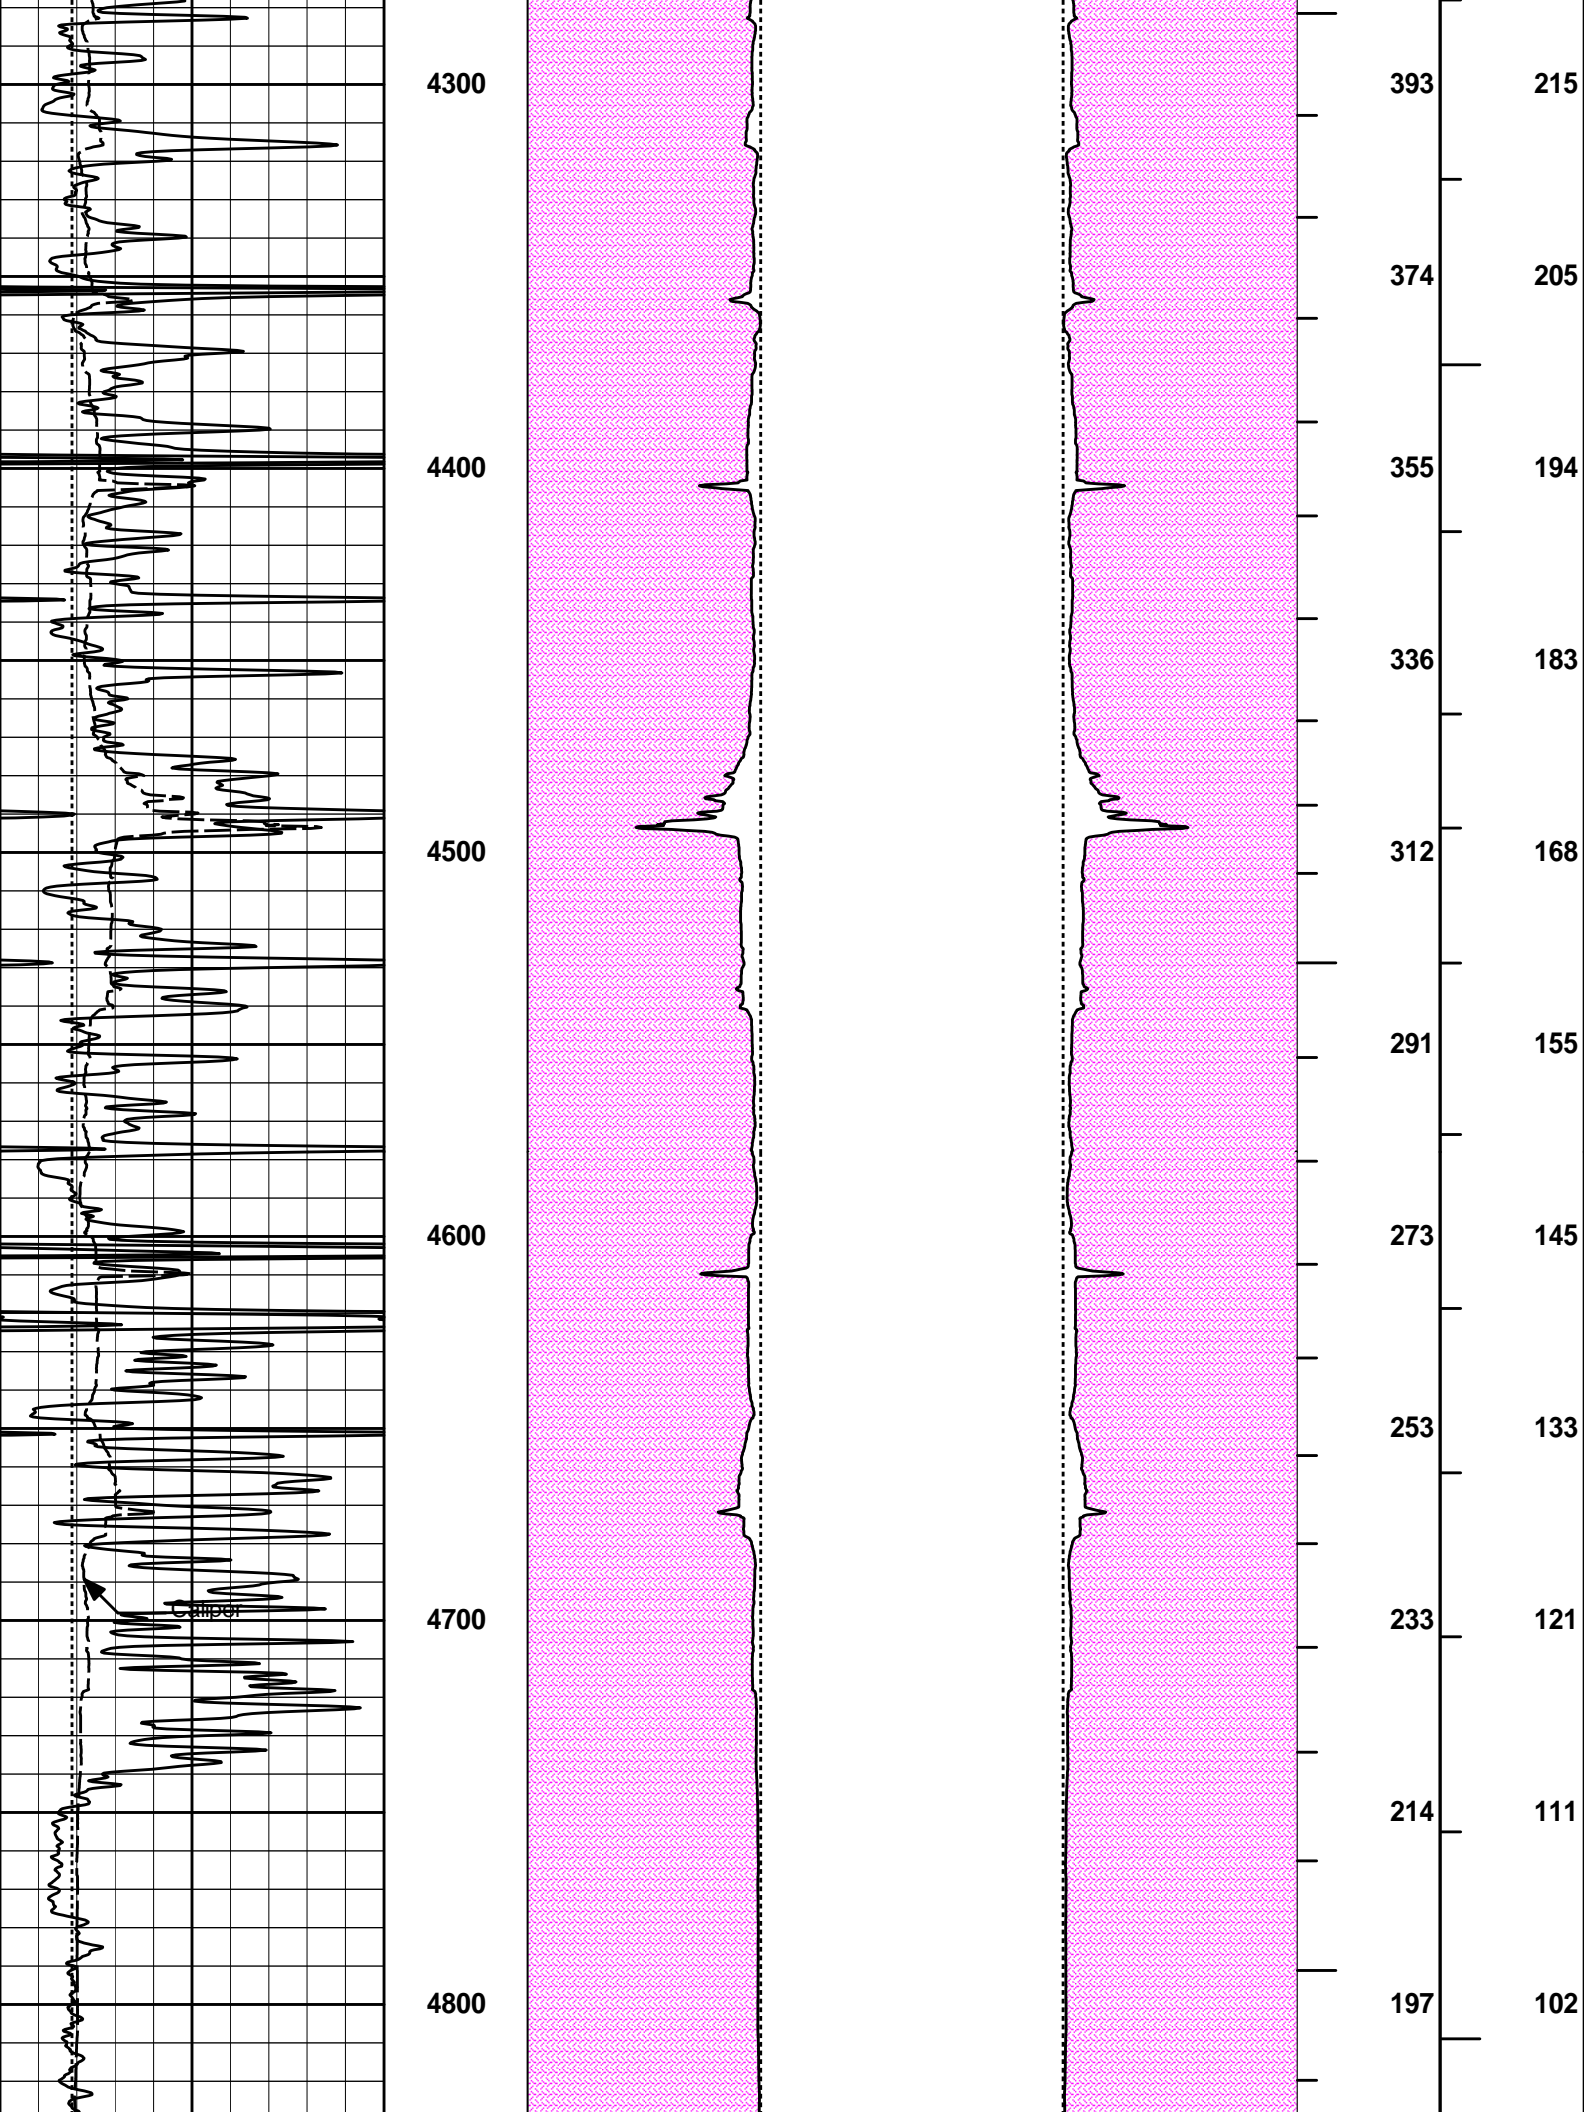

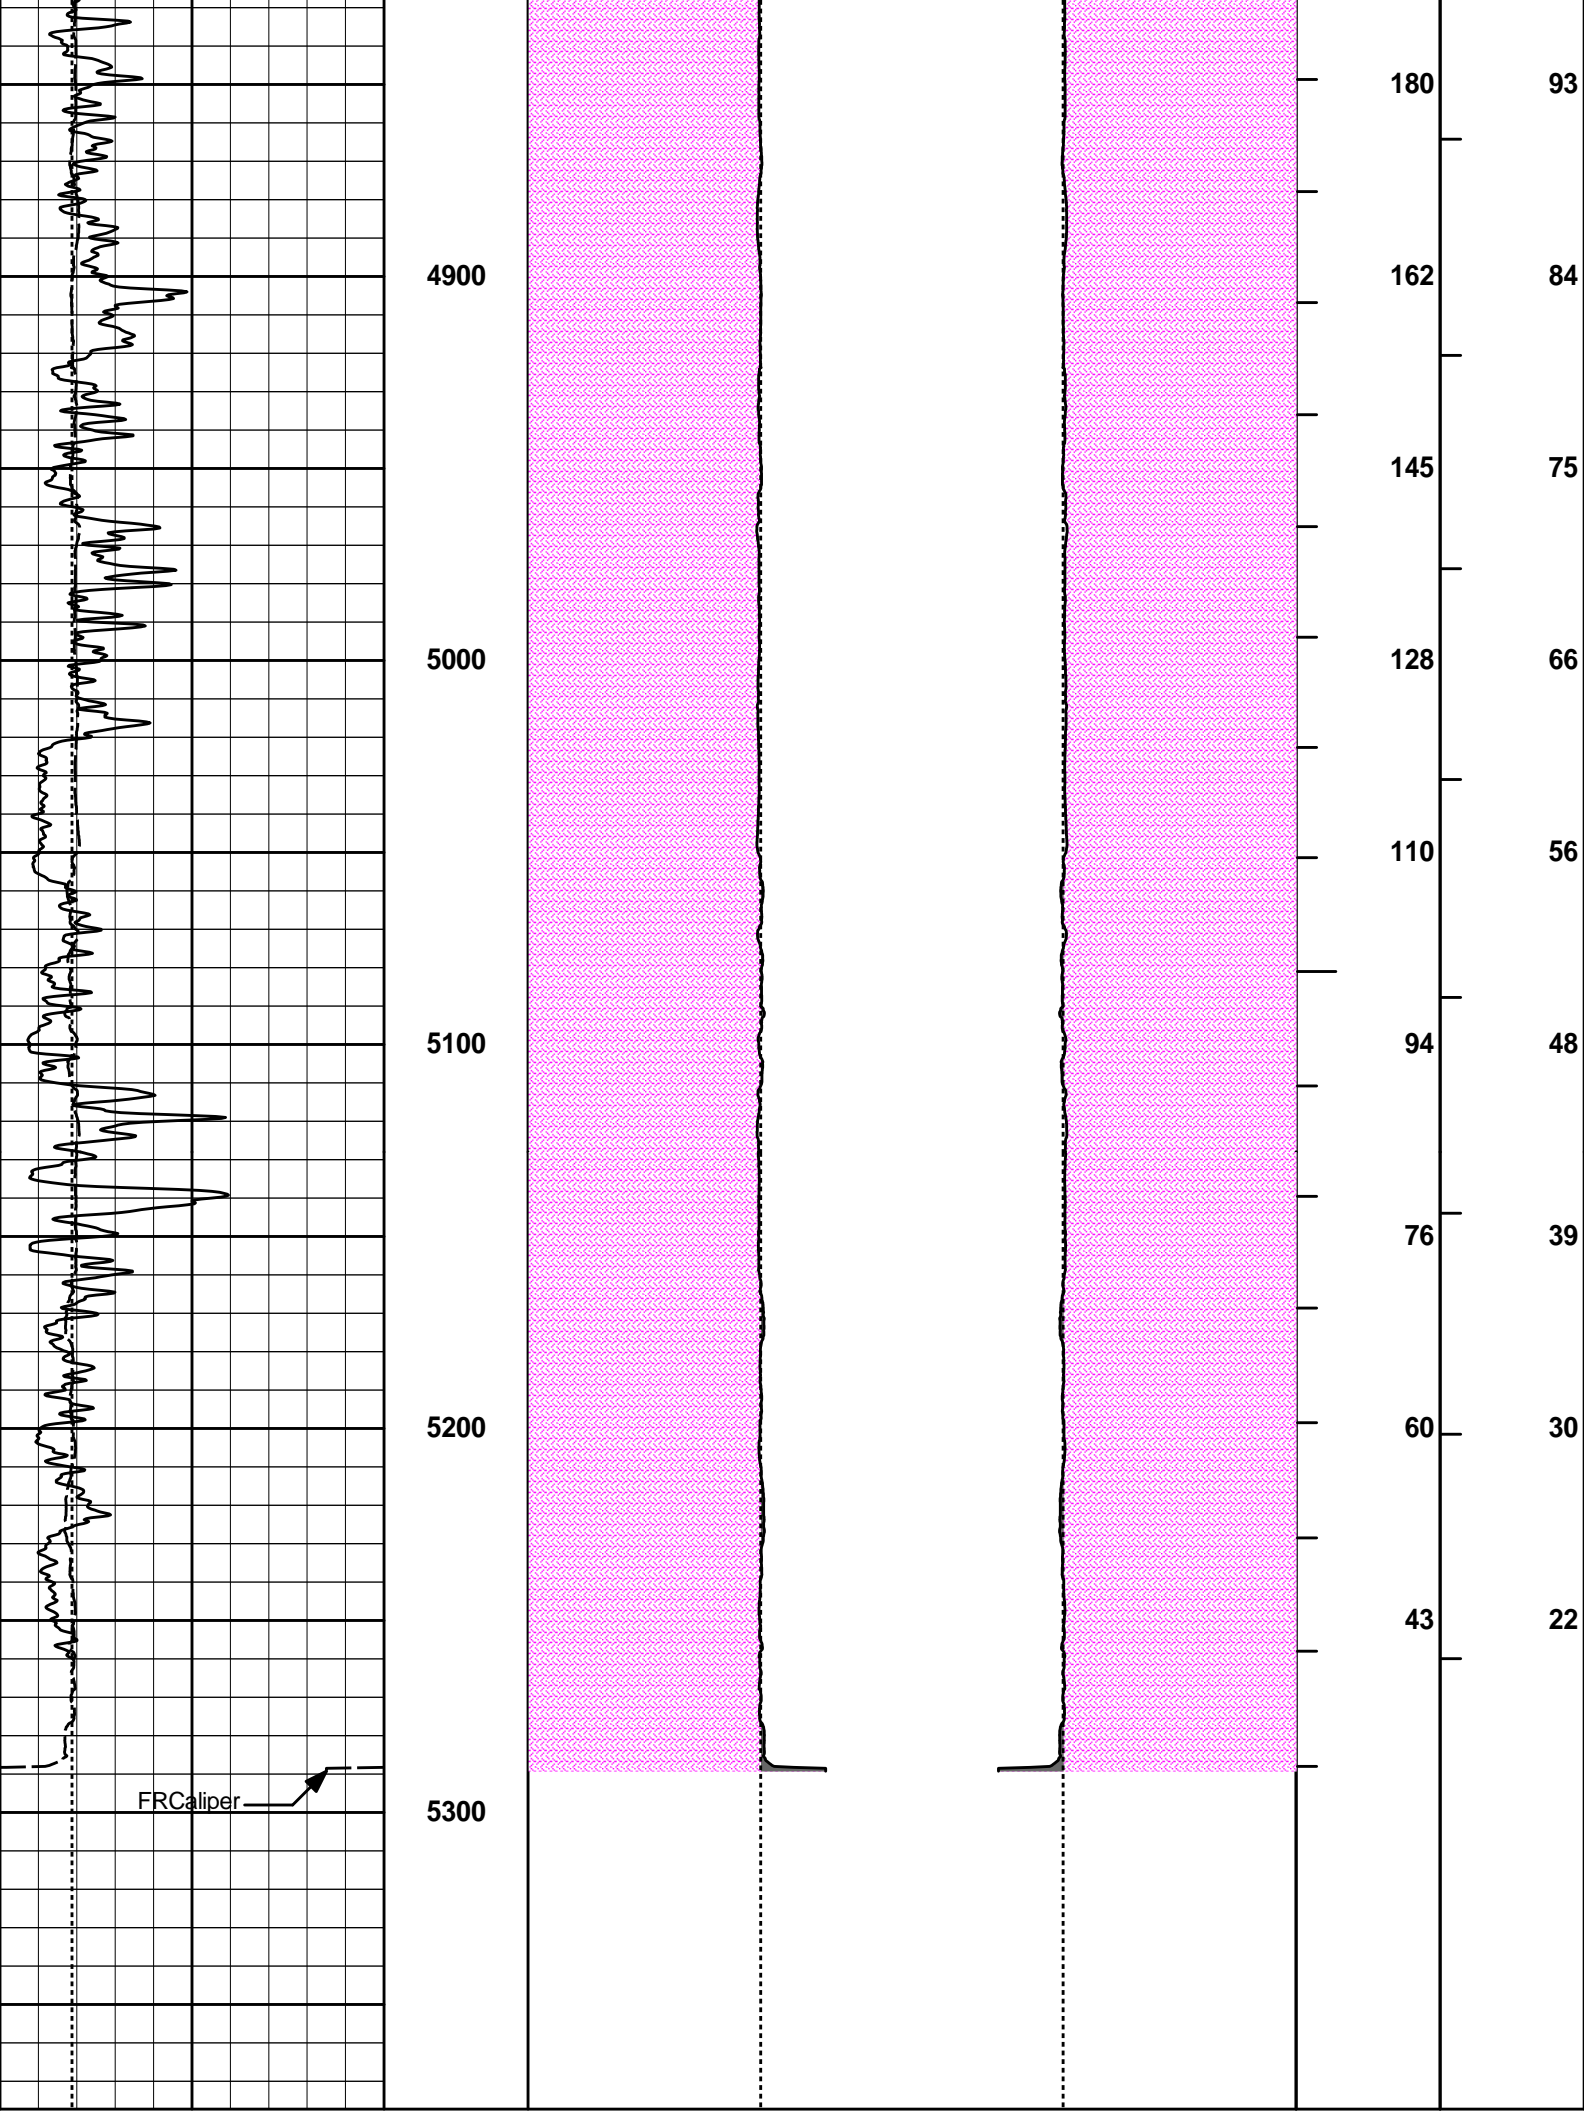

6	Caliper	16	MD 1 : 600 ft	20	Caliper	0 0	20	BHVT	AHVT
	inches					inches			
6	Bit Size	16		20	Bit Size	0 0	20		
	inches								
0	Gamma API	150							
	api				MUDCAKE		MUDCAKE		

HALLIBURTON

Plot Time: 18-Apr-13 03:21:44
 Plot Range: 340 ft to 5377.25 ft
 Data: PAMELA_2330_1-3\Well Based\DAQ-0001-003\
 Plot File: \\-LOCAL-1PAMELA_2330_1-3\0001 SP-GTET-DSN-SDL-XRMI-WSTT-ACRT-BNPORVAHV_2_IQ_LIB

ANNULAR HOLE VOLUME PLOT

COMPANY	SANDRIDGE ENERGY		
WELL	PAMELA 2330 1-34 RE		
FIELD			
COUNTY	FINNEY	STATE	KANSAS

HALLIBURTON

DUAL SPACED NEUTRON
SPECTRAL DENSITY
LOG