



Weatherford

MICRORESISTIVITY LOG

COMPANY

RED OAK ENERGY, INC.

WELL

ST-SI UNIT #1-30

FIELD

WILDCAT

PROVINCE/COUNTY

SCOTT

COUNTRY/STATE

U.S.A. / KANSAS

LOCATION

199' FNL & 2284' FWL

SEC 30

TWP 17S

RGE 33W

Other Services

Latitude

MDN/MPD

MSS

MAI/MFE

Longitude

Permanent Datum GL, Elevation 3083 feet

Log Measured From KB

Drilling Measured From KB @ 5 feet

Date

07-JUL-2016

Run Number

ONE

Service Order

7577-155028408

Depth Driller

4929.00

Depth Logger

4928.00

First Reading

4882.00

Last Reading

3890.00

Casing Driller

261.00

Casing Logger

260.00

Bit Size

7.875

Hole Fluid Type

CHEMICAL

Density / Viscosity

9.20 lb/USg

PH / Fluid Loss

10.00

Sample Source

FLOW LINE

Rm @ Measured Temp

0.54 @ 75.0

Rmf @ Measured Temp

0.43 @ 75.0

Rmc @ Measured Temp

0.64 @ 75.0

Source Rmf / Rmc

CALC

Rm @ BHT

0.34 @123.0

Time Since Circulation

3 HOURS

Max Recorded Temp

123.00

Equipment / Base

13096

Recorded By

JEFFREY RANDLE

Witnessed By

SEAN DEENIHAN

Elevations:
KB 3088.00
DF 3087.00
GL 3083.00

BOREHOLE RECORD

Last Edited: 07-JUL-2016 18:30

Bit Size inches	Depth From feet	Depth To feet
12.250	0.00	270.00
7.875	270.00	4929.00

CASING RECORD

Type	Size inches	Depth From feet	Shoe Depth feet	Weight pounds/ft
SURFACE	8.625	0.00	261.00	24.00

REMARKS

- SOFTWARE ISSUE: WLS 15.03.5939.
- RUN ONE: MCG, MML, MDN, MPD, MFE, MSS, MAI RUN IN COMBINATION.
 - HARDWARE: DUAL BOWSPRING USED ON MDN.
 - 0.5 INCH STANDOFF USED ON MFE.
 - TWO 0.5 INCH STANDOFFS USED ON MSS.
 - 0.5 INCH STANDOFF USED ON MAI.
- 2.71 G/CC LIMESTONE DENSITY MATRIX USED TO CALCULATE POROSITY.
- BOREHOLE RUGOSITY, TIGHT PULLS, AND WASHOUTS WILL AFFECT DATA QUALITY.
- ALL INTERVALS LOGGED AND SCALED PER CUSTOMER'S REQUEST.
- TOTAL HOLE VOLUME FROM TD TO SURFACE CASING: 2447 CU.FT.
- ANNUAL HOLE VOLUME WITH 5.5 INCH PRODUCTION CASING FROM TD TO SURFACE CASING: 1689 CU.FT.

DST Uphole Tension
pounds
5000 0

Replay
Scale
1:240

3888

3900

116°



3950


116°


4000


116°


4050

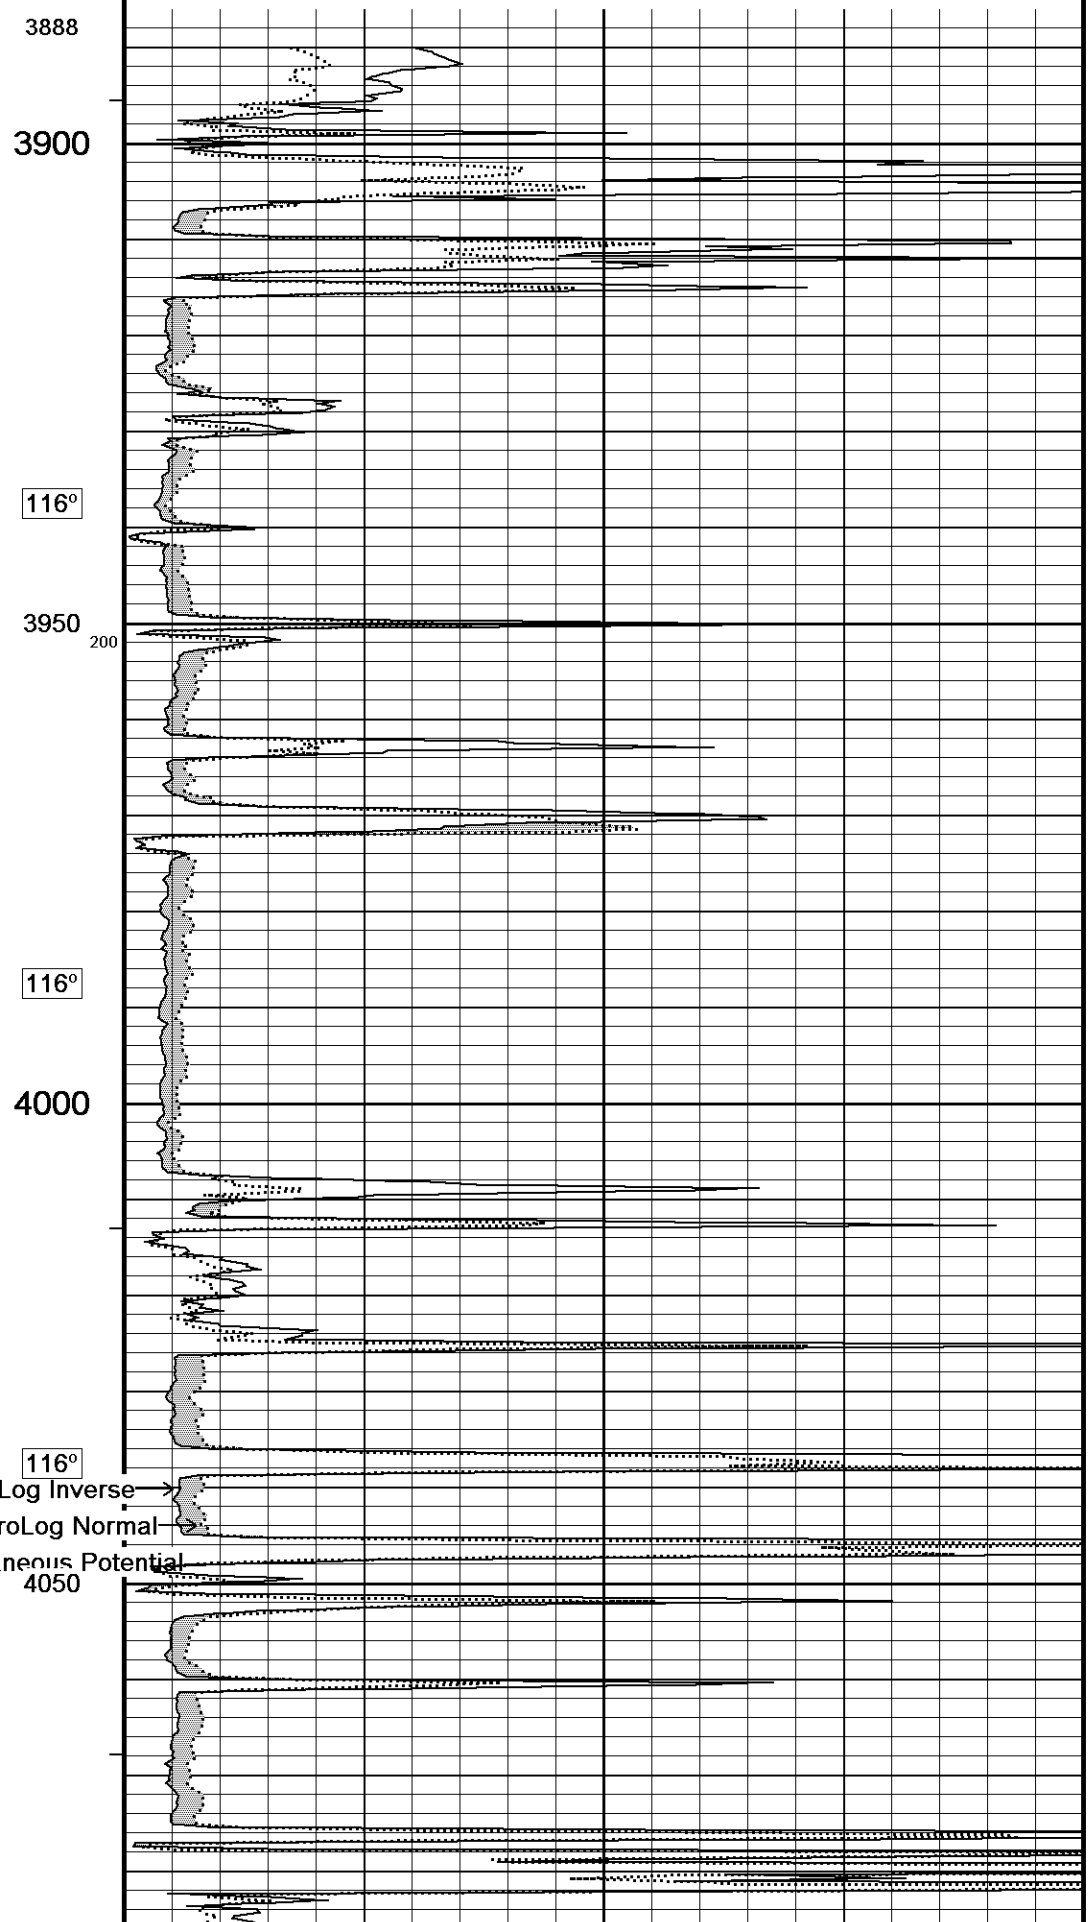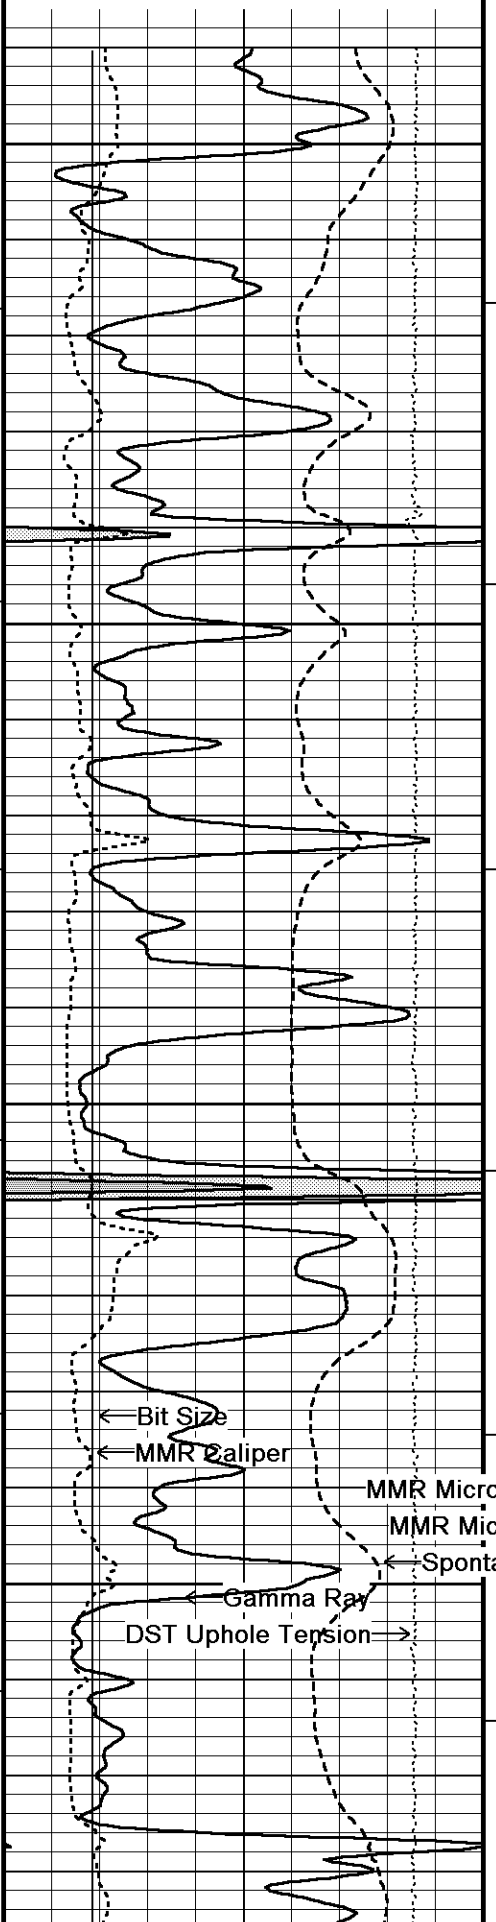


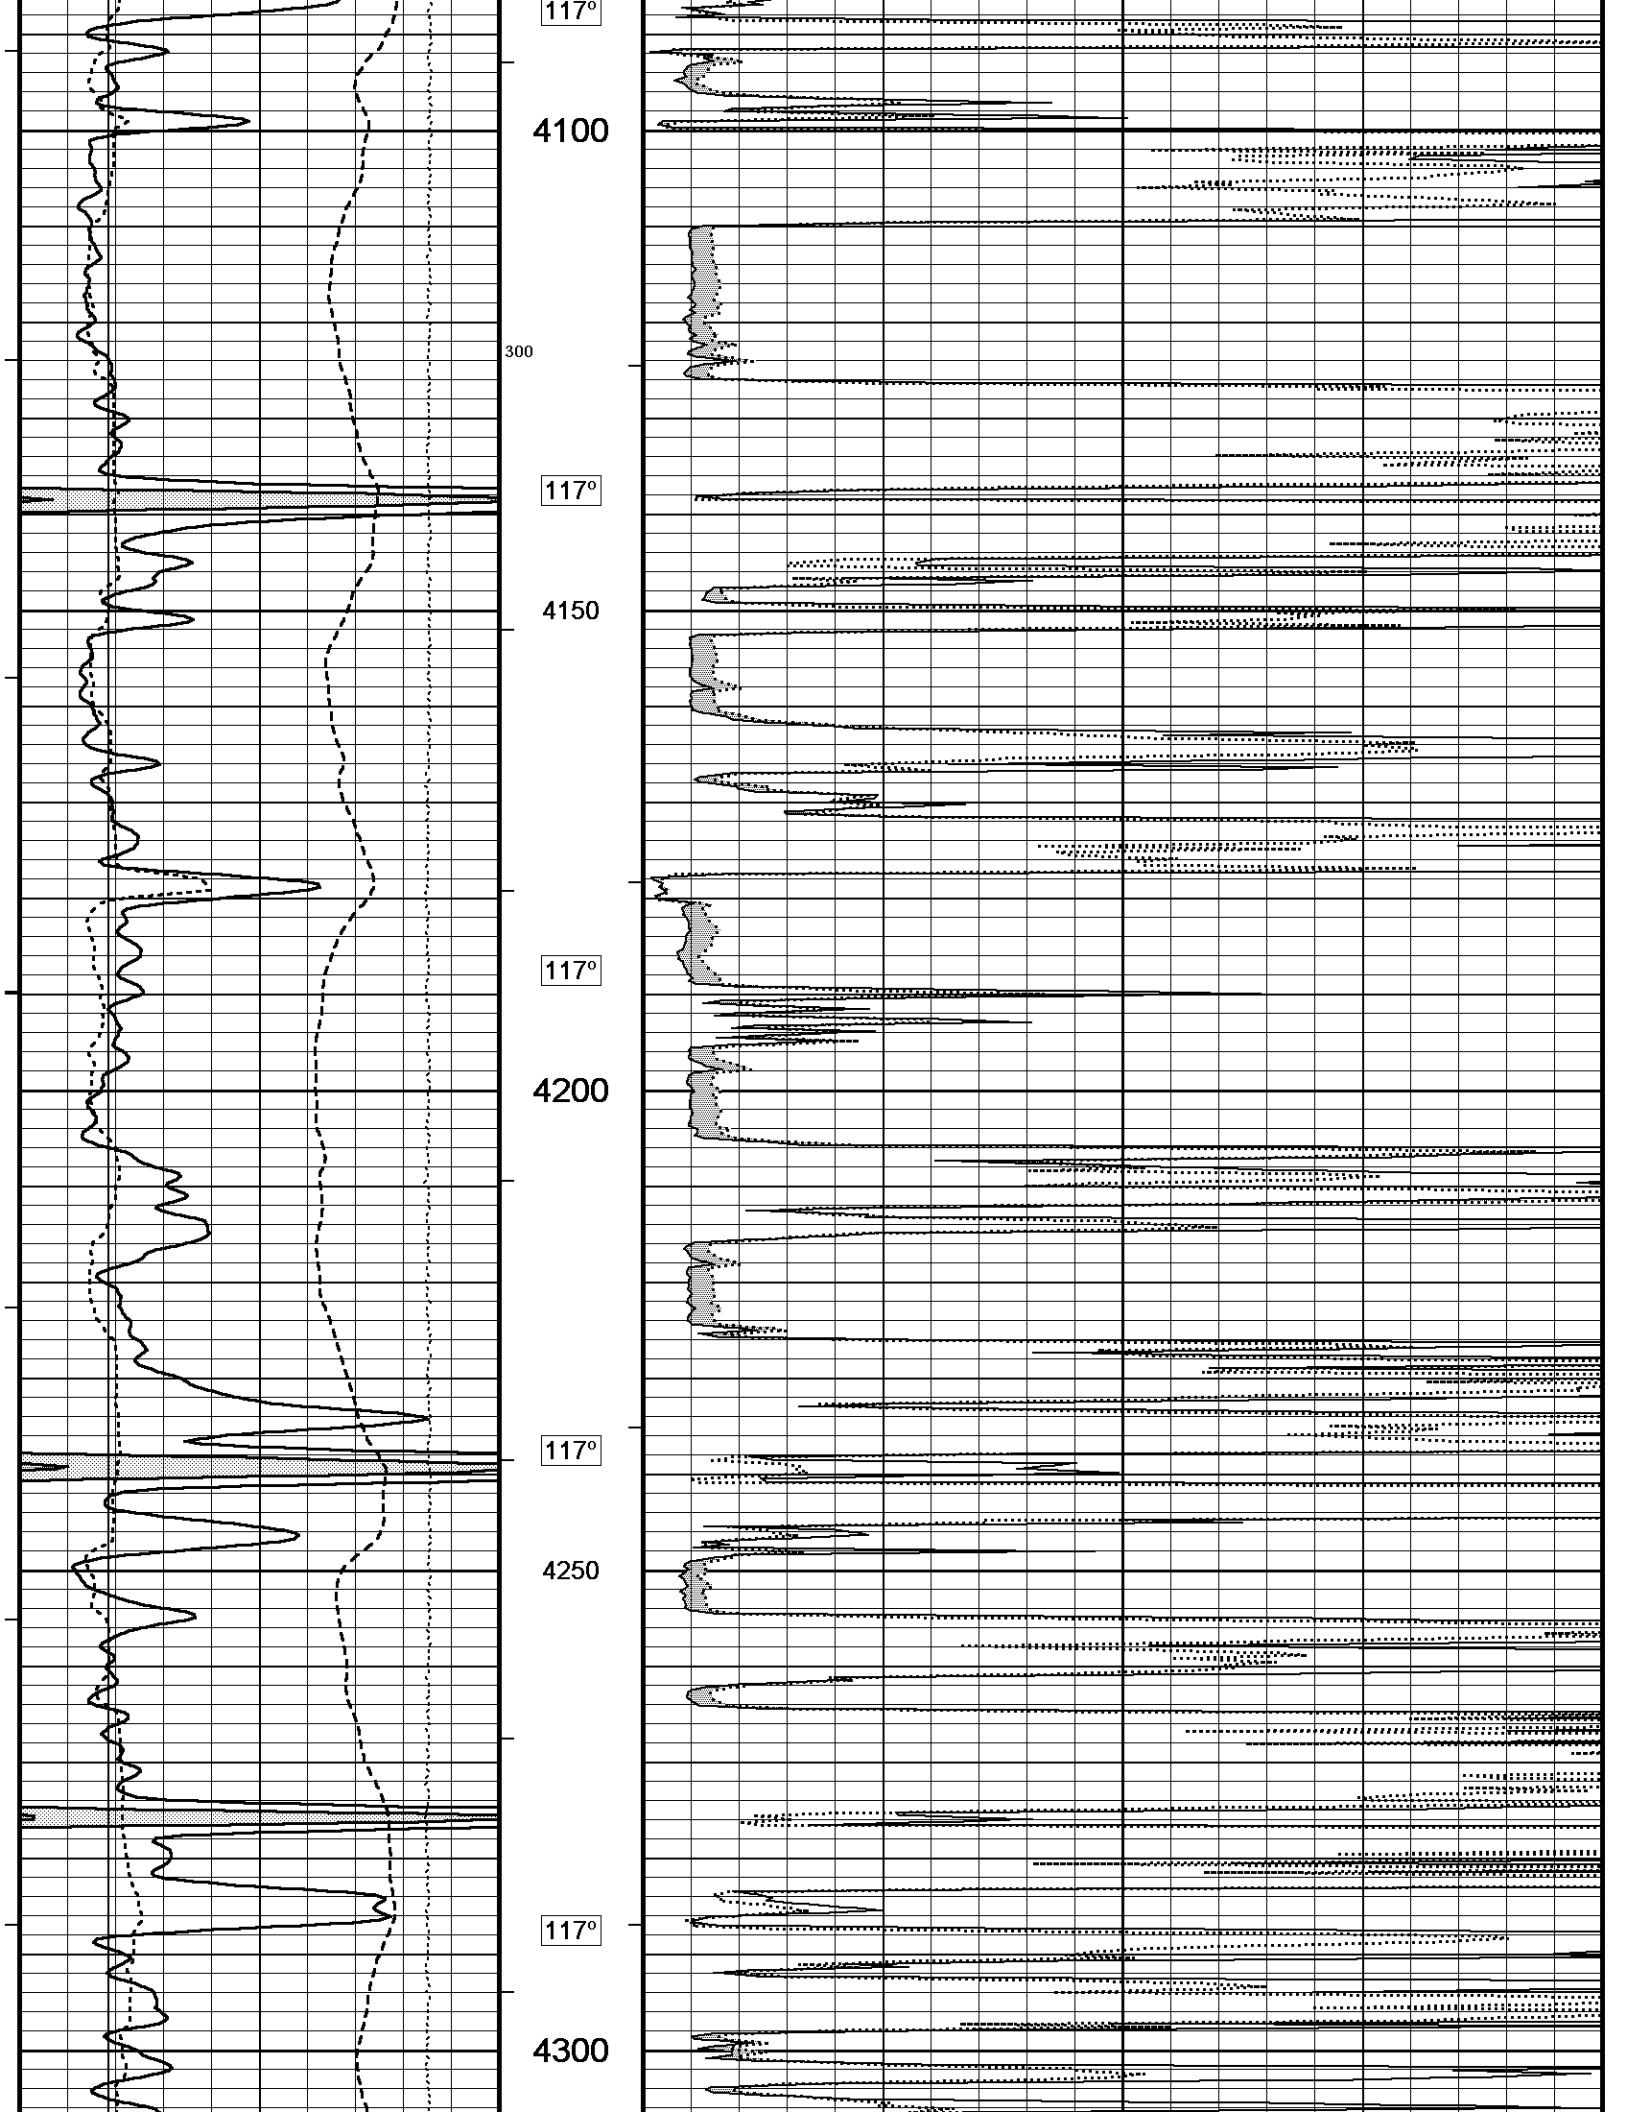

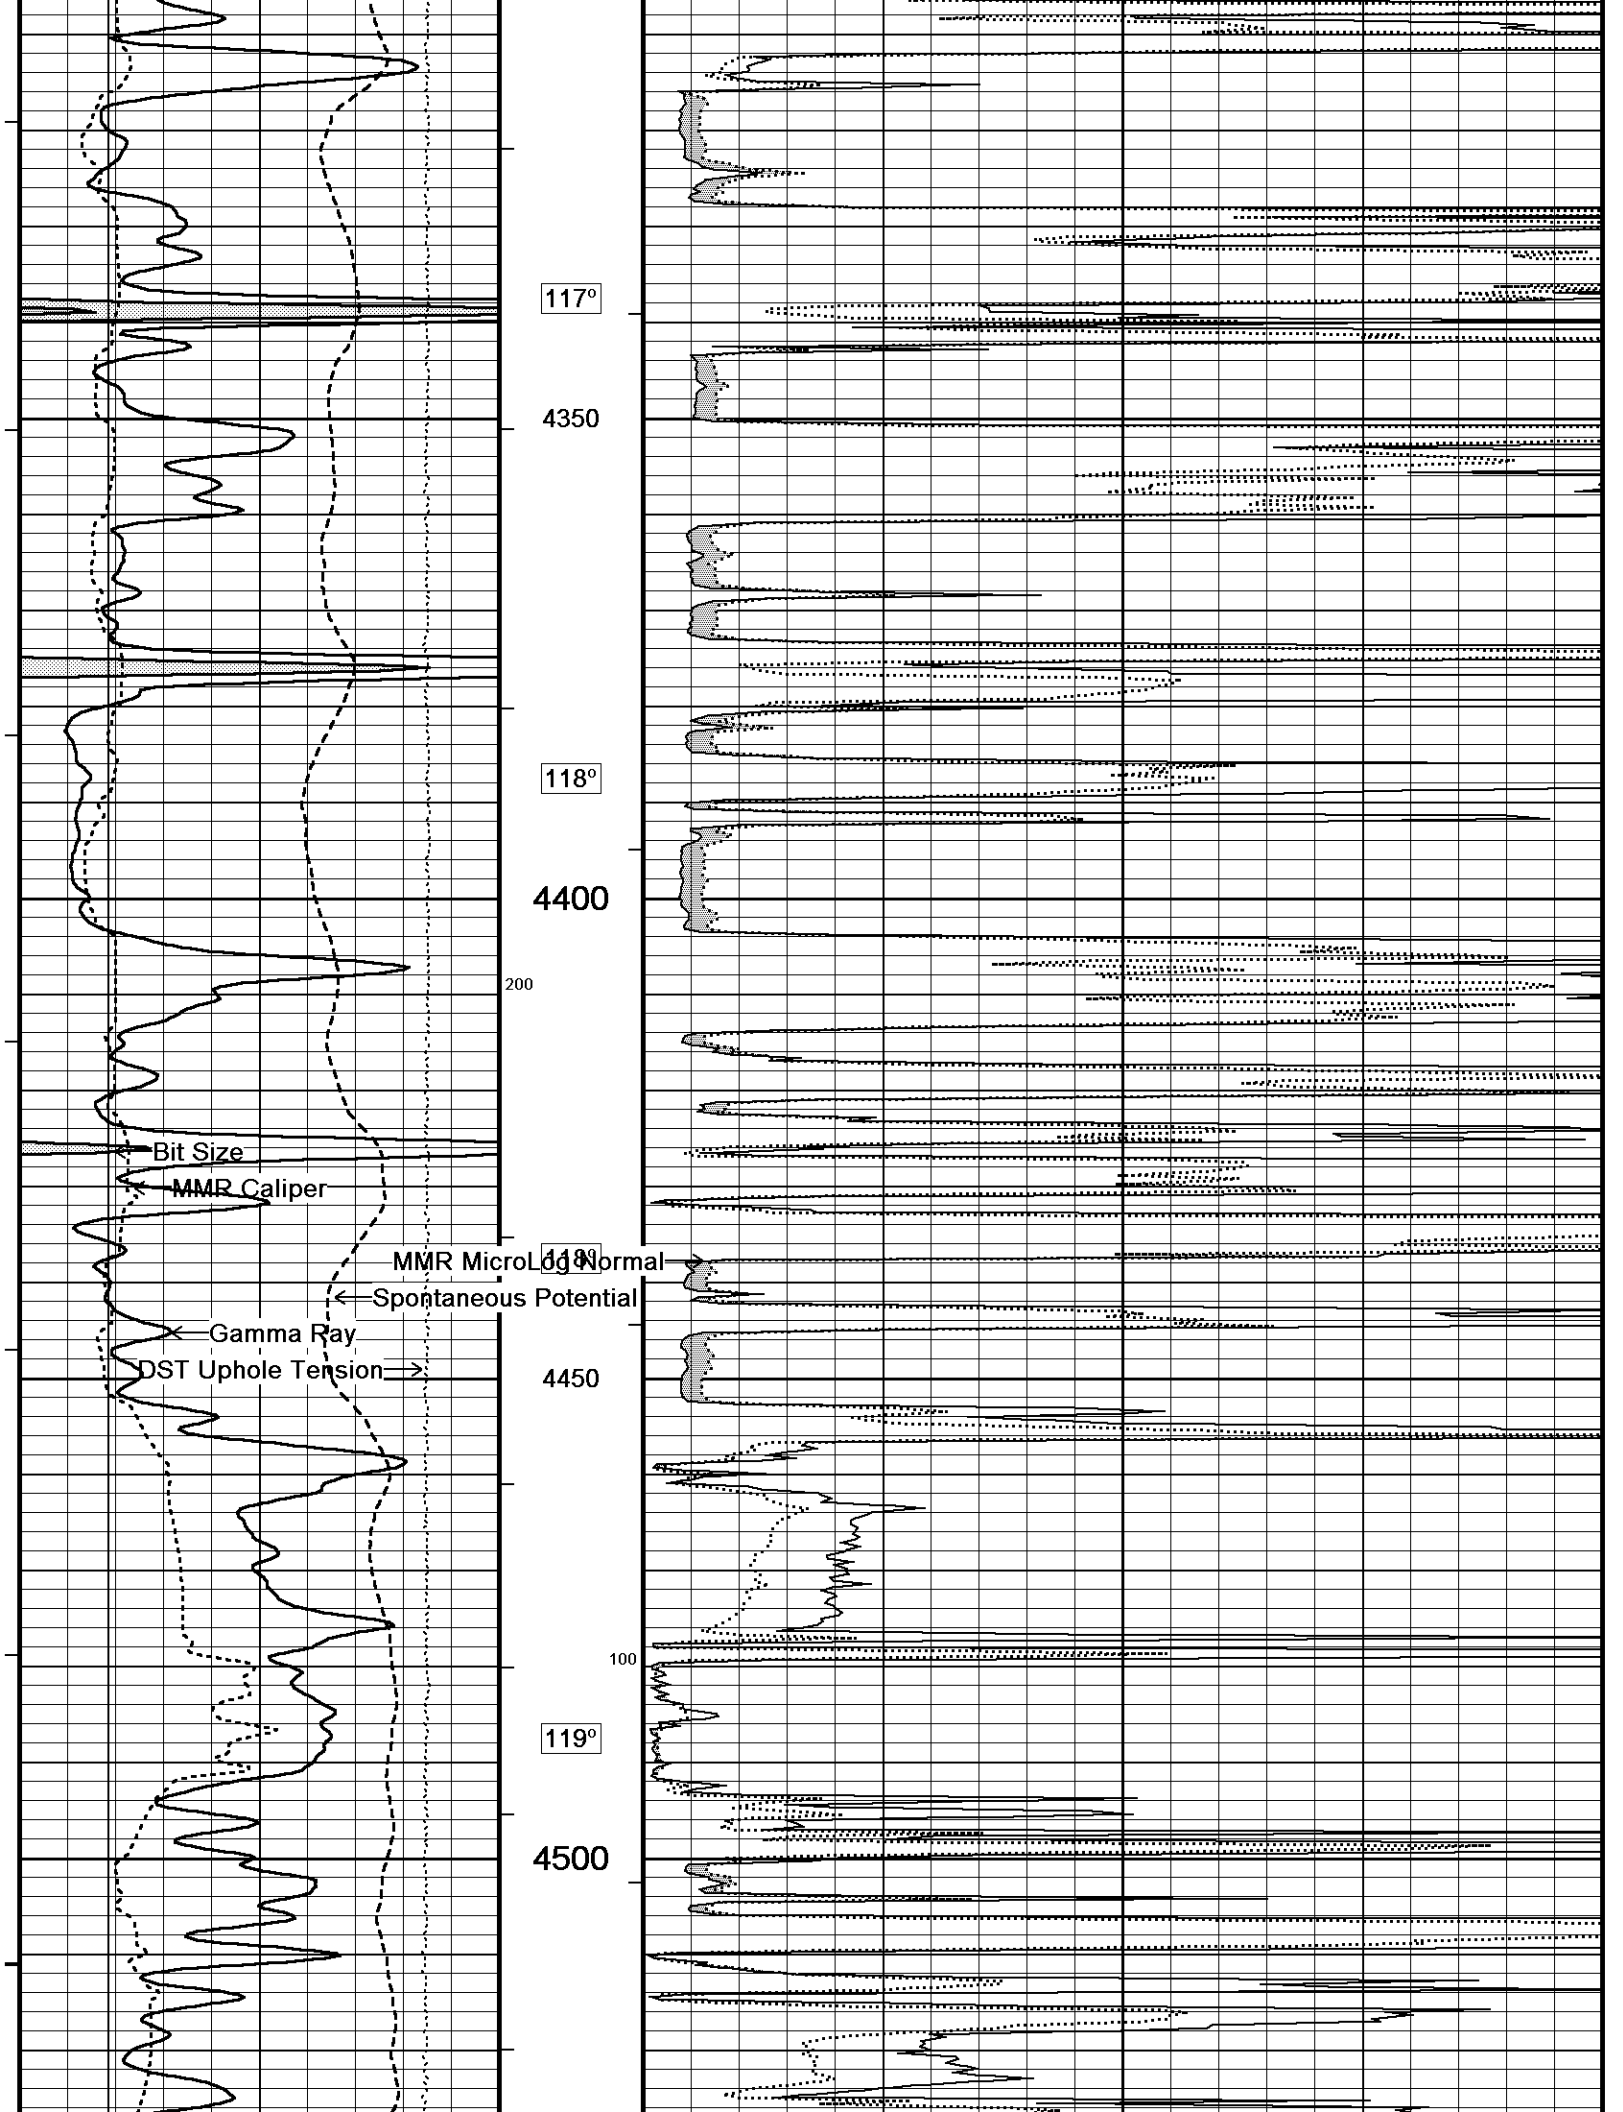

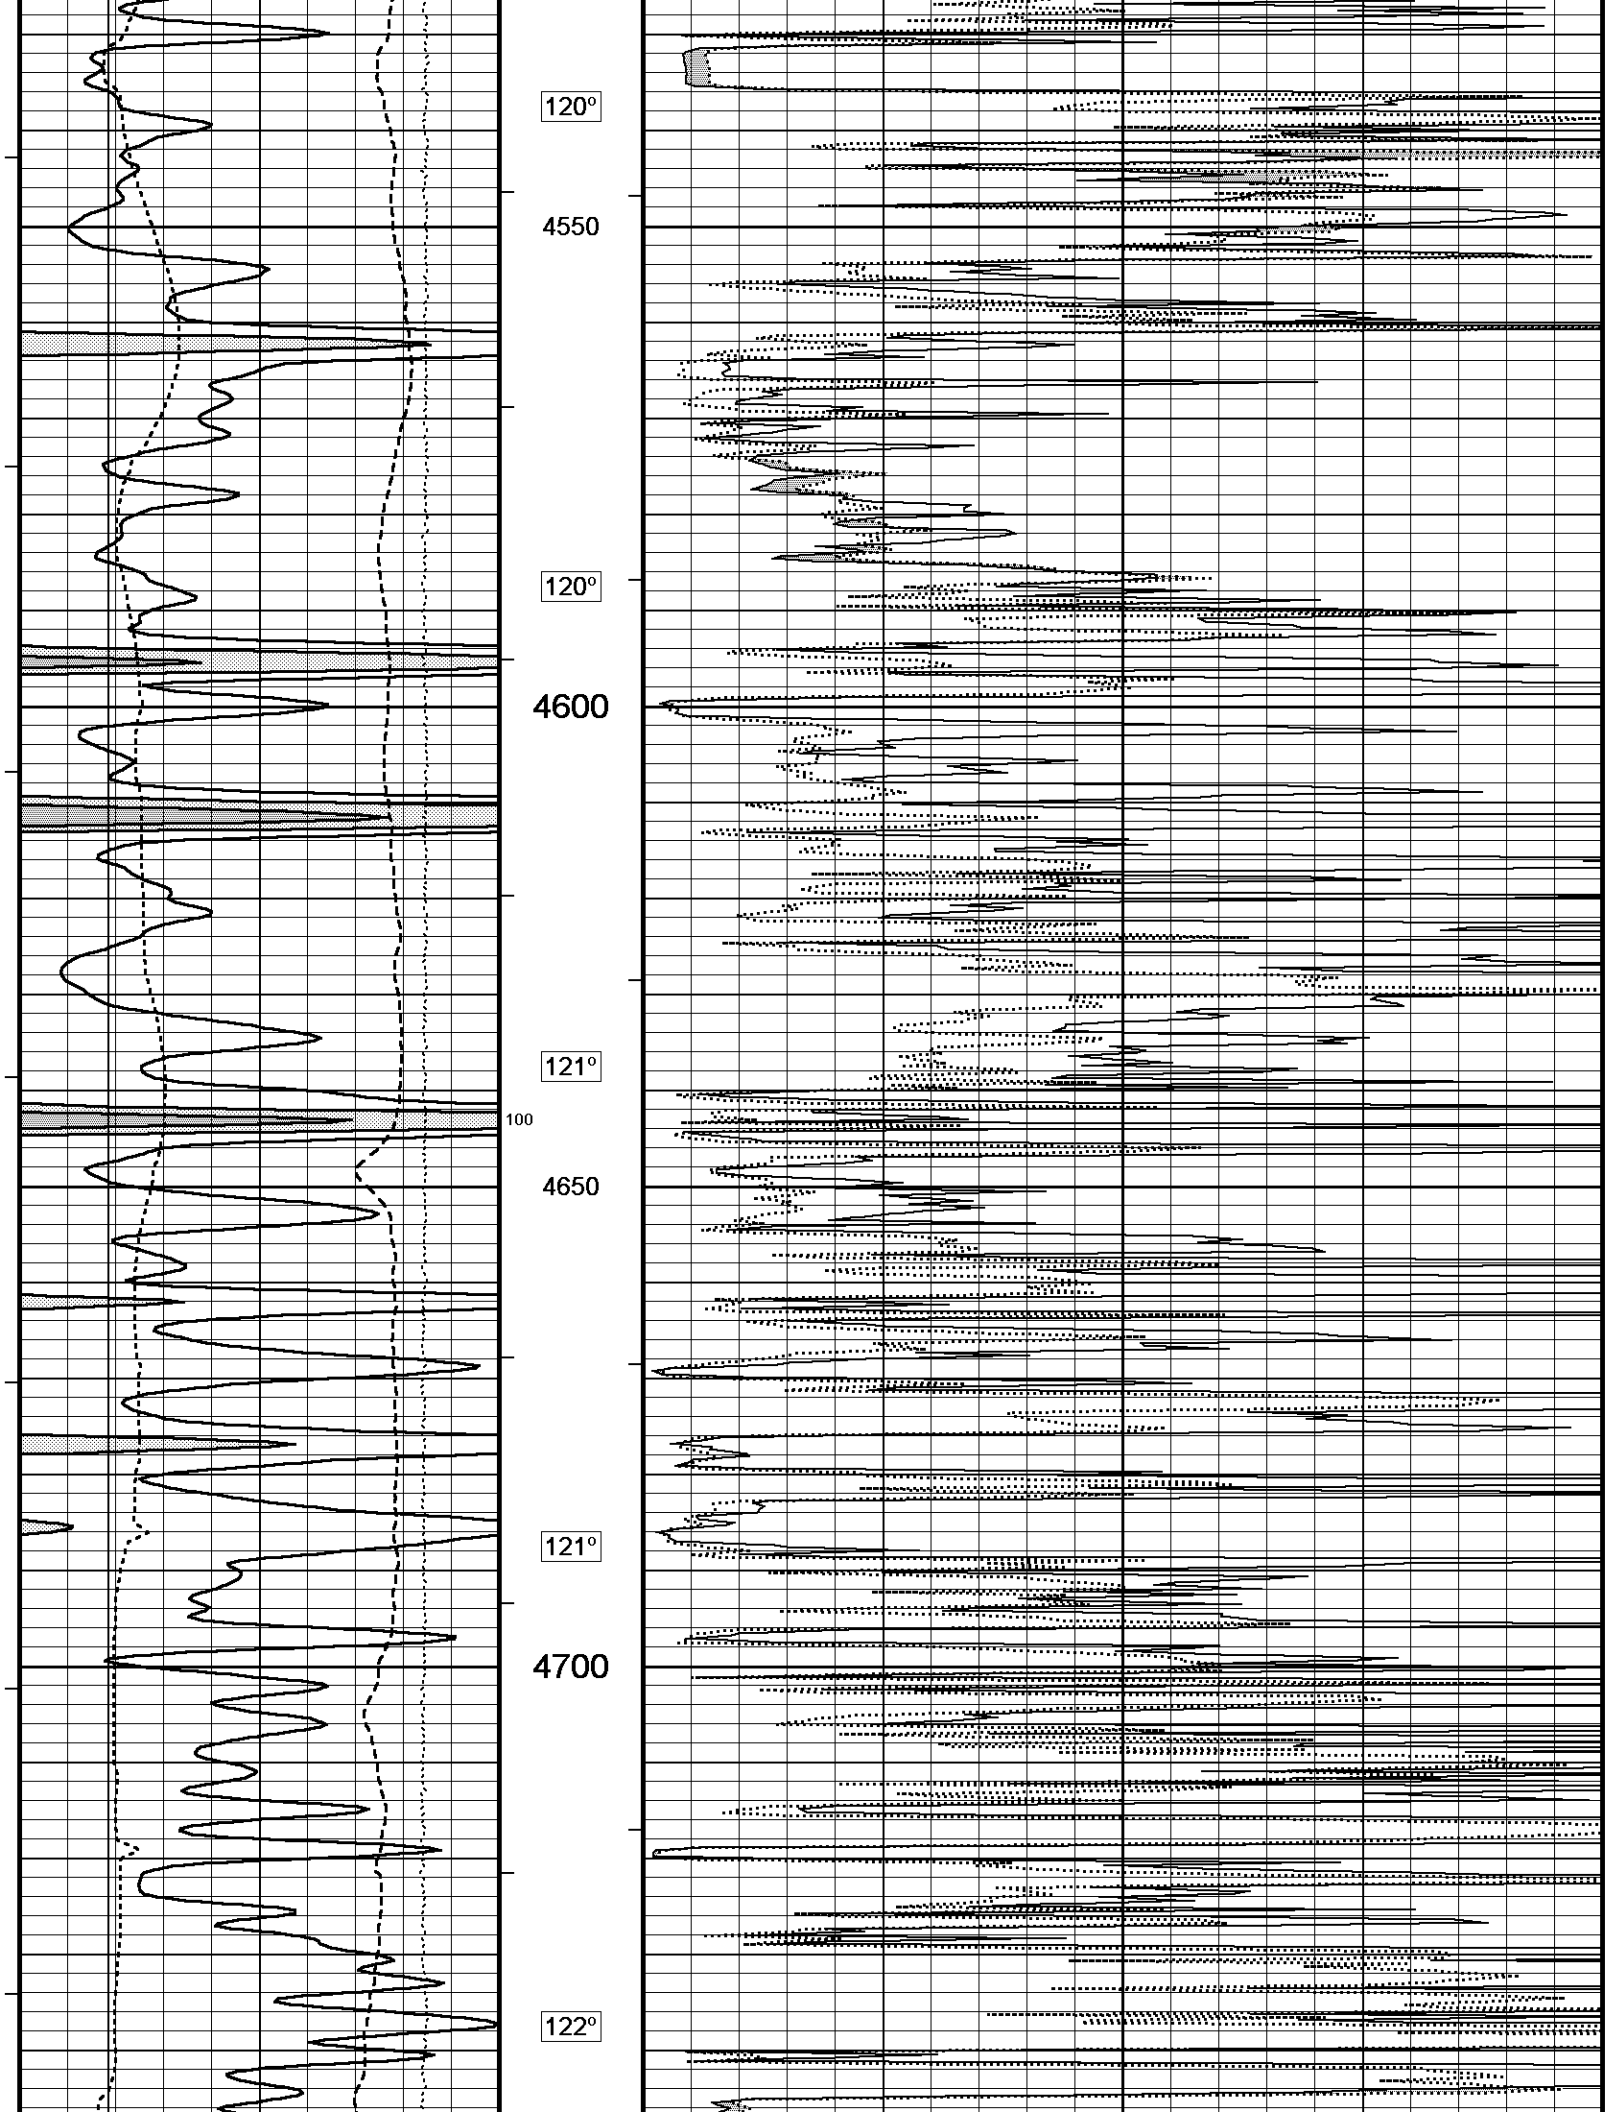

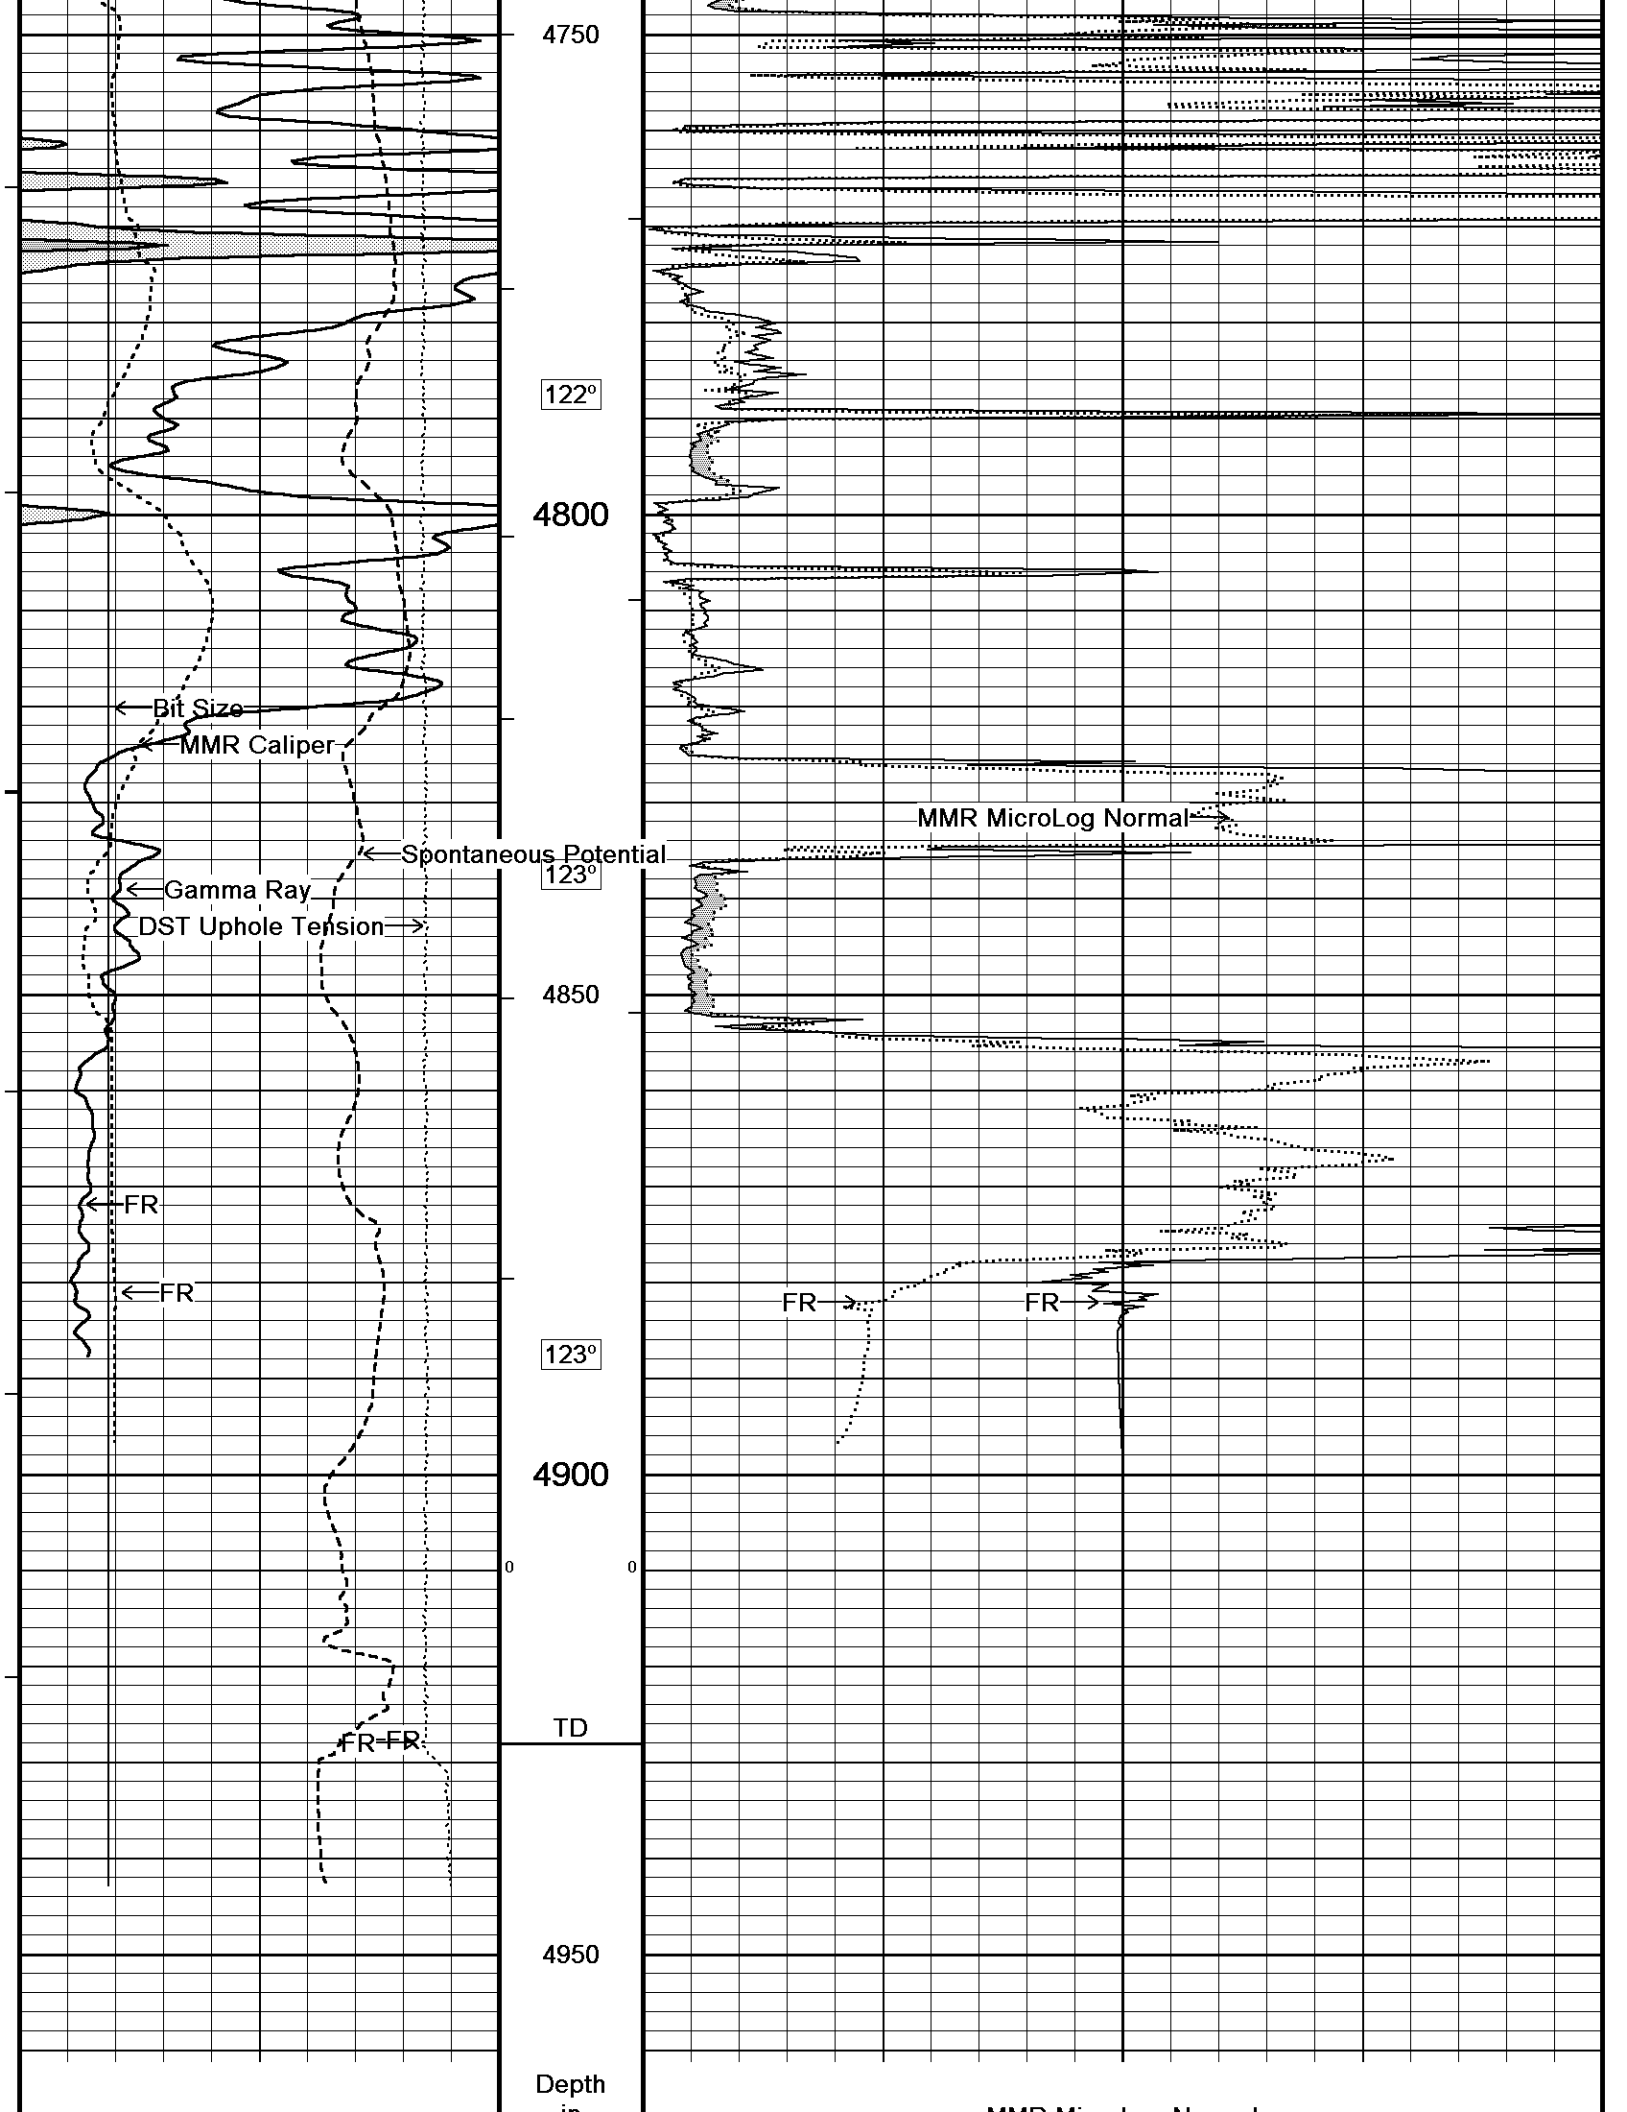

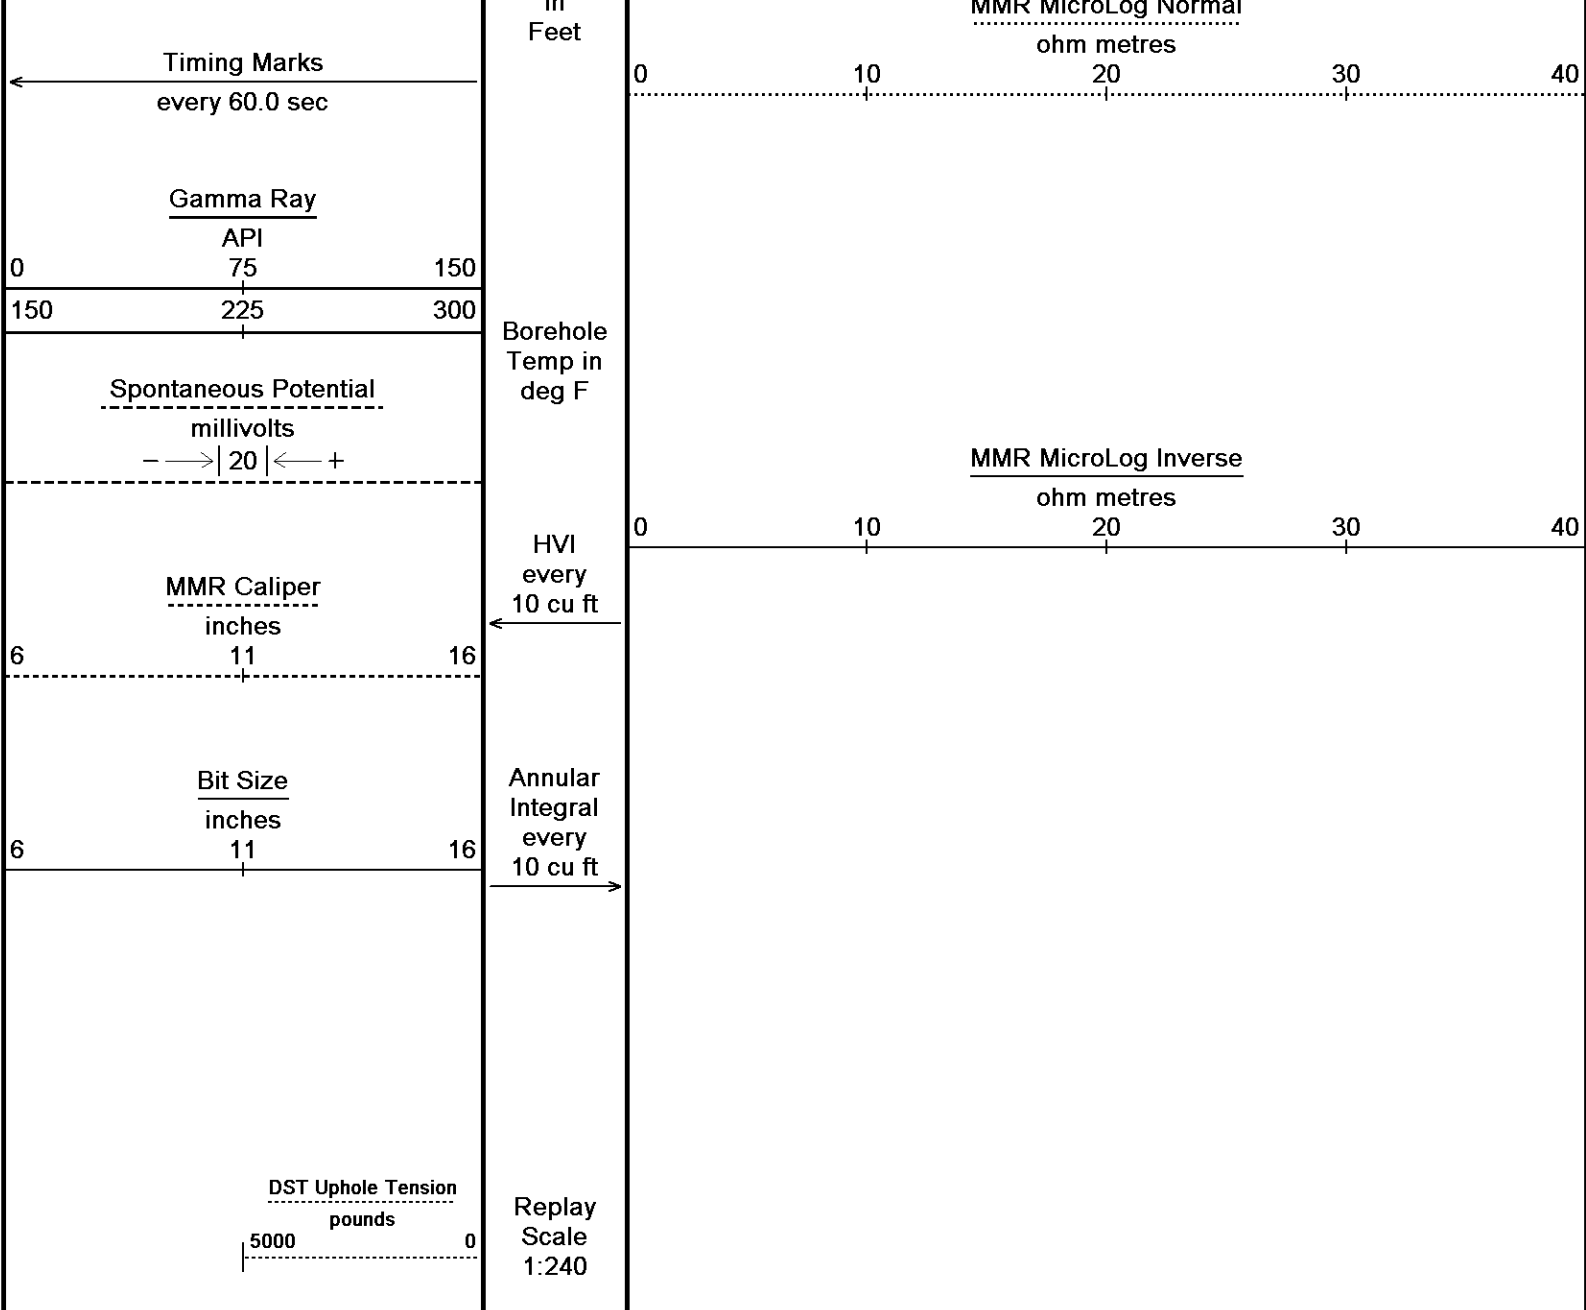


Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 07-JUL-2016 23:06
 Filename: C:\Minimus 15.03.5939\Logs\Red Oak ST-SI Unit #1-30\Red Oak ST-SI Unit #1-30 Main.dta
 Recorded on 07-JUL-2016 19:32
 System Versions: Logged with 15.03.5939 Plotted with 15.03.5939

5 INCH MAIN

REPEAT SECTION

Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 07-JUL-2016 23:06
 Filename: C:\Minimus 15.03.5939\Logs\Red Oak ST-SI Unit #1-30\Red Oak ST-SI Unit #1-30 Repeat.dta
 Recorded on 07-JUL-2016 19:14
 System Versions: Logged with 15.03.5939 Plotted with 15.03.5939

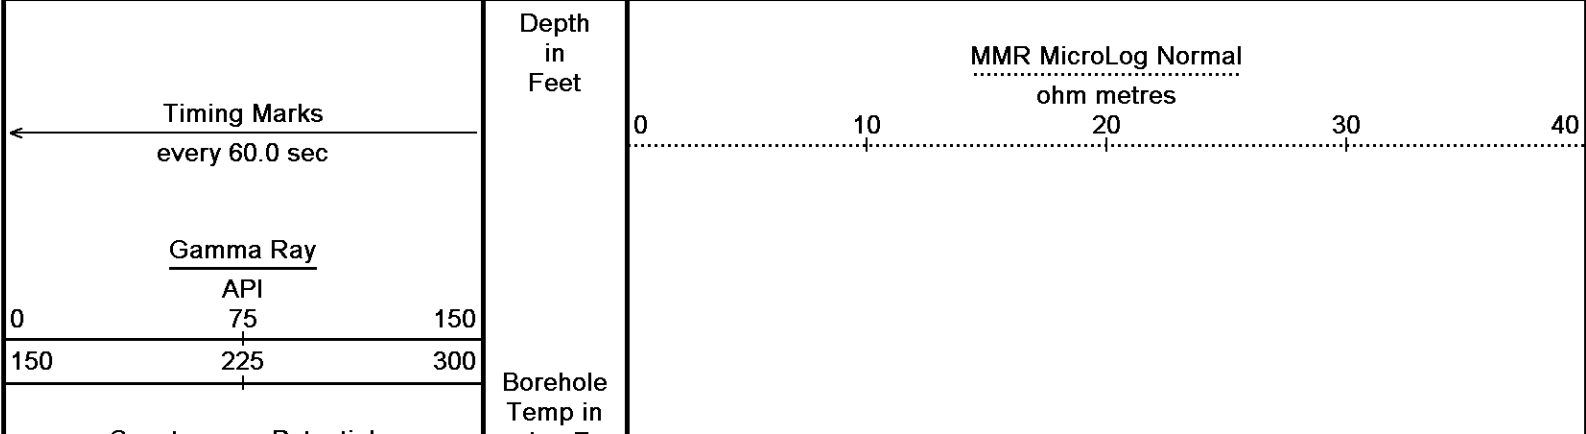

Spontaneous Potential
millivolts
- -> | 20 | <- +

MMR Caliper
inches
6 11 16

Bit Size
inches
6 11 16

DST Uphole Tension
pounds
5000 0

deg F

HVI
every
10 cu ft

Annular
Integral
every
10 cu ft

Replay
Scale
1:240

4726

4750

122°

4800

MMR MicroLog Inverse



Spontaneous Potential





122°

MMR MicroLog Inverse

ohm metres

0 10 20 30 40

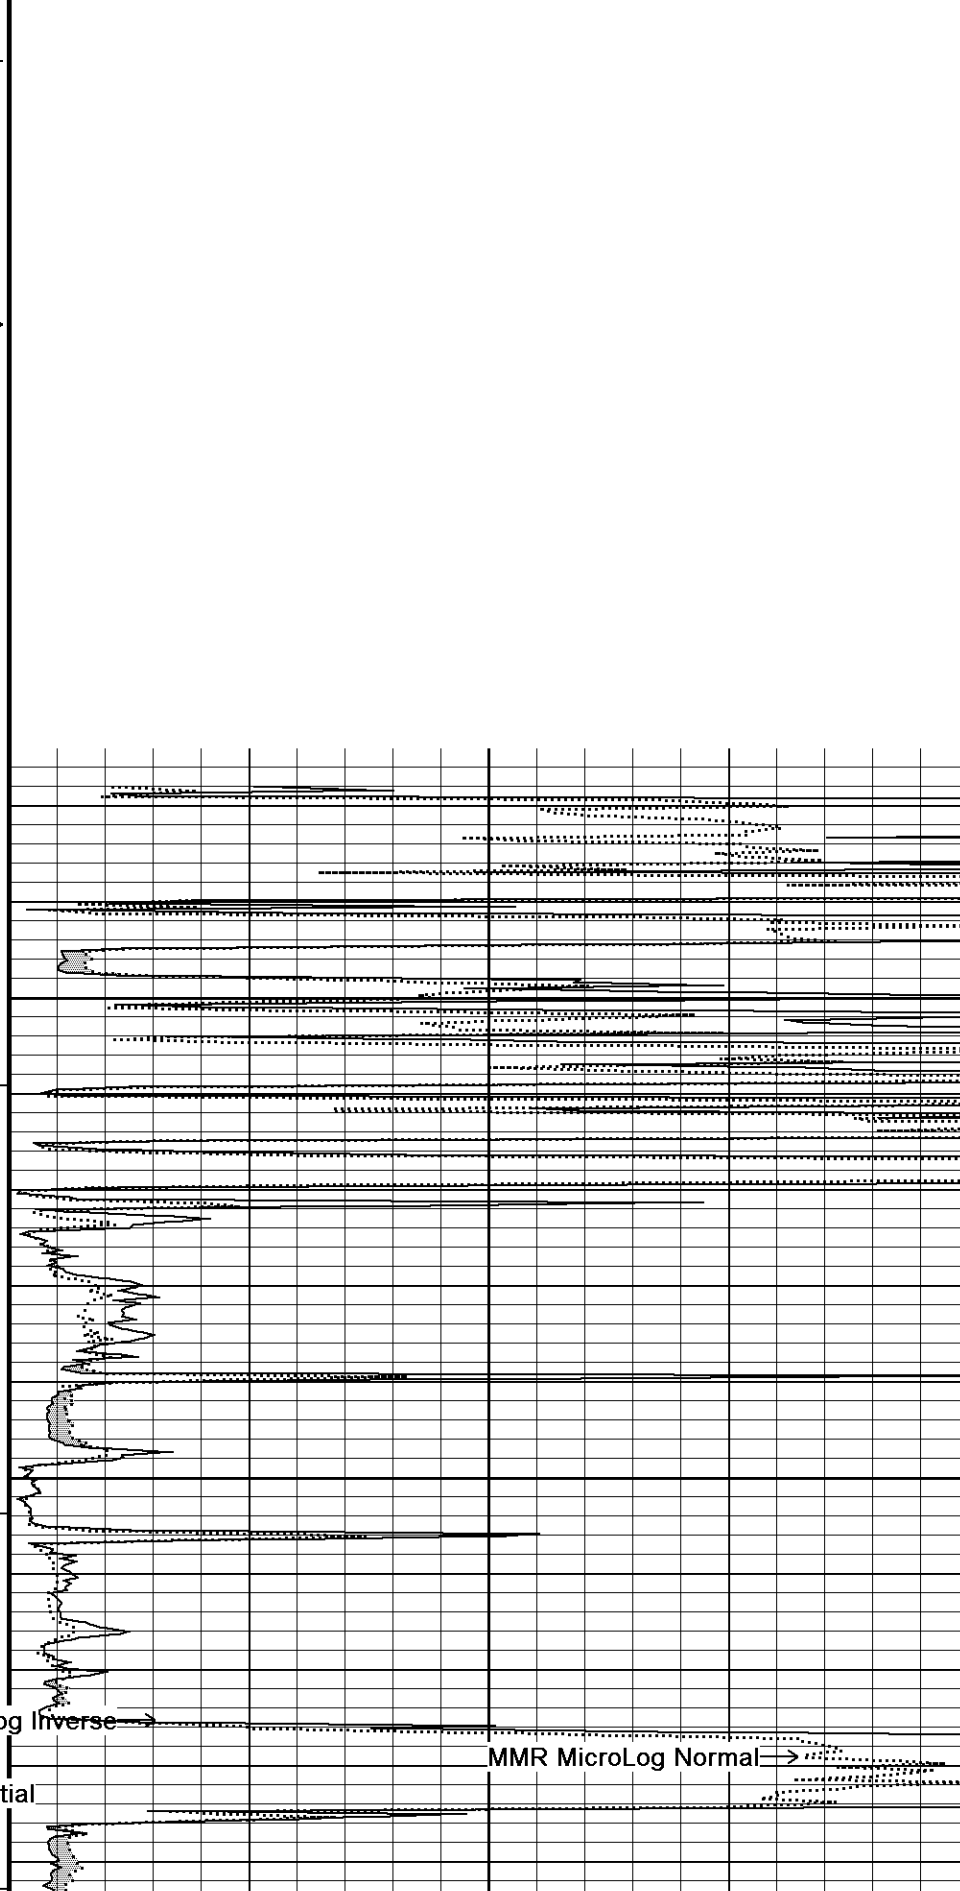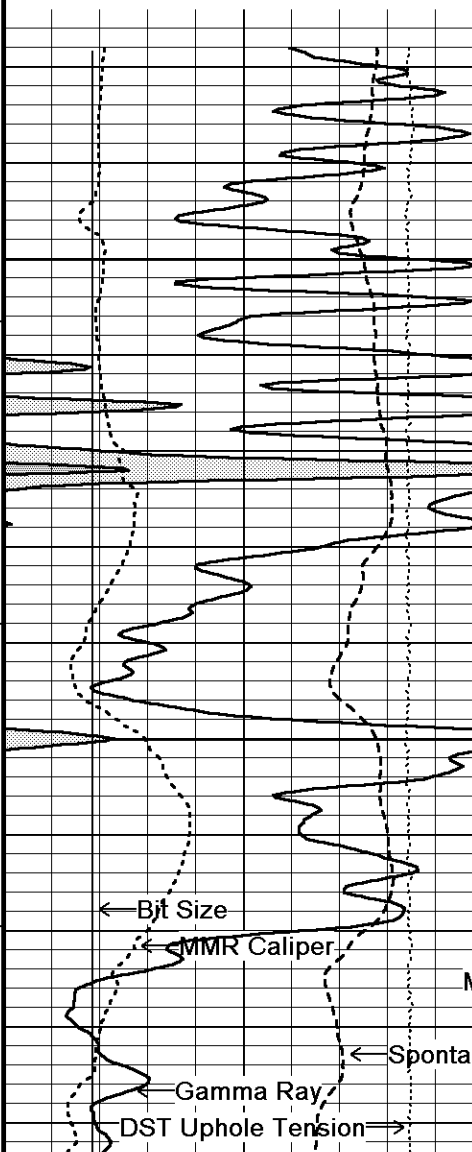

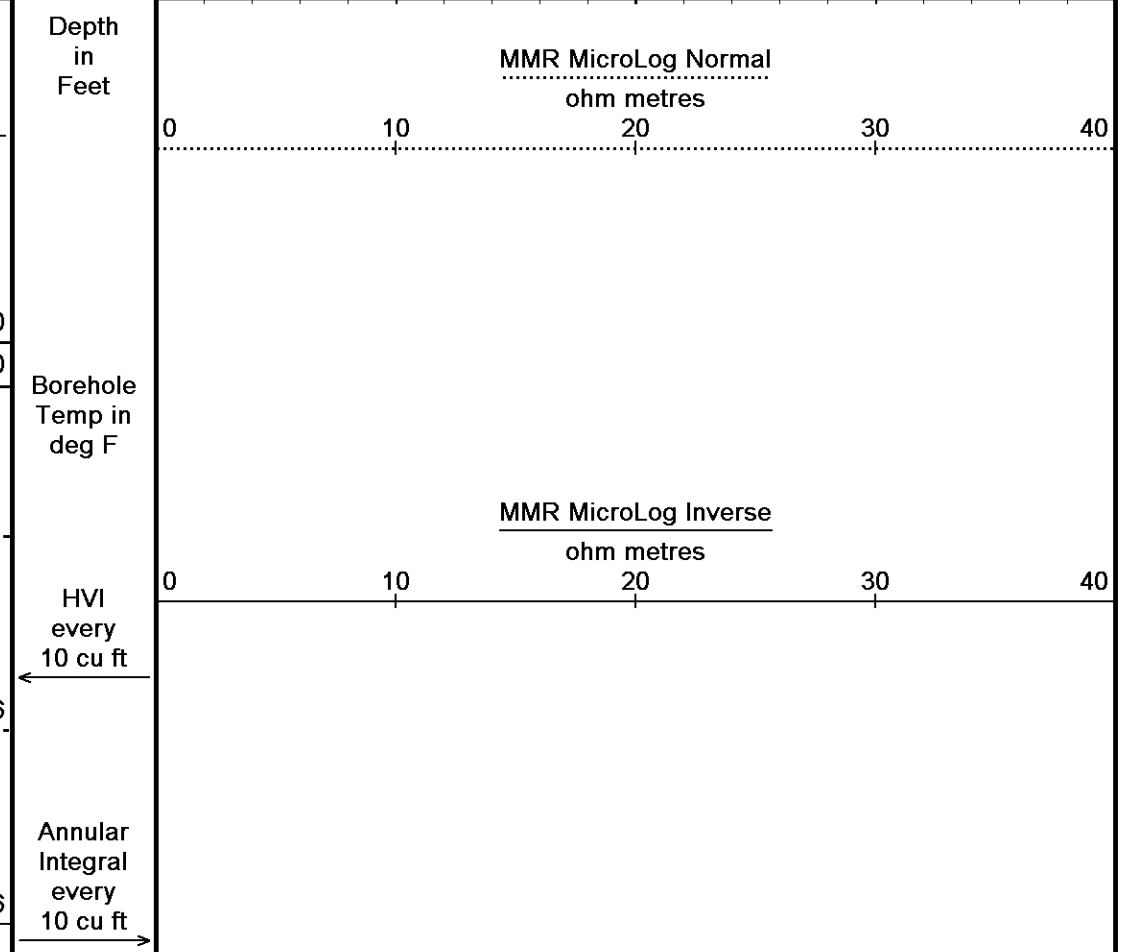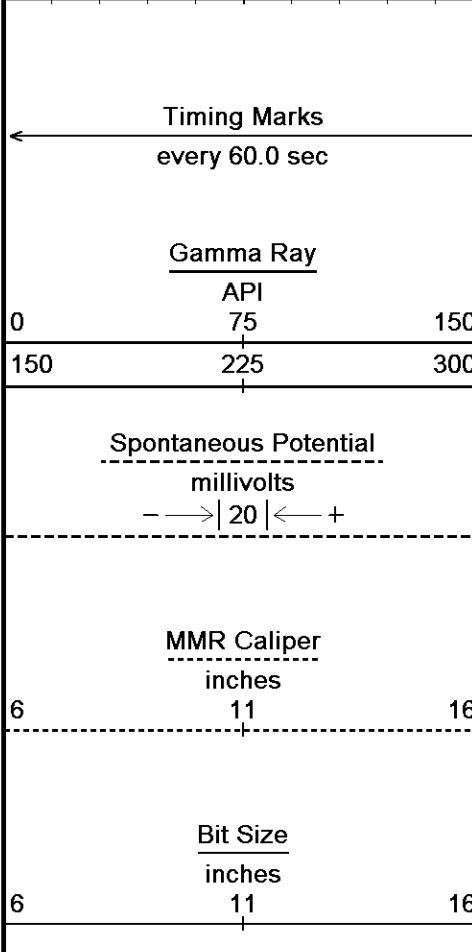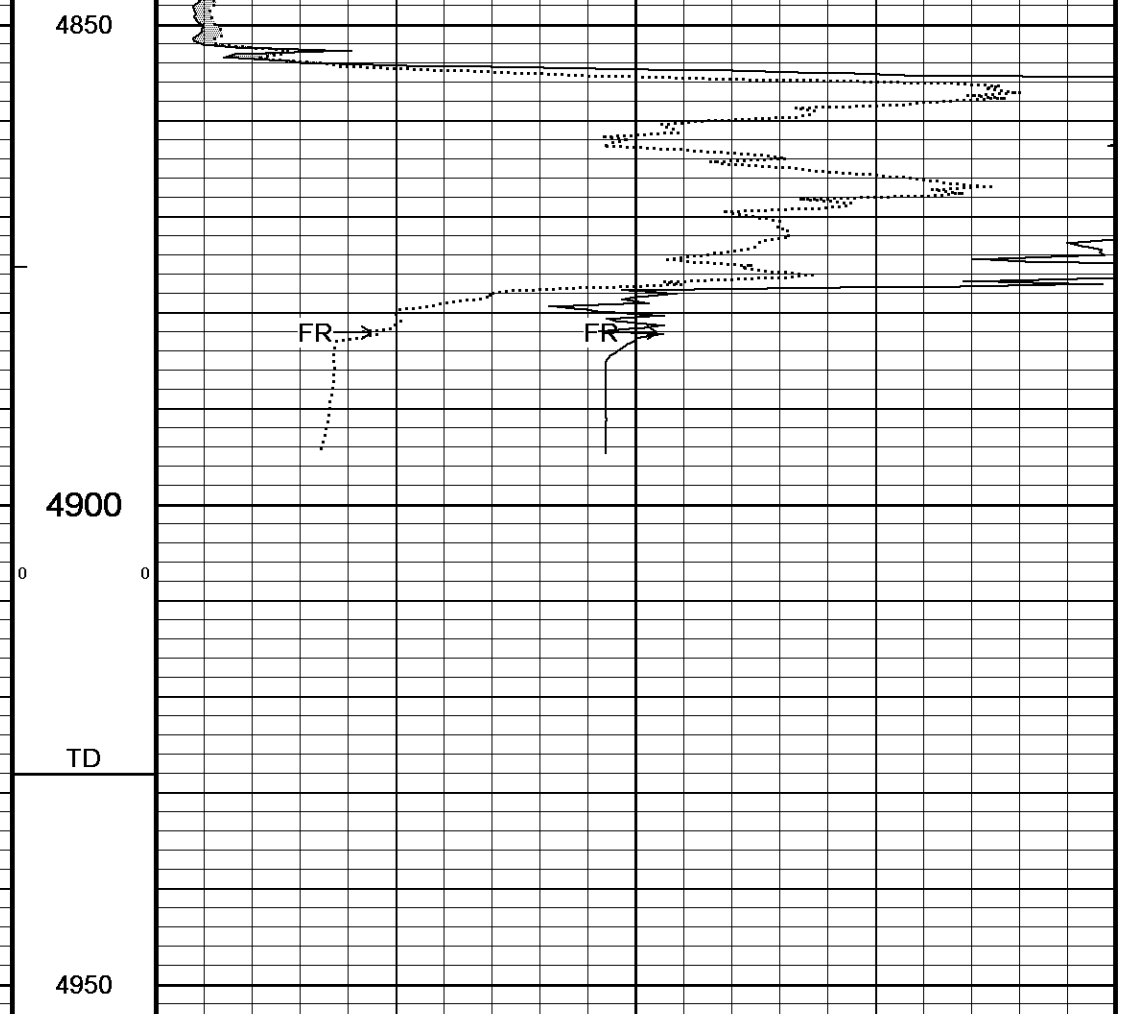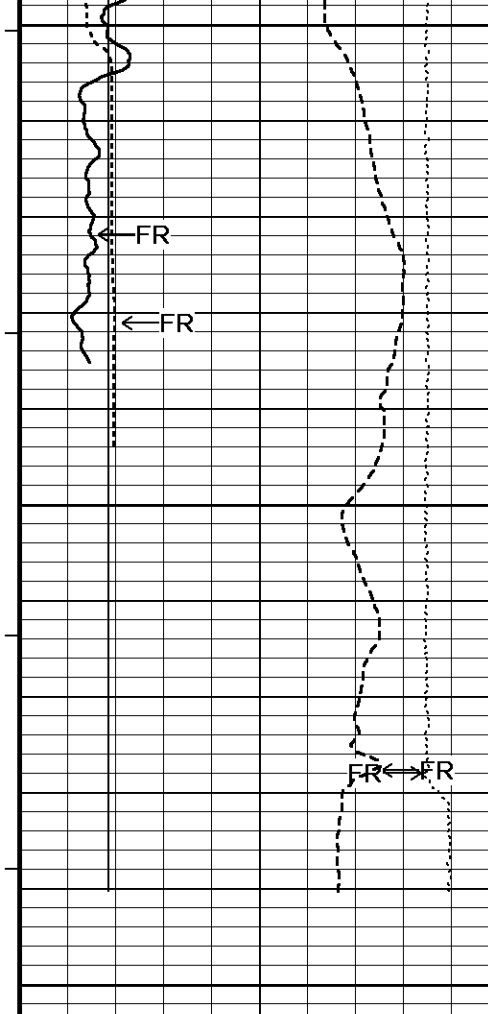

DST Uphole Tension
pounds
5000 0

Replay
Scale
1:240

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 07-JUL-2016 23:06
 Filename: C:\Minimus 15.03.5939\Logs\Red Oak ST-SI Unit #1...\Red Oak ST-SI Unit #1-30 Repeat.dta Recorded on 07-JUL-2016 19:14
 System Versions: Logged with 15.03.5939 Plotted with 15.03.5939

↑ REPEAT SECTION ↑

BEFORE SURVEY CALIBRATION

C:\Minimus 15.03.5939\Logs\Red Oak ST-SI Unit #1-30\Red Oak ST-SI Unit #1-30 Repeat.dta

General Constants All 000 Last Edited on 07-JUL-2016,18:00

General Parameters

Mud Resistivity	0.540	ohm-metres
Mud Resistivity Temperature	75.000	degrees F
Water Level	0.000	feet
Borehole Fluid Processing	Wet Hole	

Hole/Annular Volume and Differential Caliper Parameters

HVOL Method	Single Caliper	
HVOL Caliper 1	Density Caliper	
HVOL Caliper 2	N/A	
Annular Volume Diameter	5.500	inches
Caliper for Differential Caliper	MMR Caliper	

Rwa Parameters

Porosity used	Base Density Porosity	
Resistivity used	Array Ind. One Res Rt	
RWA Constant A	0.610	
RWA Constant M	2.150	
SW/APOR Tool Source	0.000	


Down-hole Tension Calibration SMS 0 Field Calibration on 07-JUL-2016 18:22

Reading No	Measured	Calibrated (lbs)
1	1056.01	0.00
2	-1326.30	480.60

Gamma Calibration MCG-C 84 Field Calibration on 07-JUL-2016 14:26

	Measured	Calibrated (API)
Background	70	46
Calibrator (Gross)	759	502
Calibrator (Net)	689	456

Gamma Calibration Tolerances MCG-C 84

Ratio 1.511  Counts/API

Gamma Constants MCG-C 84 Last Edited on 07-JUL-2016,18:00

Gamma Calibrator Number	MCGGRCC141	
GRC-M Calibrator Jig in Use?	NO	
Inactive Background Jig in Use?	NO	
Mud Density	1.10	gm/cc
Caliper Source for Processing	Density Caliper	
Tool Position	Eccentred	
Potassium Equivalence	Chloride	
K Mud Concentration	0.00	%

SP Calibration MCG-C 84 Field Calibration on 07-JUL-2016 14:15

Measured	Calibrated (API)
----------	------------------

Reference 1	measured	104.6	Calibrated (mV)	100.1
Reference 2		-95.7		-98.8

High Resolution Temperature Calibration MCG-C 84

Field Calibration on 22-JUL-2014,11:40

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	75.00	75.00

High Resolution Temperature Constants MCG-C 84

Last Edited on 09-SEP-2014,02:23

Pre-filter Length 11

Micro Normal and Micro Inverse Calibration MMR-C.A 247

Base Calibration on 22-MAY-2016 16:59


Field Check on 07-JUL-2016 13:49

Base Calibration

		Measured	Calibrated (ohm-m)
Channel	Resistor 1	Resistor 2	Resistor 1 Resistor 2
	Micro Normal	10.2 49.9	5.1 25.6
	Micro Inverse	10.0 49.5	3.4 16.9

Channel	Base Check (ohm-m)	Field Check (ohm-m)
Micro Normal	93.6	93.6
Micro Inverse	62.2	62.2

Micro Normal & Micro Inverse Calibration Tolerance MMR-C.A 247

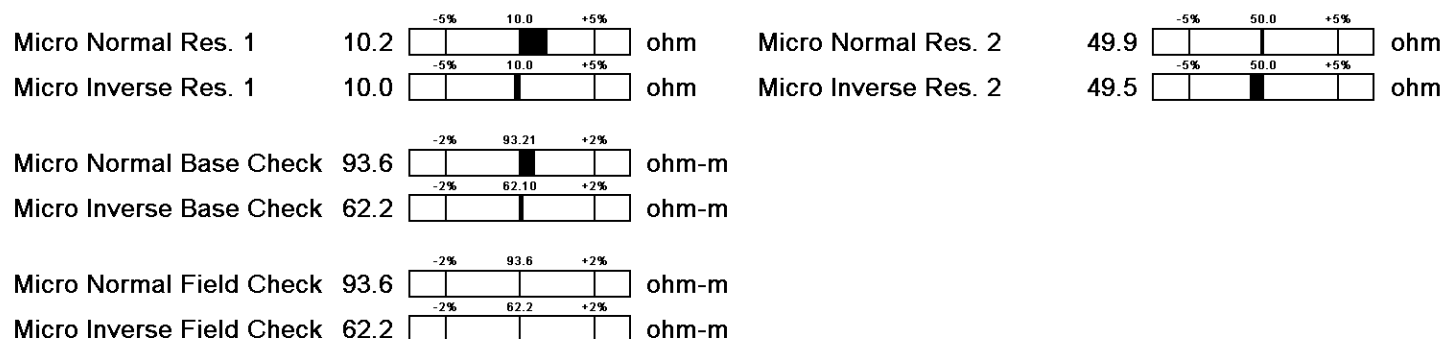

Micro Normal and Micro Inverse Constants MMR-C.A 247

Last Edited on 26-JUN-2016,15:44

Pad Type 8-12 in Soft Rubber Inflatable 006-9011-159

Micro Normal K Factor 0.5110

Micro Inverse K Factor 0.3380

Standoff Offset 0.0000 inches

Caliper Calibration MMR-C.A 247

Base Calibration on 22-MAY-2016 16:40

Field Calibration on 07-JUL-2016 13:51


Base Calibration

Reading No	Measured	Calibrator Size (in)
1	14762	5.98
2	18067	7.97
3	21325	9.86
4	25277	11.92
5	0	0.00
6	N/A	N/A

Field Calibration

Measured Caliper (in)	Actual Caliper (in)
8.02	7.97

Caliper Calibration Tolerances MMR-C.A 247



Micro-Resistivity Caliper Constants MMR-C.A 247

Last Edited on

Sonde Configuration Resistivity Mode

Neutron Calibration MDN-A.B 66

Base Calibration on 22-MAY-2016,18:15

Field Check on 07-JUL-2016 14:30


Base Calibration

Measured	Calibrated (cps)
----------	------------------

Near	3116	Far	97	Near	3714	Far	110
Ratio	32.277		33.764				

Field Calibrator at Base		Calibrated (cps)	
Ratio		2061	3028
		0.681	
Field Check		Calibrated (cps)	
Ratio		2133	3061
		0.697	

Neutron Calibration Tolerances MDN-A.B 66

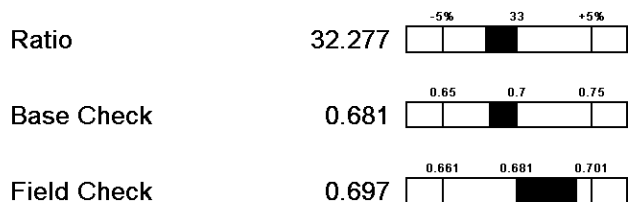

Neutron Constants MDN-A.B 66

Last Edited on 07-JUL-2016,14:26


Neutron Source Id	P0204NN	
Neutron Jig Number	NJ5736	
Air Hole Processing	Legacy	
Caliper Source for Processing	Density Caliper	
Stand-off	0.00	inches
Mud Density	1.00	gm/cc
Limestone Sigma	7.10	cu
Sandstone Sigma	4.26	cu
Dolomite Sigma	4.70	cu
Formation Pressure Source	None	
Formation Pressure	N/A	kpsi
Temperature Source	Constant Value	
Temperature	68.00	degrees F
Mud Salinity	0.00	kppm
Salinity Correction	Not Applied	
Formation Fluid Salinity Source	None	
Formation Fluid Salinity	N/A	kppm
Barite Mud Correction	Not Applied	

FE Calibration MFE-B.J 352

Base Calibration on 22-MAY-2016 16:12
Field Check on 07-JUL-2016 13:47

Base Calibration		Measured	Calibrated (ohm-m)
Reference 1		0.0	0.0
Reference 2		972.3	126.8
Base Check			278.7
Field Check			278.7

FE Calibration Tolerances MFE-B.J 352

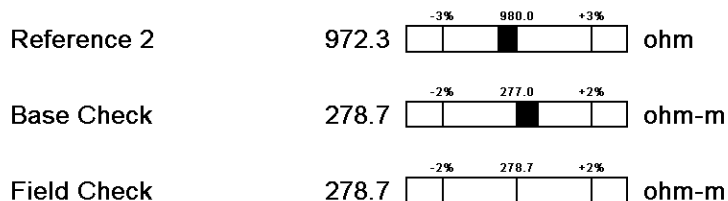

FE Constants MFE-B.J 352

Last Edited on 07-JUL-2016,13:46

Running Mode	No Sleeve	
MFE K Factor	0.1268	
Borehole Correction Constants		
Sonde Position	0.5	inches
Hole Size Source	Density Caliper	
Hole Size Constant Value	N/A	inches

Sonic Constants MSS-A.A 55

Last Edited on 07-JUL-2016,13:42

Maximum Boundary Contrast	100.00	micro-sec/ft
Fluid Transit Time	189.00	micro-sec/ft
Limestone Transit Time	47.50	micro-sec/ft
Sandstone Transit Time	55.50	micro-sec/ft
Dolomite Transit Time	43.50	micro-sec/ft
Sonic used for Porosities	3-5' Compensated Sonic	
Correction for Sonde Skew	Applied	
Cycle Stretch Algorithm	Applied	
MN3FT	N/A	micro-sec
MX3FT	N/A	micro-sec
Hunt-Raymer Constant	83.13	micro-sec/ft

Sonde Mode Compensated
 Hole Type Open Hole

Sonde Parameters

	Measured	Calibrated
Offset	N/A	0.0000
Free Pipe	N/A	N/A
Peak Amplitude Source		N/A

Waveform	Start Time (micro-sec)	Width (micro-sec)	Pre Gain	Start Gain	Discriminator (mV)
3'	N/A	N/A	N/A	N/A	N/A
4'	N/A	N/A	N/A	N/A	N/A
5'	N/A	N/A	N/A	N/A	N/A
6'	N/A	N/A	N/A	N/A	N/A

Processed Fixed Gate Parameters

Waveform Used For Processing	N/A			
Start Time (micro-sec)	End Time (micro-sec)	Discriminator (mV)	Depth (ft)	
N/A	N/A	N/A	0.00	
N/A	N/A	N/A	0.00	
N/A	N/A	N/A	0.00	
N/A	N/A	N/A	0.00	
N/A	N/A	N/A	0.00	

Full Waveform Parameters

Use 3' Waveform to derive TR	N/A
Use 4' Waveform to derive TR	N/A
Use 5' Waveform to derive TR	N/A
Use 6' Waveform to derive TR	N/A
3' Waveform Discriminator Level	N/A mV
4' Waveform Discriminator Level	N/A mV
5' Waveform Discriminator Level	N/A mV
6' Waveform Discriminator Level	N/A mV
3' Waveform Filter	N/A
4' Waveform Filter	N/A
5' Waveform Filter	N/A
6' Waveform Filter	N/A
Semblance Level	N/A
Semblance Window Width	N/A micro-sec
Sonic 1 Despiker	N/A N/A
Sonic 2 Despiker	N/A N/A

Induction Calibration MAI-A.A 111

Base Calibration on 05-AUG-2014,09:34
 Field Check on 07-JUL-2016 13:46

Base Calibration

















Test Loop Calibration Channel	Measured		Calibrated (mmho/m)	
	Low	High	Low	High
1	17.6	473.6	9.3	966.2
2	6.4	385.9	7.6	821.4
3	3.2	264.0	5.2	566.0
4	2.1	135.5	2.6	279.2

Test Loop Calibration Verified

22-MAY-2016,17:59

Channel	Base Check (mmho/m)		Field Check (mmho/m)		
	Low	High	Low	High	
1	12.1	3873.0	10.7	3867.6	
2	29.8	3528.1	27.7	3522.3	
3	29.1	3021.3	27.2	3016.2	
4	19.1	2058.5	17.8	2055.0	
Deep	17.7	1962.1	16.5	1958.8	
Medium	43.1	3976.4	40.4	3969.4	
Shallow	44.4	5232.7	41.4	5224.1	
Array Temperature	65.8		87.7		Deg F

Induction Calibration Tolerances MAI-A.A 111

Low Conductivity 1	17.6		mmho/m	High Conductivity 1	473.6		mmho/m
Low Conductivity 2	6.4		mmho/m	High Conductivity 2	385.9		mmho/m
Low Conductivity 3	3.2		mmho/m	High Conductivity 3	264.0		mmho/m
Low Conductivity 4	2.1		mmho/m	High Conductivity 4	135.5		mmho/m
Background Vx 1	0.0		mmho/m	Phase Check Loop 1	0.0		%
Background Vx 2	0.0		mmho/m	Phase Check Loop 2	0.0		%
Background Vx 3	0.0		mmho/m	Phase Check Loop 3	0.0		%
Background Vx 4	0.0		mmho/m	Phase Check Loop 4	0.0		%

Induction Constants MAI-A.A 111

Last Edited on 07-JUL-2016,13:43

Induction Model	RtAP-WBM		
Borehole Correction Constants			
Tool Centred	No		
Hole Size Source	Density Caliper		
Hole Size Constant Value	N/A	inches	
Stand-off Type	Fins		
Stand-off	0.50	inches	
Number of Fins on Stand-off	8.0000		
Stand-off Fin Angle	45.00	degrees	
Stand-off Fin Width	0.5000	inches	
Rm Source	Global Value: Temperature Corrected		
Temp. for Rm Corr.	MCG External Temperature		
Squasher Start	0.0020	mhos/metre	
Squasher Offset	N/A	mhos/metre	
Borehole Normalisation			
DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000
Calibration Site Corrections			
Channel 1	0.00	mmhos/metre	
Channel 2	0.00	mmhos/metre	
Channel 3	0.00	mmhos/metre	
Channel 4	0.00	mmhos/metre	
Symmetrised Receiver Gains			
Receiver 1	1.00		
Receiver 2	1.00		
Receiver 3	1.00		
Receiver 4	1.00		

Apparent Porosity and Water Saturation Constants

Archie Constant (A)	1.00	
Cementation Exponent (M)	2.00	
Saturation Exponent (N)	2.00	
Saturation of Water for Apor	100.00	percent
Resistivity of Water for Apor and Sw	0.05	ohm-m
Resistivity of Mud Filtrate for Sw	0.00	ohm-m
Source for Rt	0.00	
Source for Rxo	0.00	

High Resolution Temperature Calibration MAI-A.A 111

Field Calibration on 24-NOV-2014,10:23

	Measured	Calibrated(Deg F)
Lower	10.00	10.00
Upper	100.00	100.00

High Resolution Temperature Constants MAI-A.A 111

Last Edited on 26-JUN-2014,15:06

Pre-filter Length 11

Photo Density Calibration MPD-B 104

Base Calibration on 22-MAY-2016 17:45

Field Check on 07-JUL-2016 13:57

Density Calibration

Base Calibration

	Measured		Calibrated (sdu)	
	Near	Far	Near	Far
Background	1148	1338		
Reference 1	49789	23977	59556	30836
Reference 2	20127	2423	24941	2541

Field Check at Base

1148.2 1337.6

Field Check

1146.2 1331.8

PE Calibration

Base Calibration

	WS	Measured		Calibrated Ratio
		WH	Ratio	
Background	211	1025		
Reference 1	20854	49612	0.425	0.371
Reference 2	5819	19993	0.296	0.272





Field Check at Base

211.2 1025.1

Field Check

210.6 1022.8

Photo Density Calibration Tolerances MPD-B 104



Density Constants MPD-B 104

Last Edited on 07-JUL-2016,17:59

Density Source Id	P50557B	
Nylon Calibrator Number	DNCE695	
Aluminium Calibrator Number	DACD698	
Density Shoe Profile	8 inch	
Caliper Source for Processing	Density Caliper	
PE Correction to Density	Not Applied	
Mud Density	1.10	gm/cc
Mud Density Z/A Multiplier	1.11	
Mud Filtrate Density	1.00	gm/cc
Dry Hole Mud Filtrate Density	1.00	gm/cc
DNCT	0.00	gm/cc
CRCT	0.00	gm/cc
Density Z/A Correction	Hybrid	

Matrix Density (gm/cc)	Depth (ft)
2.71	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00


Caliper Calibration MPD-B 104

Base Calibration on 22-MAY-2016 17:26
Field Calibration on 07-JUL-2016 13:58

Base Calibration		
Reading No	Measured	Calibrator Size (in)
1	13598	3.99
2	22432	5.98
3	31029	7.97
4	39246	9.86
5	48339	11.92
6	N/A	N/A

Field Calibration		
	Measured Caliper (in)	Actual Caliper (in)
	7.97	7.97

Caliper Calibration Tolerances MPD-B 104



DOWNHOLE EQUIPMENT

C:\Minimus 15.03.5939\Logs\Red Oak ST-SI Unit #1-30\Red Oak ST-SI Unit #1-30 Repeat.dta

Cablehead, 11 pin
CBH-CA 155 LG: 2.40 ft WT: 24.3 lb OD: 2.244 in

Compact Comms Gamma
MCG-C 84 LG: 8.70 ft WT: 63.9 lb OD: 2.244 in


Compact Micro-Resistivity
MMR-C.A 247 LG: 8.59 ft WT: 81.6 lb OD: 4.882 in

Compact Neutron
MDN-A.B 66 LG: 5.04 ft WT: 50.7 lb OD: 2.244 in

Compact Density/Caliper
MPD-B 104 LG: 9.59 ft WT: 90.4 lb OD: 2.449 in


Compact Focussed Electric
MFE-B.J 352 LG: 6.05 ft WT: 48.5 lb OD: 2.244 in

Compact Sonic
MSS-A.A 55 LG: 12.52 ft WT: 72.8 lb OD: 2.244 in

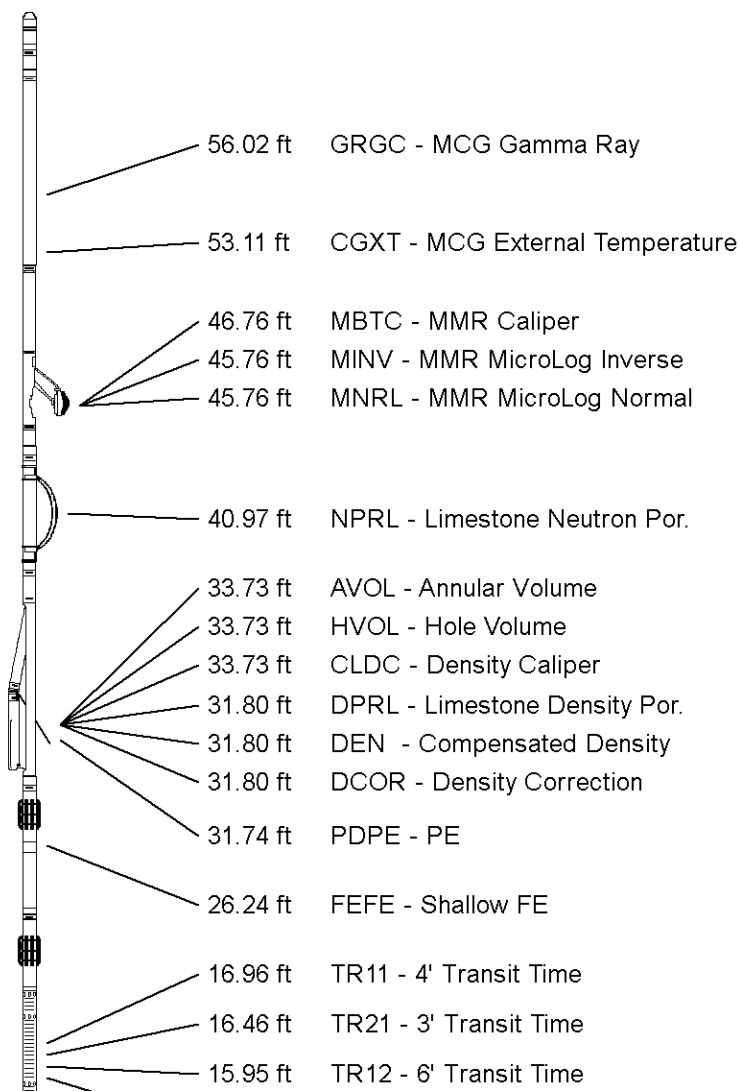

Compact Induction
 MAI-A.A 111 LG: 10.81 ft WT: 48.5 lb OD: 2.244 in

Total Length: 63.70 ft Weight: 480.6 lb

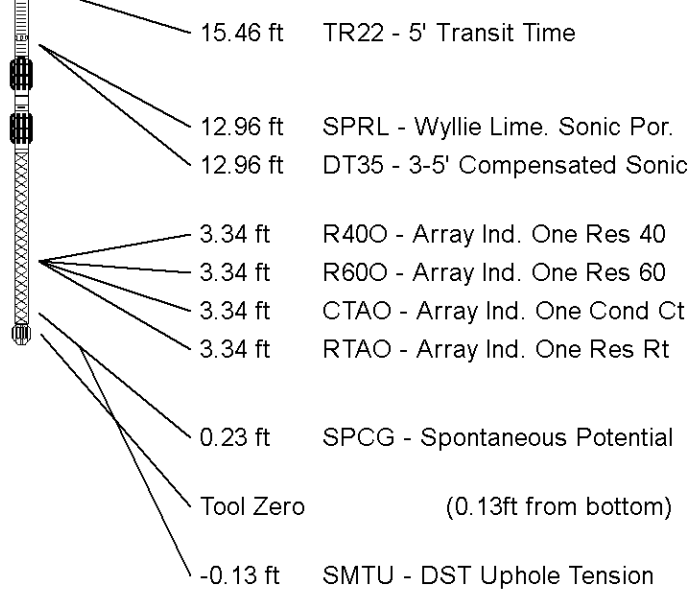

All measurements relative to tool zero.

COMPANY	RED OAK ENERGY, INC.				
WELL	ST-SI UNIT #1-30				
FIELD	WILDCAT				
PROVINCE/COUNTY	SCOTT				
COUNTRY/STATE	U.S.A. / KANSAS				
Elevation Kelly Bushing	3088.00	feet	First Reading	4882.00	feet
Elevation Drill Floor	3087.00	feet	Depth Driller	4929.00	feet
Elevation Ground Level	3083.00	feet	Depth Logger	4928.00	feet



Weatherford[®]

MICRORESISTIVITY LOG