



Weatherford

**COMPENSATED NEUTRON
SONIC POROSITY
OVERLAY**

COMPANY	RED OAK ENERGY, INC.		
WELL	ST-SI UNIT #1-30		
FIELD	WILDCAT		
PROVINCE/COUNTY	SCOTT		
COUNTRY/STATE	U.S.A. / KANSAS		
LOCATION	199' FNL & 2284' FWL		
SEC 30	TWP 17S	RGE 33W	Other Services
Latitude	15-171-21168		
Longitude			
API Number	Permanent Datum GL, Elevation 3083 feet		
Log Measured From	KB		
Drilling Measured From	KB @ 5 feet		
Date	07-JUL-2016		Elevations: KB 3088.00 DF 3087.00 GL 3083.00
Run Number	ONE		
Service Order	7577-155028408		
Depth Driller	4929.00	feet	
Depth Logger	4928.00	feet	
First Reading	4887.00	feet	
Last Reading	3900.00	feet	
Casing Driller	261.00	feet	
Casing Logger	260.00	feet	
Bit Size	7.875	inches	
Hole Fluid Type	CHEMICAL		
Density / Viscosity	9.20 lb/USg	53.00 CP	
PH / Fluid Loss	10.00	8.00 ml/30Min	
Sample Source	FLOW LINE		
Rm @ Measured Temp	0.54 @ 75.0	ohm-m	
Rmf @ Measured Temp	0.43 @ 75.0	ohm-m	
Rmc @ Measured Temp	0.64 @ 75.0	ohm-m	
Source Rmf / Rmc	CALC	CALC	
Rm @ BHT	0.34 @ 123.0	ohm-m	
Time Since Circulation	3 HOURS		
Max Recorded Temp	123.00	deg F	
Equipment / Base	13096	OKC	
Recorded By	JEFFREY RANDLE		
Witnessed By	SEAN DEENIHAN		

BOREHOLE RECORD			Last Edited: 07-JUL-2016 18:30
Bit Size inches	Depth From feet	Depth To feet	
12.250	0.00	270.00	
7.875	270.00	4929.00	

CASING RECORD				
Type	Size inches	Depth From feet	Shoe Depth feet	Weight pounds/ft
SURFACE	8.625	0.00	261.00	24.00

REMARKS

- SOFTWARE ISSUE: WLS 15.03.5939.

- RUN ONE: MCG, MML, MDN, MPD, MFE, MSS, MAI RUN IN COMBINATION.
 - HARDWARE: DUAL BOWSPRING USED ON MDN.
 0.5 INCH STANDOFF USED ON MFE.
 TWO 0.5 INCH STANDOFFS USED ON MSS.
 0.5 INCH STANDOFF USED ON MAI.

- 2.71 G/CC LIMESTONE DENSITY MATRIX USED TO CALCULATE POROSITY.

- BOREHOLE RUGOSITY, TIGHT PULLS, AND WASHOUTS WILL AFFECT DATA QUALITY.

- ALL INTERVALS LOGGED AND SCALED PER CUSTOMER'S REQUEST.

- TOTAL HOLE VOLUME FROM TD TO SURFACE CASING: 2447 CU.FT.


- ANNUAL HOLE VOLUME WITH 5.5 INCH PRODUCTION CASING FROM TD TO SURFACE CASING: 1689 CU.FT.


- MUD PROPERTIES: LCM: 2#
CI: 6200 PPM
- RIG: WW DRILLING RIG #2.
- ENGINEER: J. RANDLE.
- OPERATOR: J. LaPOINT.


In interpreting, communicating or providing information and/or making recommendations, either written or oral, as to logs or test or other data, type or amount of material, or Work or other service to be furnished, or manner of performance, or in predicting results to be obtained, the Contractor will give the Company the benefit of the Contractor's best judgment based on its experience and will perform all such Work in a good and workmanlike manner. Any interpretation of test or other data, and any recommendation or reservoir description based upon such interpretations, are opinions based upon inferences from measurements and empirical relationships and assumptions, which inferences and assumptions are not infallible, and with respect to which professional engineers and analysts may differ. ACCORDINGLY ANY INTERPRETATION OR RECOMMENDATION RESULTING FROM THE SERVICES WILL BE AT THE SOLE RISK OF THE COMPANY, AND THE CONTRACTOR CANNOT AND DOES NOT WARRANT THE ACCURACY, CORRECTNESS OR COMPLETENESS OF ANY SUCH INTERPRETATION OR RECOMMENDATION, WHICH INTERPRETATIONS AND RECOMMENDATIONS SHOULD NOT, THEREFORE, UNDER ANY CIRCUMSTANCES BE RELIED UPON AS THE SOLE OR MAIN BASIS FOR ANY DRILLING, COMPLETION, WELL TREATMENT, PRODUCTION OR FINANCIAL DECISION, OR ANY PROCEDURE INVOLVING ANY RISK TO THE SAFETY OF ANY DRILLING ACTIVITY, DRILLING RIG OR ITS CREW OR ANY OTHER INDIVIDUAL. THE COMPANY HAS FULL RESPONSIBILITY FOR ALL DECISIONS CONCERNING THE SERVICES.


5 INCH MAIN


Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 07-JUL-2016 23:12
 Filename: C:\Minimus 15.03.5939\Logs\Red Oak ST-SI Unit #1-30\Red Oak ST-SI Unit #1-30 Main.dta Recorded on 07-JUL-2016 19:32
 System Versions: Logged with 15.03.5939 Plotted with 15.03.5939

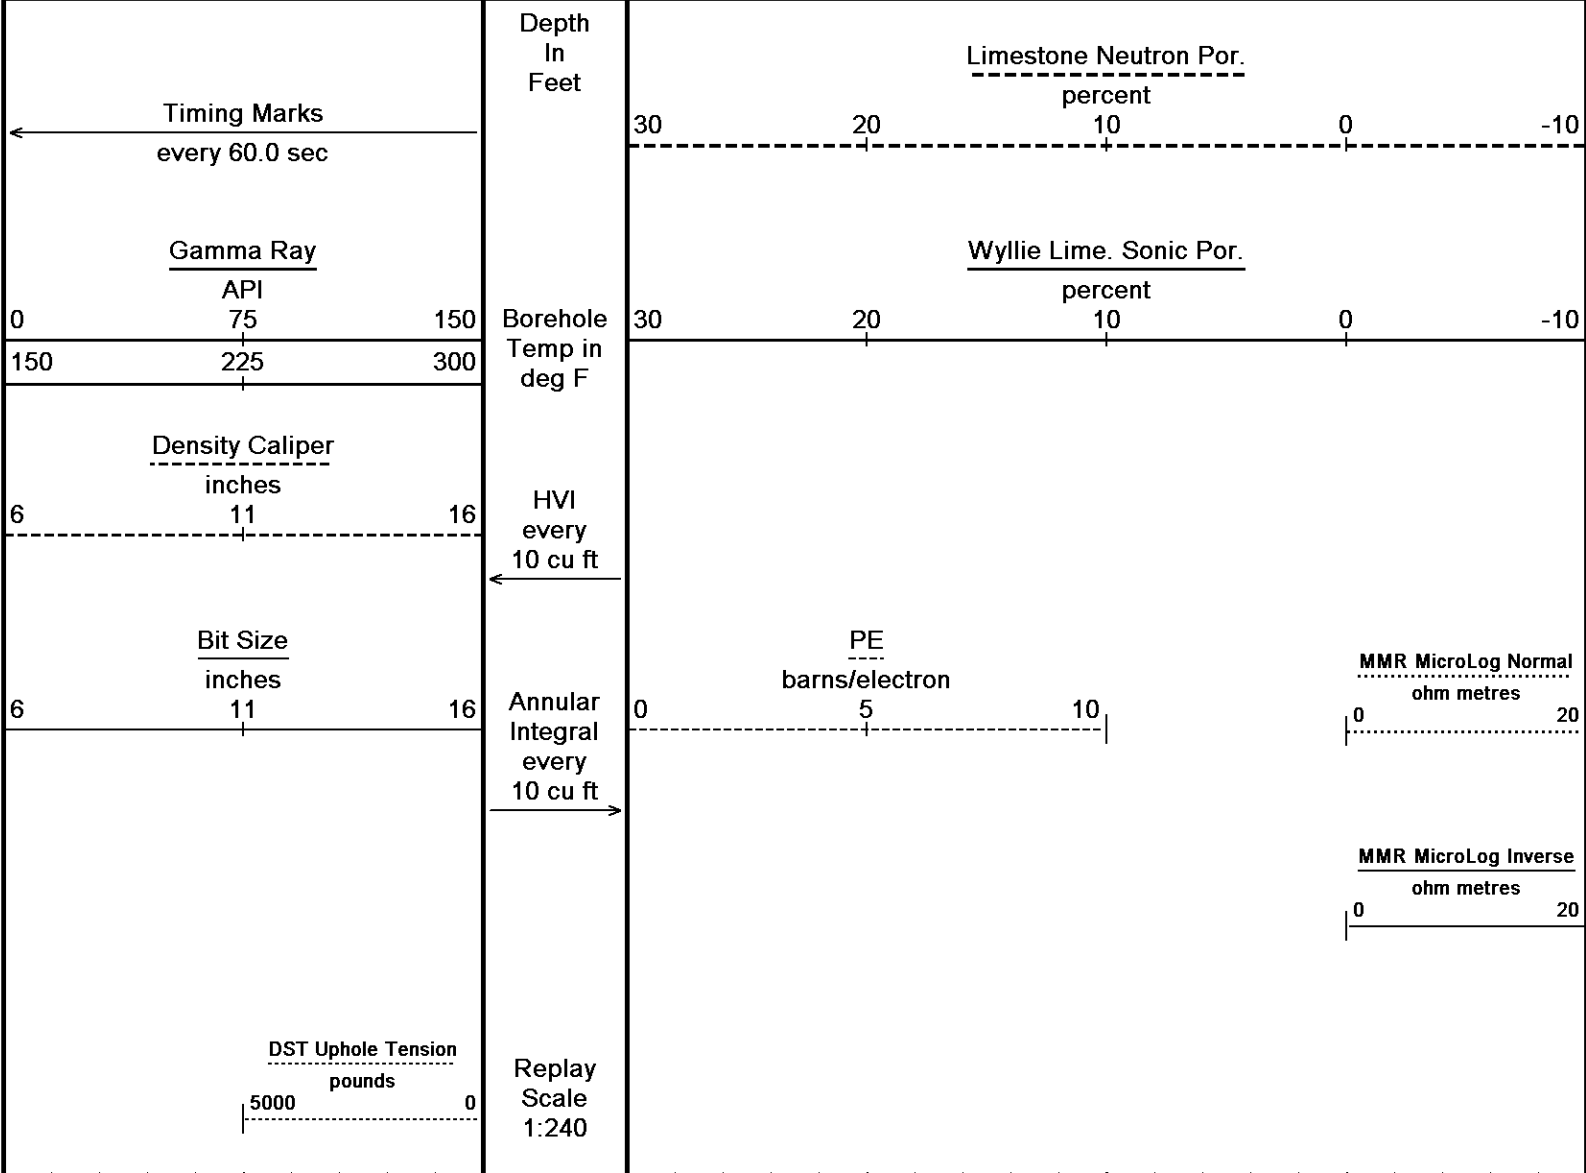


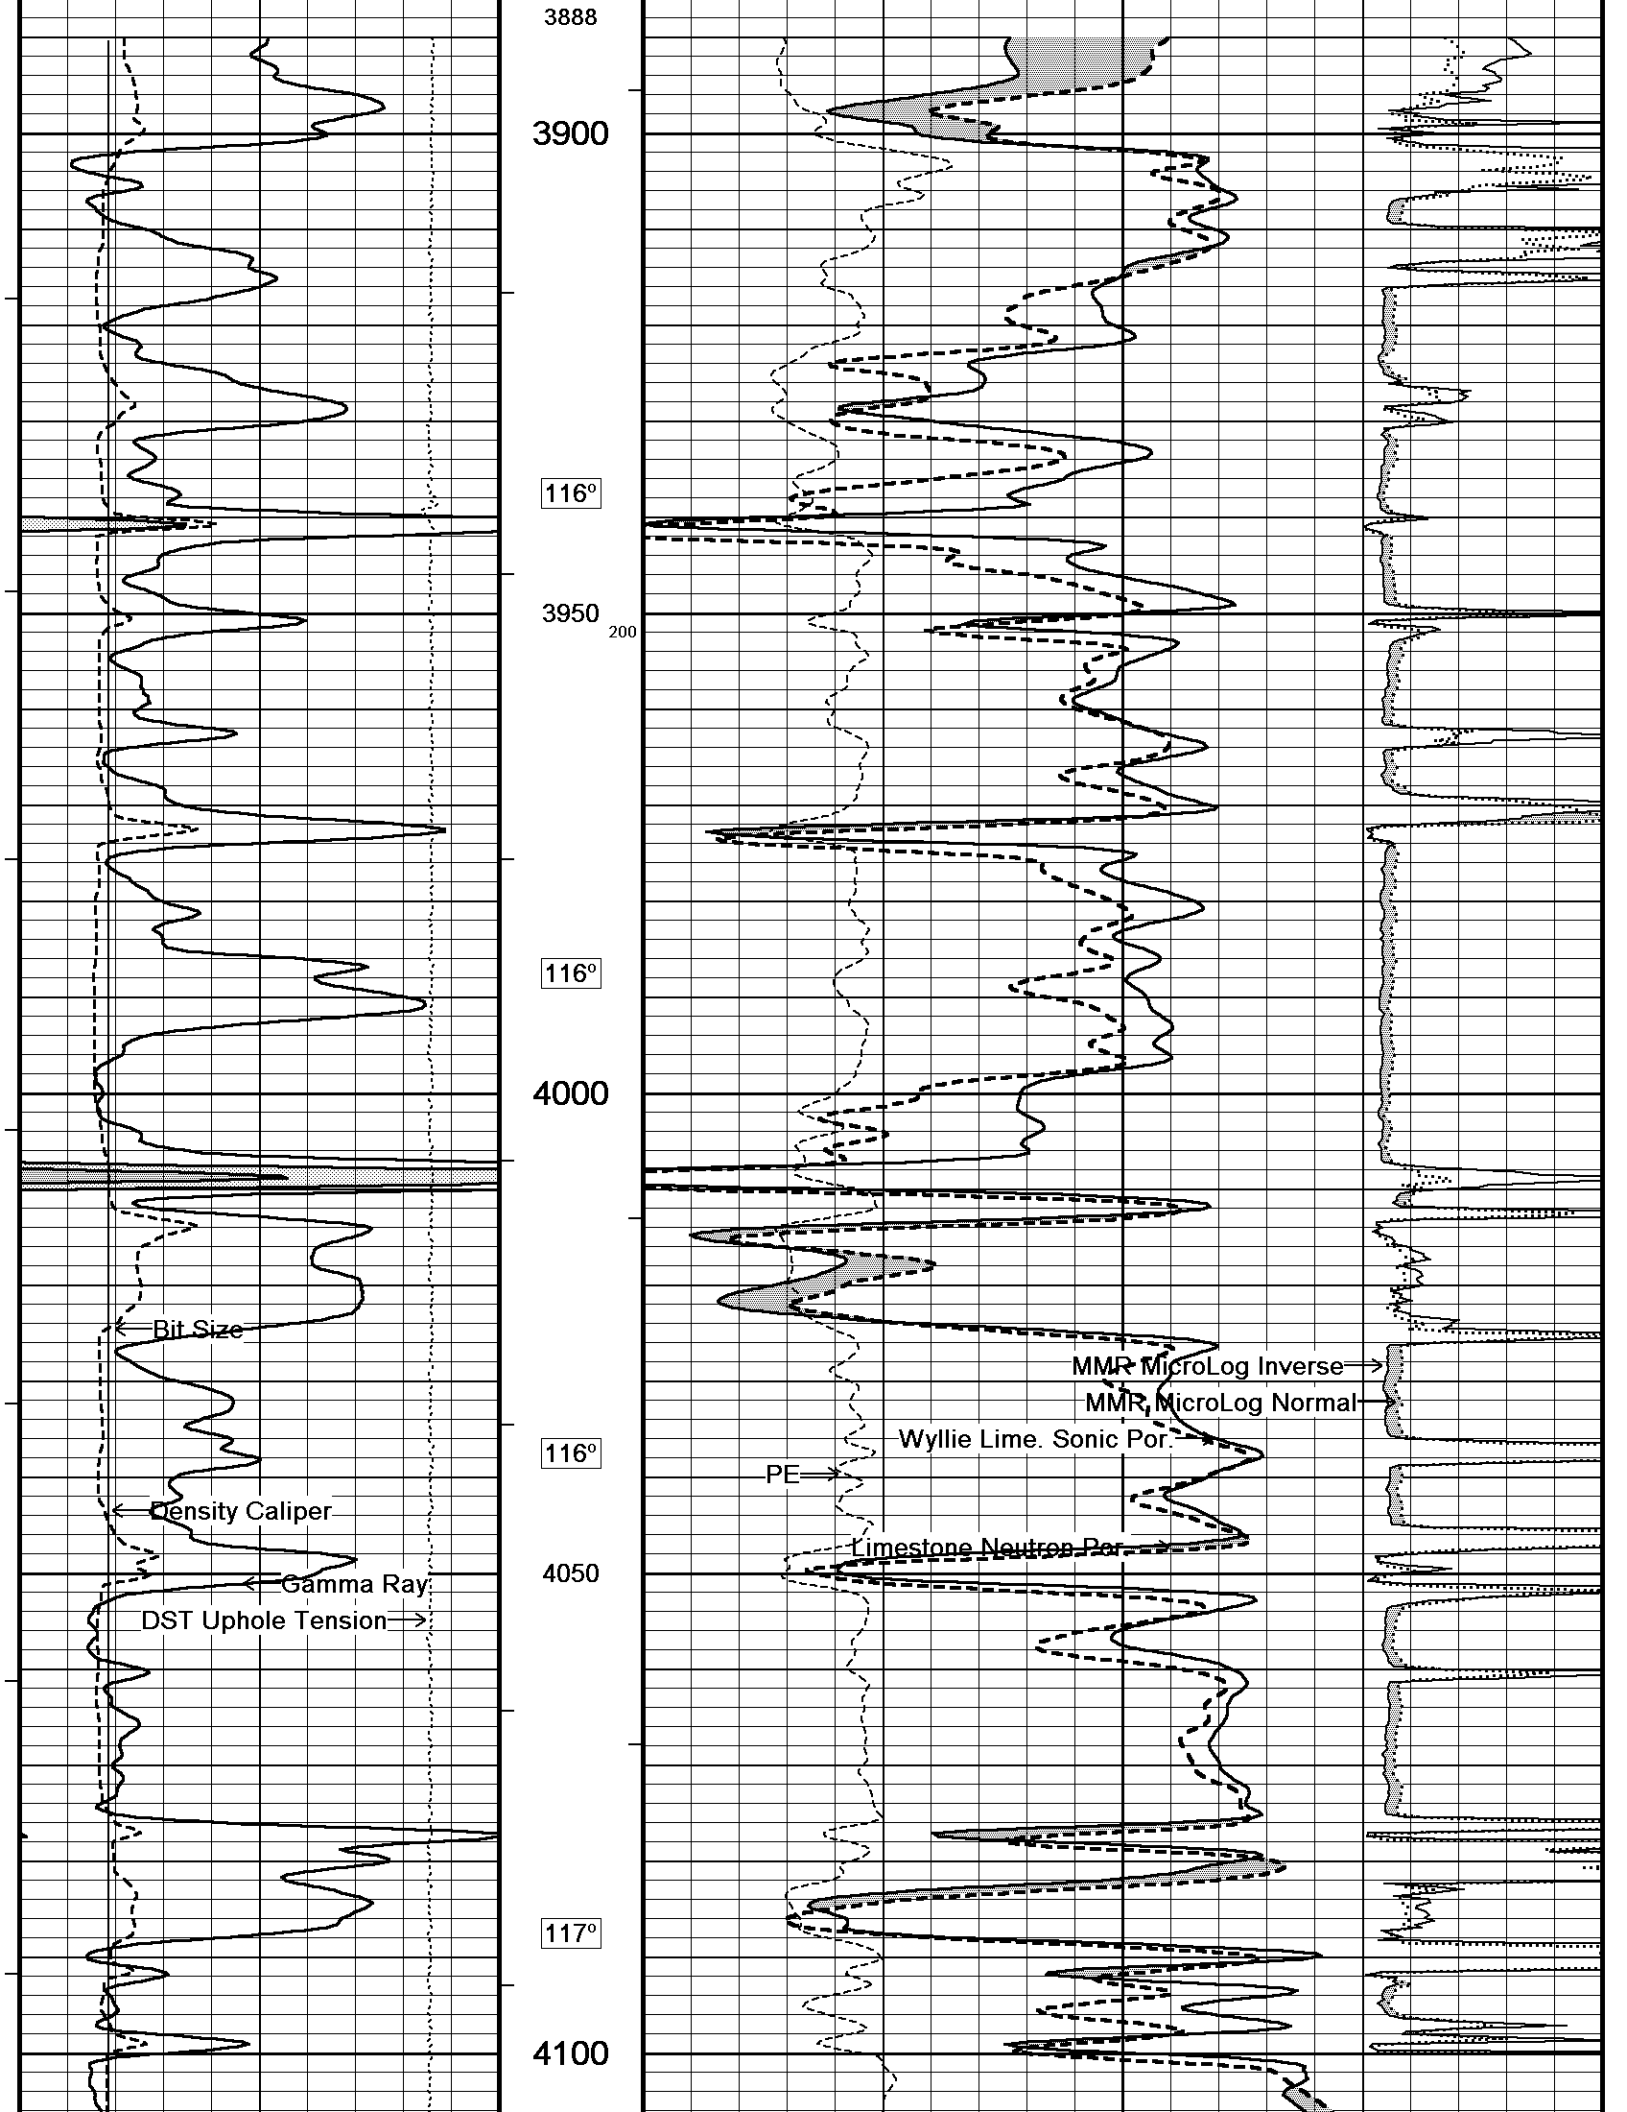


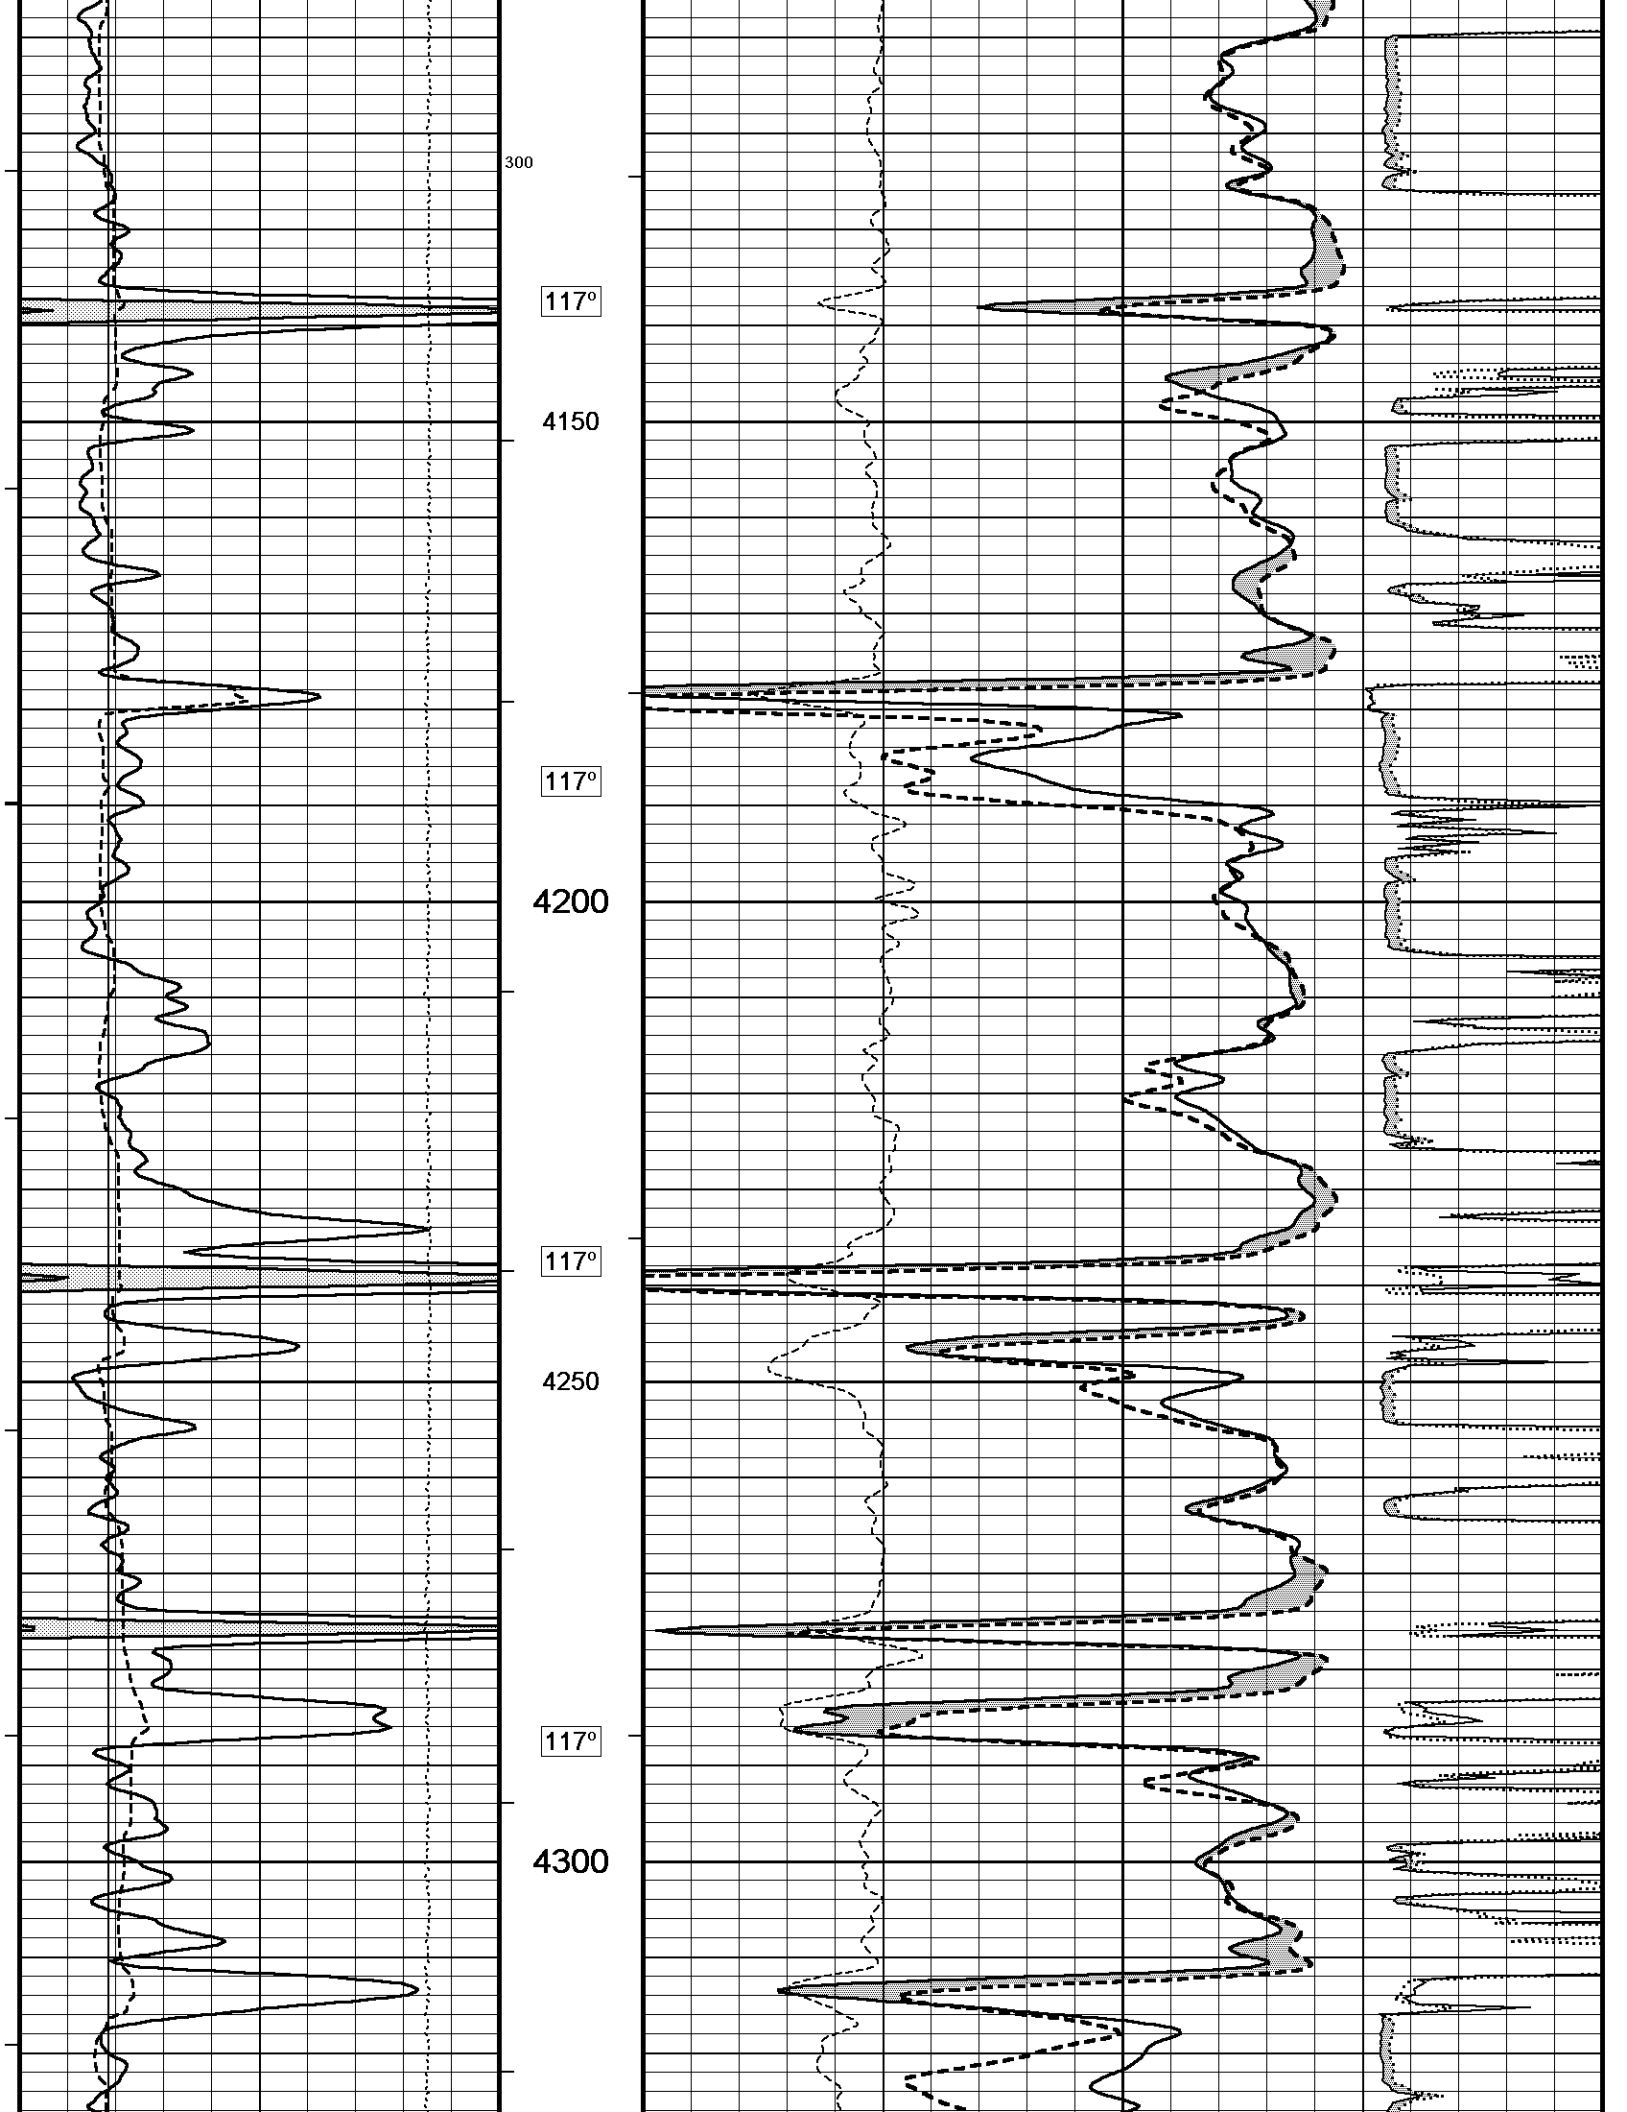

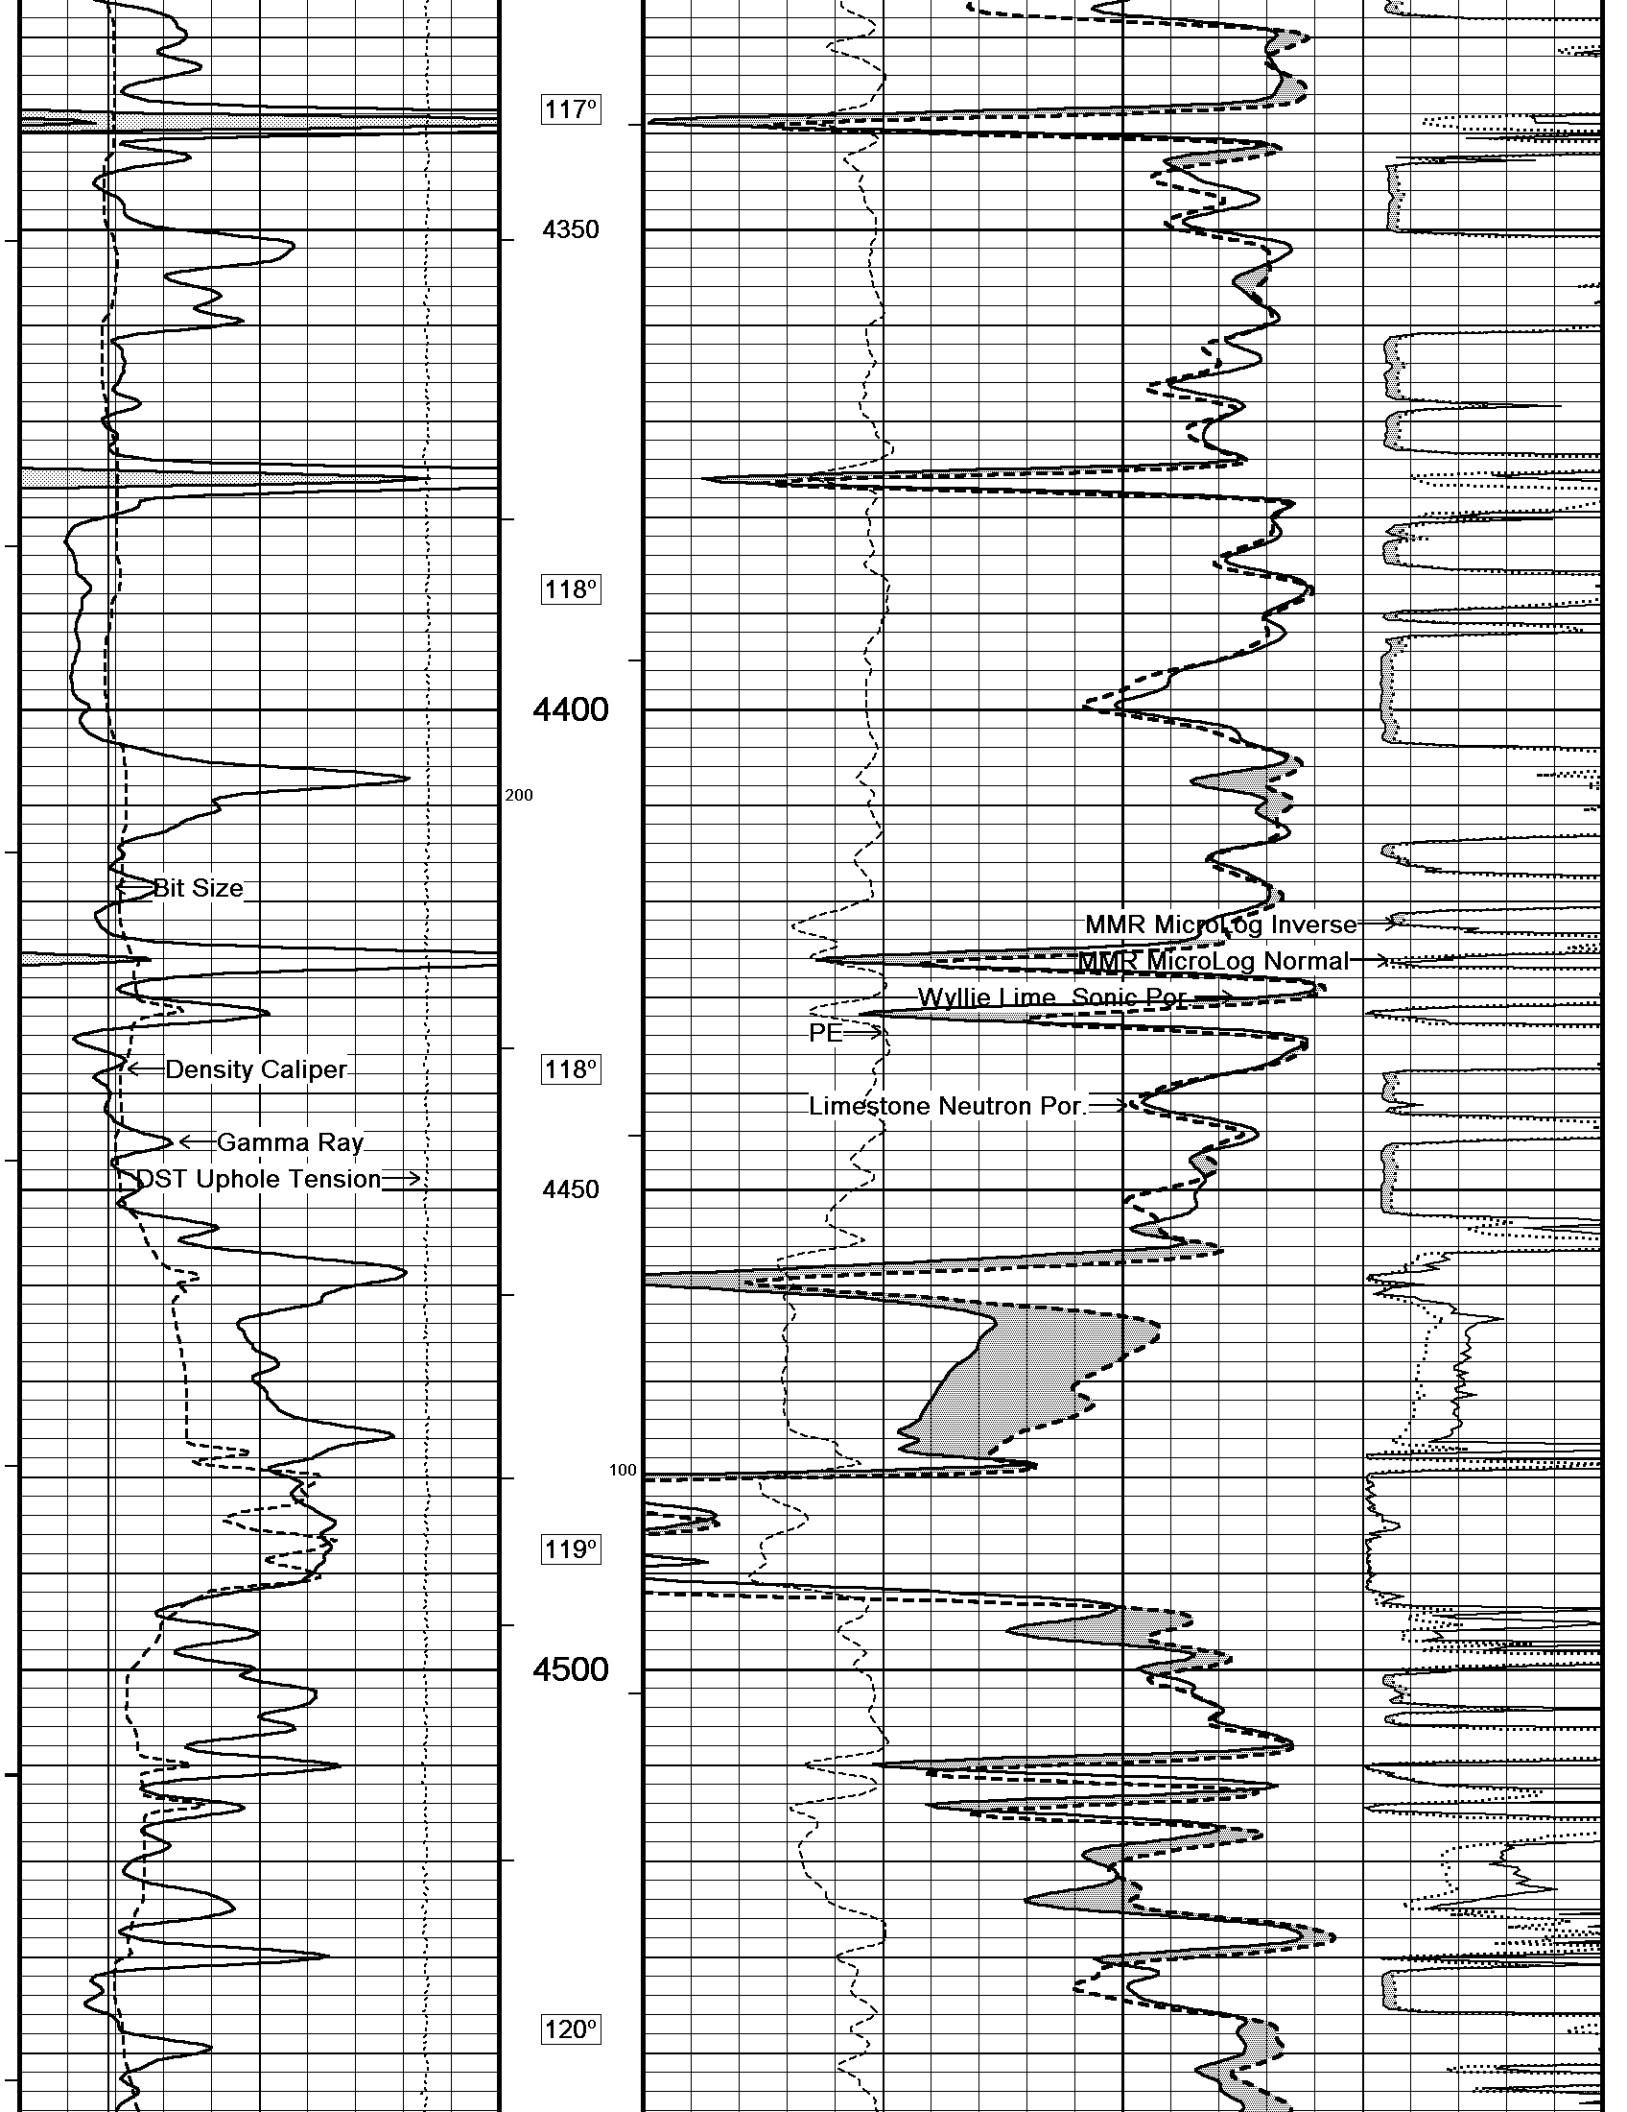

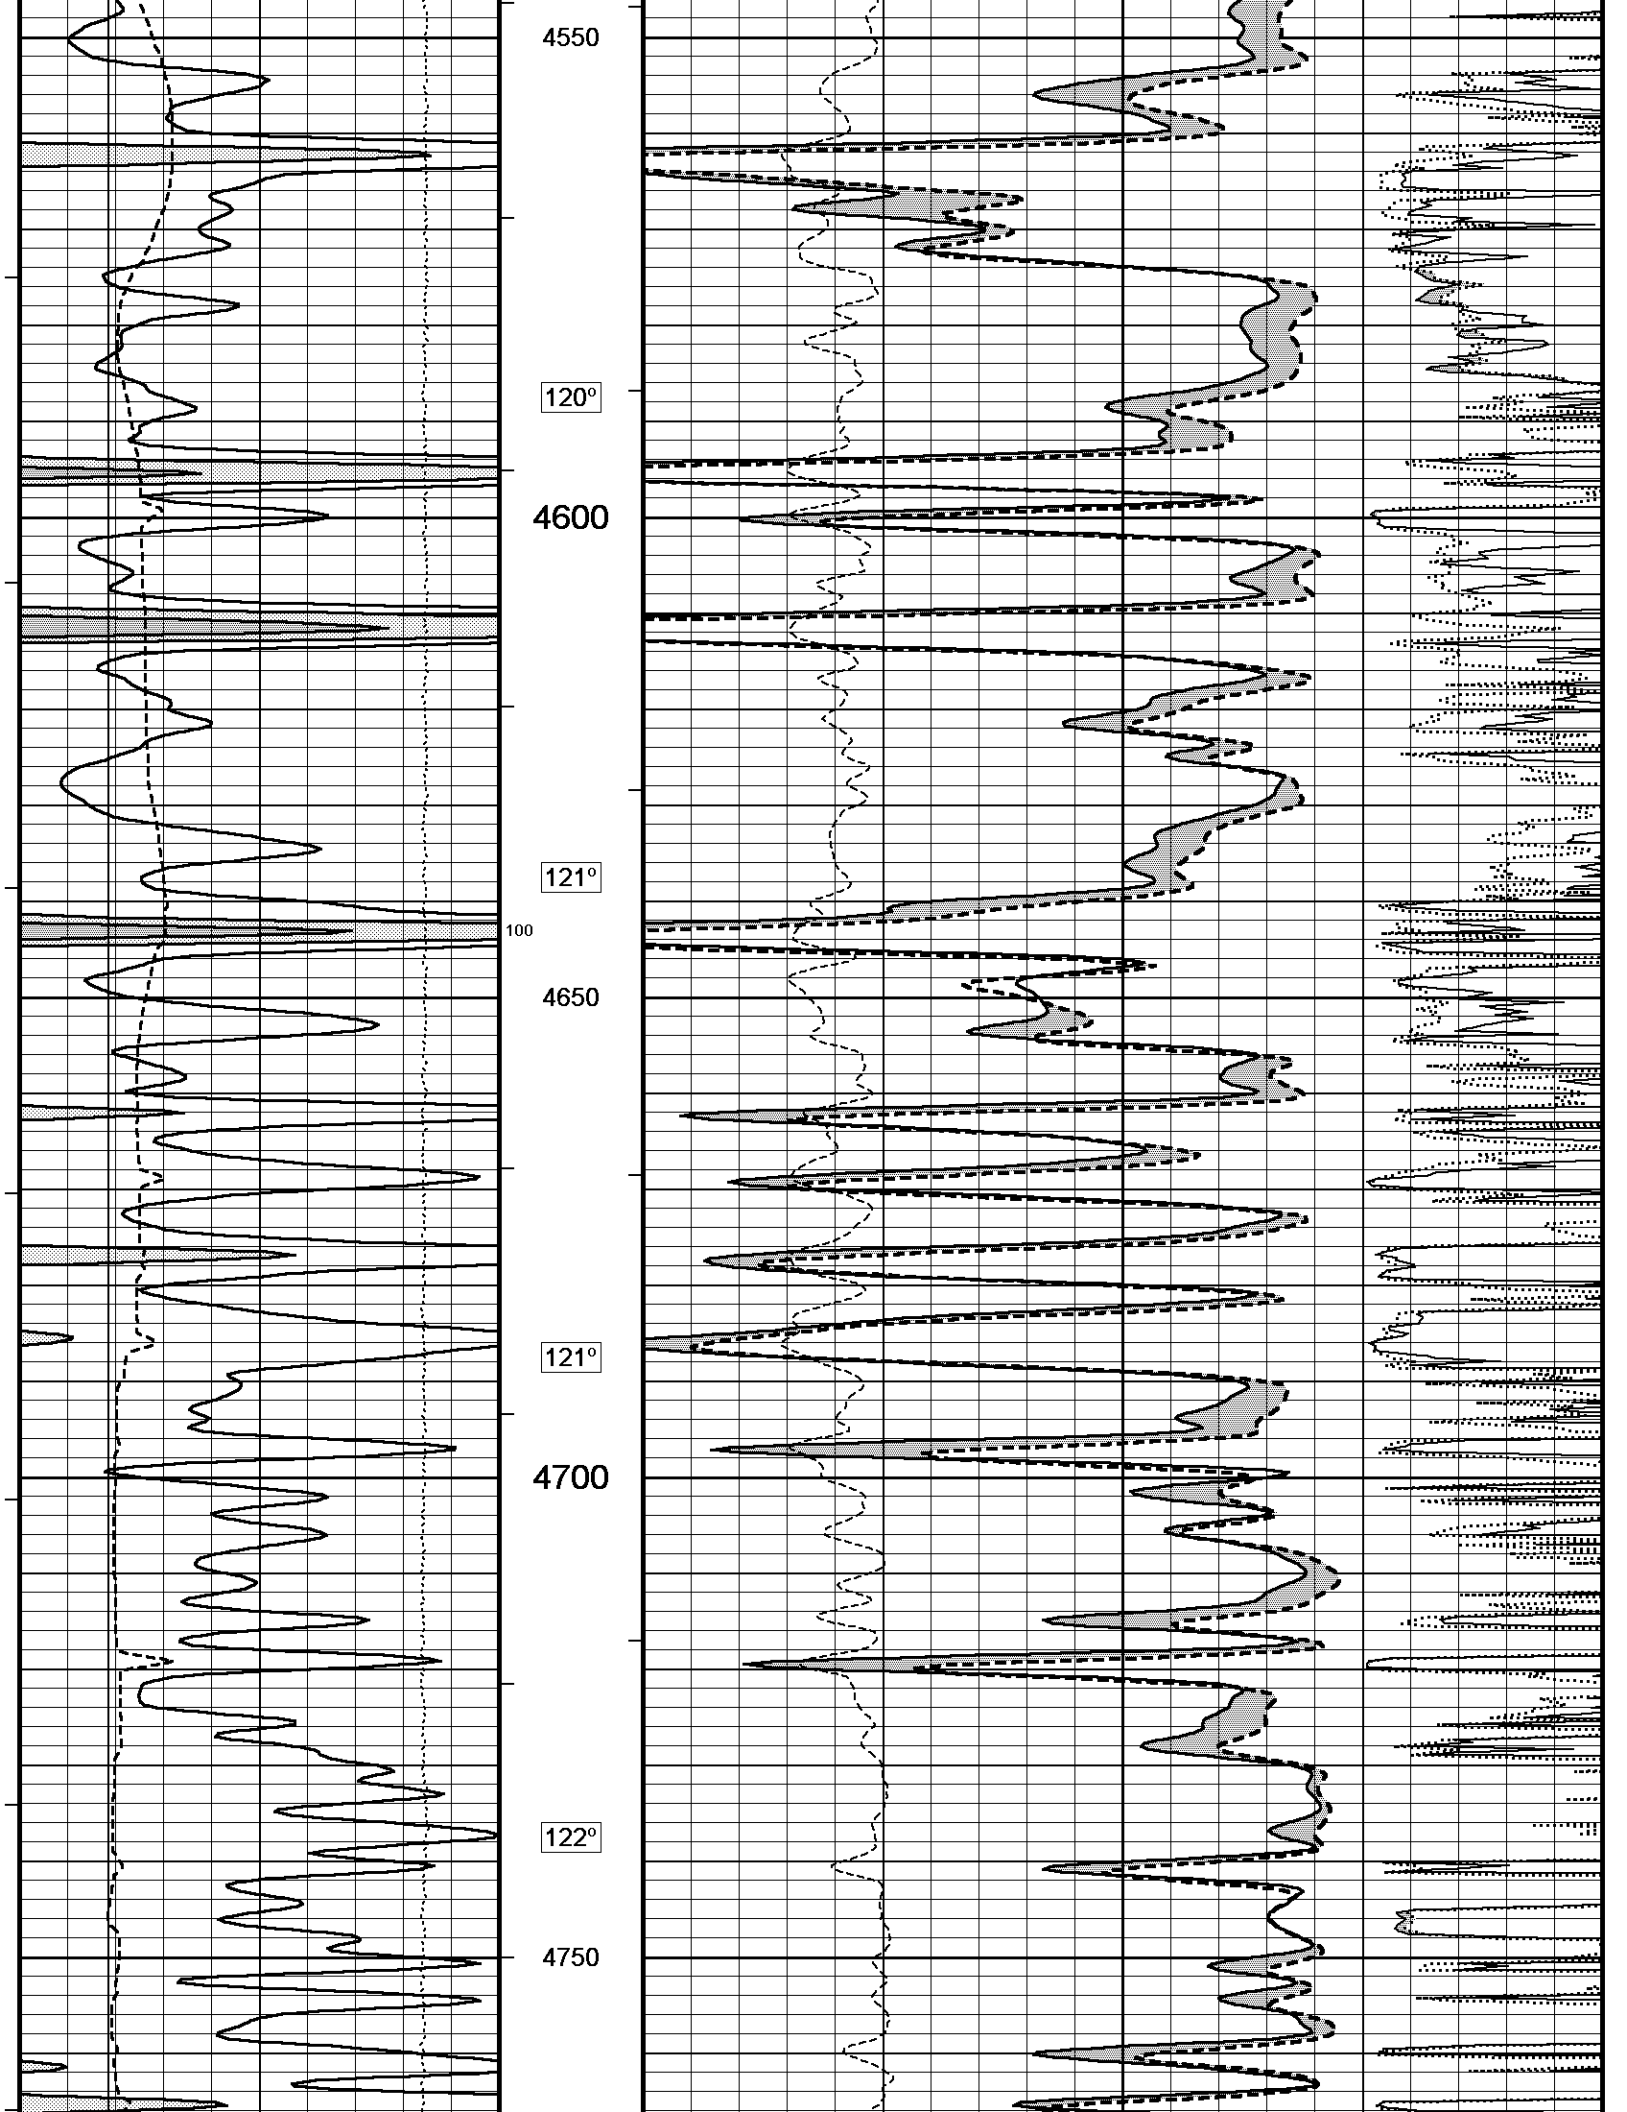

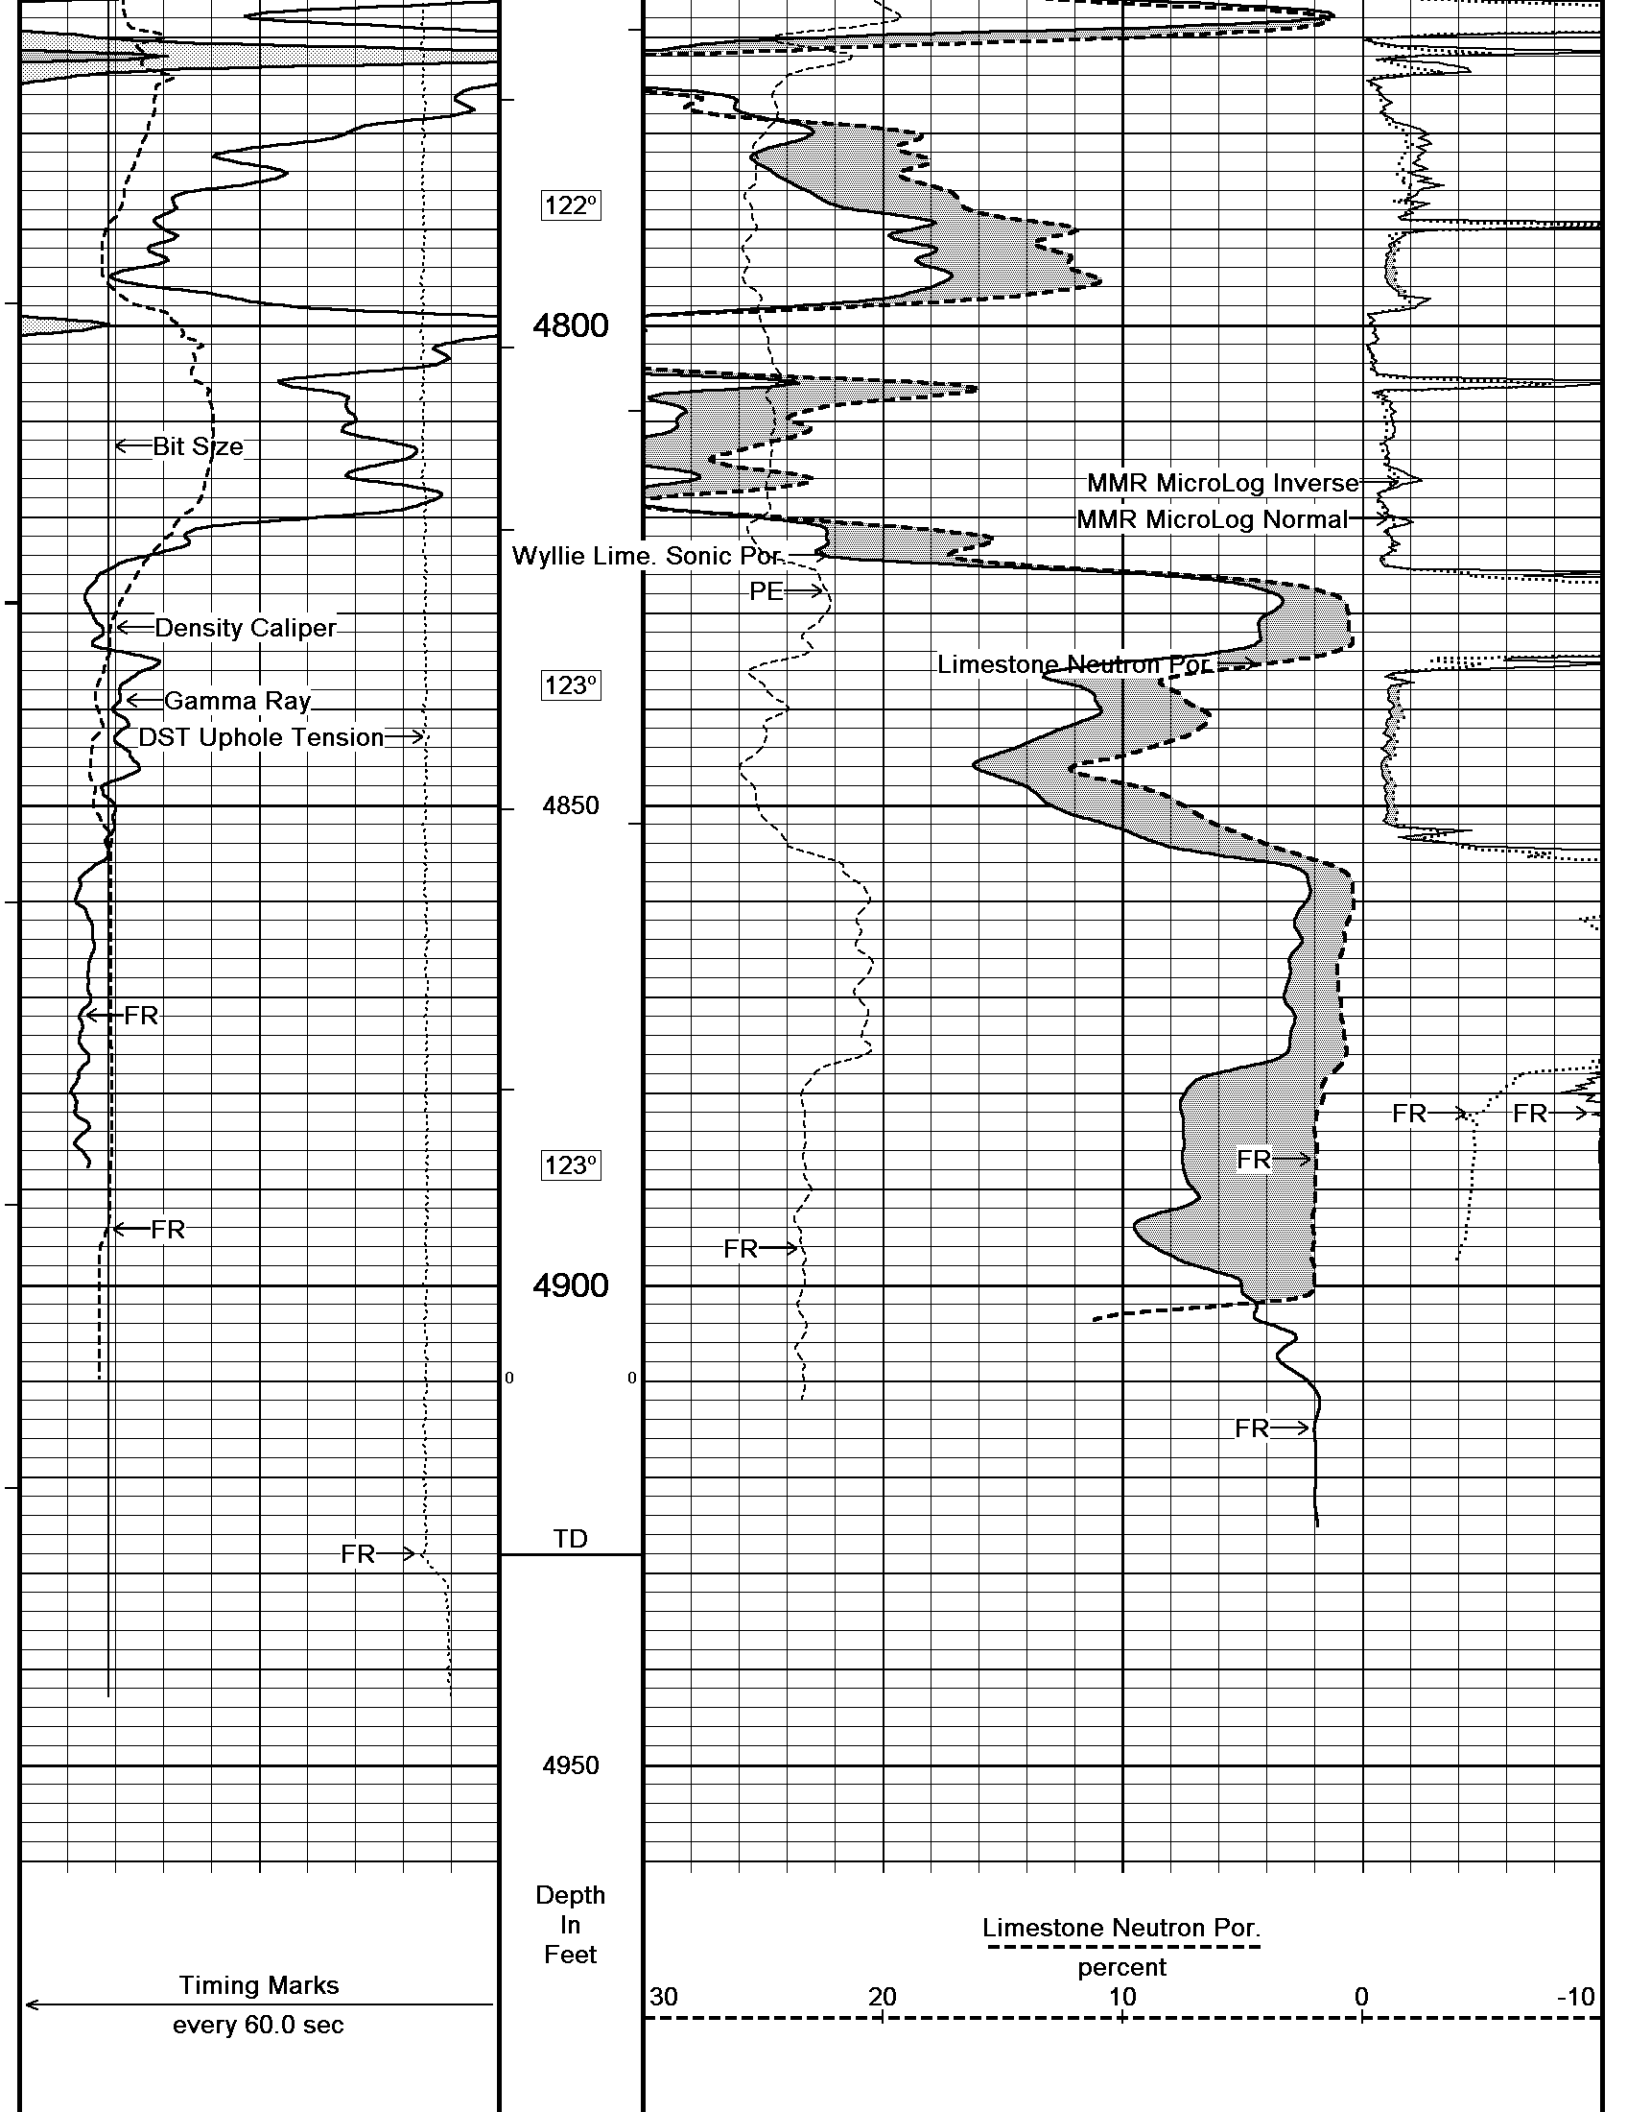

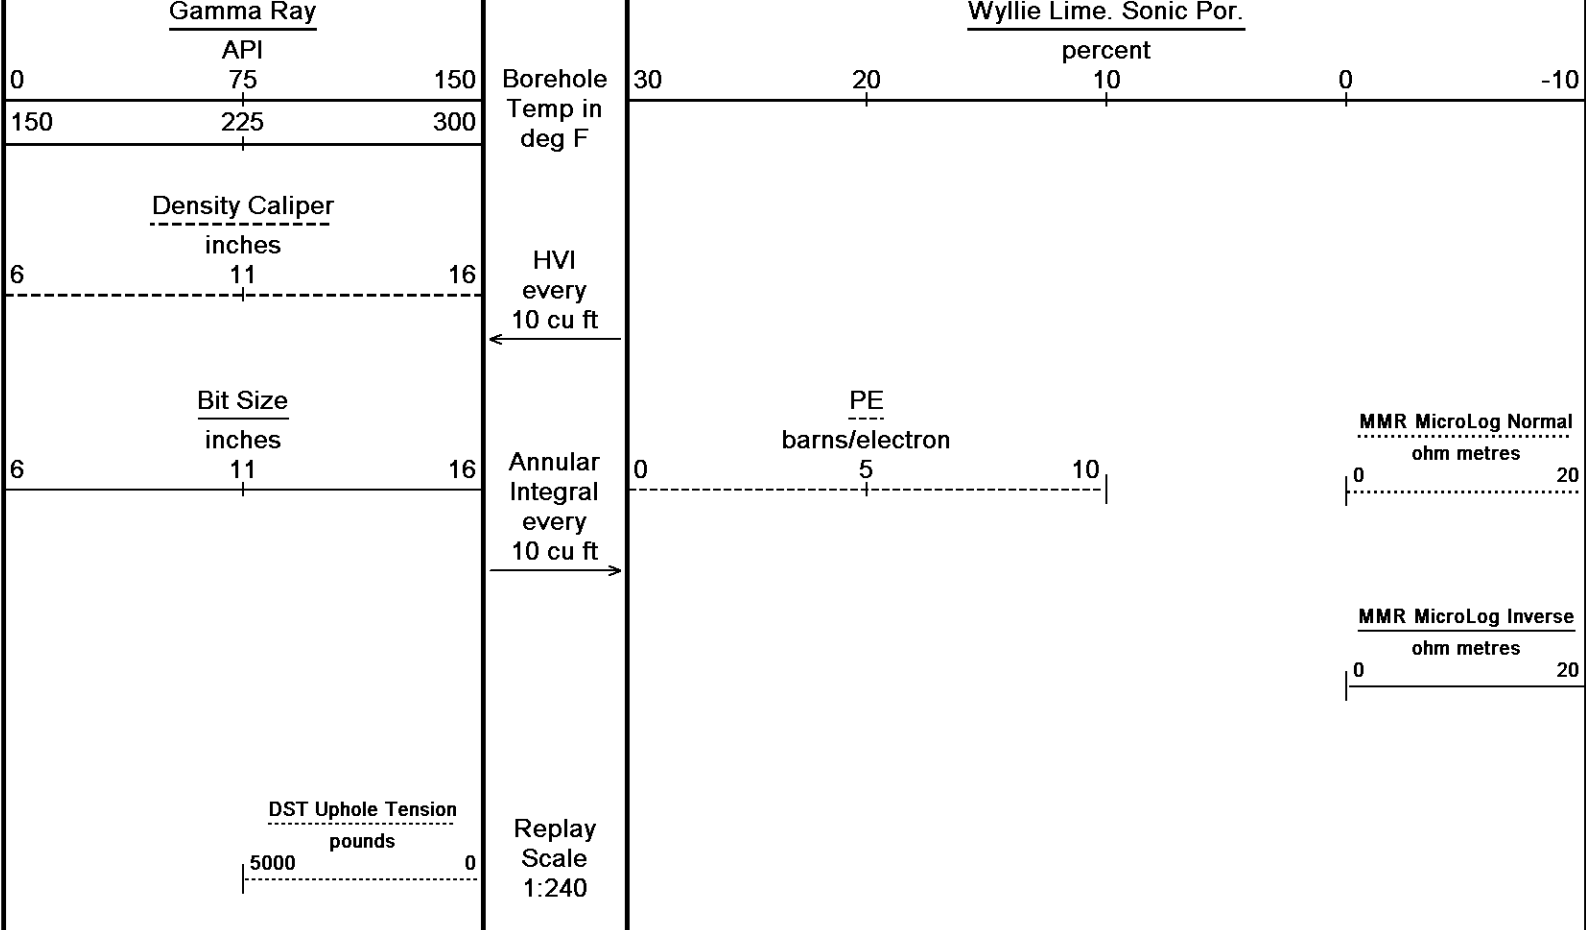

Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 07-JUL-2016 23:12
 Filename: C:\Minimus 15.03.5939\Log\Red Oak ST-SI Unit #1-30\Red Oak ST-SI Unit #1-30 Main.dta
 Recorded on 07-JUL-2016 19:32
 System Versions: Logged with 15.03.5939 Plotted with 15.03.5939

↑ **5 INCH MAIN** ↑

BEFORE SURVEY CALIBRATION
 C:\Minimus 15.03.5939\Log\Red Oak ST-SI Unit #1-30\Red Oak ST-SI Unit #1-30 Repeat.dta

General Constants All 000 Last Edited on 07-JUL-2016,18:00

General Parameters		
Mud Resistivity	0.540	ohm-metres
Mud Resistivity Temperature	75.000	degrees F
Water Level	0.000	feet
Borehole Fluid Processing	Wet Hole	
Hole/Annular Volume and Differential Caliper Parameters		
HVOL Method	Single Caliper	
HVOL Caliper 1	Density Caliper	
HVOL Caliper 2	N/A	
Annular Volume Diameter	5.500	inches
Caliper for Differential Caliper	MMR Caliper	
Rwa Parameters		
Porosity used	Base Density Porosity	
Resistivity used	Array Ind. One Res Rt	
RWA Constant A	0.610	
RWA Constant M	2.150	
SW/APOR Tool Source	0.000	


Down-hole Tension Calibration SMS 0 Field Calibration on 07-JUL-2016 18:22

Reading No	Measured	Calibrated (lbs)
1	1056.01	0.00
2	-1326.30	480.60

Gamma Calibration MCG-C 84 Field Calibration on 07-JUL-2016 14:26

	Measured	Calibrated (API)
Background	70	46
Calibrator (Gross)	759	502
Calibrator (Net)	689	456

Gamma Calibration Tolerances MCG-C 84



Gamma Constants MCG-C 84

Last Edited on 07-JUL-2016,18:00

Gamma Calibrator Number	MCGGRCC141	
GRC-M Calibrator Jig in Use?	NO	
Inactive Background Jig in Use?	NO	
Mud Density	1.10	gm/cc
Caliper Source for Processing	Density Caliper	
Tool Position	Eccentred	
Potassium Equivalence	Chloride	
K Mud Concentration	0.00	%

SP Calibration MCG-C 84

Field Calibration on 07-JUL-2016 14:15

	Measured	Calibrated (mV)
Reference 1	104.6	100.1
Reference 2	-95.7	-98.8

High Resolution Temperature Calibration MCG-C 84

Field Calibration on 22-JUL-2014,11:40

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	75.00	75.00

High Resolution Temperature Constants MCG-C 84

Last Edited on 09-SEP-2014,02:23


Pre-filter Length	11
-------------------	----

Micro Normal and Micro Inverse Calibration MMR-C.A 247

Base Calibration on 22-MAY-2016 16:59
Field Check on 07-JUL-2016 13:49

Base Calibration					
		Measured		Calibrated (ohm-m)	
Channel		Resistor 1	Resistor 2	Resistor 1	Resistor 2
Micro Normal		10.2	49.9	5.1	25.6
Micro Inverse		10.0	49.5	3.4	16.9
Channel		Base Check (ohm-m)		Field Check (ohm-m)	
Micro Normal		93.6		93.6	
Micro Inverse		62.2		62.2	

Micro Normal & Micro Inverse Calibration Tolerance MMR-C.A 247

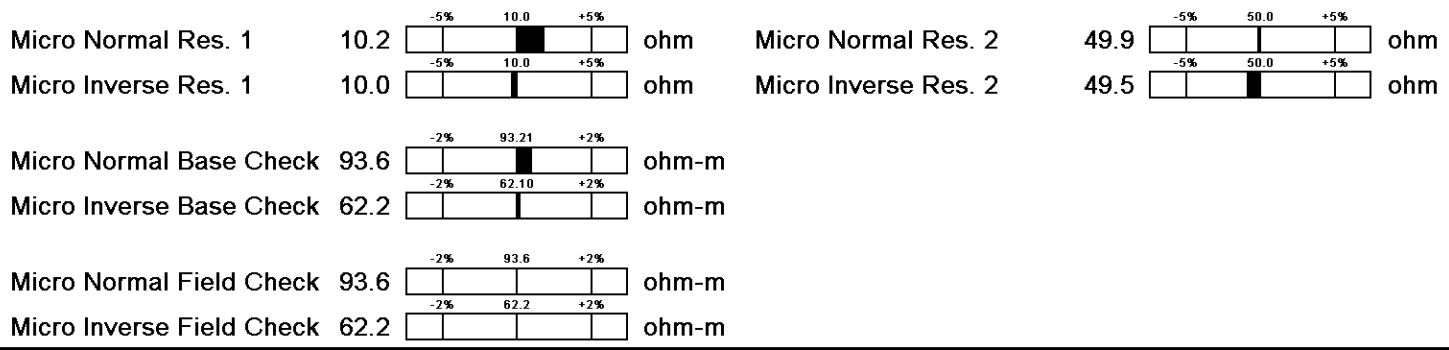

Micro Normal and Micro Inverse Constants MMR-C.A 247

Last Edited on 26-JUN-2016,15:44

Pad Type	8-12 in Soft Rubber Inflatable 006-9011-159
Micro Normal K Factor	0.5110
Micro Inverse K Factor	0.3380
Standoff Offset	0.0000 inches

Caliper Calibration MMR-C.A 247

Base Calibration on 22-MAY-2016 16:40
Field Calibration on 07-JUL-2016 13:51


Base Calibration		
Reading No	Measured	Calibrator Size (in)
4	1.4762	5.00

1	14762	5.98
2	18067	7.97
3	21325	9.86
4	25277	11.92
5	0	0.00
6	N/A	N/A

Field Calibration

Measured Caliper (in)	Actual Caliper (in)
8.02	7.97

Caliper Calibration Tolerances MMR-C.A 247



Micro-Resistivity Caliper Constants MMR-C.A 247

Last Edited on

Sonde Configuration Resistivity Mode

Neutron Calibration MDN-A.B 66

Base Calibration on 22-MAY-2016,18:15
Field Check on 07-JUL-2016 14:30

Base Calibration

	Measured		Calibrated (cps)	
	Near	Far	Near	Far
Ratio	3116	97	3714	110
	32.277		33.764	




Field Calibrator at Base

	Calibrated (cps)
Ratio	2061 3028
	0.681

Field Check

	Calibrated (cps)
Ratio	2133 3061
	0.697

Neutron Calibration Tolerances MDN-A.B 66



Neutron Constants MDN-A.B 66

Last Edited on 07-JUL-2016,14:26

Neutron Source Id	P0204NN	
Neutron Jig Number	NJ5736	
Air Hole Processing	Legacy	
Caliper Source for Processing	Density Caliper	
Stand-off	0.00	inches
Mud Density	1.00	gm/cc
Limestone Sigma	7.10	cu
Sandstone Sigma	4.26	cu
Dolomite Sigma	4.70	cu
Formation Pressure Source	None	
Formation Pressure	N/A	kpsi
Temperature Source	Constant Value	
Temperature	68.00	degrees F
Mud Salinity	0.00	kppm
Salinity Correction	Not Applied	
Formation Fluid Salinity Source	None	
Formation Fluid Salinity	N/A	kppm
Barite Mud Correction	Not Applied	

FE Calibration MFE-B.J 352

Base Calibration on 22-MAY-2016 16:12
Field Check on 07-JUL-2016 13:47

Base Calibration

	Measured	Calibrated (ohm-m)
Reference 1	0.0	0.0
Reference 2	972.3	126.8

Base Check

278.7

Field Check

278.7

FE Calibration Tolerances MFE-B.J 352

Reference 2	972.3		ohm
Base Check	278.7		ohm-m
Field Check	278.7		ohm-m

FE Constants MFE-B.J 352

Last Edited on 07-JUL-2016,13:46

Running Mode No Sleeve
MFE K Factor 0.1268

Borehole Correction Constants
Sonde Position 0.5 inches
Hole Size Source Density Caliper
Hole Size Constant Value N/A inches
Rm Source Global Value: Temperature Corrected
Temp. for Rm Corr. MCG External Temperature

Sonic Constants MSS-A.A 55

Last Edited on 07-JUL-2016,13:42

Maximum Boundary Contrast 100.00 micro-sec/ft
Fluid Transit Time 189.00 micro-sec/ft
Limestone Transit Time 47.50 micro-sec/ft
Sandstone Transit Time 55.50 micro-sec/ft
Dolomite Transit Time 43.50 micro-sec/ft
Sonic used for Porosities 3-5' Compensated Sonic
Correction for Sonde Skew Applied
Cycle Stretch Algorithm Applied
MN3FT N/A micro-sec
MX3FT N/A micro-sec
Hunt-Raymer Constant 83.13 micro-sec/ft

Sonde Mode Compensated
Hole Type Open Hole

Sonde Parameters

	Measured	Calibrated
Offset	N/A	0.0000
Free Pipe	N/A	N/A
Peak Amplitude Source		N/A

Waveform	Start Time (micro-sec)	Width (micro-sec)	Pre Gain	Start Gain	Discriminator (mV)
3'	N/A	N/A	N/A	N/A	N/A
4'	N/A	N/A	N/A	N/A	N/A
5'	N/A	N/A	N/A	N/A	N/A
6'	N/A	N/A	N/A	N/A	N/A

Processed Fixed Gate Parameters

Waveform Used For Processing	Start Time (micro-sec)	End Time (micro-sec)	Discriminator (mV)	Depth (ft)
N/A	N/A	N/A	N/A	0.00
N/A	N/A	N/A	N/A	0.00
N/A	N/A	N/A	N/A	0.00
N/A	N/A	N/A	N/A	0.00
N/A	N/A	N/A	N/A	0.00

Full Waveform Parameters

Use 3' Waveform to derive TR N/A
Use 4' Waveform to derive TR N/A
Use 5' Waveform to derive TR N/A
Use 6' Waveform to derive TR N/A
3' Waveform Discriminator Level N/A mV
4' Waveform Discriminator Level N/A mV

4' Waveform Discriminator Level	N/A	mV
5' Waveform Discriminator Level	N/A	mV
6' Waveform Discriminator Level	N/A	mV
3' Waveform Filter	N/A	
4' Waveform Filter	N/A	
5' Waveform Filter	N/A	
6' Waveform Filter	N/A	
Semblance Level	N/A	
Semblance Window Width	N/A	micro-sec
Sonic 1 Despiker	N/A	N/A
Sonic 2 Despiker	N/A	N/A

Induction Calibration MAI-A.A 111

Base Calibration on 05-AUG-2014,09:34
Field Check on 07-JUL-2016 13:46

Base Calibration

Test Loop Calibration Channel	Measured		Calibrated (mmho/m)	
	Low	High	Low	High
1	17.6	473.6	9.3	966.2
2	6.4	385.9	7.6	821.4
3	3.2	264.0	5.2	566.0
4	2.1	135.5	2.6	279.2
Array Temperature	23.0		Deg F	

Test Loop Calibration Verified 22-MAY-2016,17:59

Channel	Base Check (mmho/m)		Field Check (mmho/m)		
	Low	High	Low	High	
1	12.1	3873.0	10.7	3867.6	
2	29.8	3528.1	27.7	3522.3	
3	29.1	3021.3	27.2	3016.2	
4	19.1	2058.5	17.8	2055.0	
Deep	17.7	1962.1	16.5	1958.8	
Medium	43.1	3976.4	40.4	3969.4	
Shallow	44.4	5232.7	41.4	5224.1	
Array Temperature	65.8		87.7		Deg F

Induction Calibration Tolerances MAI-A.A 111

Low Conductivity 1	17.6		mmho/m	High Conductivity 1	473.6		mmho/m
Low Conductivity 2	6.4		mmho/m	High Conductivity 2	385.9		mmho/m
Low Conductivity 3	3.2		mmho/m	High Conductivity 3	264.0		mmho/m
Low Conductivity 4	2.1		mmho/m	High Conductivity 4	135.5		mmho/m
Background Vx 1	0.0		mmho/m	Phase Check Loop 1	0.0		%
Background Vx 2	0.0		mmho/m	Phase Check Loop 2	0.0		%
Background Vx 3	0.0		mmho/m	Phase Check Loop 3	0.0		%
Background Vx 4	0.0		mmho/m	Phase Check Loop 4	0.0		%

Induction Constants MAI-A.A 111

Last Edited on 07-JUL-2016,13:43

Induction Model	RtAP-WBM	
Borehole Correction Constants		
Tool Centred	No	
Hole Size Source	Density Caliper	
Hole Size Constant Value	N/A	inches
Stand-off Type	Fins	
Stand-off	0.50	inches
Number of Fins on Stand-off	8.0000	
Stand-off Fin Angle	45.00	degrees
Stand-off Fin Width	0.5000	inches
Rm Source	Global Value: Temperature Corrected	
Temp. for Rm Corr.	MCG External Temperature	
Squasher Start	0.0020	mhos/metre
Squasher Offset	N/A	mhos/metre

Borehole Normalisation			
DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000

Calibration Site Corrections			
Channel 1	0.00	mmhos/metre	
Channel 2	0.00	mmhos/metre	
Channel 3	0.00	mmhos/metre	
Channel 4	0.00	mmhos/metre	

Symmetrised Receiver Gains	
Receiver 1	1.00
Receiver 2	1.00
Receiver 3	1.00
Receiver 4	1.00

Apparent Porosity and Water Saturation Constants			
Archie Constant (A)	1.00		
Cementation Exponent (M)	2.00		
Saturation Exponent (N)	2.00		
Saturation of Water for Apor	100.00	percent	
Resistivity of Water for Apor and Sw	0.05	ohm-m	
Resistivity of Mud Filtrate for Sw	0.00	ohm-m	
Source for Rt	0.00		
Source for Rxo	0.00		

High Resolution Temperature Calibration MAI-A.A 111

Field Calibration on 24-NOV-2014,10:23

	Measured	Calibrated(Deg F)
Lower	10.00	10.00
Upper	100.00	100.00

High Resolution Temperature Constants MAI-A.A 111

Last Edited on 26-JUN-2014,15:06

Pre-filter Length	11
-------------------	----

Photo Density Calibration MPD-B 104

Base Calibration on 22-MAY-2016 17:45

Field Check on 07-JUL-2016 13:57

Density Calibration					
Base Calibration	Measured		Calibrated (sdu)		
	Near	Far	Near	Far	
Background	1148	1338			
Reference 1	49789	23977	59556	30836	
Reference 2	20127	2423	24941	2541	

Field Check at Base	1148.2	1337.6
---------------------	--------	--------


Field Check	1146.2	1331.8
-------------	--------	--------



PE Calibration				
Base Calibration	WS	Measured		Calibrated Ratio
		WH	Ratio	
Background	211	1025		
Reference 1	20854	49612	0.425	0.371
Reference 2	5819	19993	0.296	0.272

Field Check at Base	211.2	1025.1
---------------------	-------	--------

Field Check	210.6	1022.8
-------------	-------	--------

Photo Density Calibration Tolerances MPD-B 104



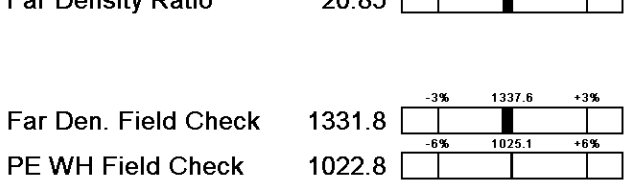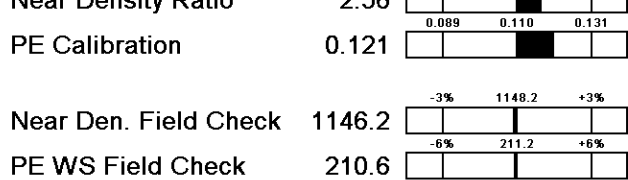


Density Constants MPD-B 104 Last Edited on 07-JUL-2016,17:59

Density Source Id	P50557B	
Nylon Calibrator Number	DNCE695	
Aluminium Calibrator Number	DACD698	
Density Shoe Profile	8 inch	
Caliper Source for Processing	Density Caliper	
PE Correction to Density	Not Applied	
Mud Density	1.10	gm/cc
Mud Density Z/A Multiplier	1.11	
Mud Filtrate Density	1.00	gm/cc
Dry Hole Mud Filtrate Density	1.00	gm/cc
DNCT	0.00	gm/cc
CRCT	0.00	gm/cc
Density Z/A Correction	Hybrid	
Matrix Density (gm/cc)	Depth (ft)	
2.71	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	

Caliper Calibration MPD-B 104 Base Calibration on 22-MAY-2016 17:26
Field Calibration on 07-JUL-2016 13:58


Base Calibration		
Reading No	Measured	Calibrator Size (in)
1	13598	3.99
2	22432	5.98
3	31029	7.97
4	39246	9.86
5	48339	11.92
6	N/A	N/A
Field Calibration		
	Measured Caliper (in)	Actual Caliper (in)
	7.97	7.97



DOWNHOLE EQUIPMENT

C:\Minimus 15.03.5939\Logs\Red Oak ST-SI Unit #1-30\Red Oak ST-SI Unit #1-30 Repeat.dta

- Cablehead, 11 pin
CBH-CA 155 LG: 2.40 ft WT: 24.3 lb OD: 2.244 in
- Compact Comms Gamma
MCG-C 84 LG: 8.70 ft WT: 63.9 lb OD: 2.244 in
- Compact Micro-Resistivity
MMR-C.A 247 LG: 8.59 ft WT: 81.6 lb OD: 4.882 in

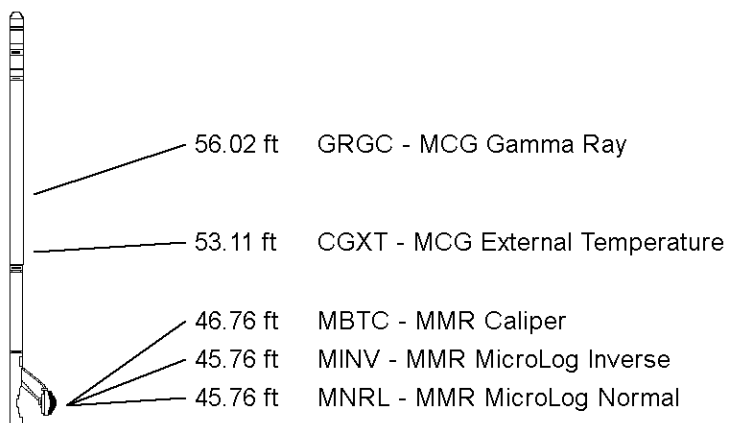

Compact Neutron
MDN-A.B 66 LG: 5.04 ft WT: 50.7 lb OD: 2.244 in


Compact Density/Caliper
MPD-B 104 LG: 9.59 ft WT: 90.4 lb OD: 2.449 in

Compact Focussed Electric
MFE-B.J 352 LG: 6.05 ft WT: 48.5 lb OD: 2.244 in

Compact Sonic
MSS-A.A 55 LG: 12.52 ft WT: 72.8 lb OD: 2.244 in

Compact Induction
MAI-A.A 111 LG: 10.81 ft WT: 48.5 lb OD: 2.244 in

Total Length: 63.70 ft Weight: 480.6 lb

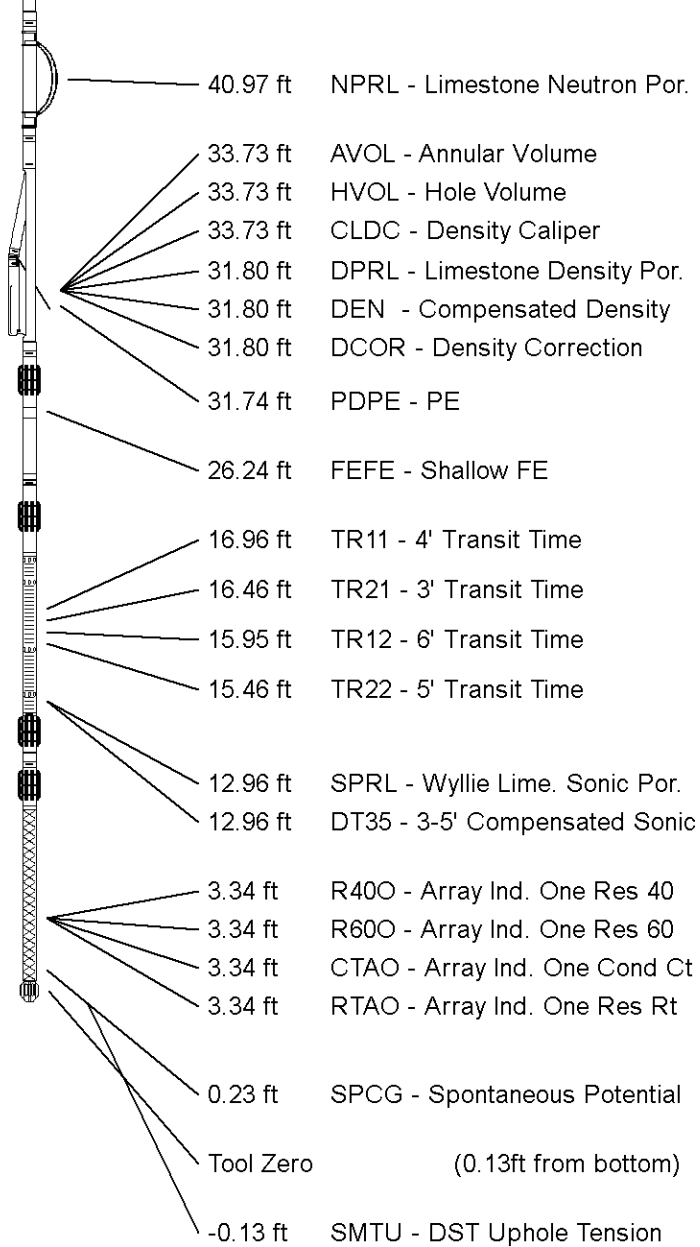

All measurements relative to tool zero.

COMPANY	RED OAK ENERGY, INC.
WELL	ST-SI UNIT #1-30
FIELD	WILDCAT
PROVINCE/COUNTY	SCOTT
COUNTRY/STATE	U.S.A. / KANSAS

Elevation Kelly Bushing	3088.00	feet	First Reading	4887.00	feet
Elevation Drill Floor	3087.00	feet	Depth Driller	4929.00	feet
Elevation Ground Level	3083.00	feet	Depth Logger	4928.00	feet



Weatherford[®]

**COMPENSATED NEUTRON
SONIC POROSITY
OVERLAY**

