

DUAL INDUCTION LOG

Company RAYMOND OIL COMPANY, INC.
 Well #1 HAACK - SOWERS UNIT
 Field WILDCAT
 County CHEYENNE
 State KANSAS

Company RAYMOND OIL COMPANY, INC.
 Well #1 HAACK - SOWERS UNIT
 Field WILDCAT
 County CHEYENNE State KANSAS

Location: API # : 15-023-21464-0000
 2299' FNL & 2633' FEL
 NW - SW - SW - NE
 SEC 20 TWP 4S RGE 30W
 Permanent Datum GROUND LEVEL Elevation 3441
 Log Measured From KELLY BUSHING 5' A.G.L.
 Drilling Measured From KELLY BUSHING
 Other Services
 CDL/CNL
 MEL
 Elevation
 K.B. 3446
 D.F. 3444
 G.L. 3441


Date	5/15/17		
Run Number	ONE		
Depth Driller	5115		
Depth Logger	5114		
Bottom Logged Interval	5112		
Top Log Interval	00		
Casing Driller	8 5/8" @ 380'		
Casing Logger	380		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3,500 PPM	
Density / Viscosity	9.2/63		
pH / Fluid Loss	10.5/8.0		
Source of Sample	FLOWLINE		
Rin @ Meas. Temp	.950 @ 100F		
Rmf @ Meas. Temp	.713 @ 100F		
Rmc @ Meas. Temp	1.14 @ 100F		
Source of Rmf / Rmc	MEASUREMENT		
Rin @ BHT	.754 @ 126F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	12:00 P.M.		
Maximum Recorded Temperature	126F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	KIM SHOEMAKER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
 DIRECTIONS
 BIRD CITY, KS., 3E. ON HWY 36 TO " RD. 31", 4S., W. INTO AT GRAIN BIN

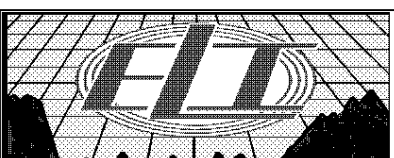


MAIN SECTION

Database File: 1421ddn.db
 Dataset Pathname: pass3.6
 Presentation Format: dil2
 Dataset Creation: Mon May 15 13:39:22 2017 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150	0	RLL3 (Ohm-m)	50
-100	SP (mV)	100	0	RILD (Ohm-m)	50
0	RWA (Ohm-m)	1	1000	CILD (mmho/m)	0
			50	RILD X10 (Ohm-m)	500
			50	RLL3 X10 (Ohm-m)	500

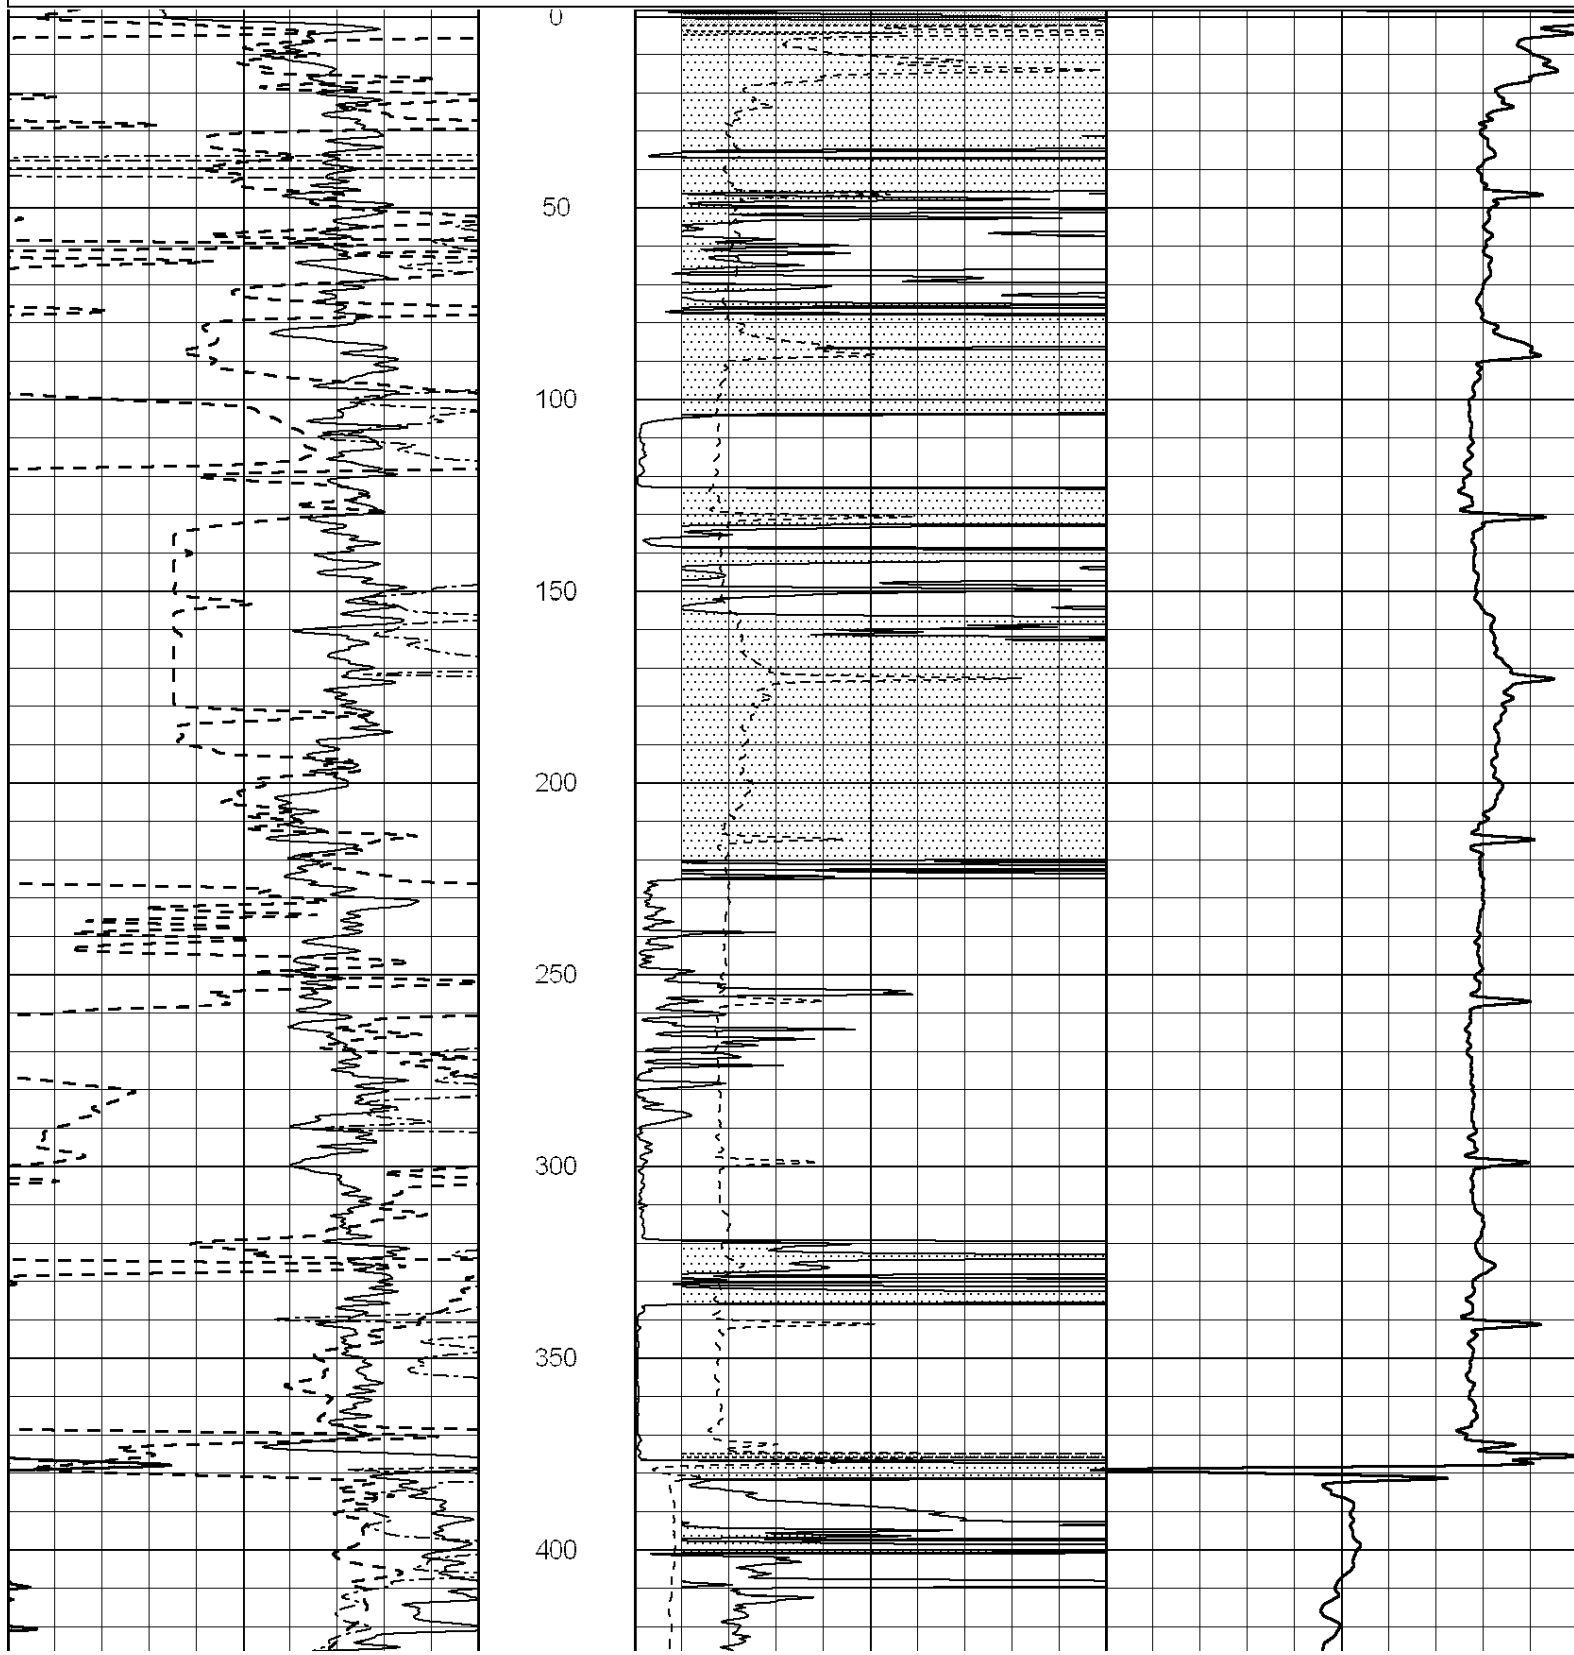

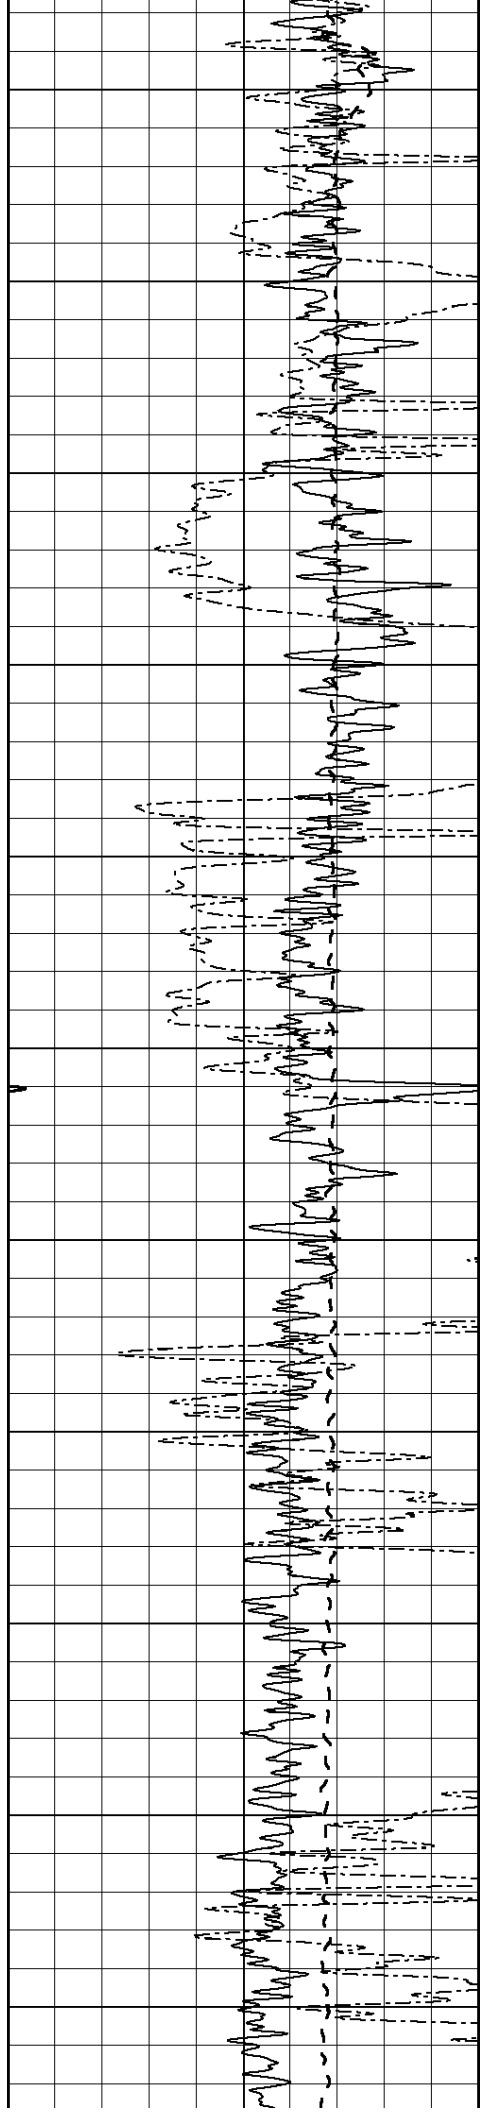

450

500

550

600

650

700


750


800

850

900

950

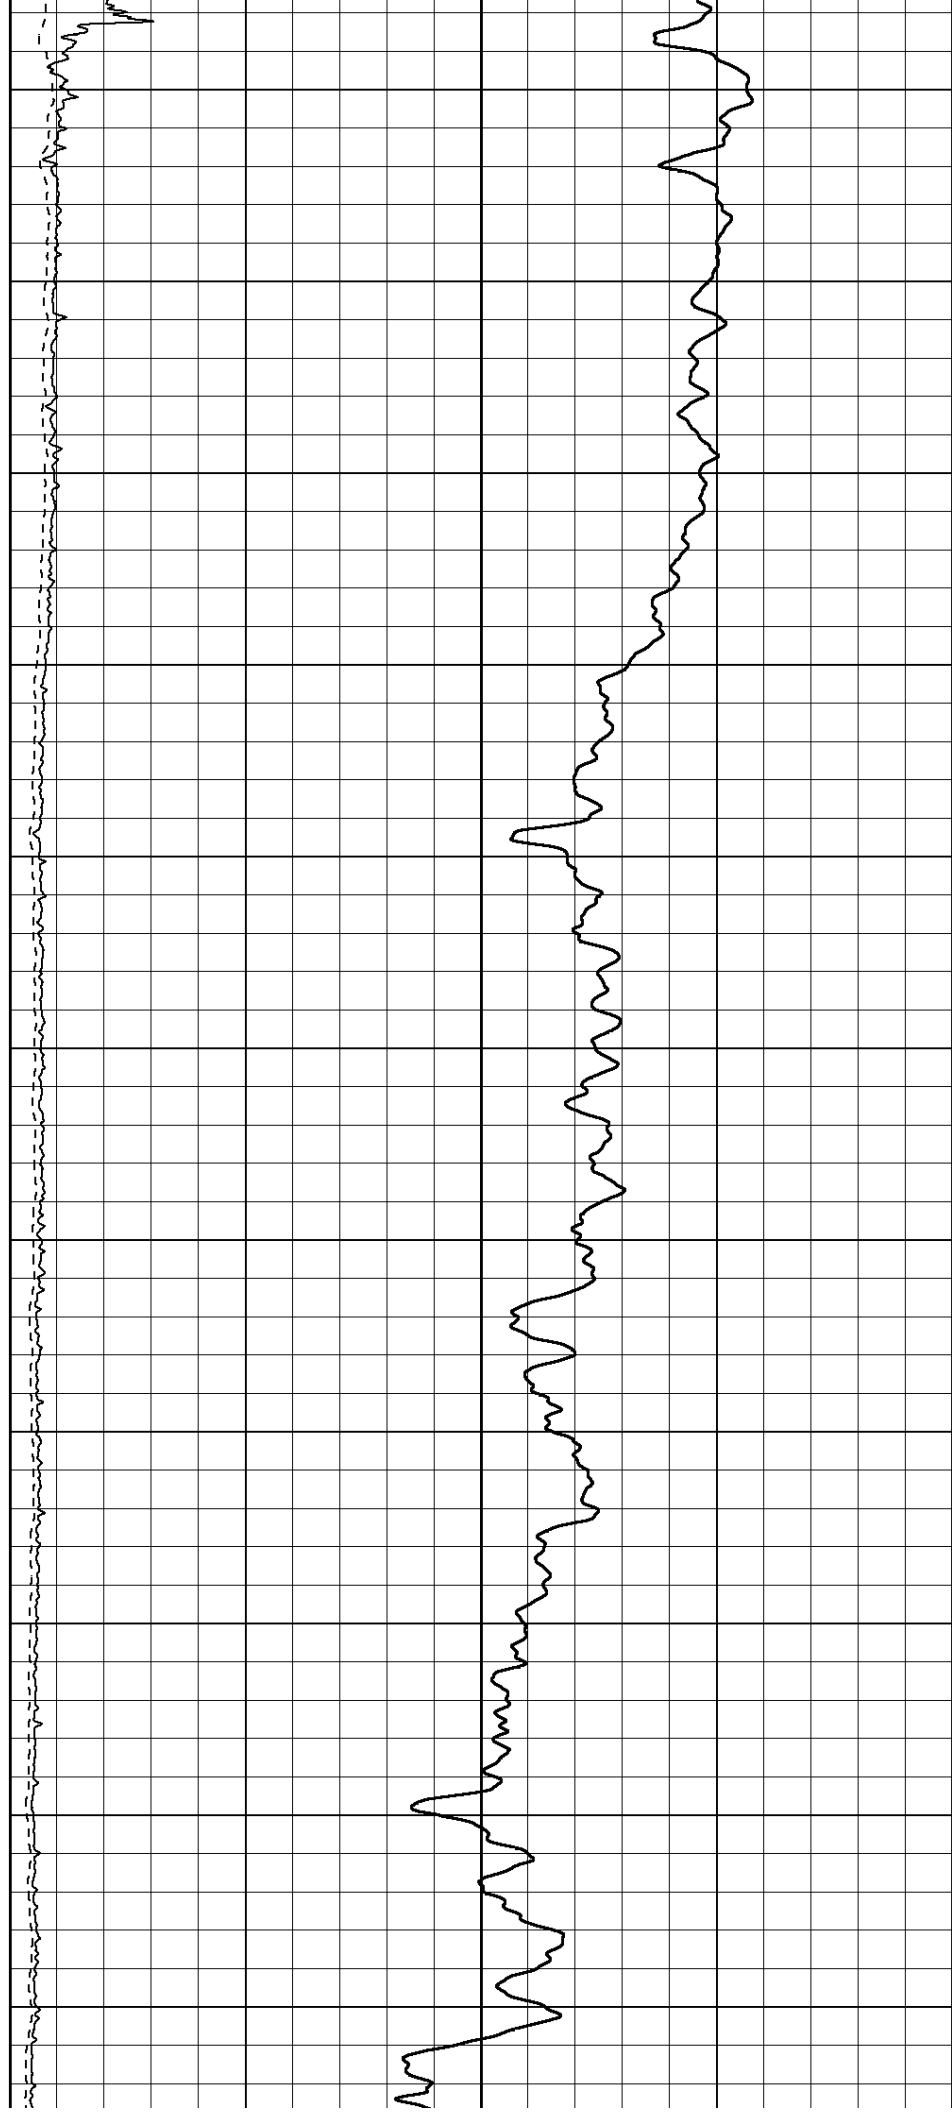

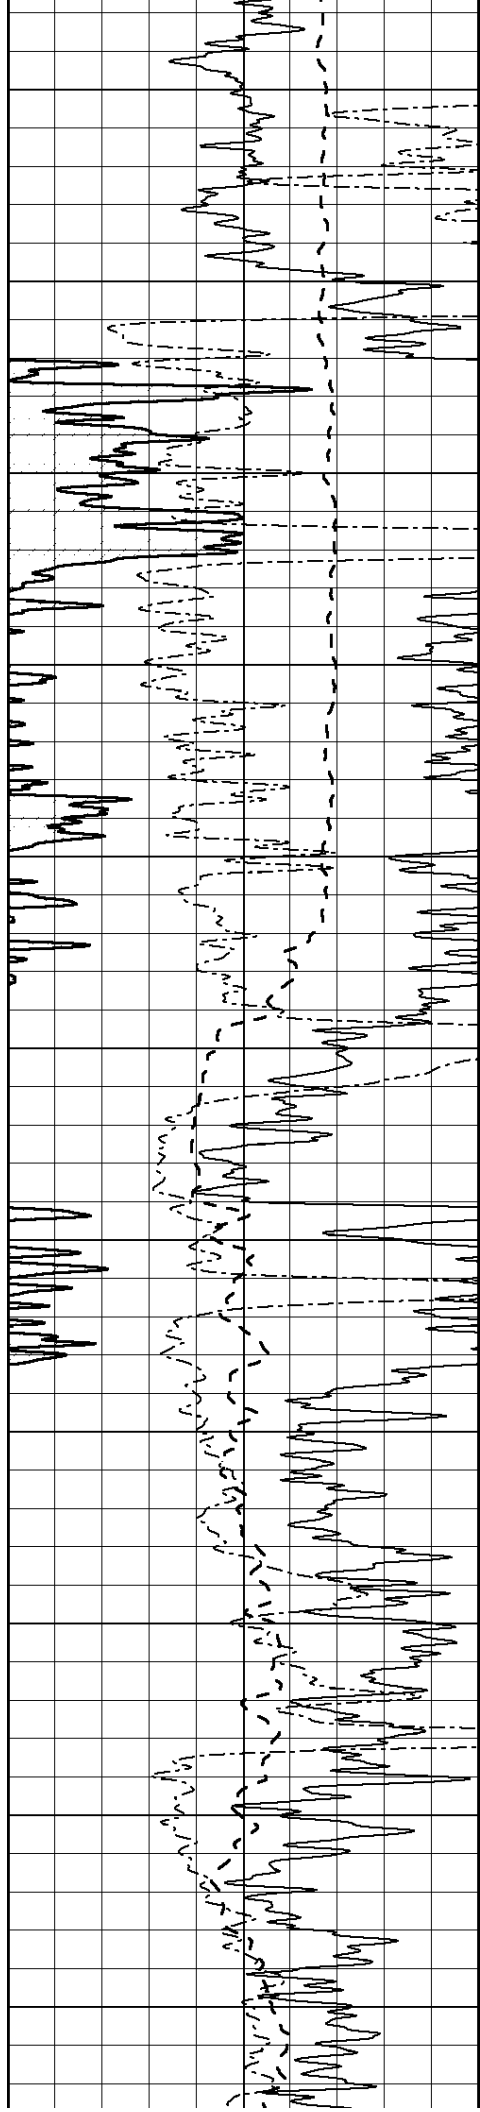

1000

1050

1100

1150

1200

1250


1300


1350

1400

1450

1500

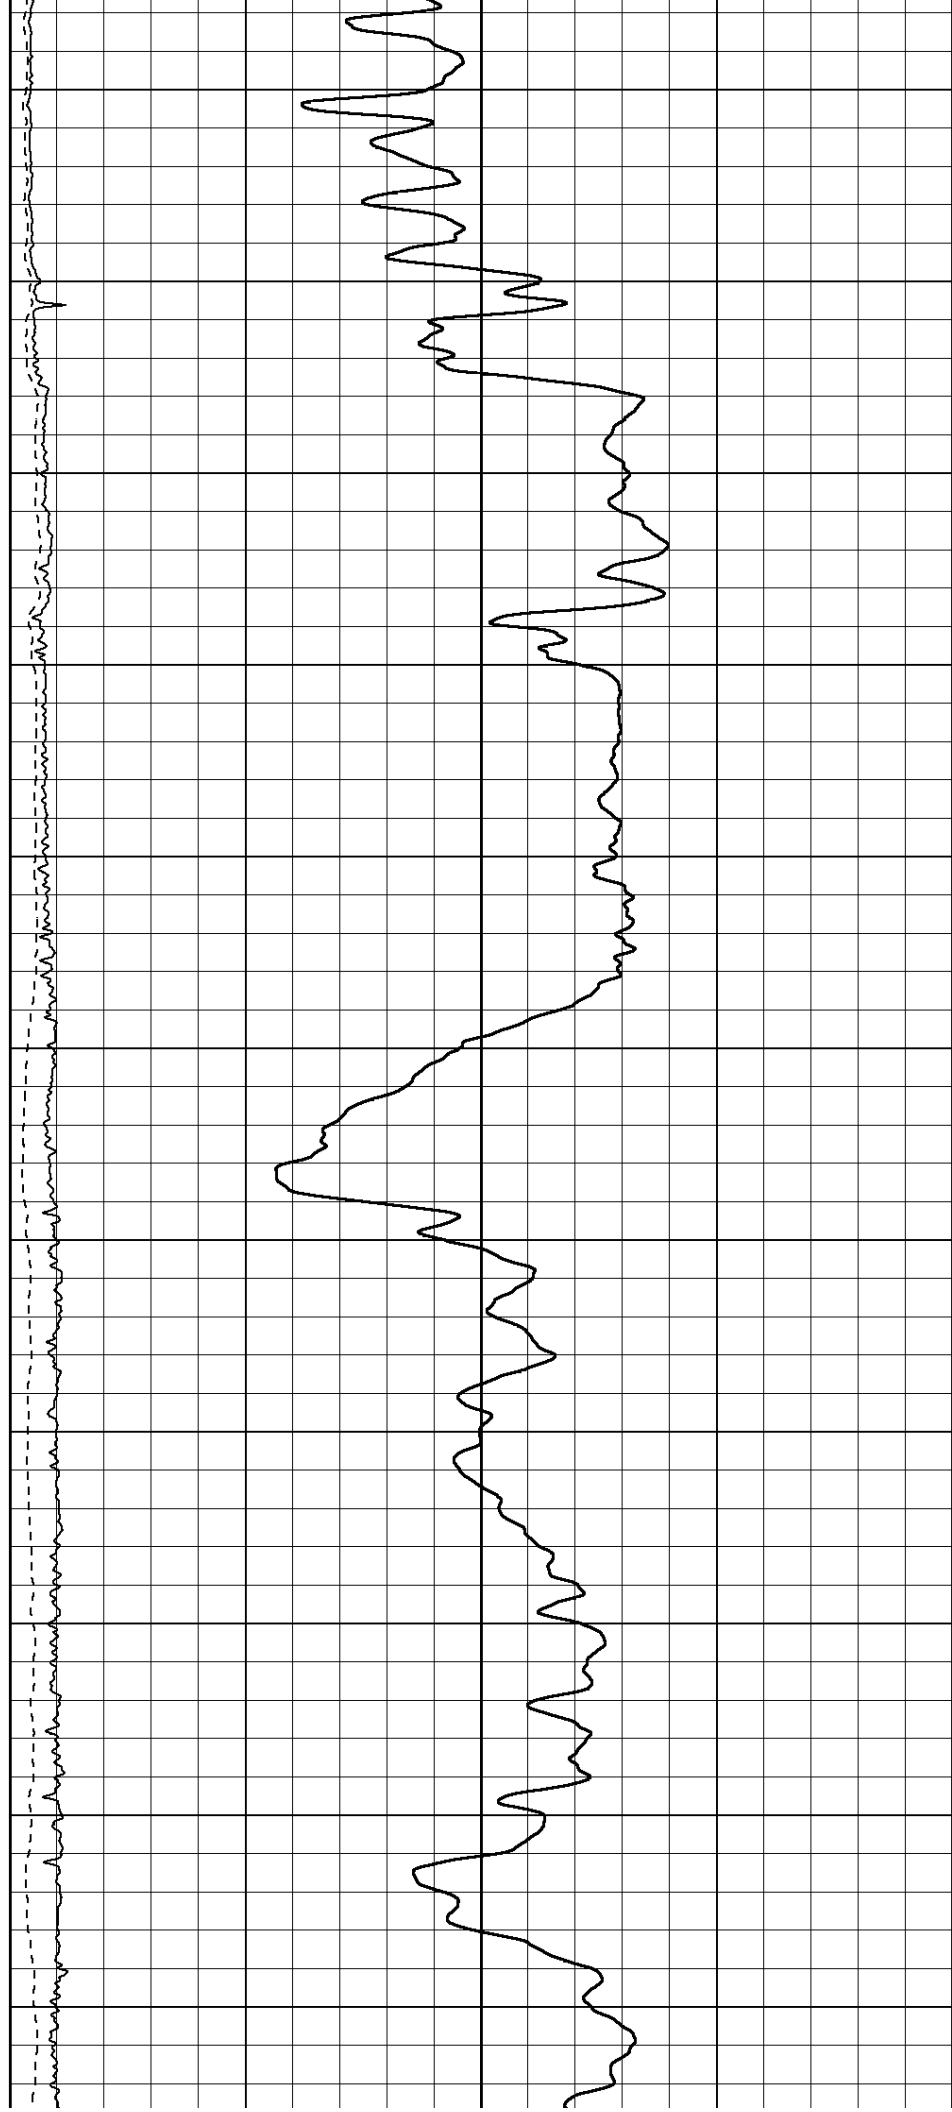

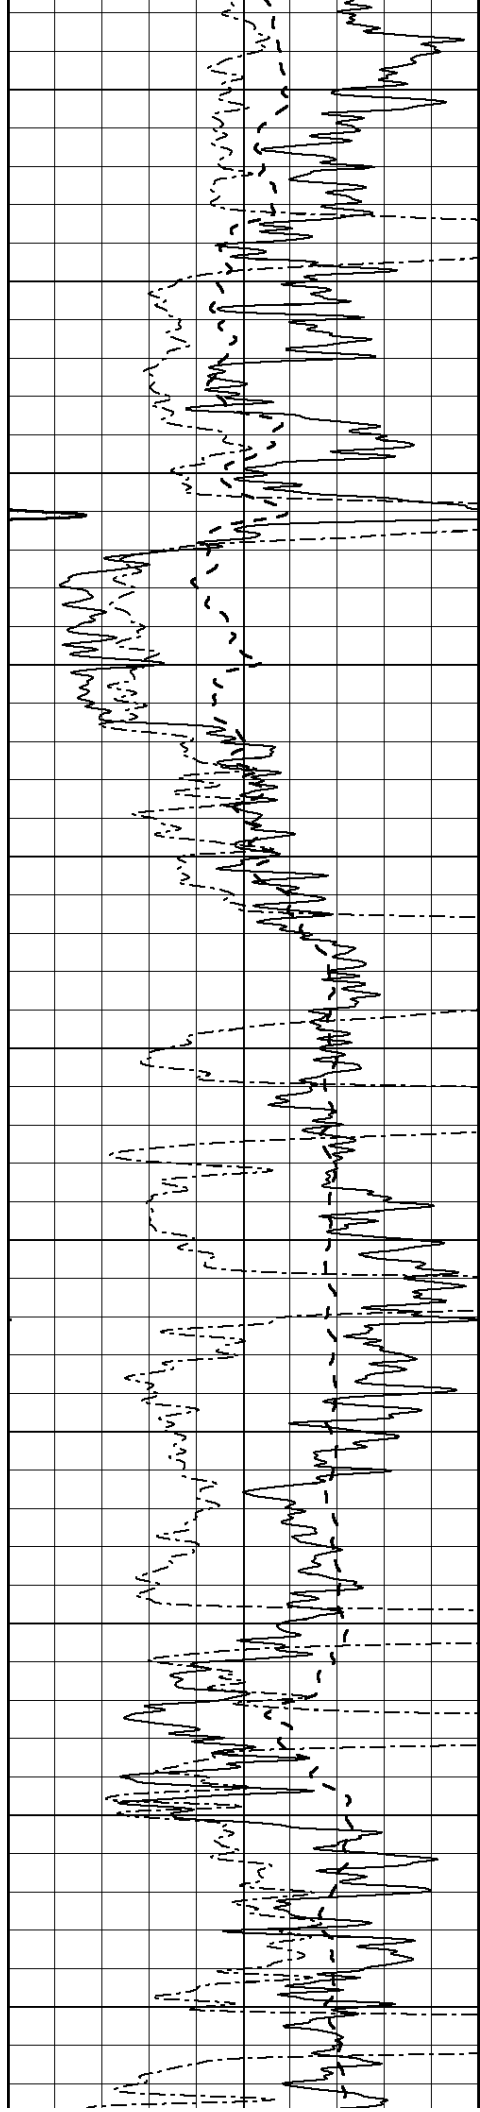

1550

1600

1650

1700

1750

1800


1850


1900

1950

2000

2050

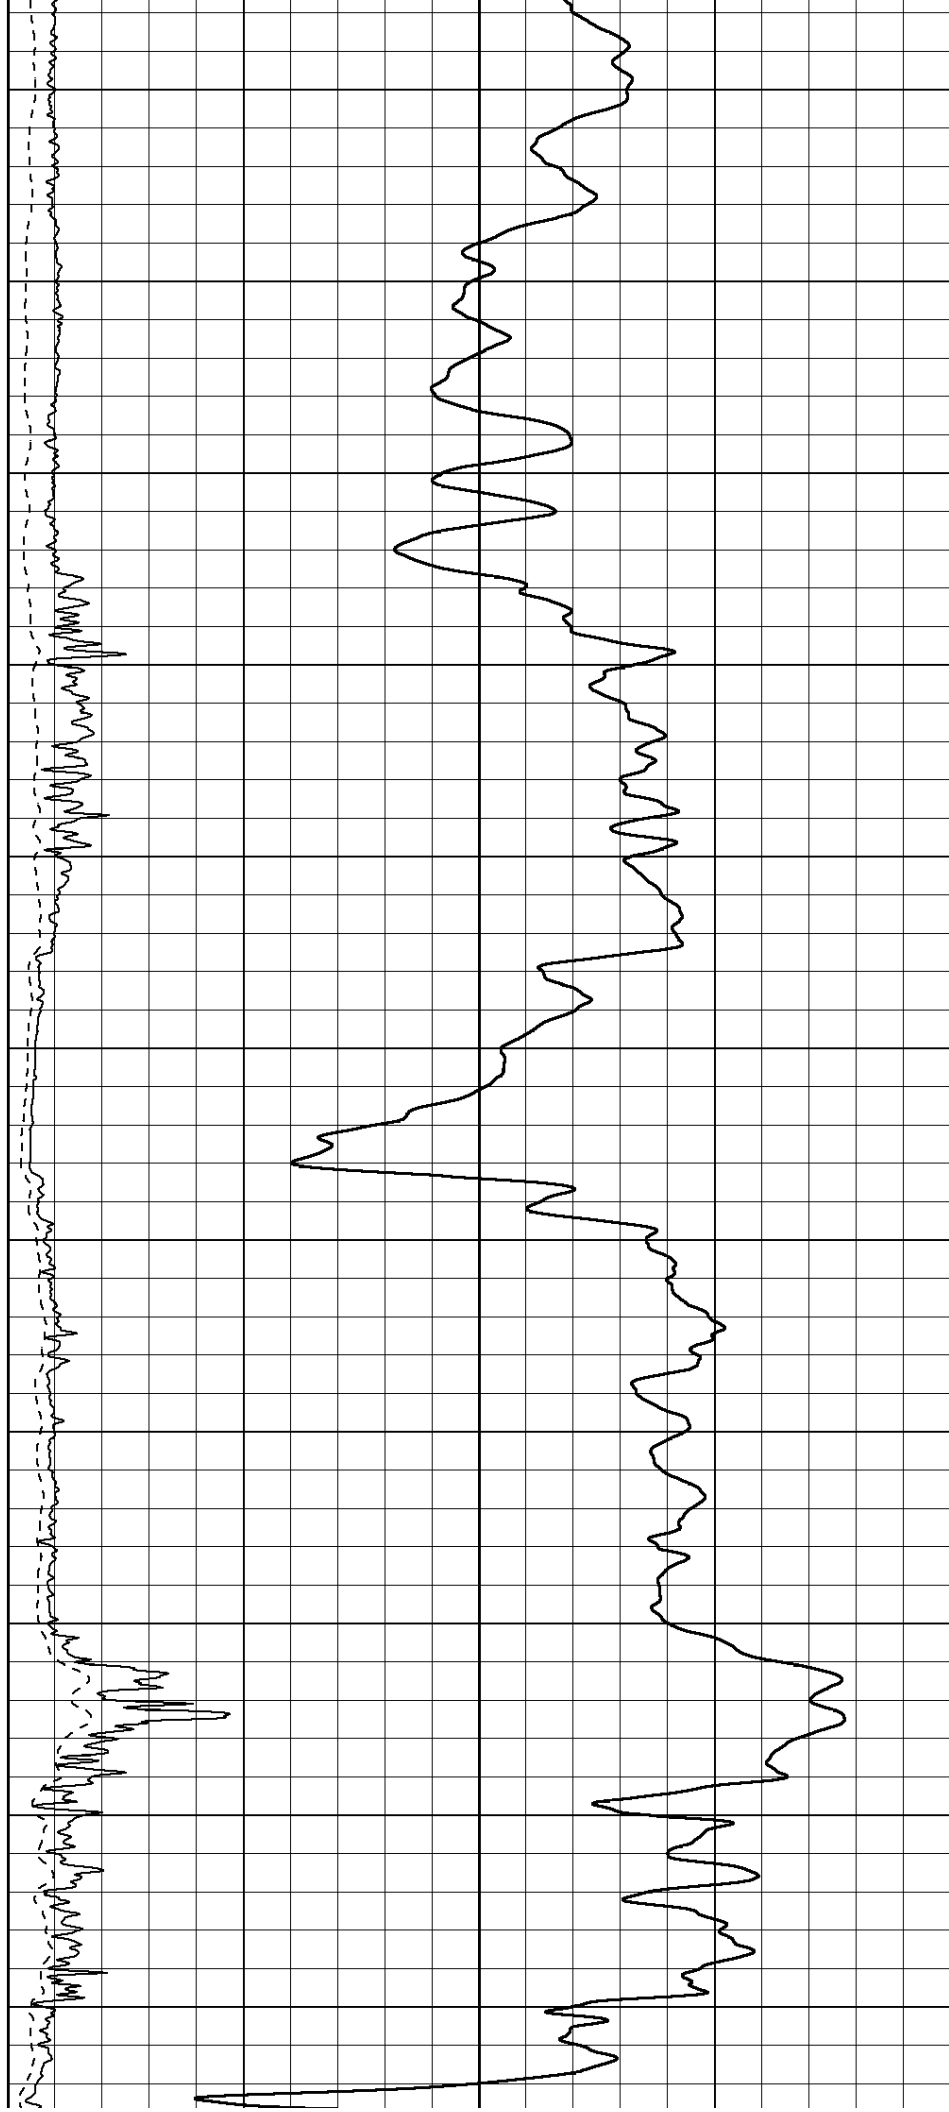

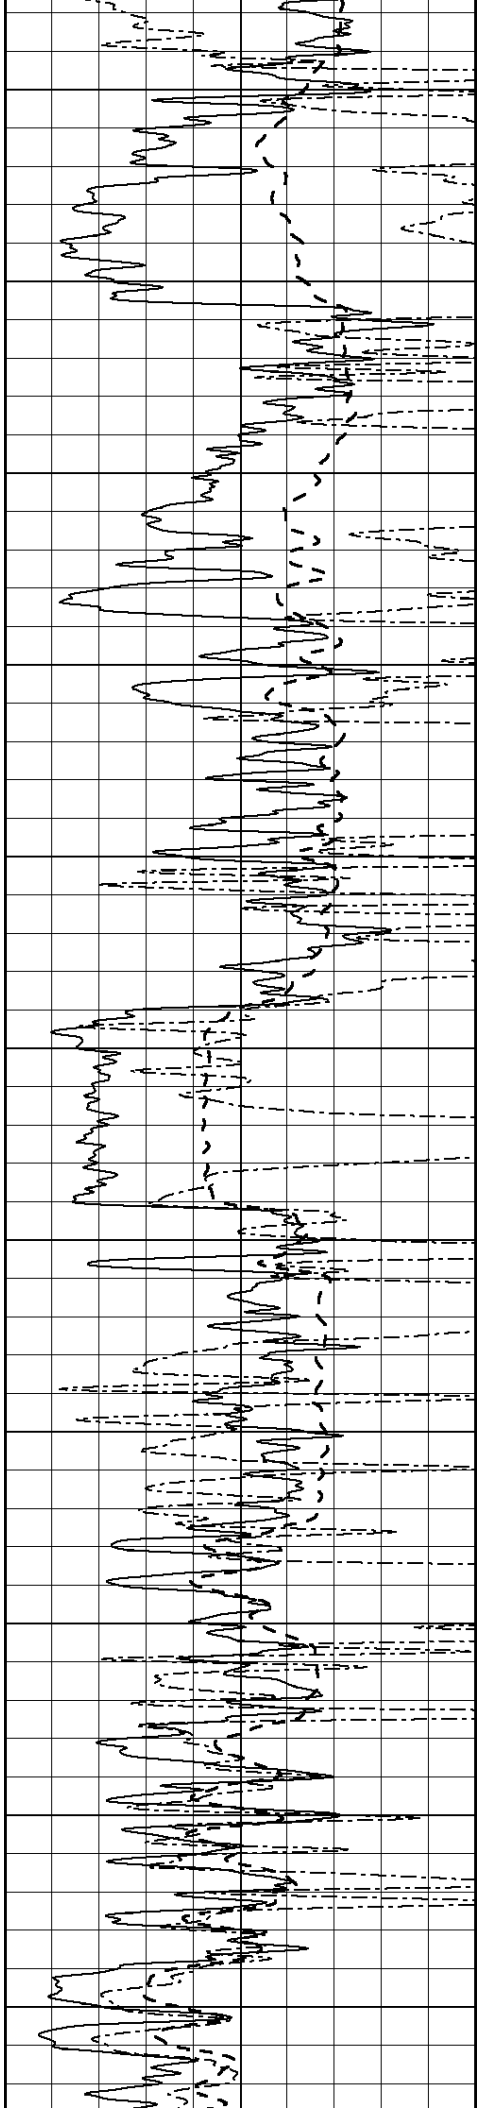

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

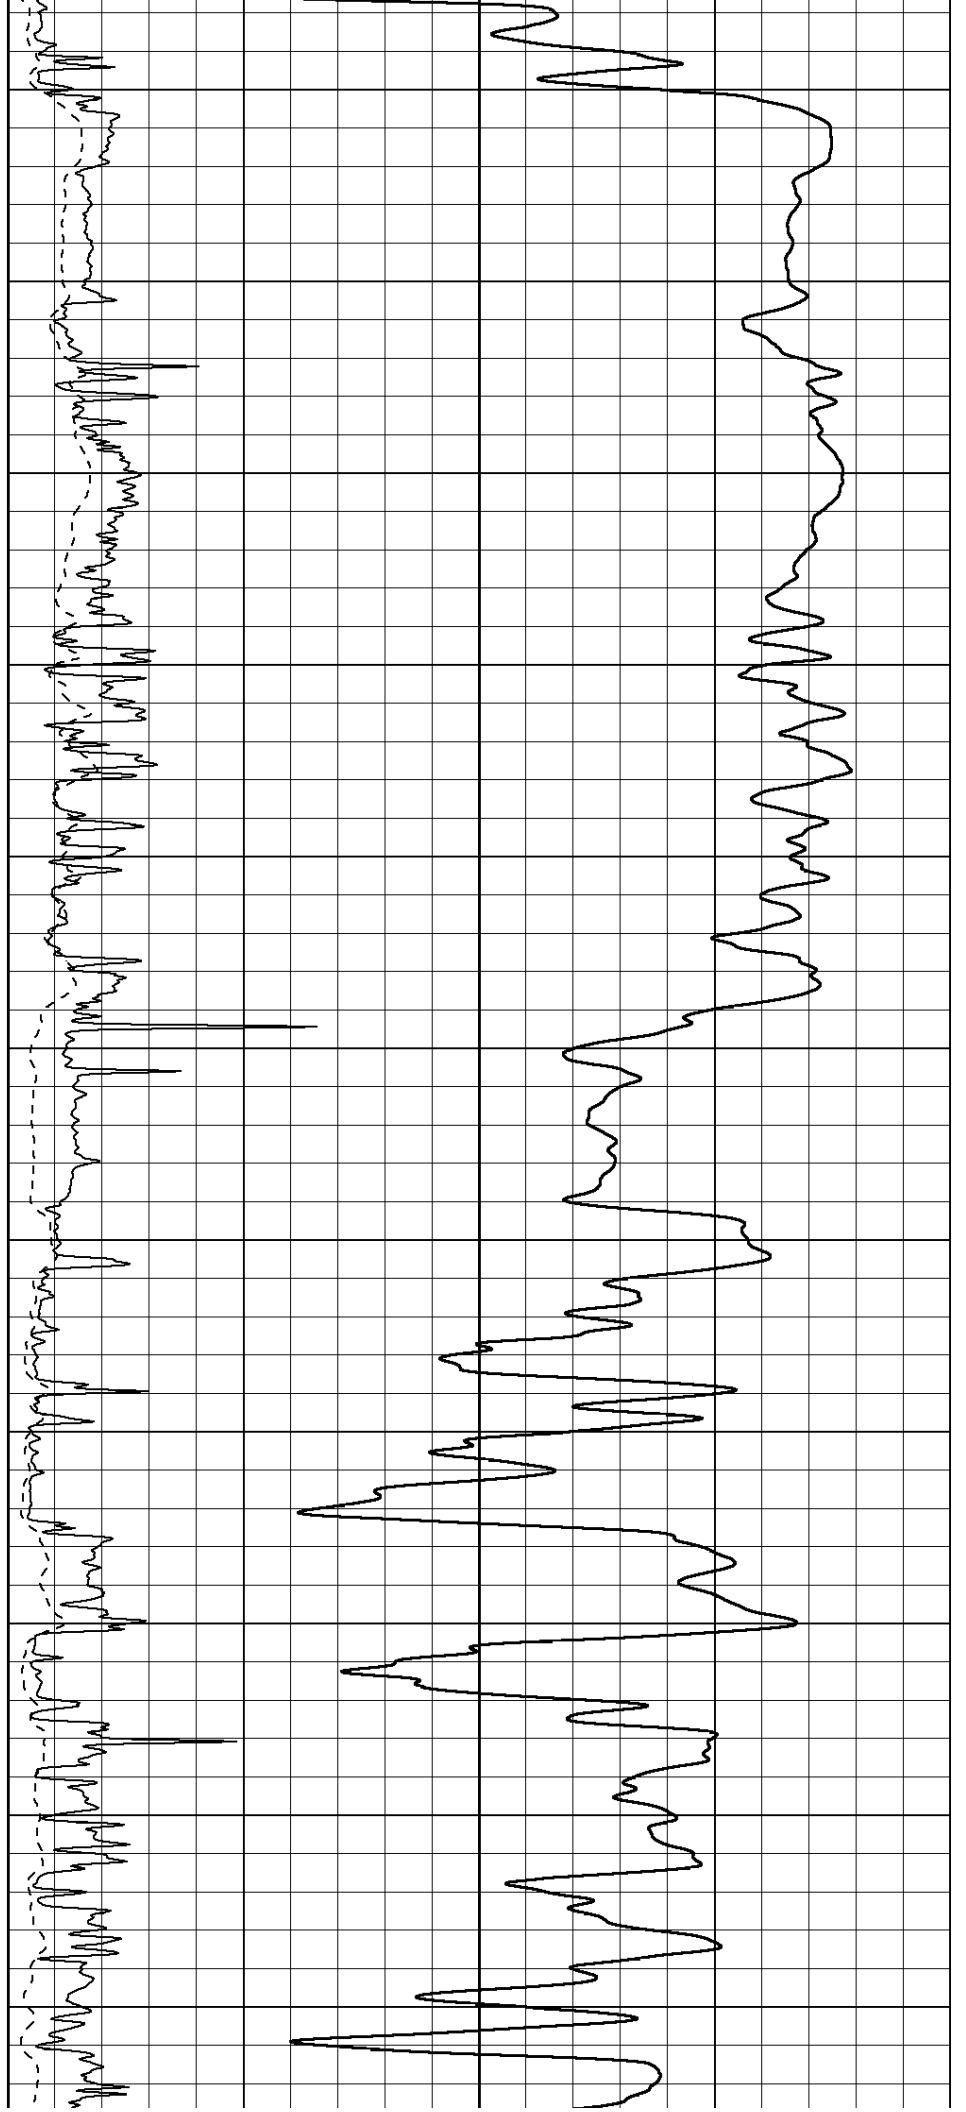

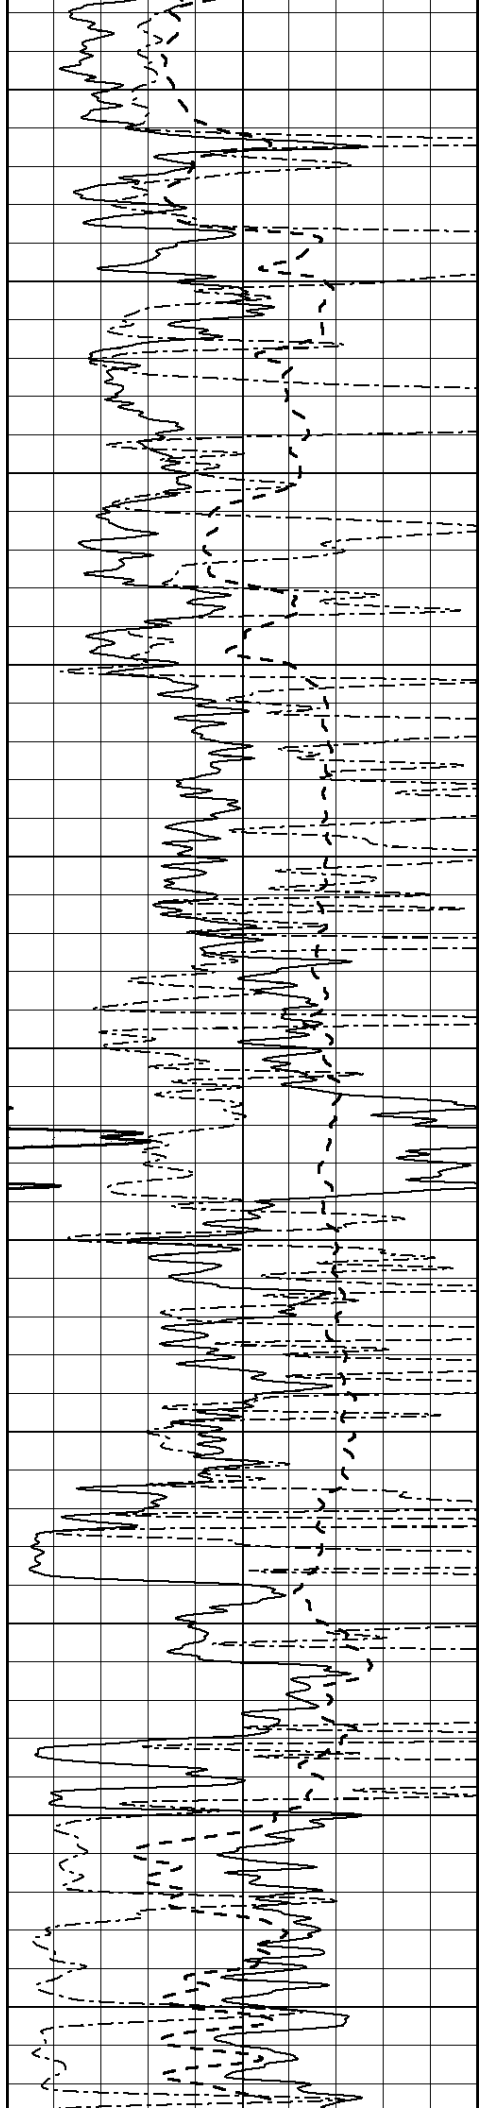

2650

2700

2750

2800

2850

2900


2950

3000

3050

3100

3150

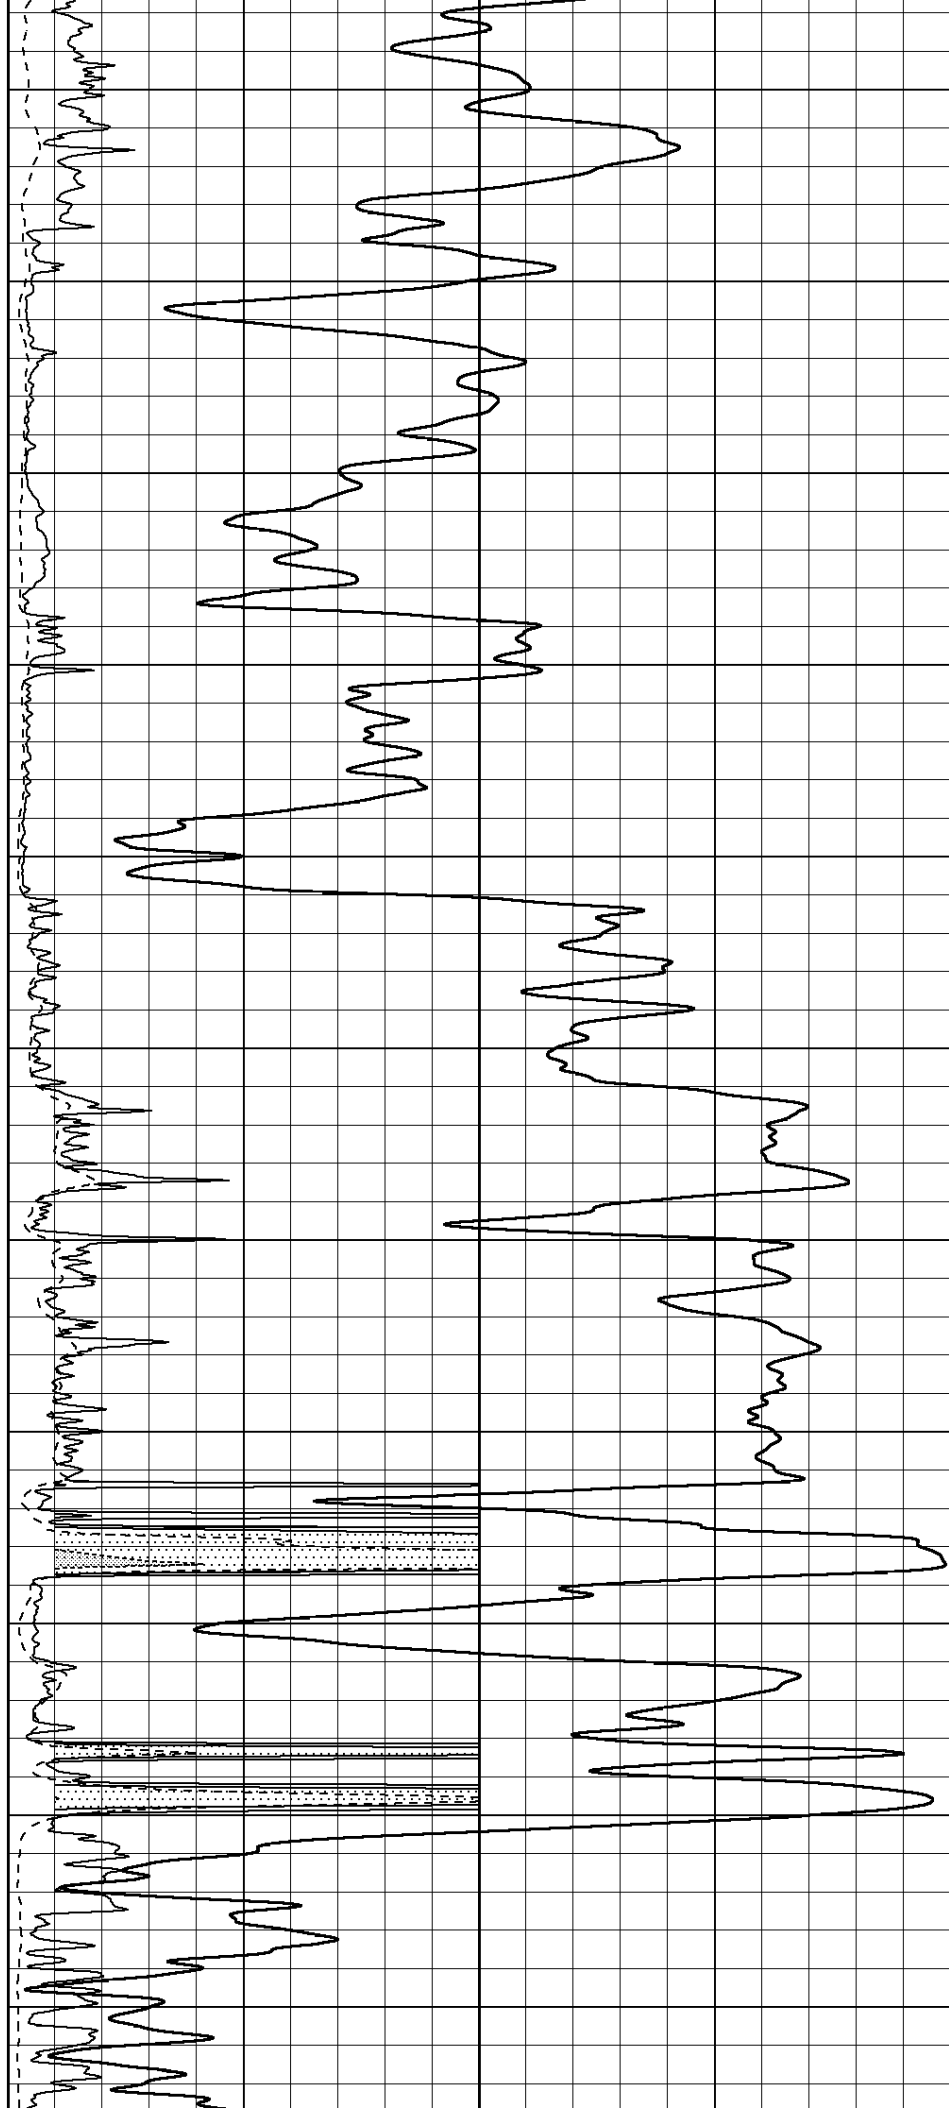

3200

3250

3300

3350

3400

3450



3500


3550

3600

3650

3700

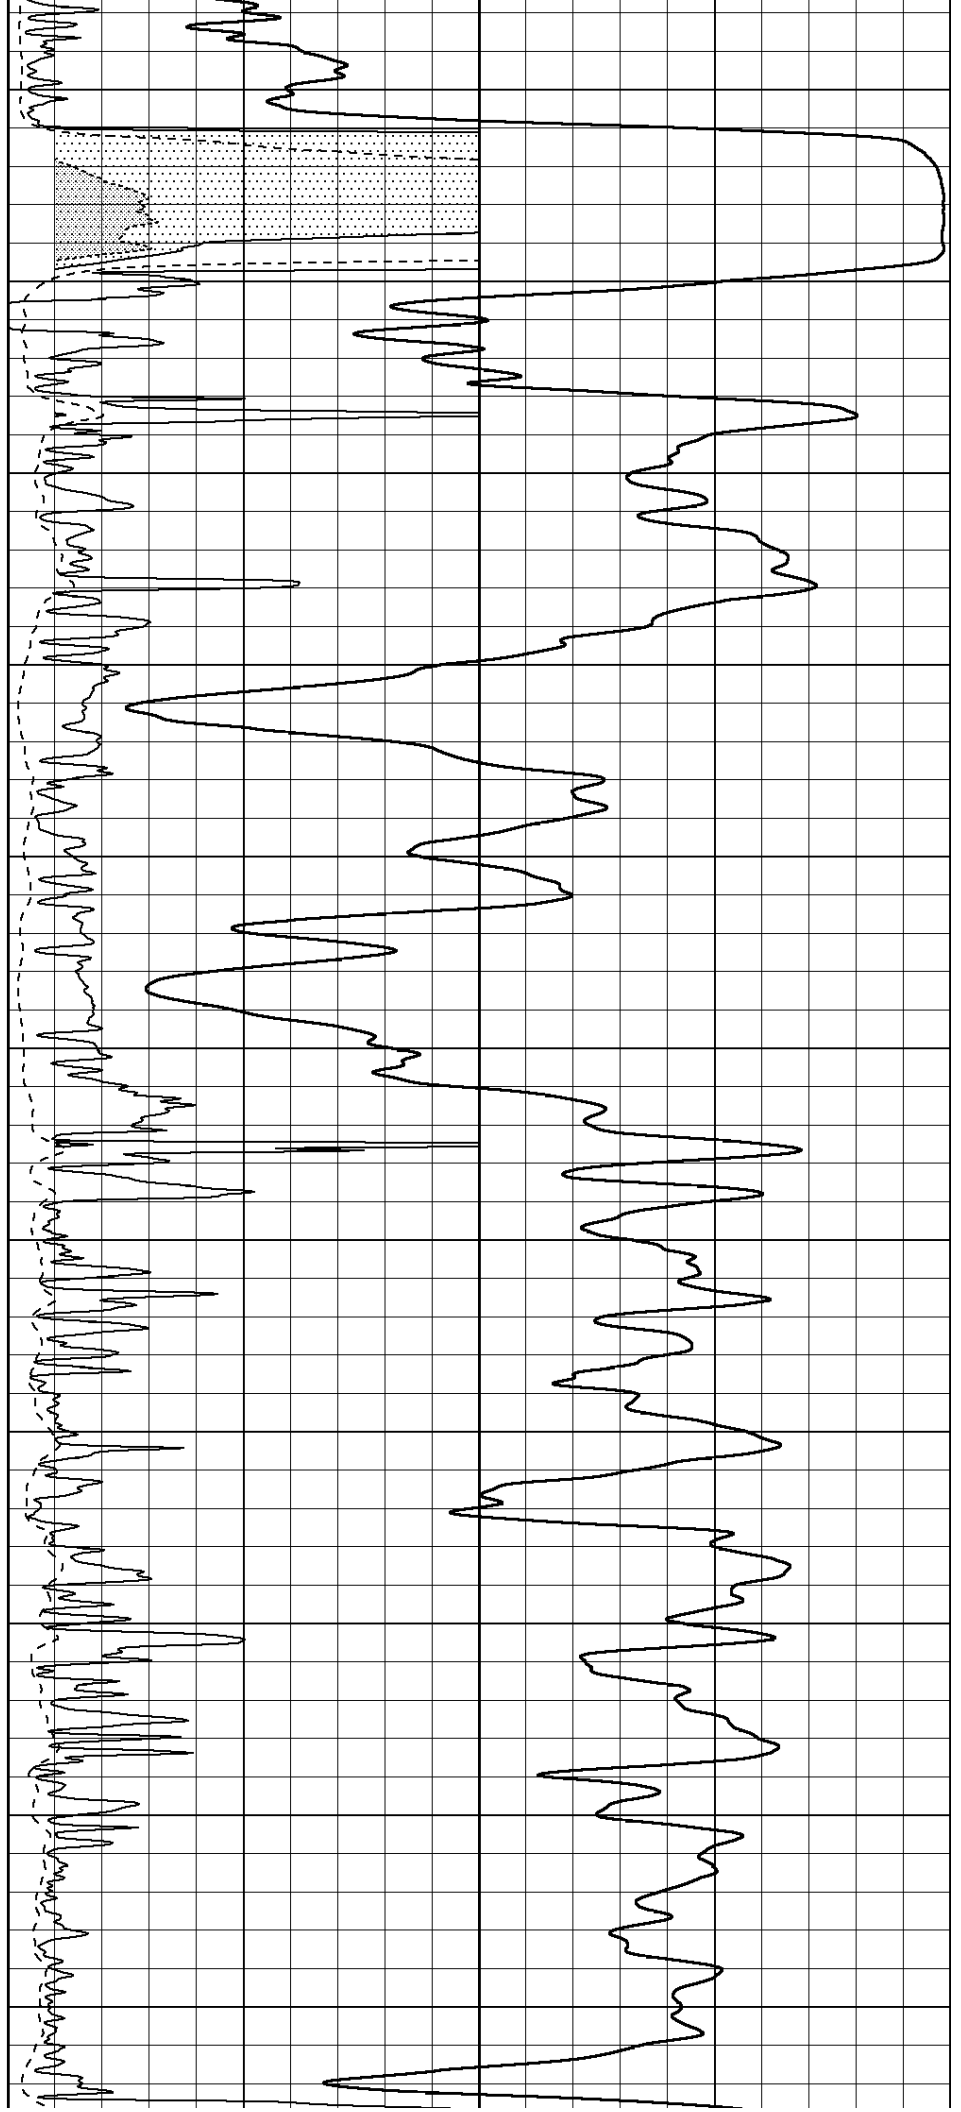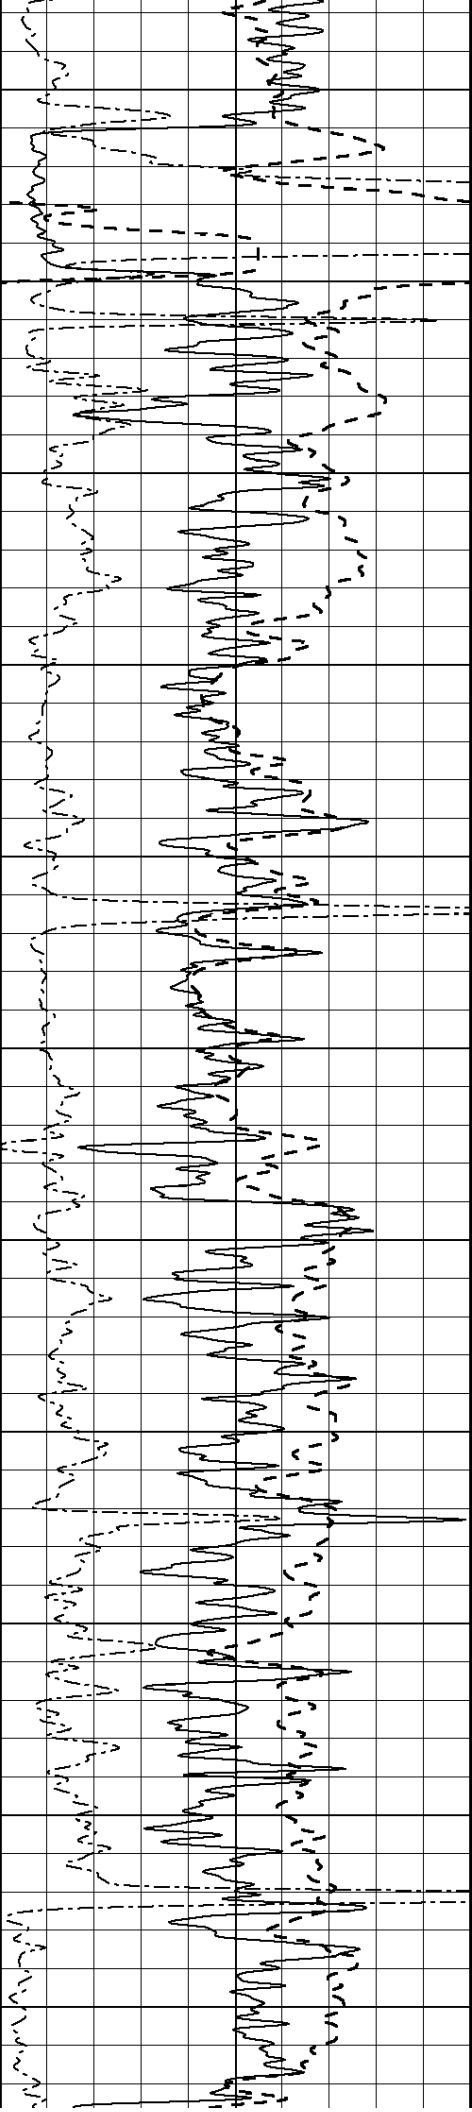

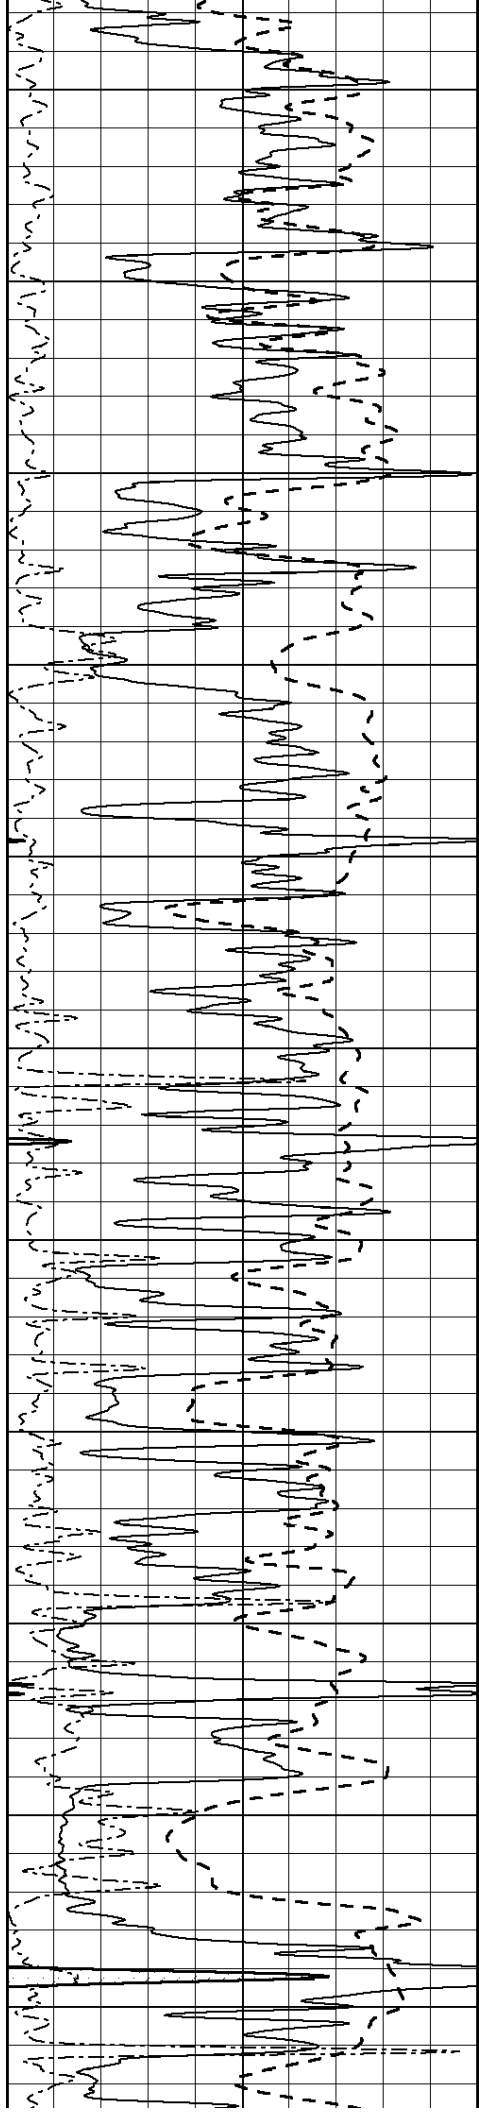

3750

3800

3850

3900

3950

4000



4050


4100

4150



4200



4250

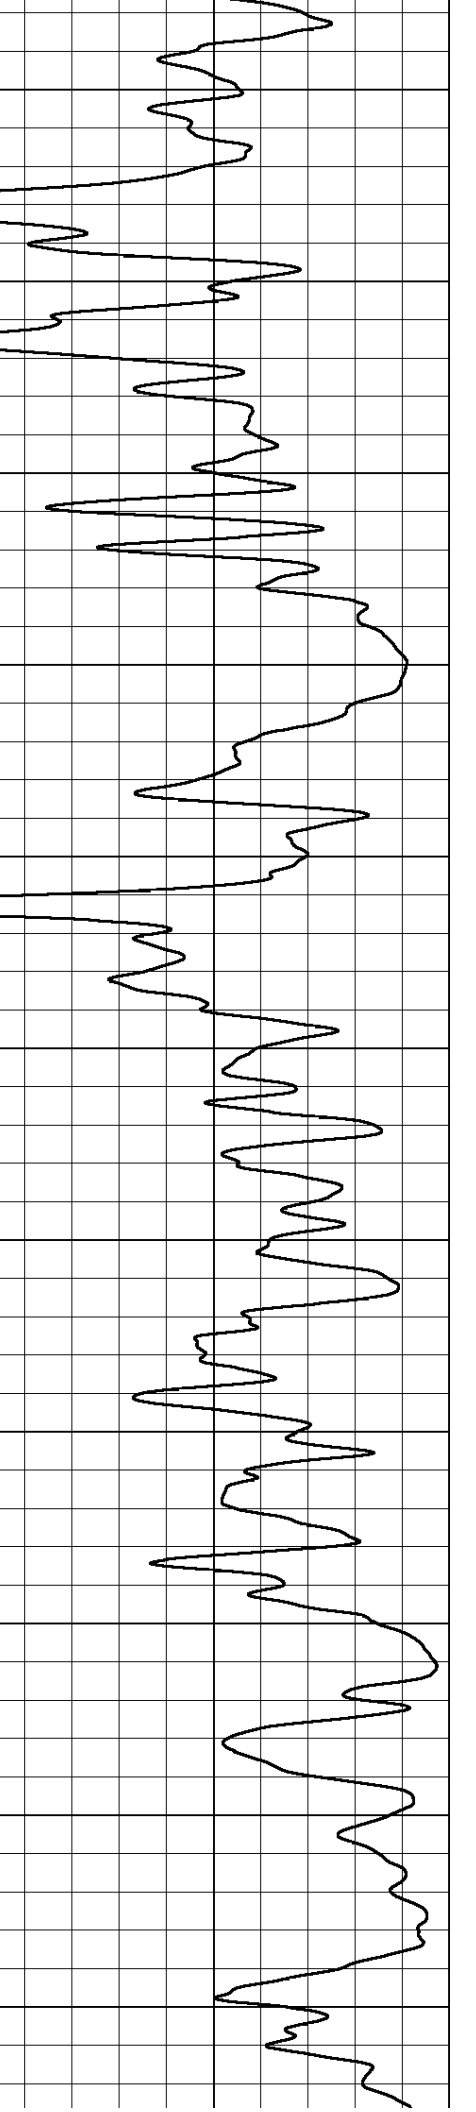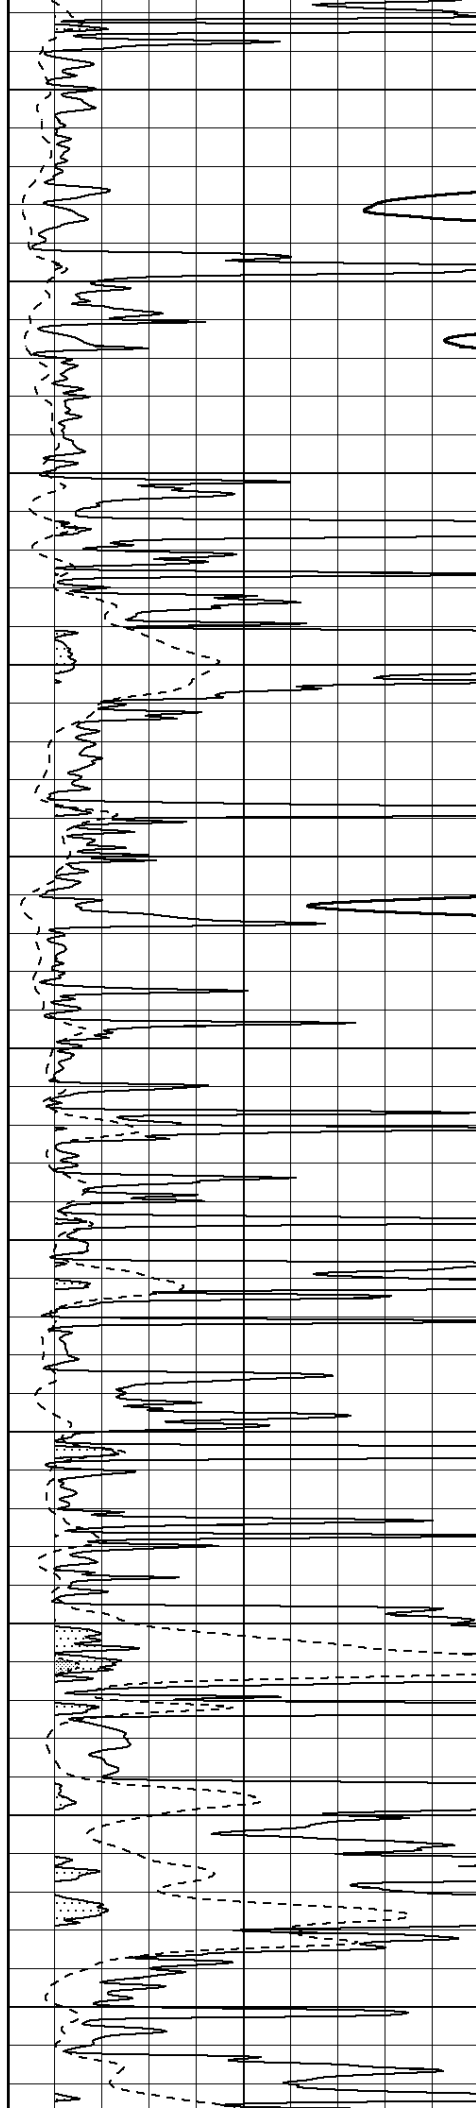

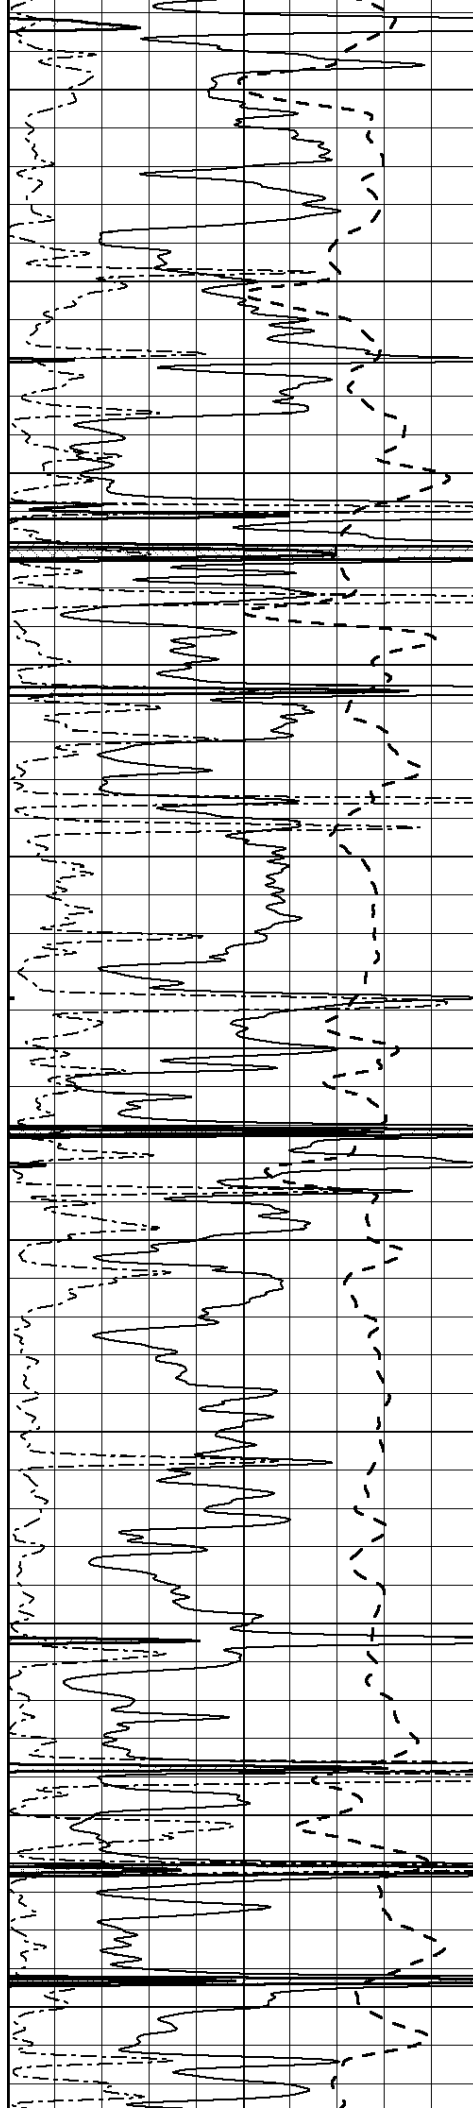

4300
4350
4400
4450
4500
4550
4600
4650
4700
4750
4800

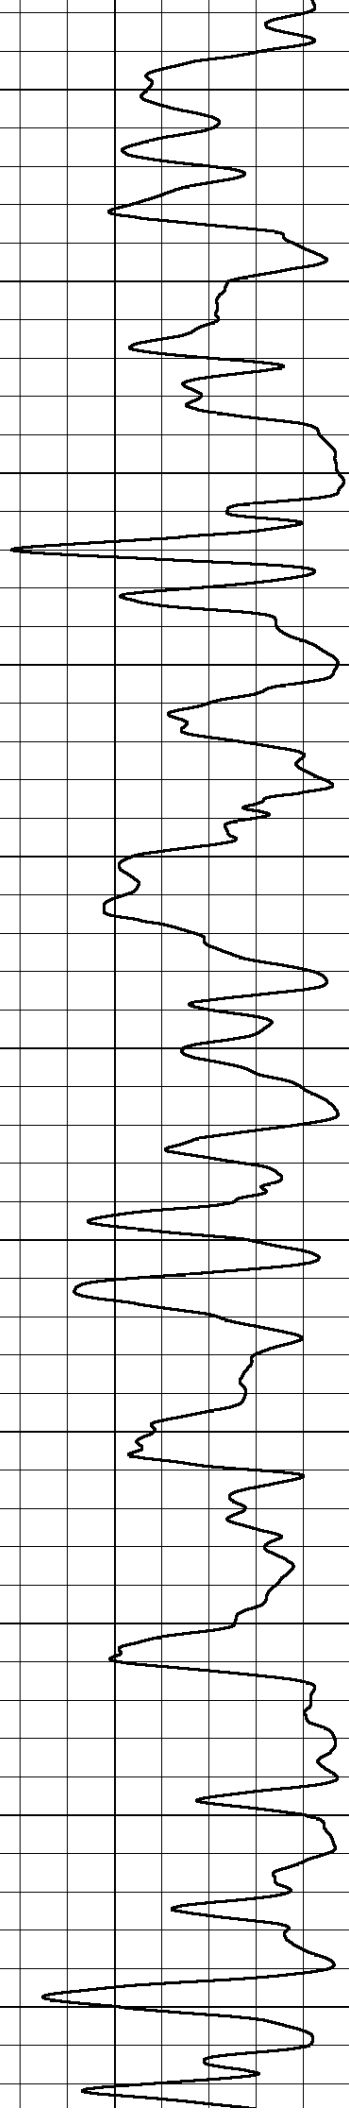
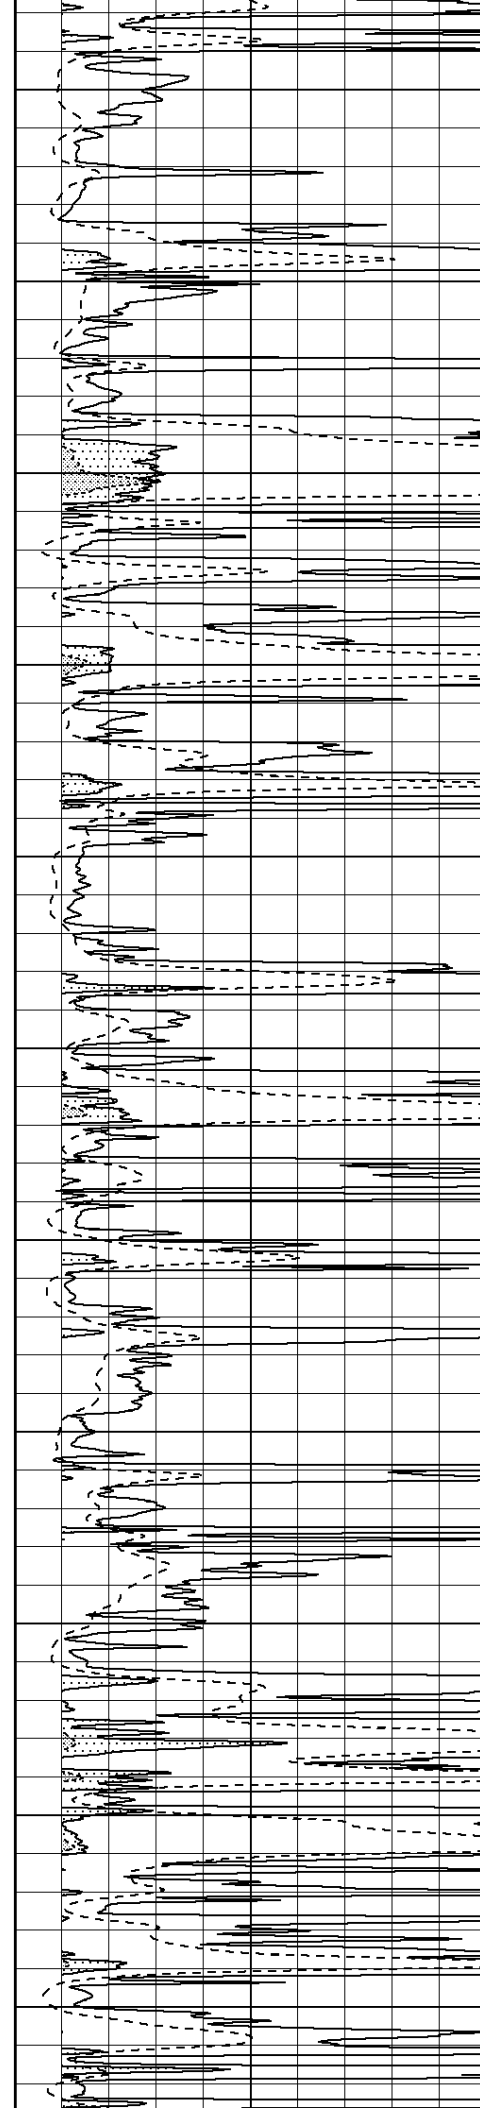


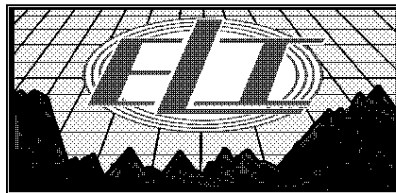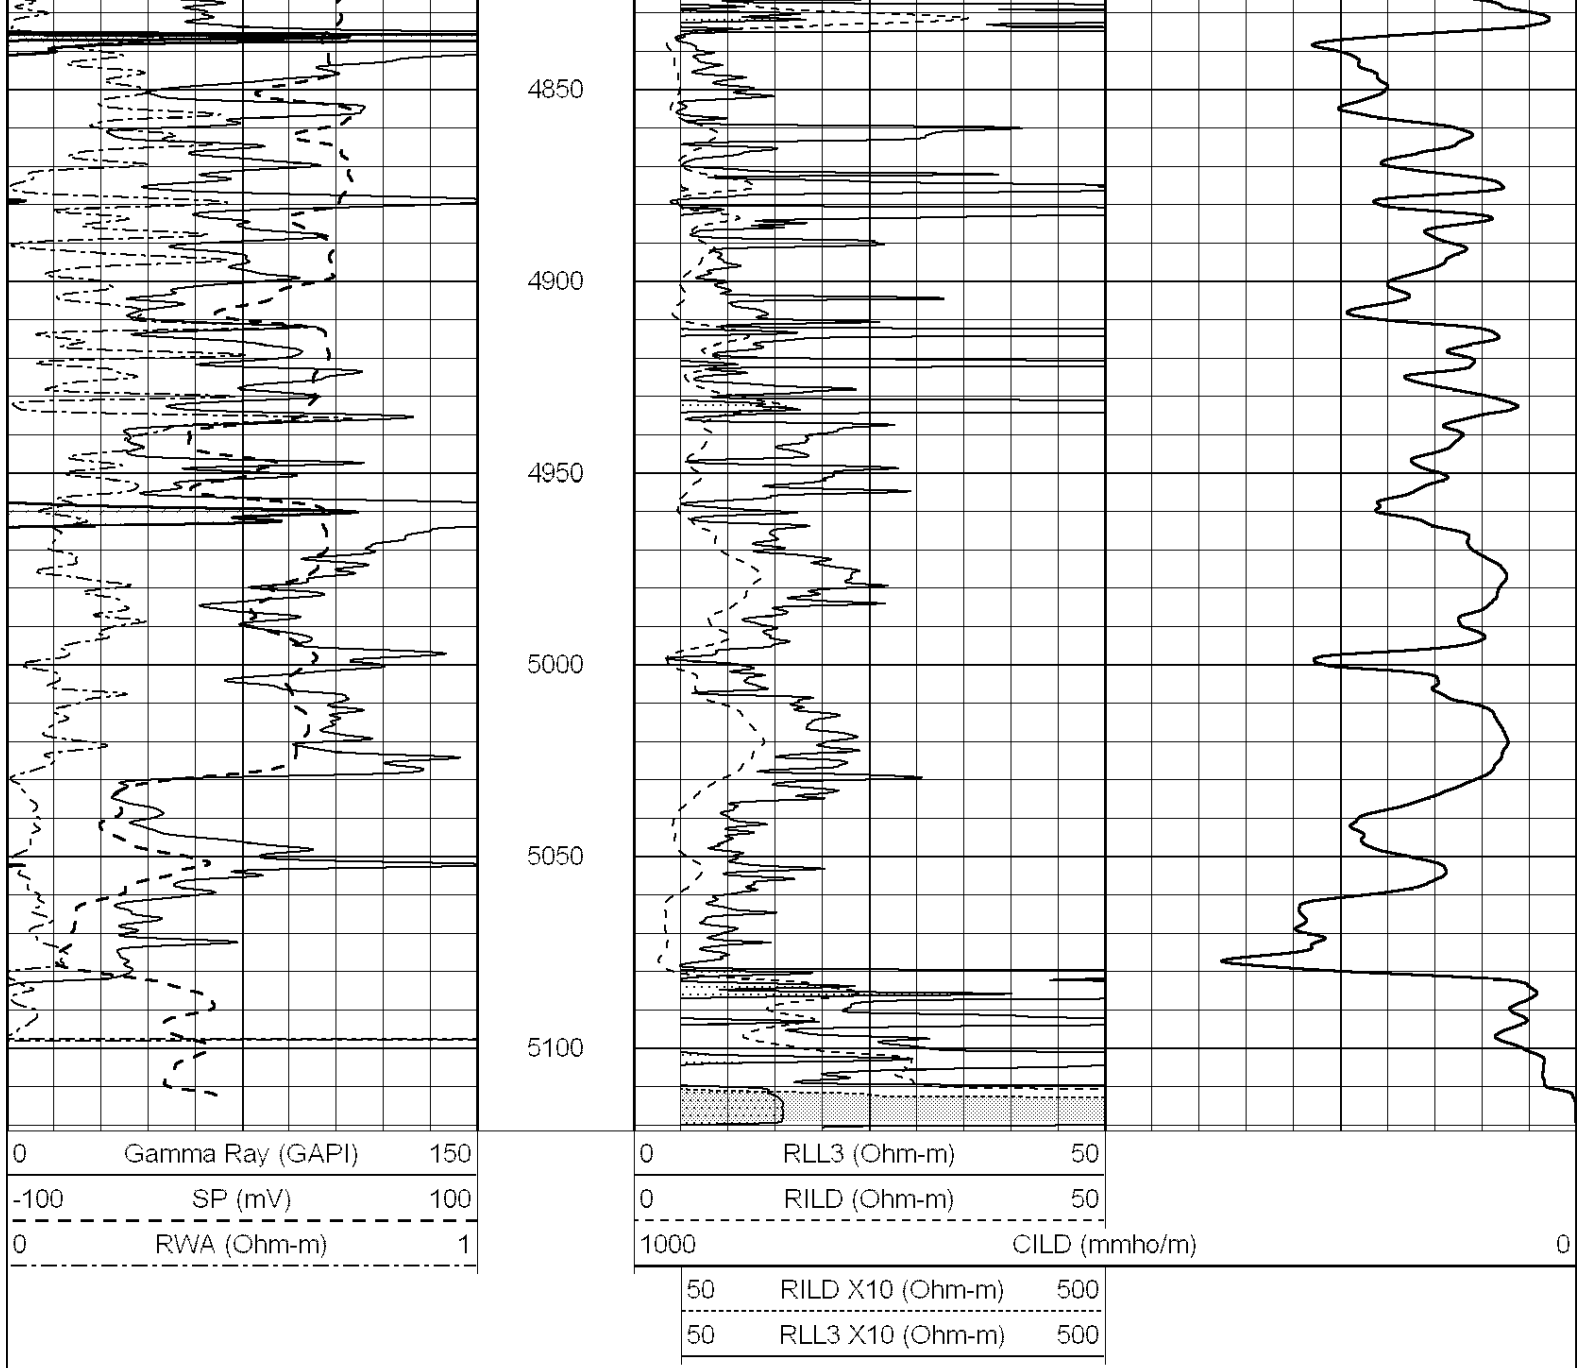


ANHYDRITE

Database File: 1421ddn.db
 Dataset Pathname: pass3.7
 Presentation Format: _dil
 Dataset Creation: Mon May 15 13:39:38 2017 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 5%; text-align: right;">0</td> <td style="width: 80%;">GAMMA RAY (GAPI)</td> <td style="width: 15%; text-align: left;">150</td> </tr> <tr> <td style="text-align: right;">-100</td> <td>SP (mV)</td> <td style="text-align: left;">100</td> </tr> <tr> <td style="text-align: right;">-250</td> <td>Rxo/Rt</td> <td style="text-align: left;">50</td> </tr> <tr> <td style="text-align: right;">0</td> <td>MINMK</td> <td style="text-align: left;">20</td> </tr> </table>	0	GAMMA RAY (GAPI)	150	-100	SP (mV)	100	-250	Rxo/Rt	50	0	MINMK	20	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 5%; text-align: right;">0.2</td> <td style="width: 80%;">SHALLOW GUARD (Ohm-m)</td> <td style="width: 10%; text-align: left;">2000</td> </tr> <tr> <td style="text-align: right;">0.2</td> <td>DEEP INDUCTION (Ohm-m)</td> <td style="text-align: left;">2000</td> </tr> <tr> <td style="text-align: right;">0.2</td> <td>MEDIUM INDUCTION (Ohm-m)</td> <td style="text-align: left;">2000</td> </tr> </table>	0.2	SHALLOW GUARD (Ohm-m)	2000	0.2	DEEP INDUCTION (Ohm-m)	2000	0.2	MEDIUM INDUCTION (Ohm-m)	2000	
0	GAMMA RAY (GAPI)	150																					
-100	SP (mV)	100																					
-250	Rxo/Rt	50																					
0	MINMK	20																					
0.2	SHALLOW GUARD (Ohm-m)	2000																					
0.2	DEEP INDUCTION (Ohm-m)	2000																					
0.2	MEDIUM INDUCTION (Ohm-m)	2000																					




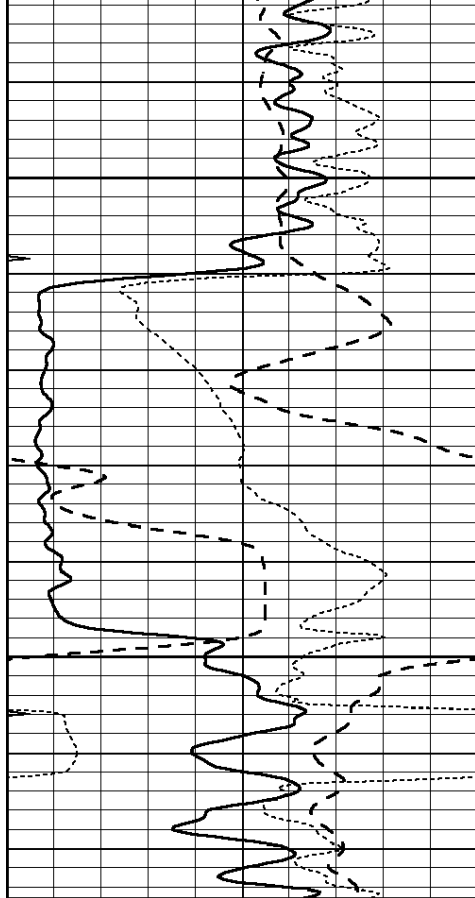


3200

3250

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

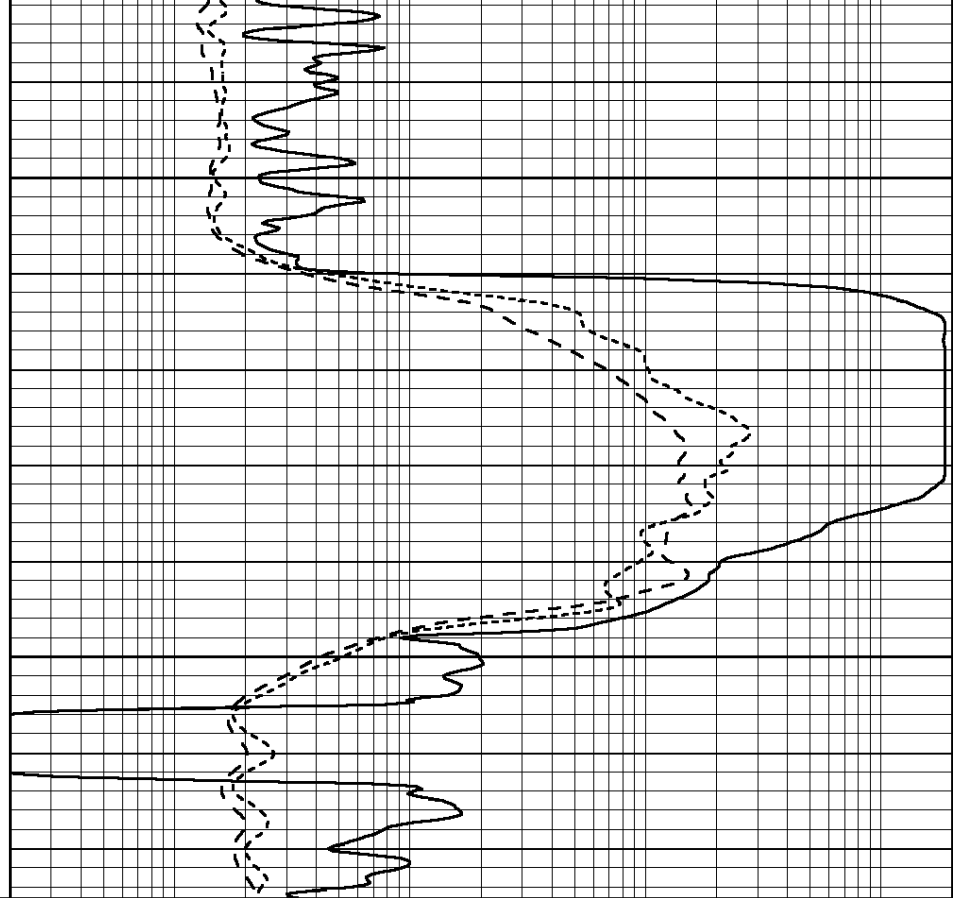

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

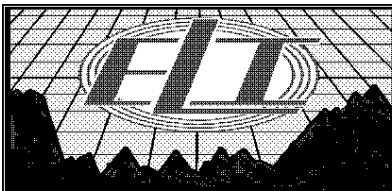


MAIN SECTION


Database File: 1421ddn.db
 Dataset Pathname: pass3.6
 Presentation Format: _dil
 Dataset Creation: Mon May 15 13:39:22 2017 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

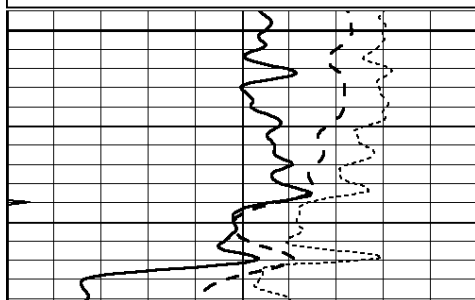

3700

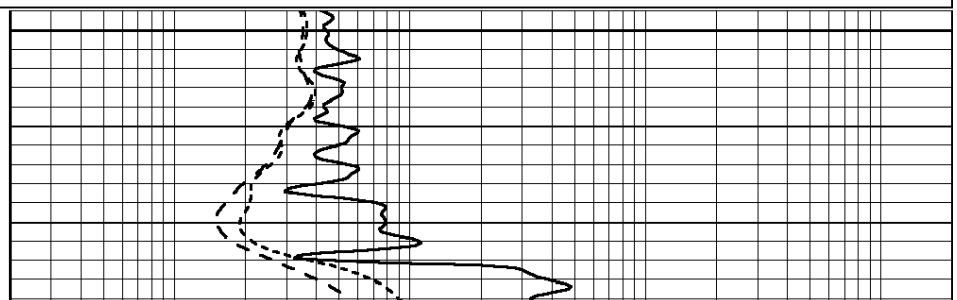

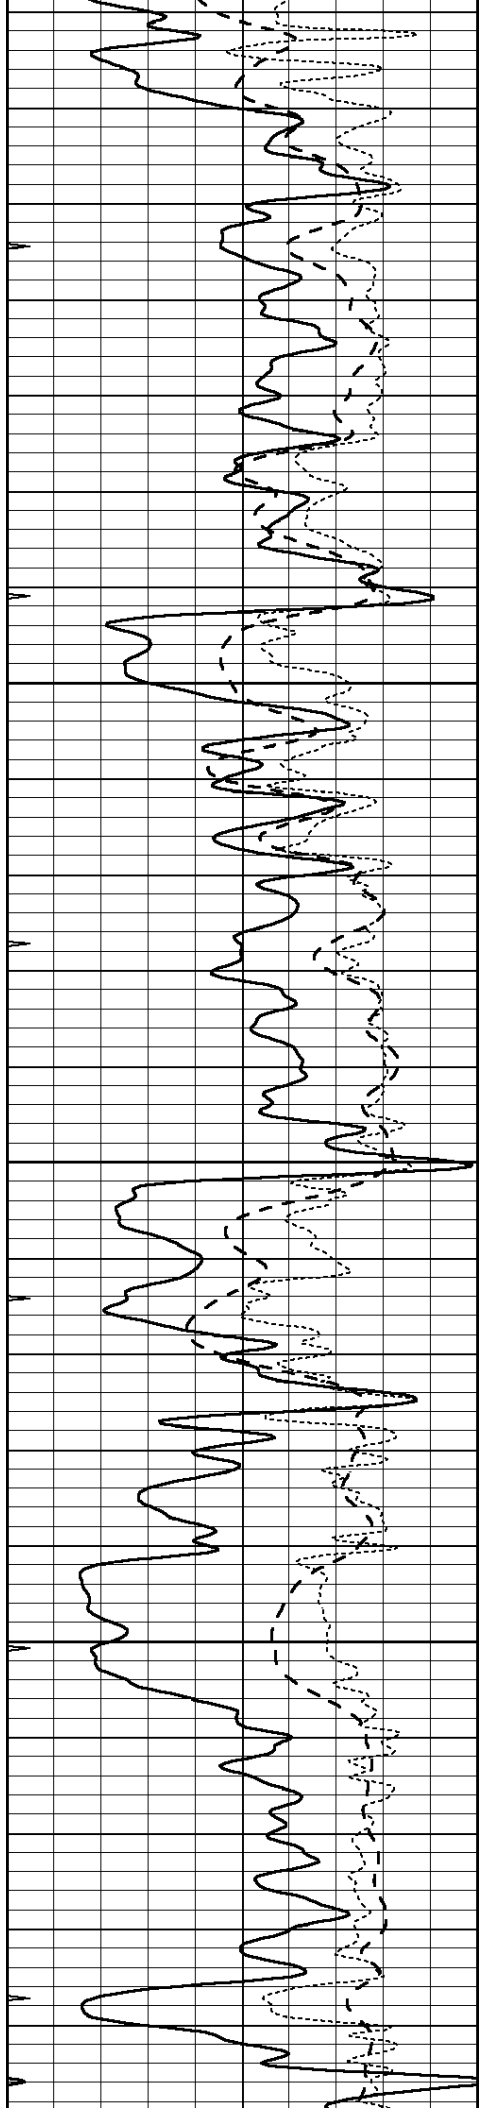



3750

3800

3850

3900

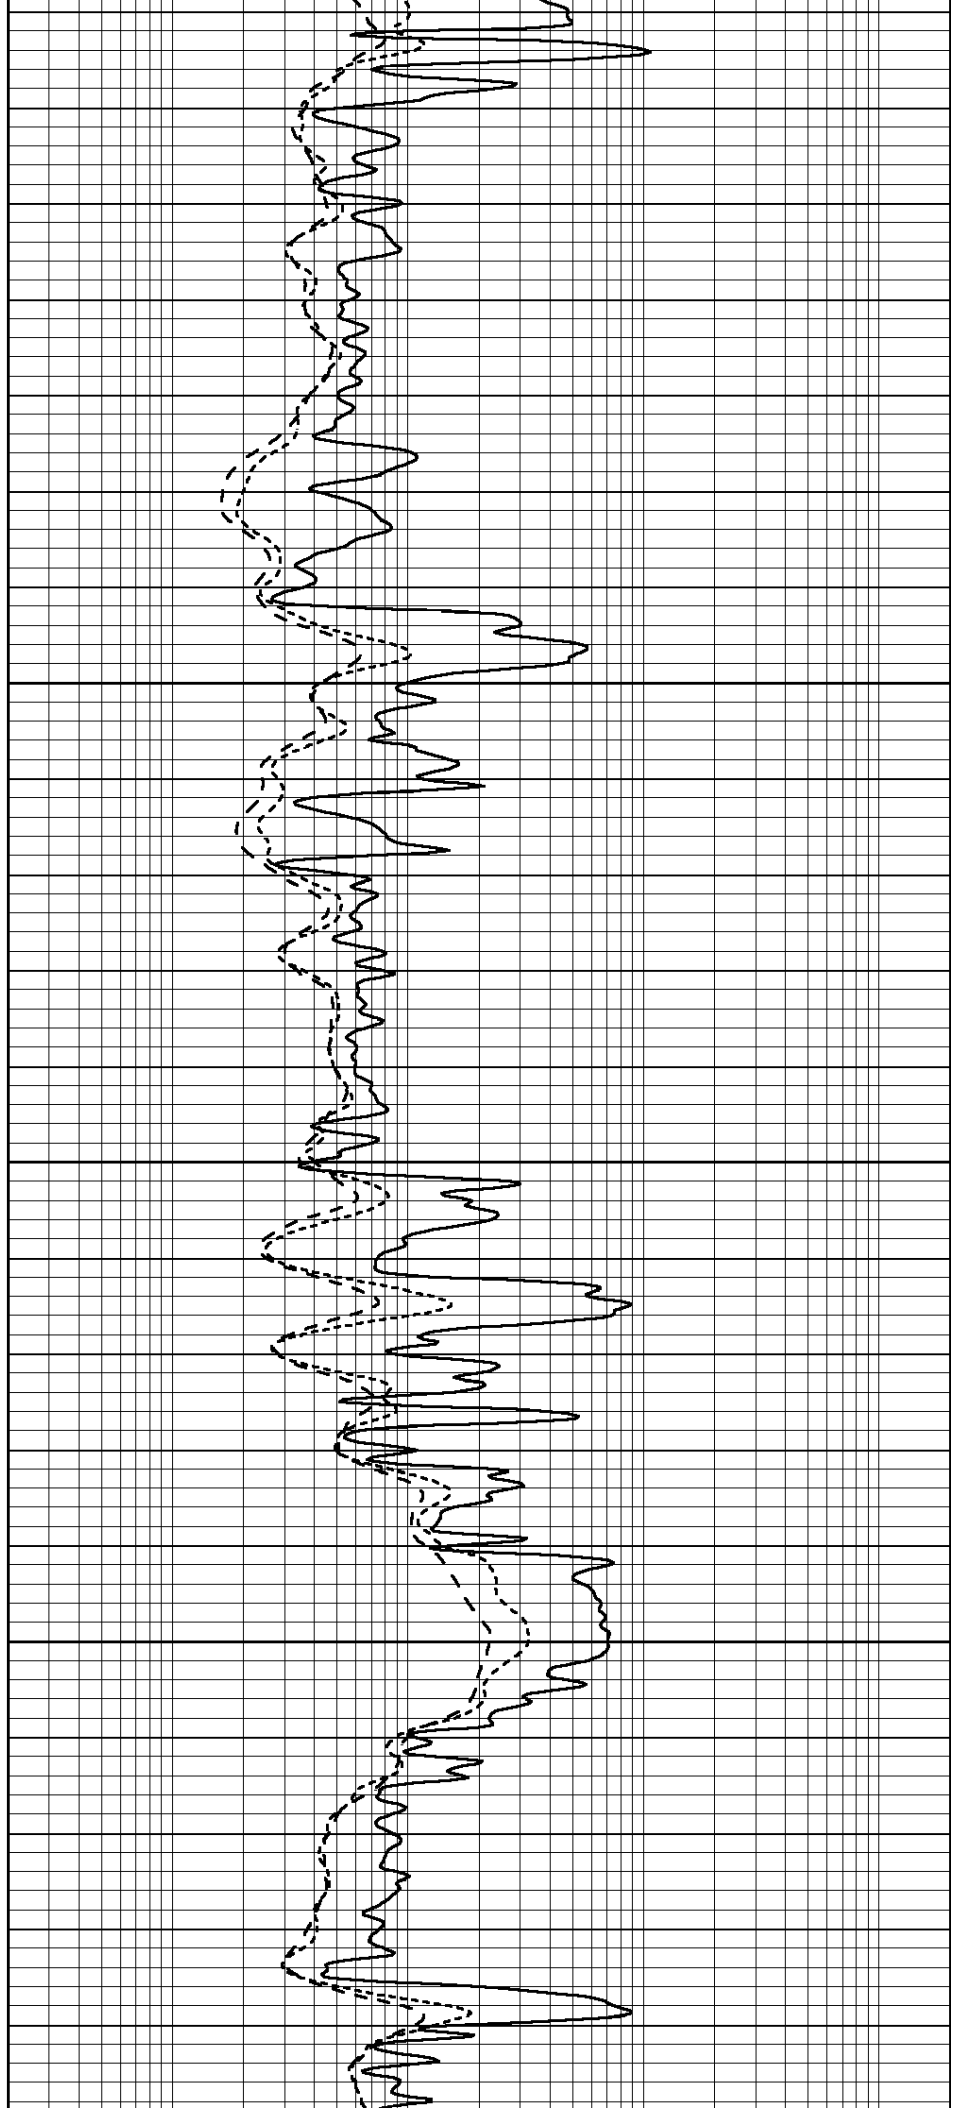

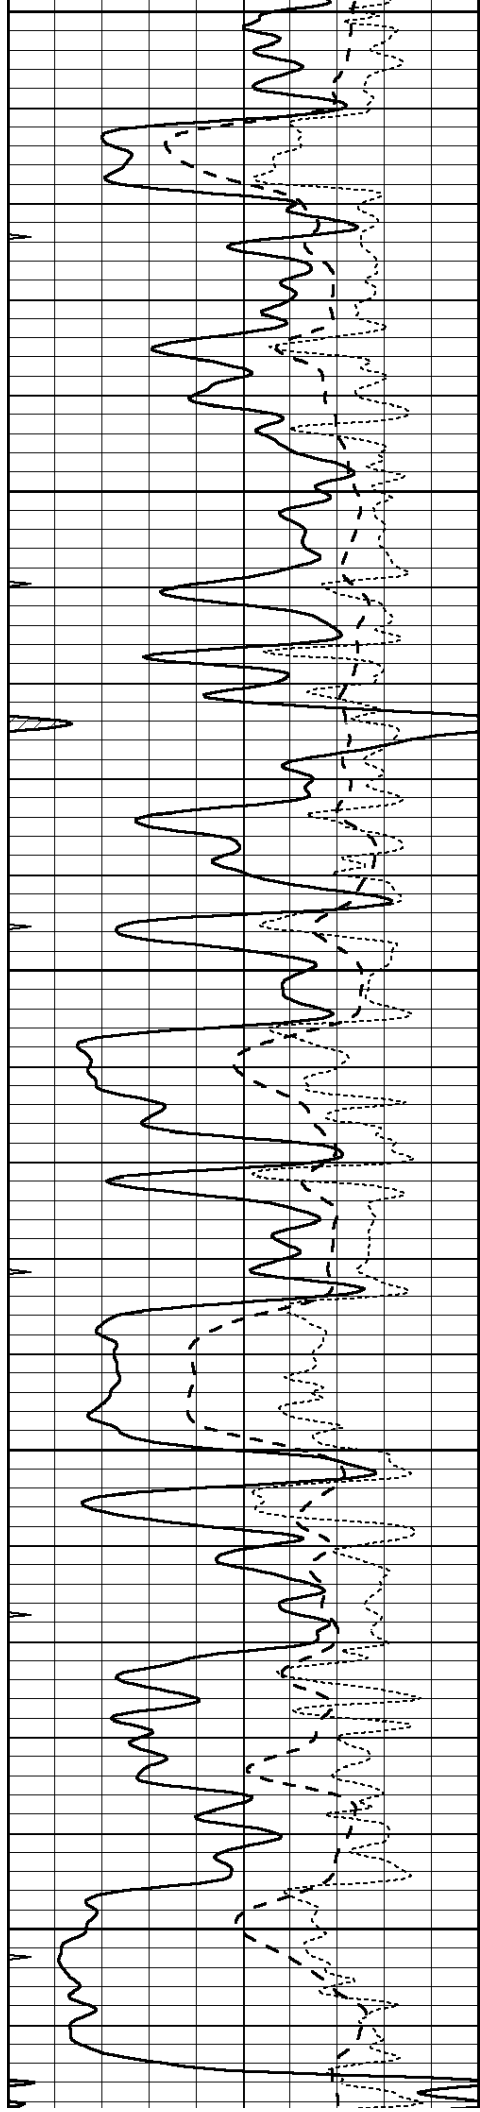


3950


4000

4050

4100

4150

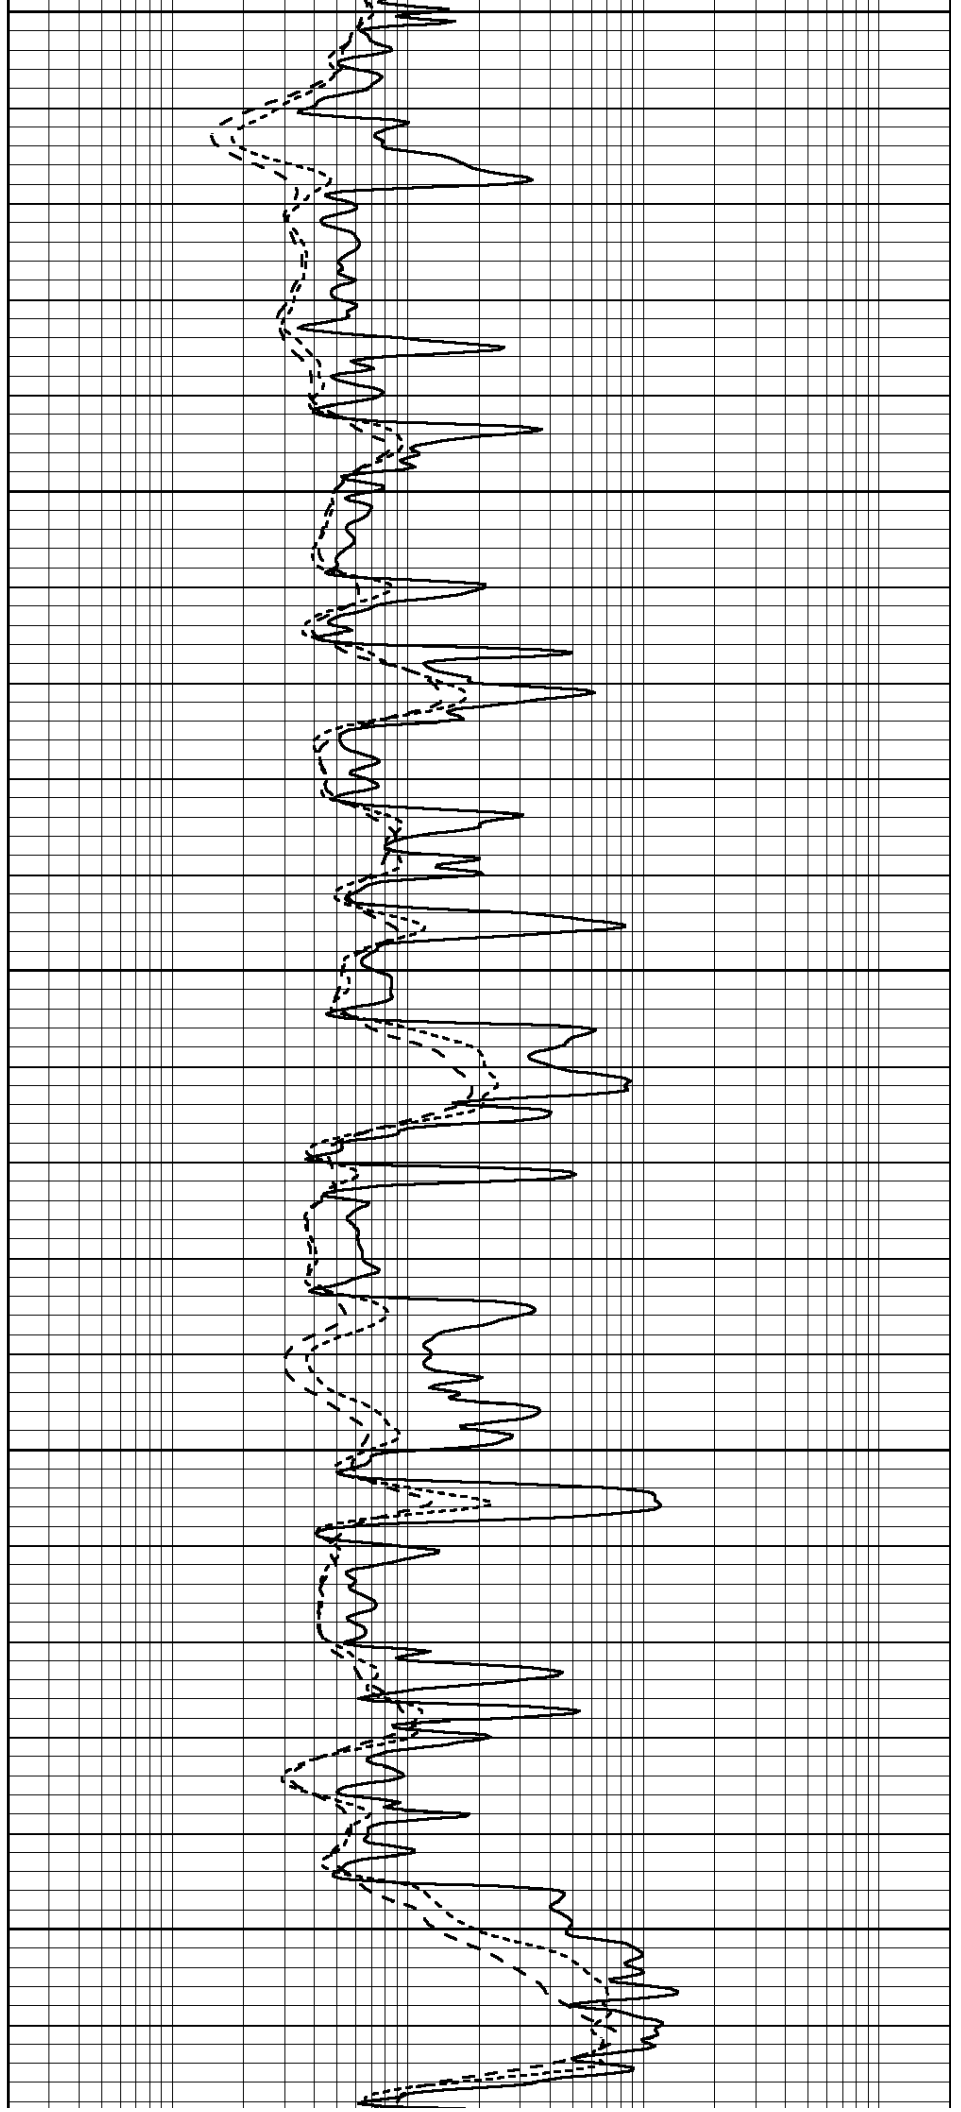

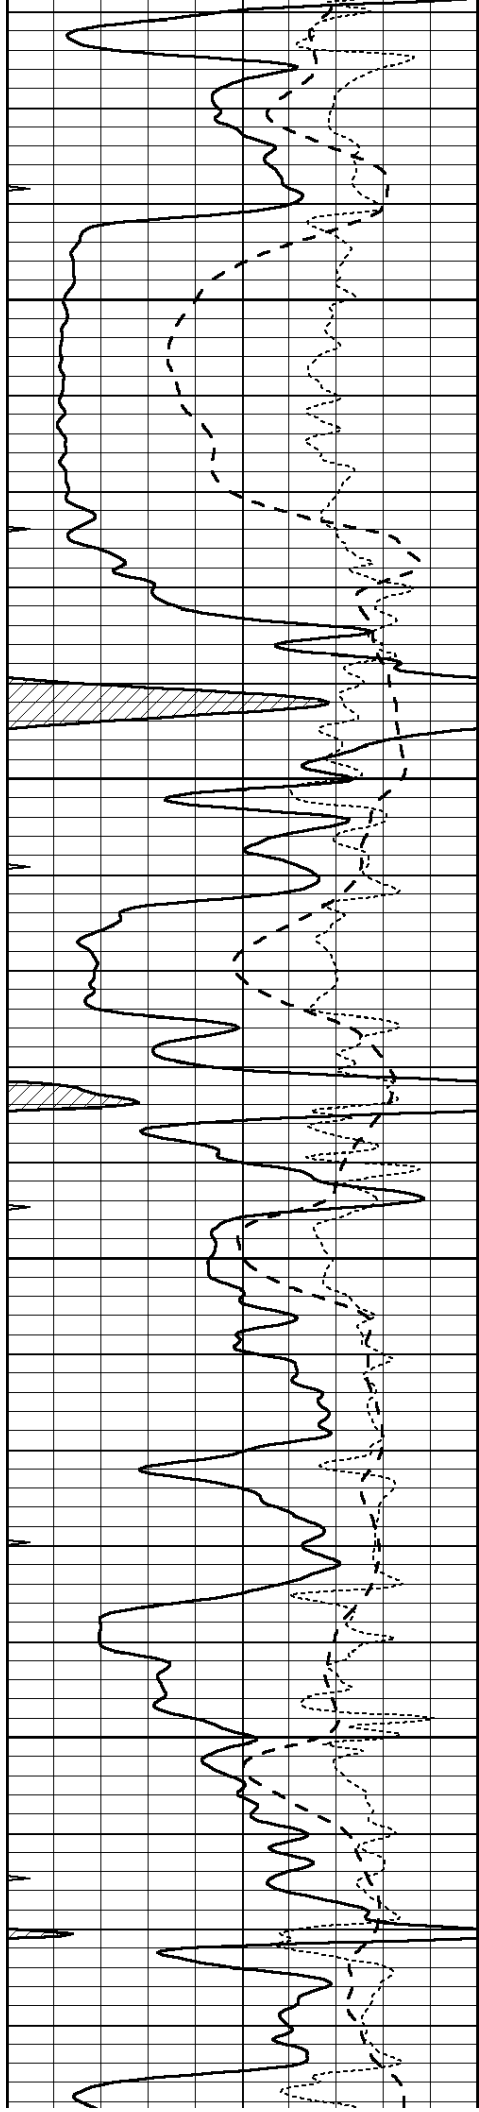



4200

4250

300

4350

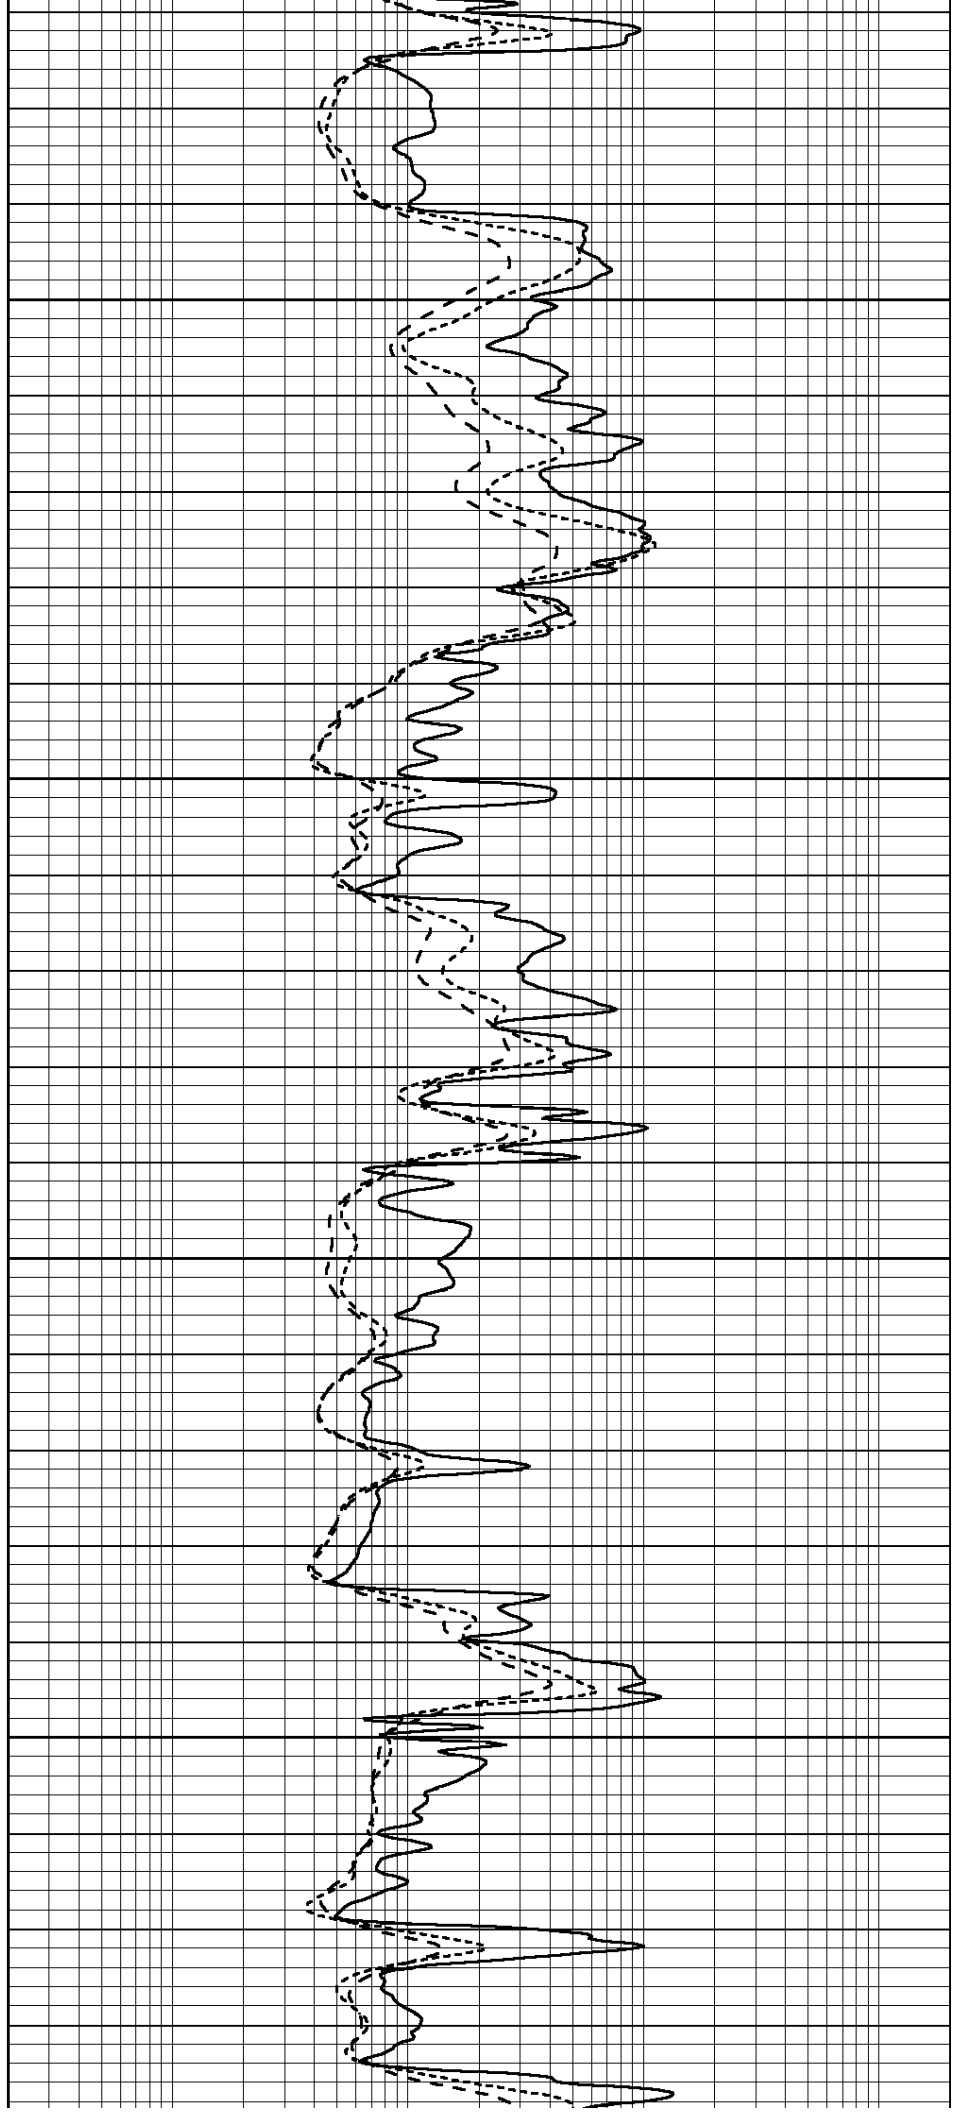

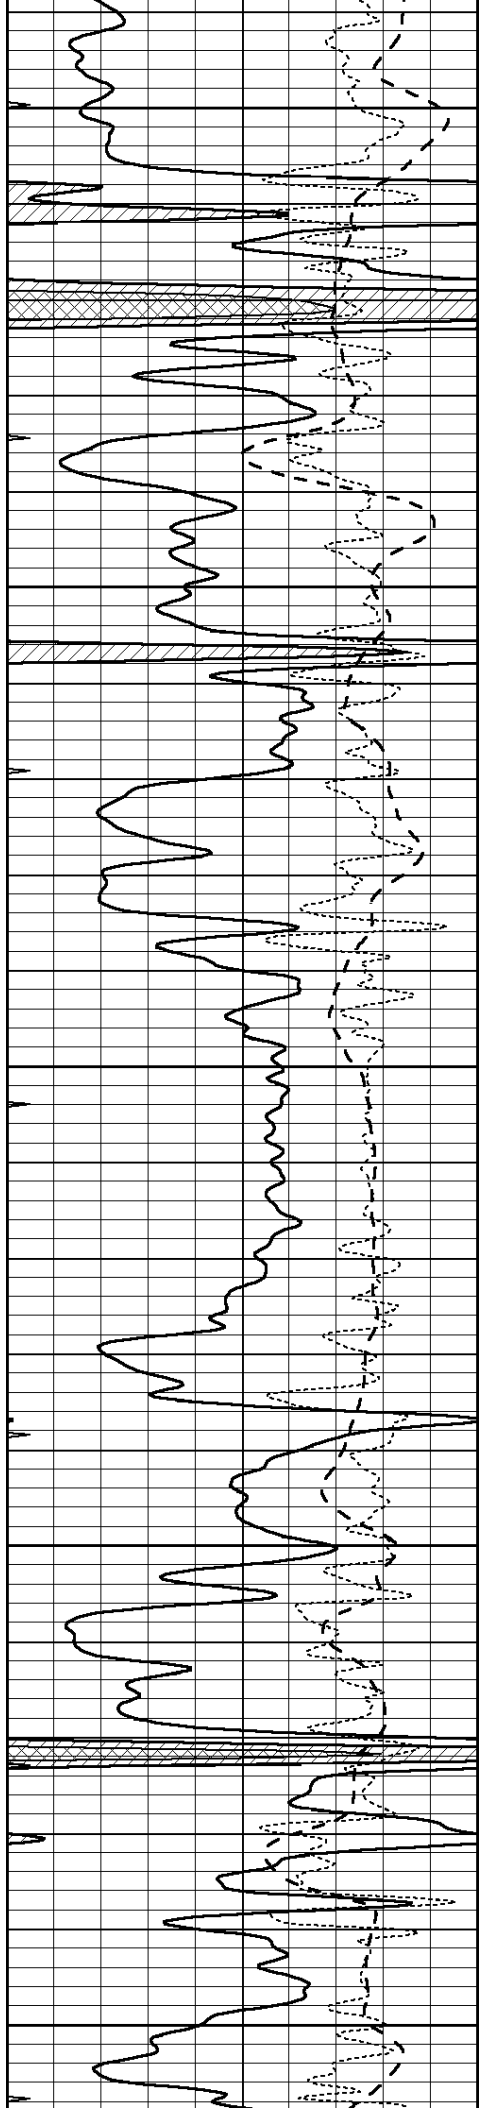


4400


4450

4500

4550

4600

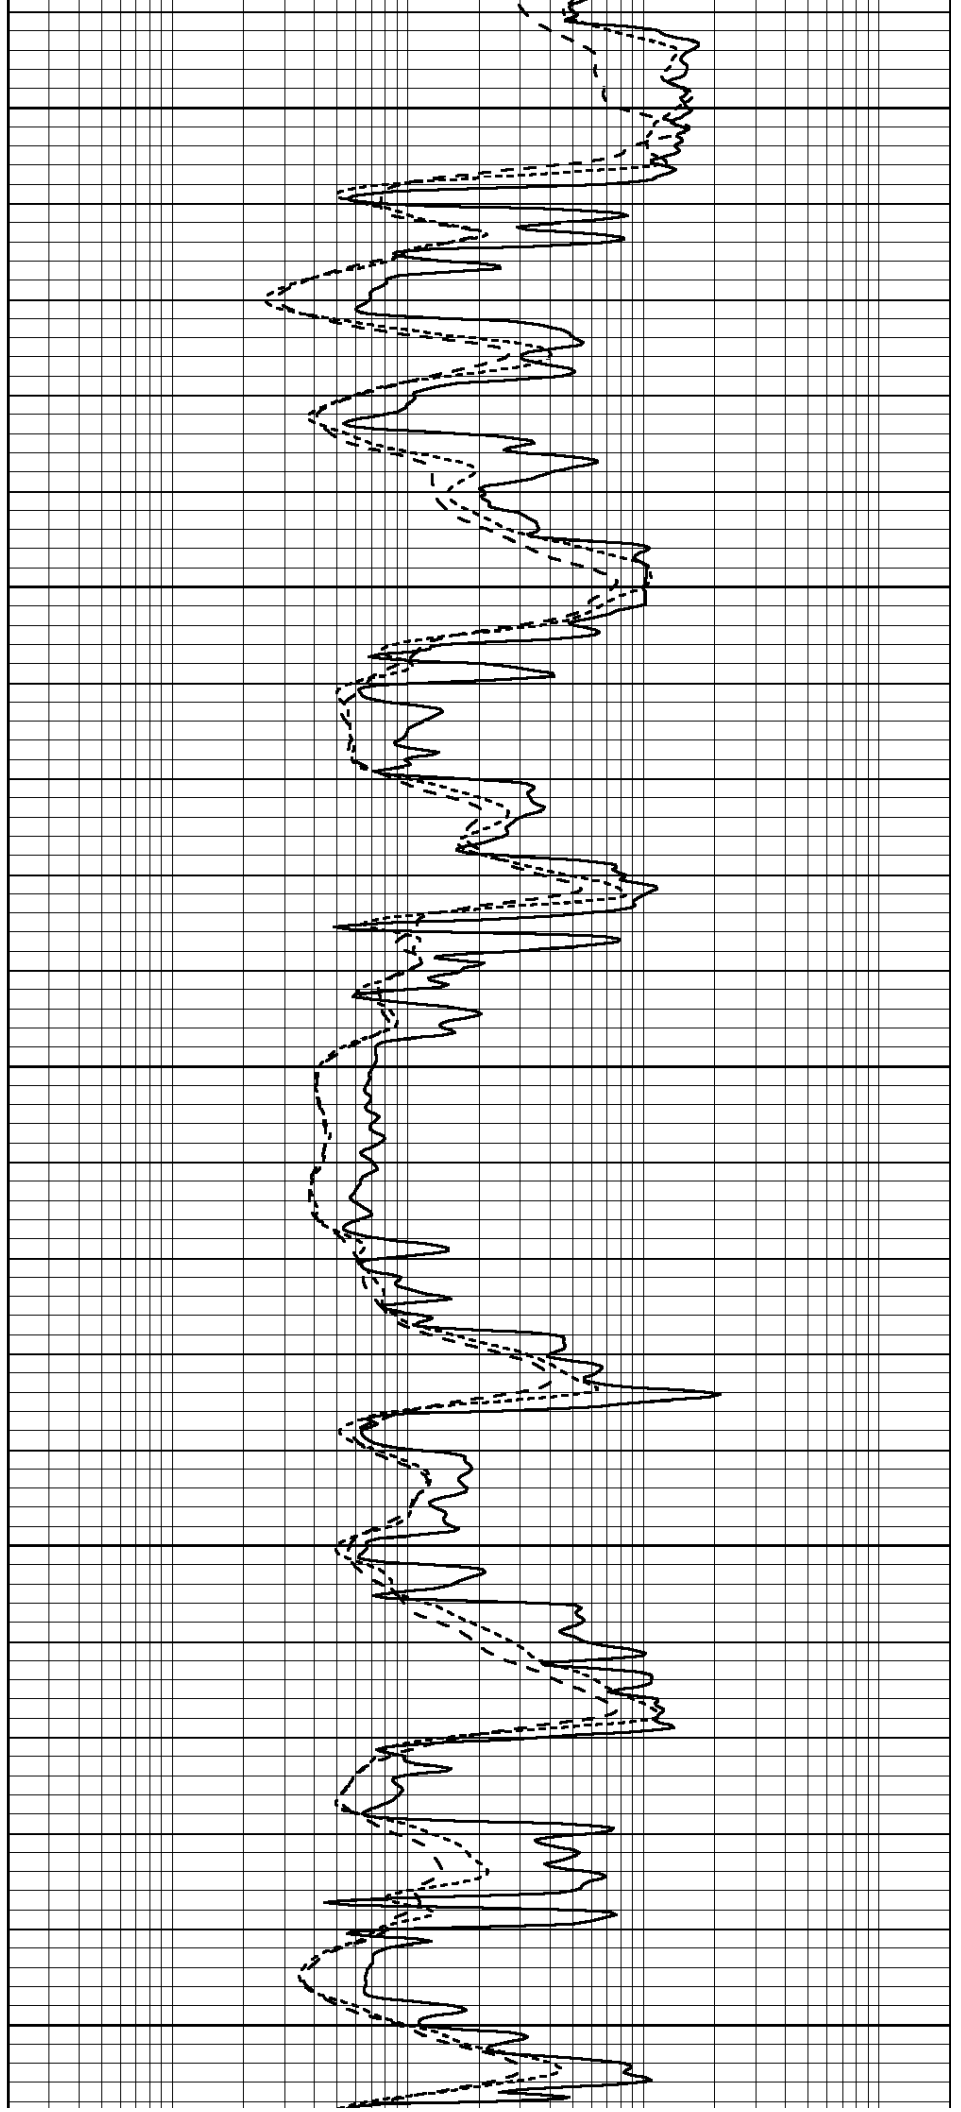

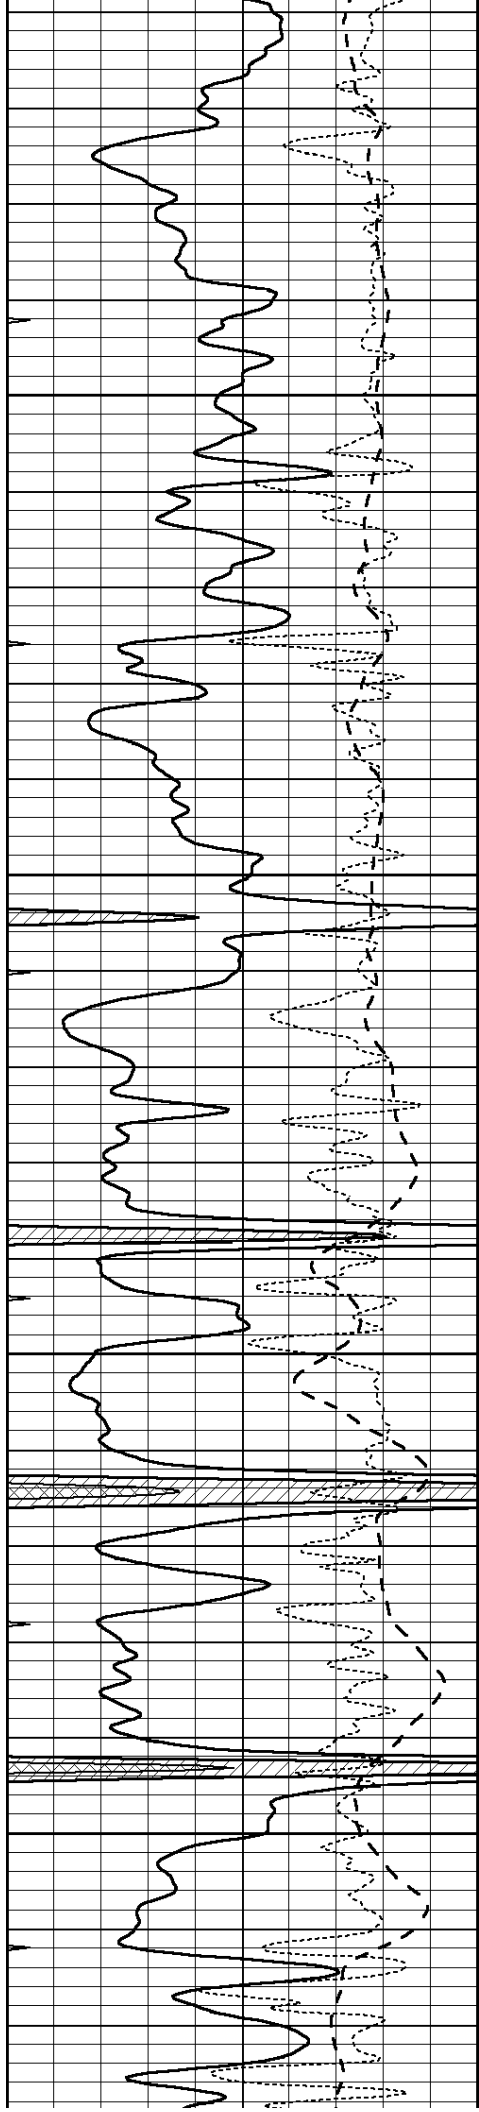



4650

4700

4750

4800

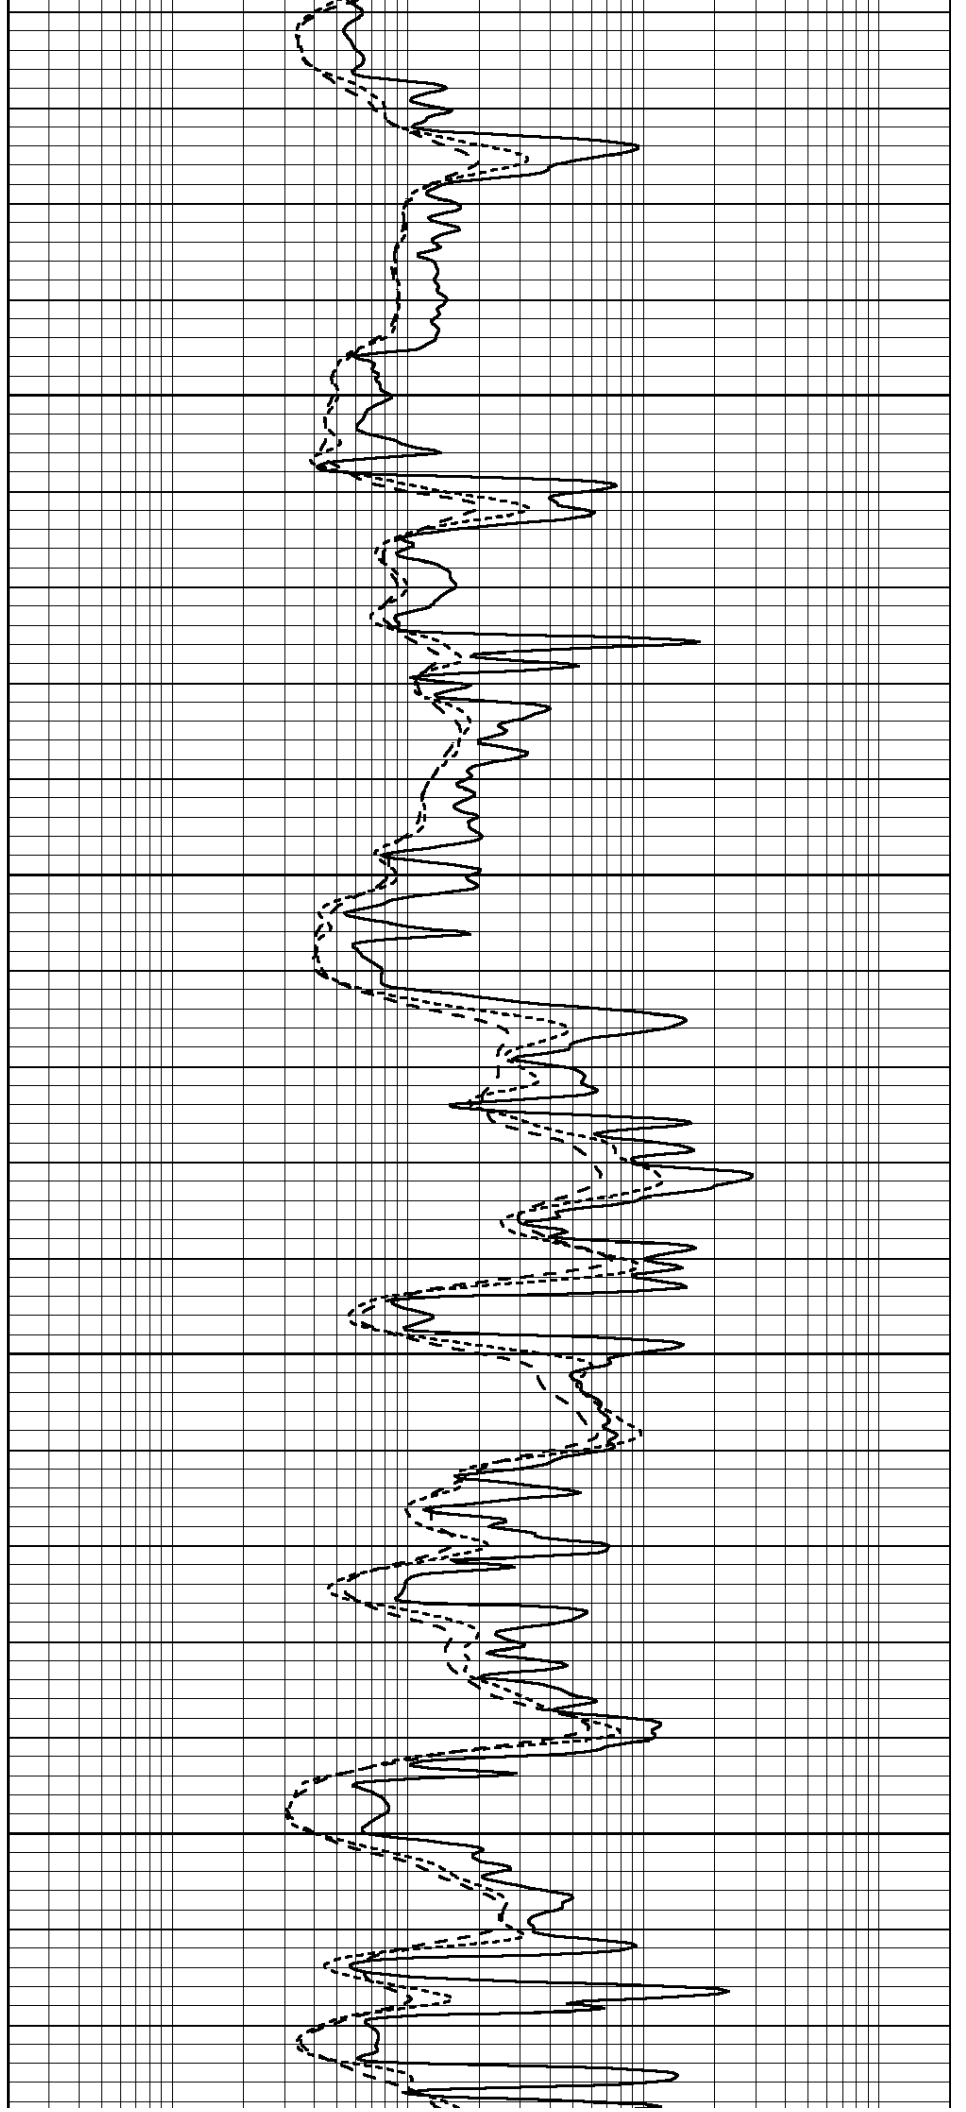

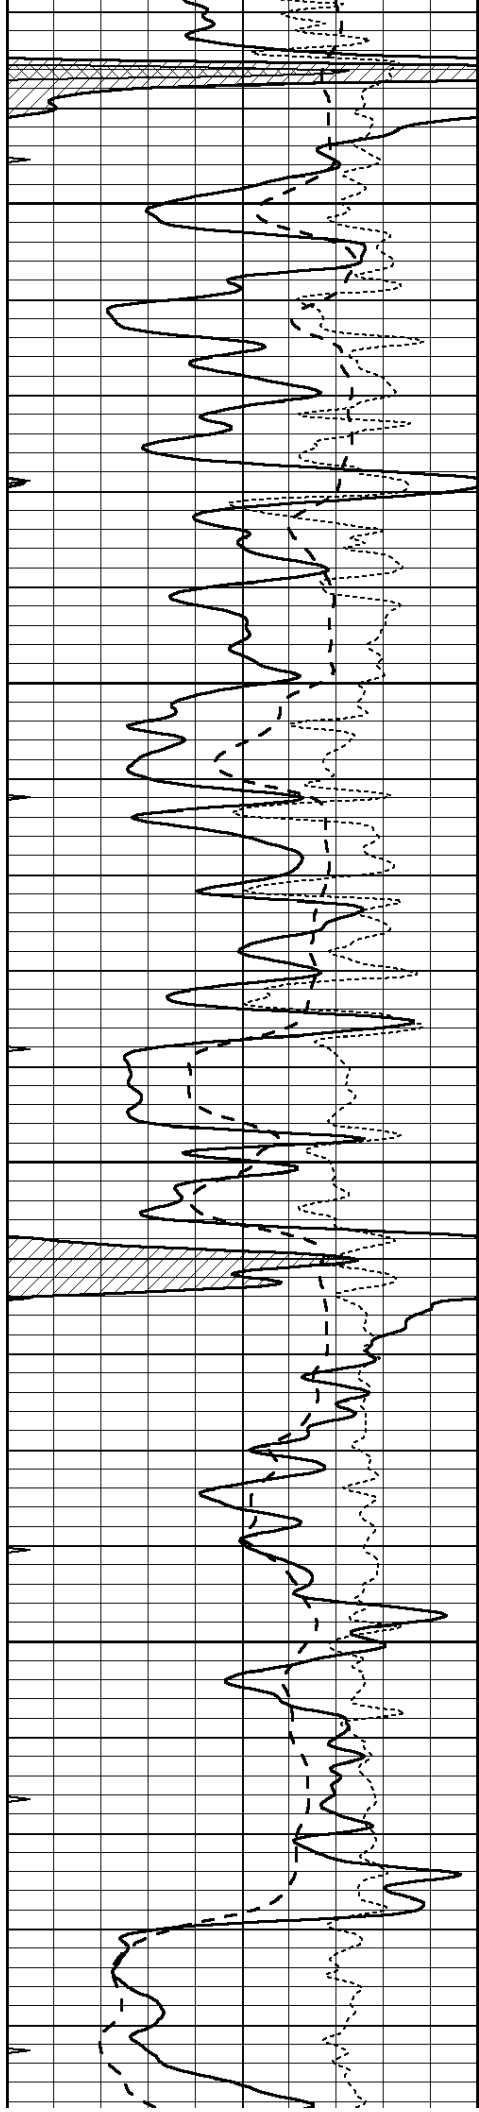



4850

4900

4950


5000

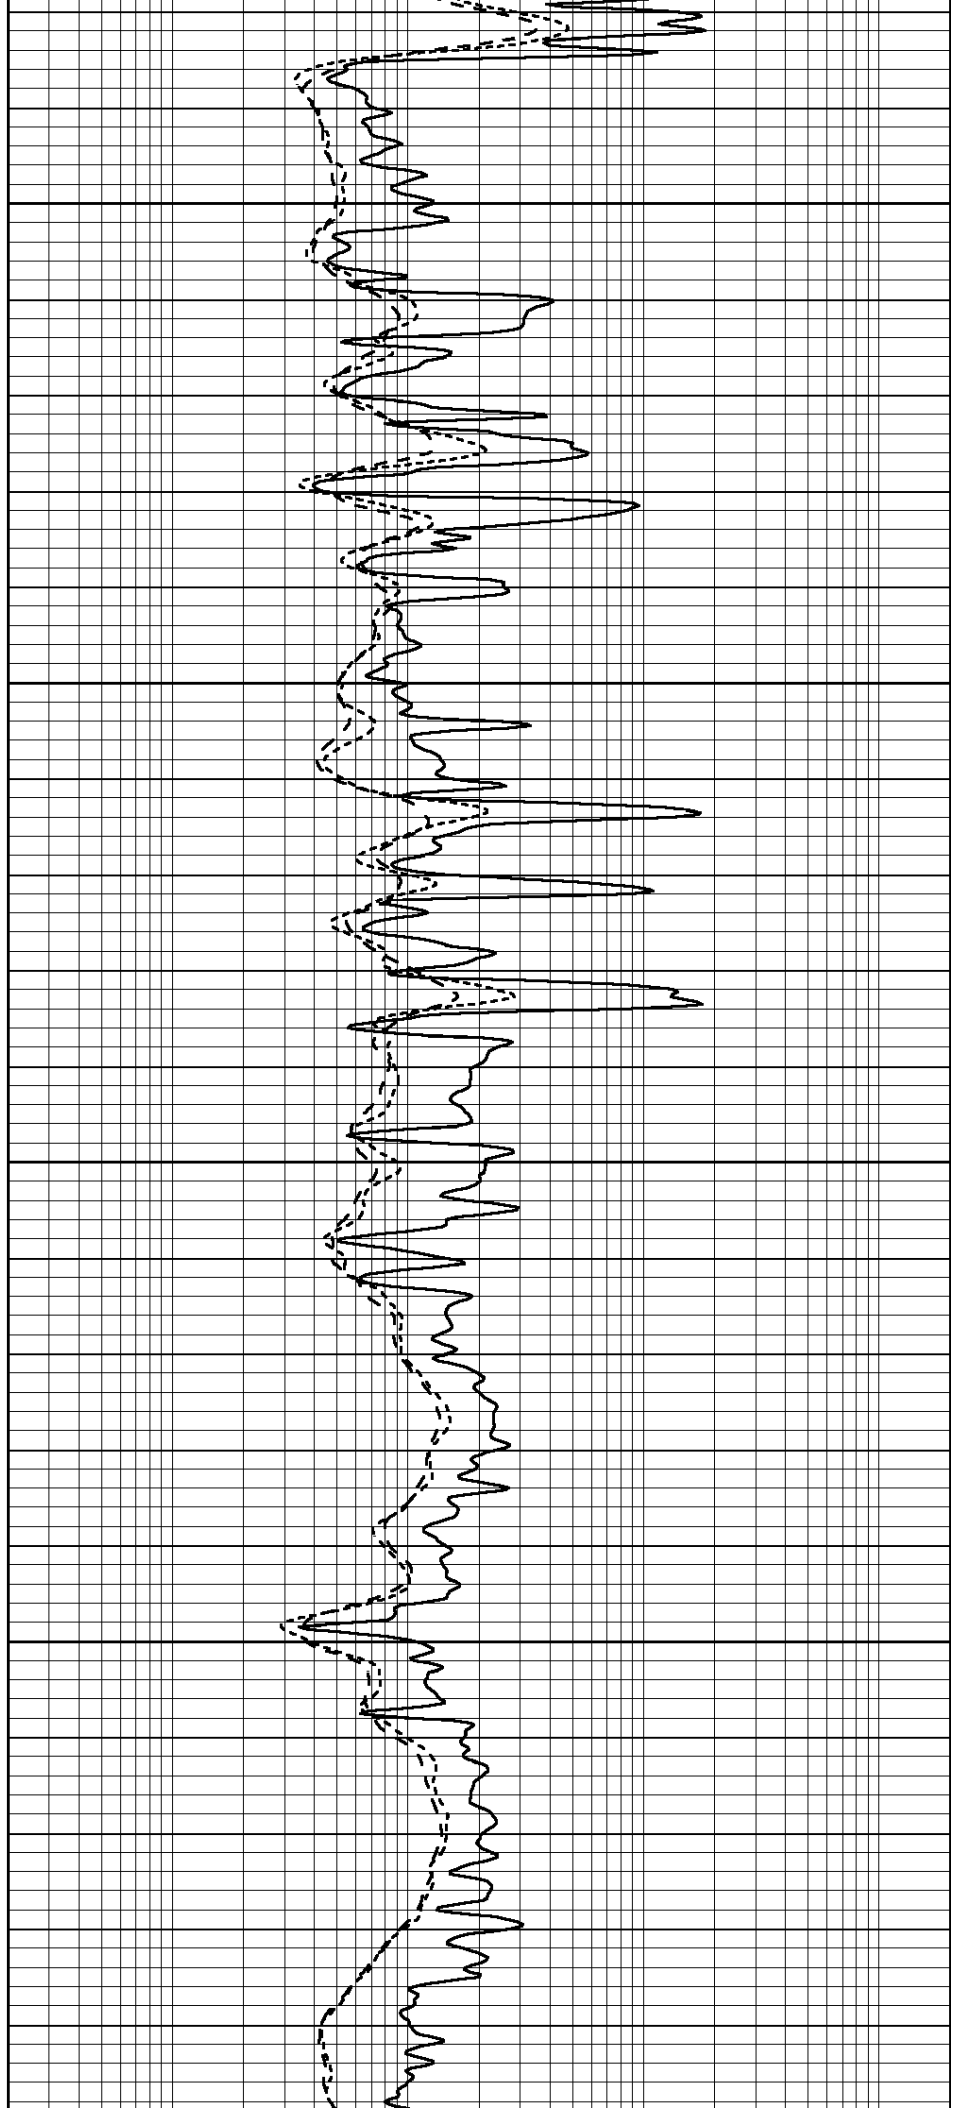

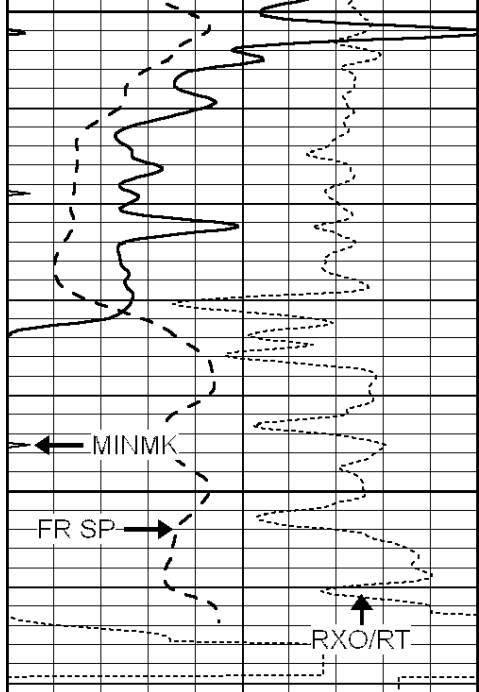


5050
5100
LTD 5114

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

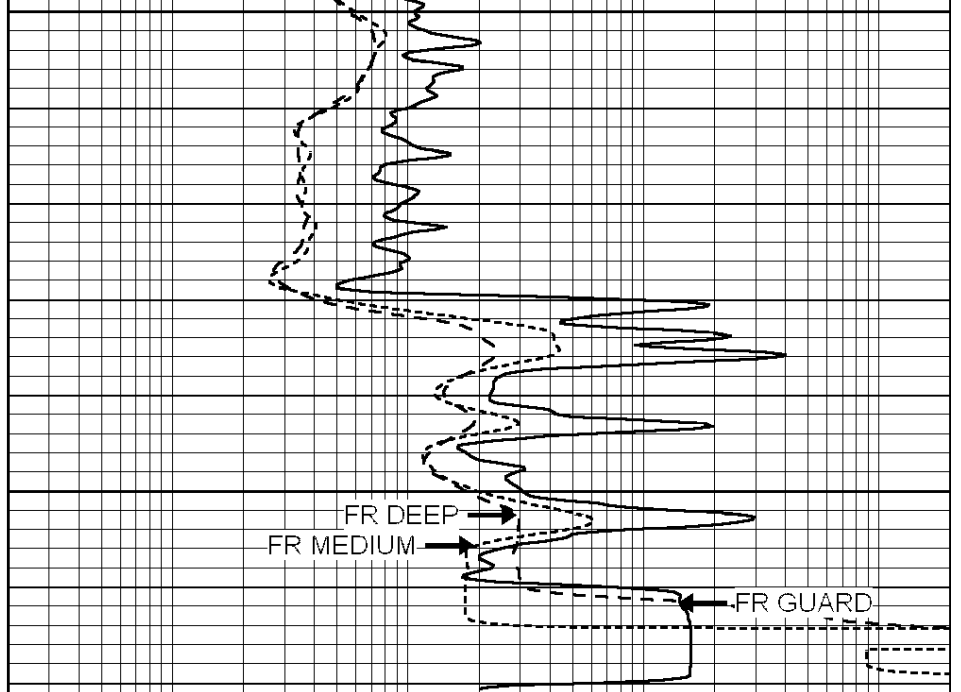

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

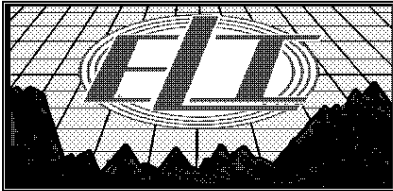


REPEAT SECTION


Database File: 1421ddn.db
 Dataset Pathname: pass2.7
 Presentation Format: _dil
 Dataset Creation: Mon May 15 12:52:12 2017 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

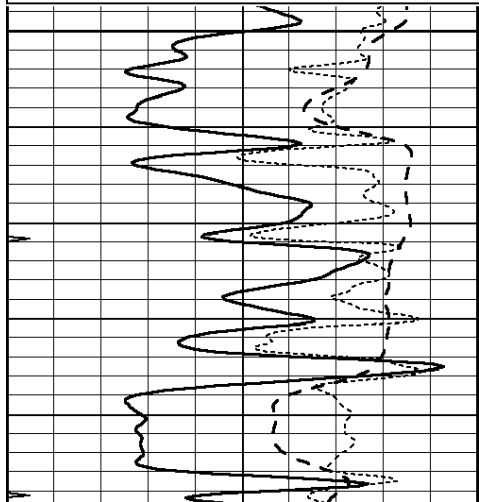


4900

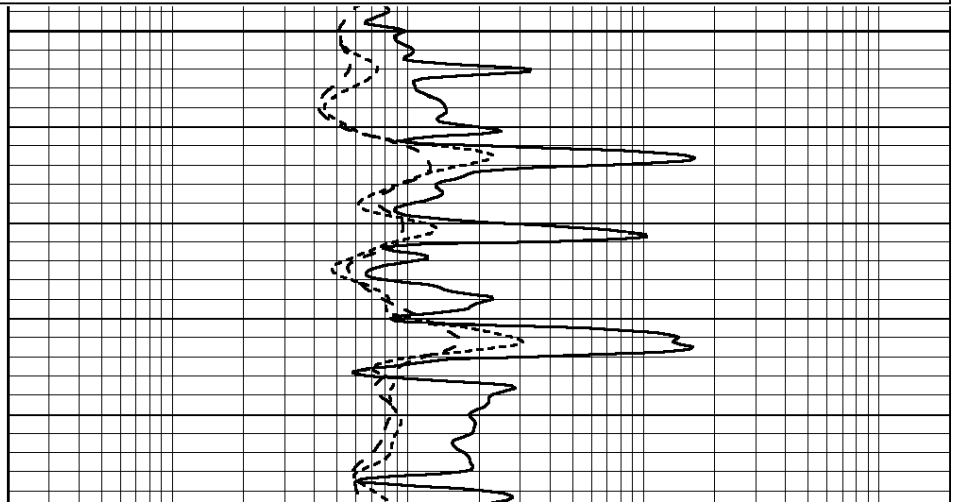

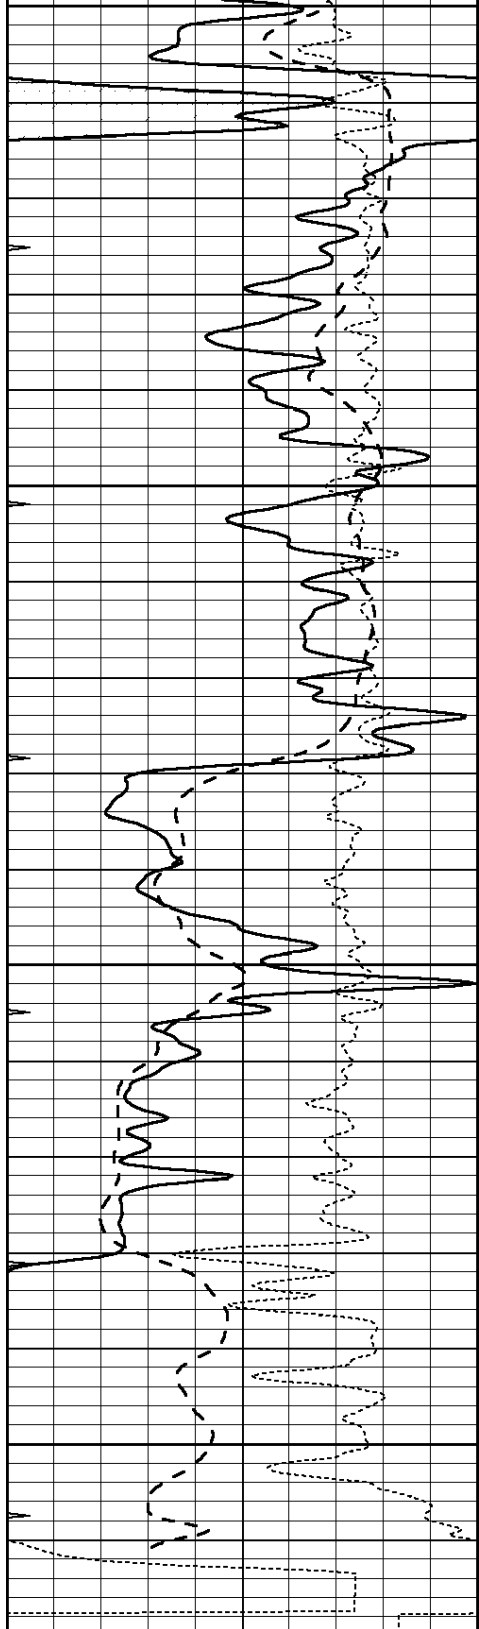

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

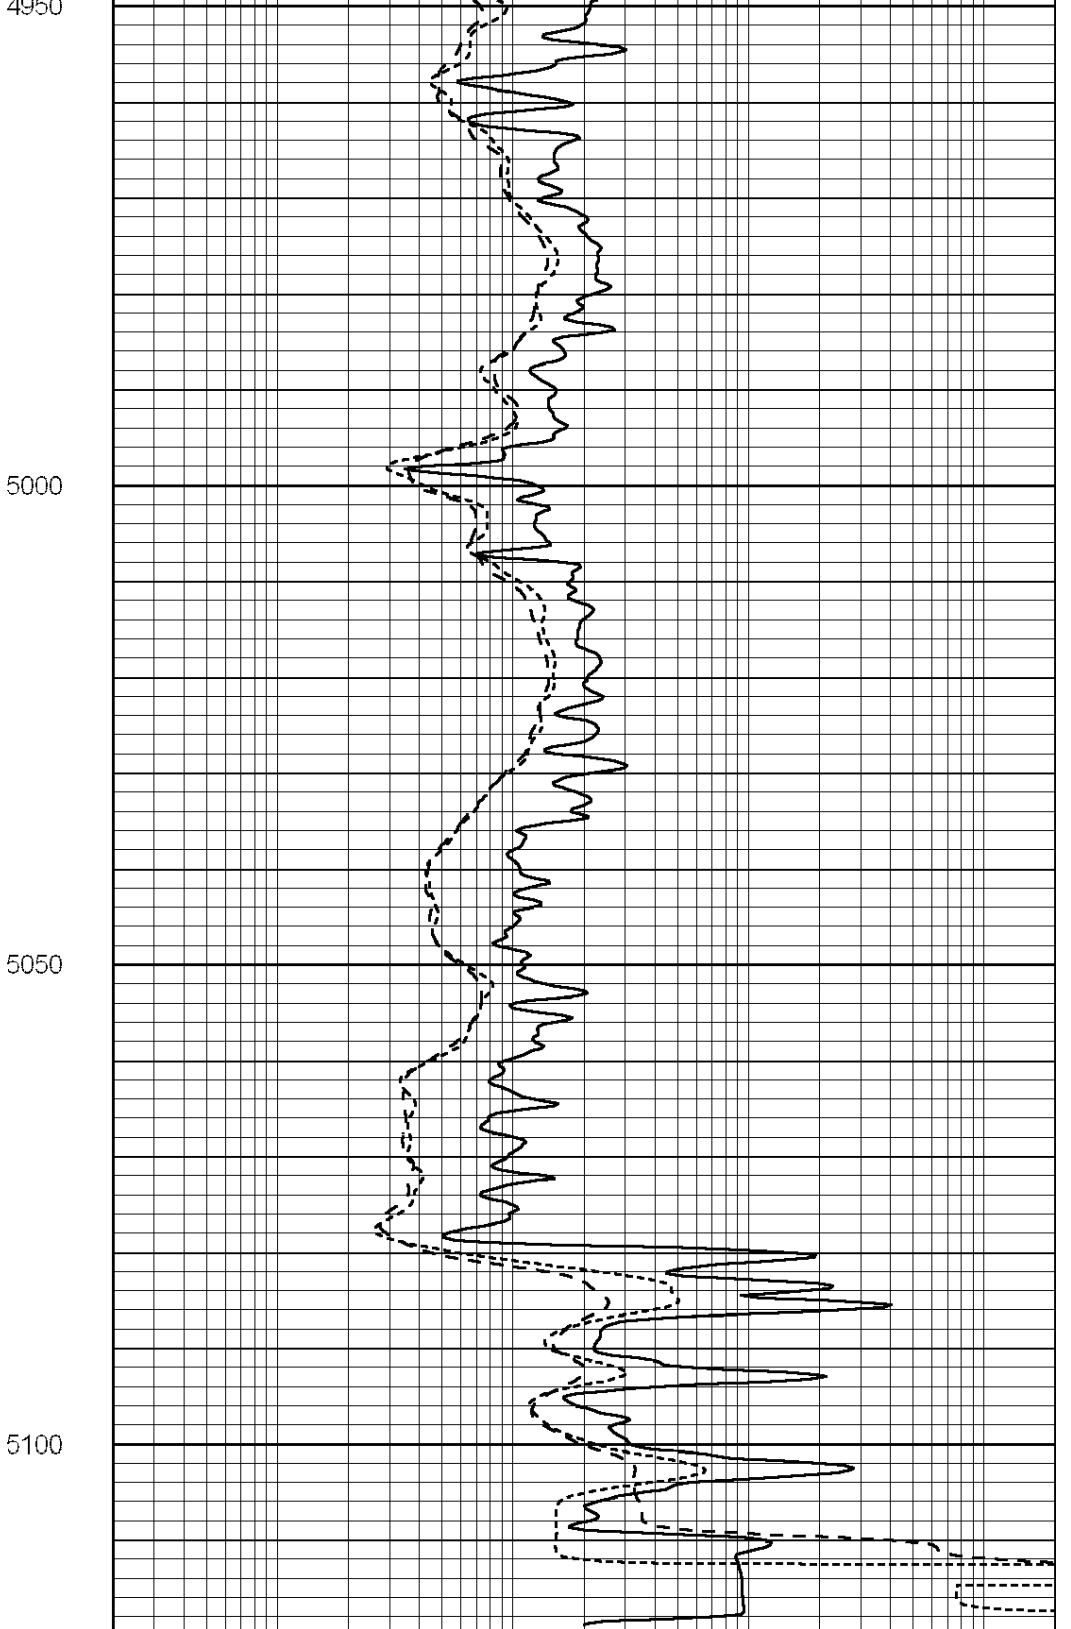

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Calibration Report

Database File: 1421ddn.db
 Dataset Pathname: pass3.6
 Dataset Creation: Mon May 15 13:39:22 2017 by Calc SOC 120430

Dual Induction Calibration Report

Serial-Model: PROBE7-DILG
 Surface Cal Performed: Mon May 15 11:30:04 2017
 Downhole Cal Performed: Mon Jul 28 12:02:56 2008
 After Survey Verification Performed: Mon Jul 28 12:02:56 2008

Surface Calibration

Loop:	Readings			References			Results	
	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	620.000	2.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-42.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification

	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report
Serial: 003N Model: PRB

Master Calibration

Performed Mon Mar 14 08:48:13 2016

	Background	Magnesium	Aluminum	Sandstone	
Window 1	1751.3	11741.0	3857.3	12907.8	cps
Window 2	1589.4	9536.2	3267.6	10282.0	cps
Window 3	1413.4	6466.1	2463.2	6828.7	cps
Window 4	399.5	407.1	405.1	406.5	cps
Long Space	0.0	7946.7	1678.1	8692.6	cps
Short Space	2.2	3366.2	2134.1	3410.2	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	
Rib Angle	: 43.7	Rib Slope	: 0.954	Density/Spine Ratio	: 0.543
Spine Angle	: 73.7	Spine Slope	: 3.412	Spine Intercept	: -18.7

Before Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps

Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 070808
 Tool Model: Probe

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: 070558
 Tool Model: OPEN_GR
 Performed: Fri May 05 12:55:28 2017

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
 Calibrator Reading: 1.0 cps

Sensitivity: 0.2800 GAPI/cps