

DUAL INDUCTION LOG

Company MULL DRILLING COMPANY, INC.
 Well #1-33 SCHIPPERS
 Field WILDCAT
 County THOMAS
 State KANSAS

Company MULL DRILLING COMPANY, INC.
 Well #1-33 SCHIPPERS
 Field WILDCAT
 County THOMAS State KANSAS

Location: API # : 15-193-21044-0000
 1243' FSL & 1732' FVL
 NE - NW - SE - SW
 Permanent Datum GROUND LEVEL Elevation 3005
 Log Measured From KELLY BUSHING 5' A.G.L.
 Drilling Measured From KELLY BUSHING
 SEC 33 TWP 10S RGE 31W
 Other Services
 CDL/CNL/PE
 MEL/SONIC
 Elevation
 K.B. 3010
 D.F. 3008
 G.L. 3005


Date	6/21/19		
Run Number	ONE		
Depth Driller	4680		
Depth Logger	4681		
Bottom Logged Interval	4679		
Top Log Interval	00		
Casing Driller	8 5/8"@287'		
Casing Logger	287		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3,400 PPM	
Density / Viscosity	9.4/64		
pH / Fluid Loss	10.5/8.8		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	1.00@90F		
Rmf @ Meas. Temp	.750@90F		
Rmc @ Meas. Temp	1.20@90F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	738@122F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	7:30 A.M.		
Maximum Recorded Temperature	122F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	KEVIN KESSLER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
 DIRECTIONS
 CAMPUS & I-70, 3N. TO "THOMAS CR B", 2 3/4W., 3/4S. INTO

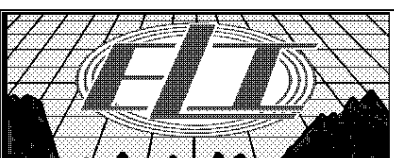




MAIN SECTION


Database File: 3733pe.db
 Dataset Pathname: pass3.6
 Presentation Format: dil2
 Dataset Creation: Sat Jun 22 08:40:38 2019
 Charted by: Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1

0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50
1000	CILD (mmho/m)	0

50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

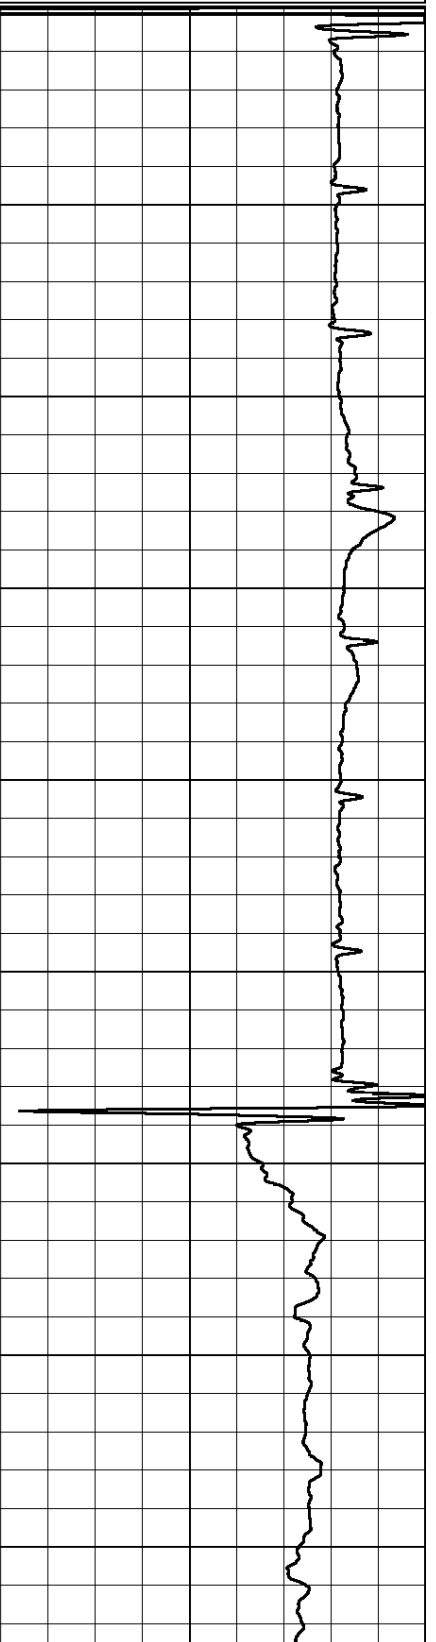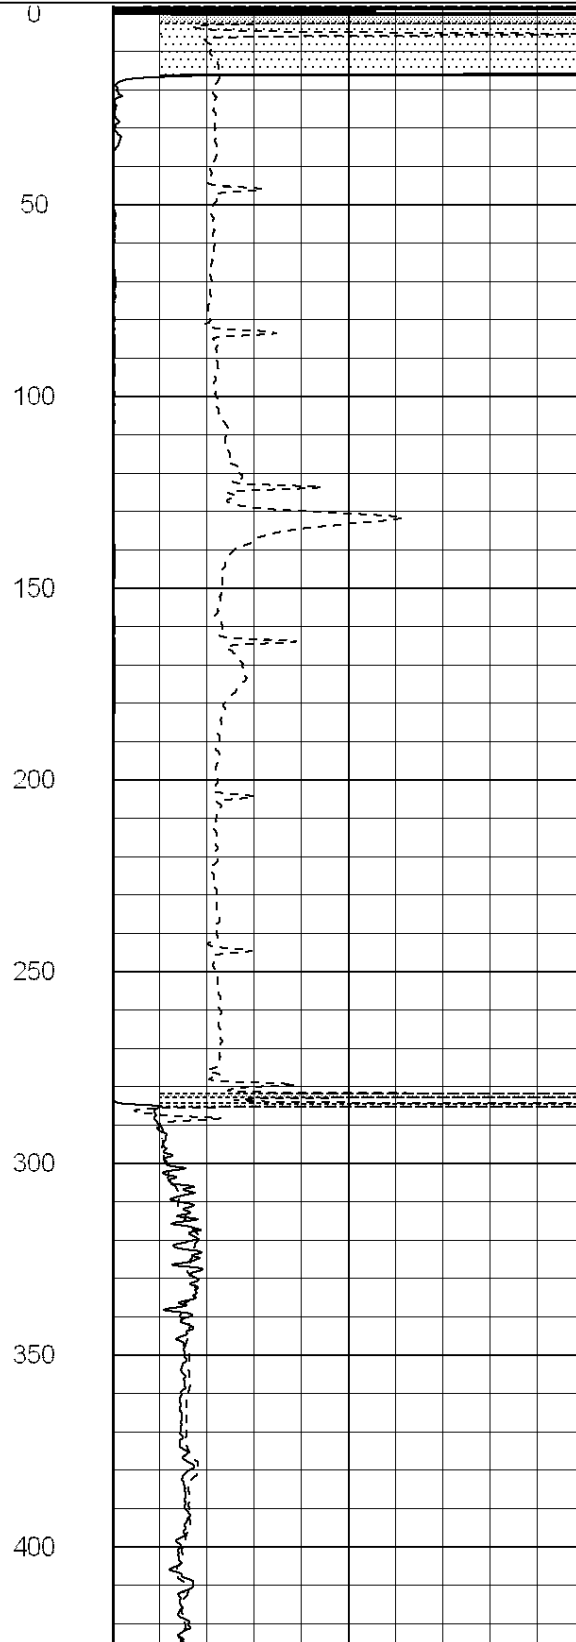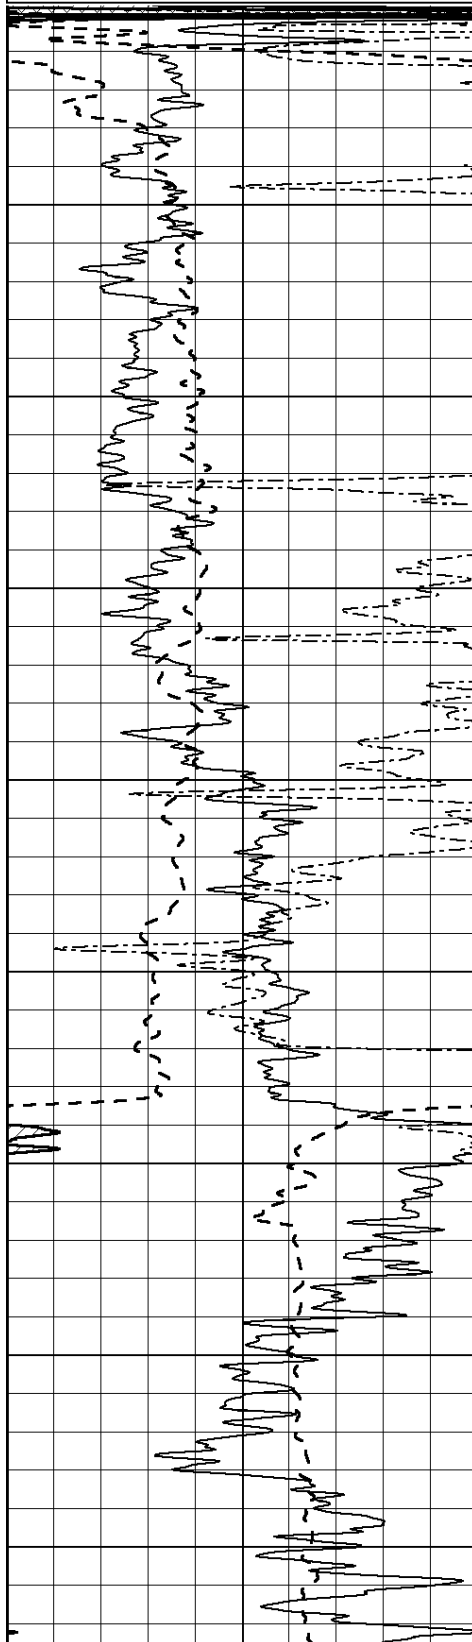

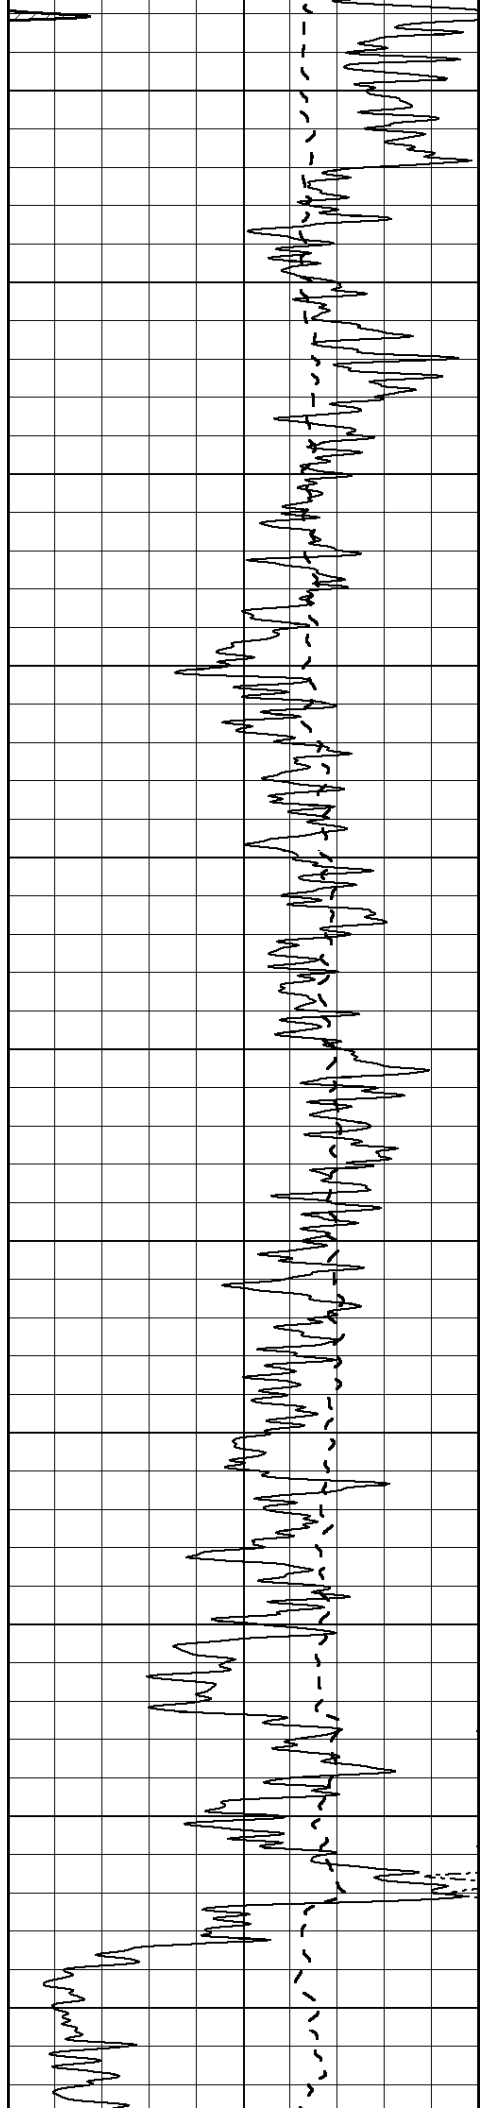

450

500

550

600

650

700


750


800

850



900


950

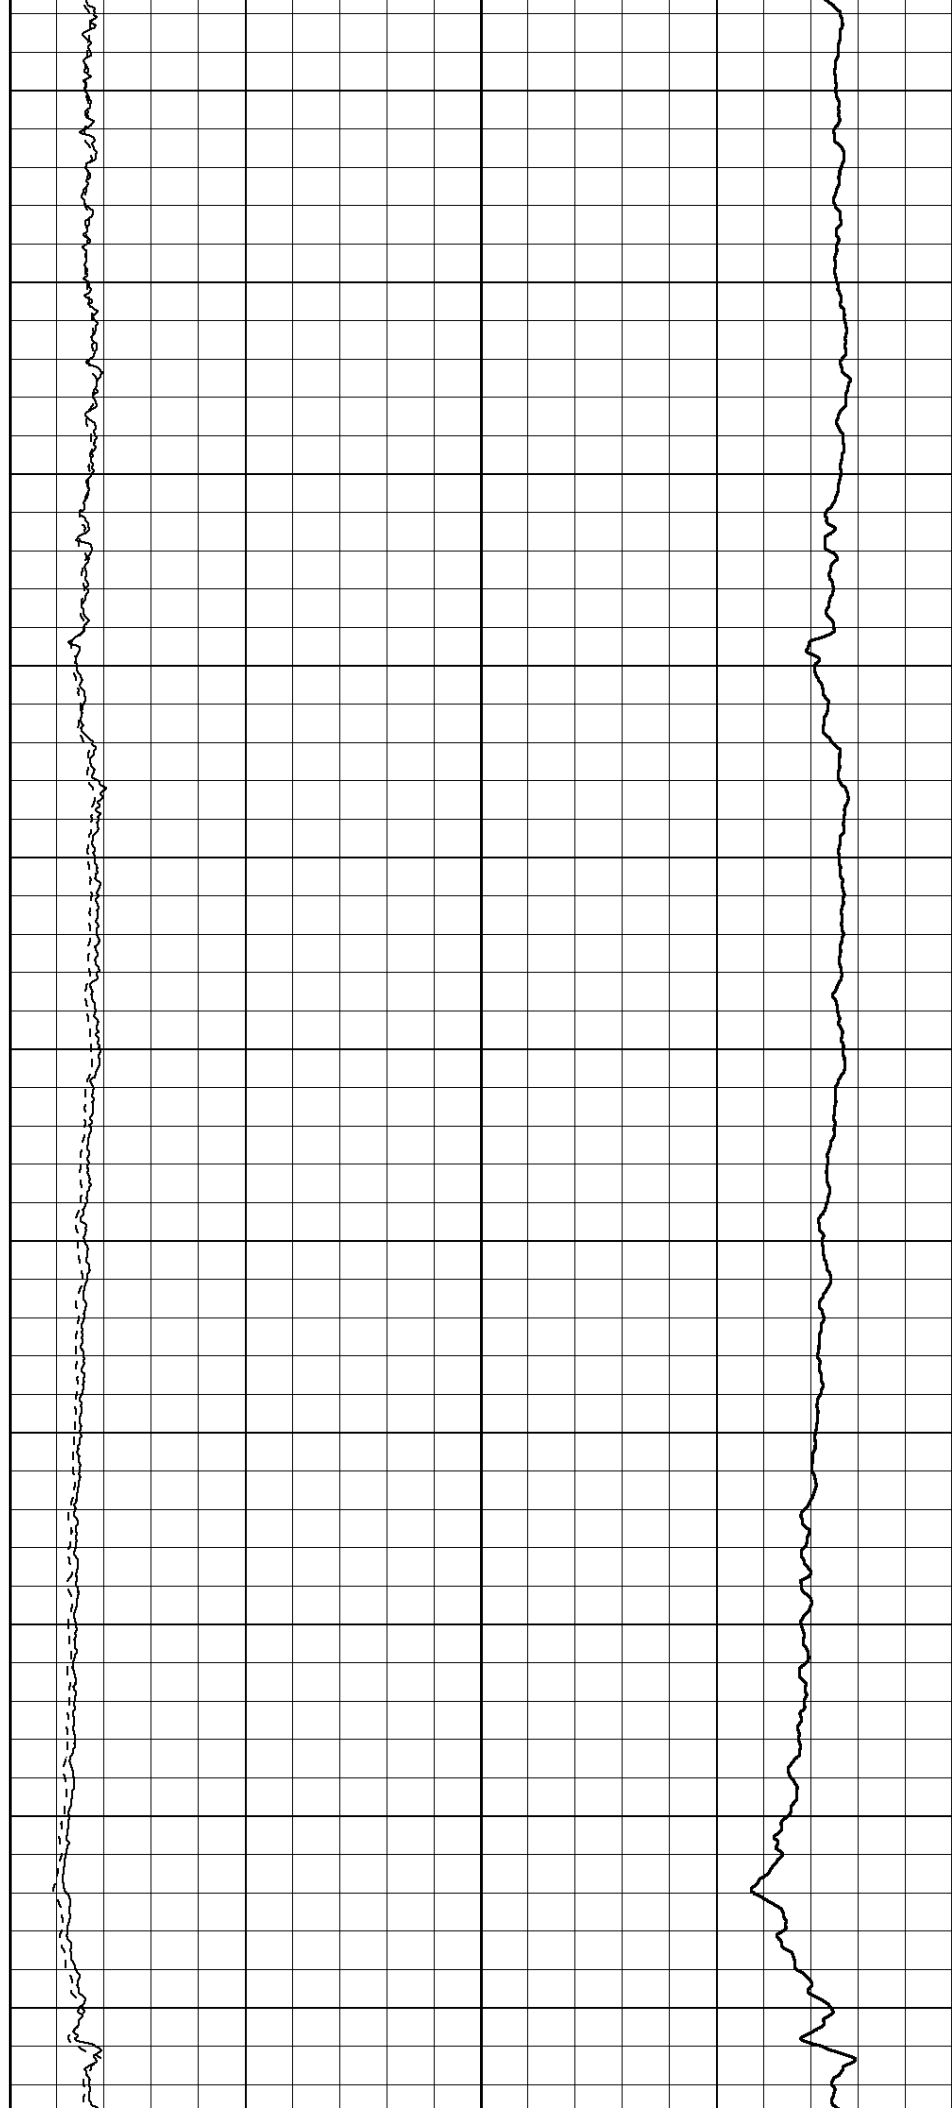

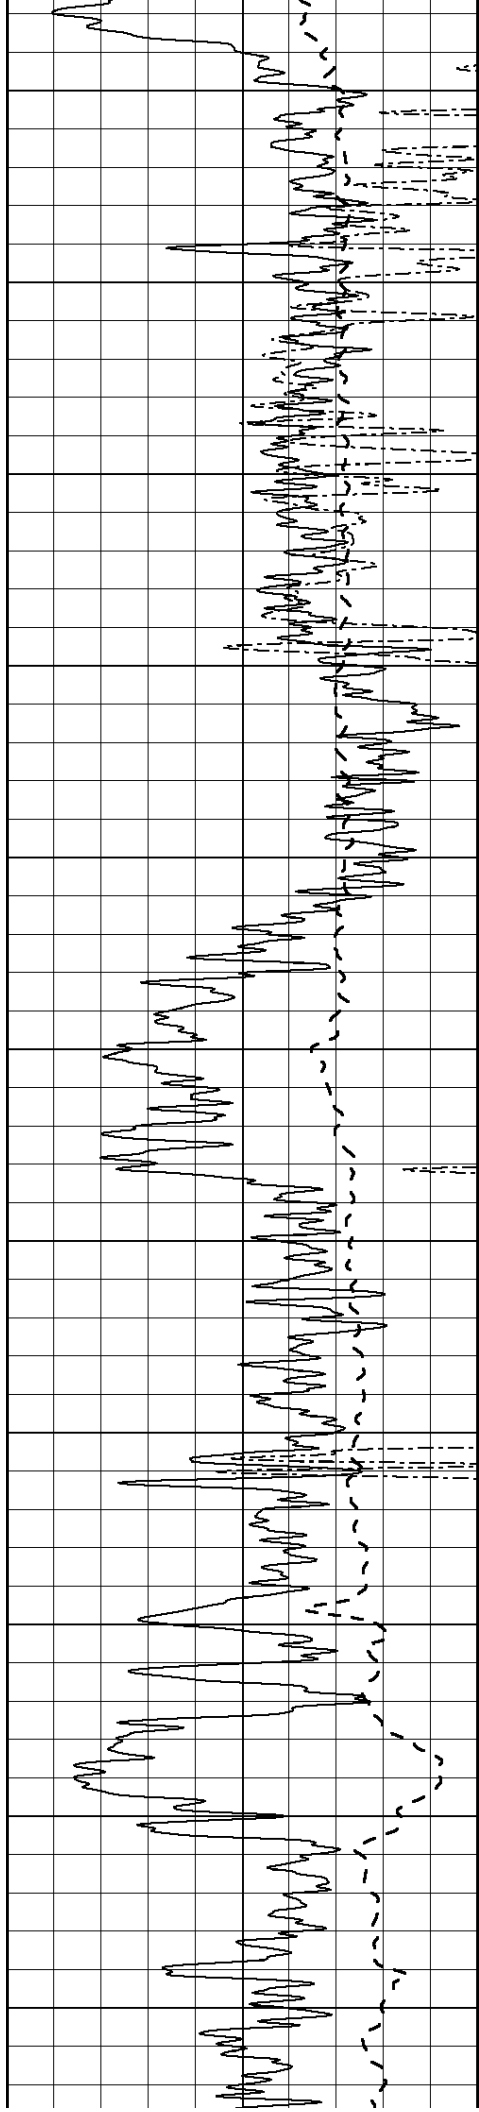

1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500

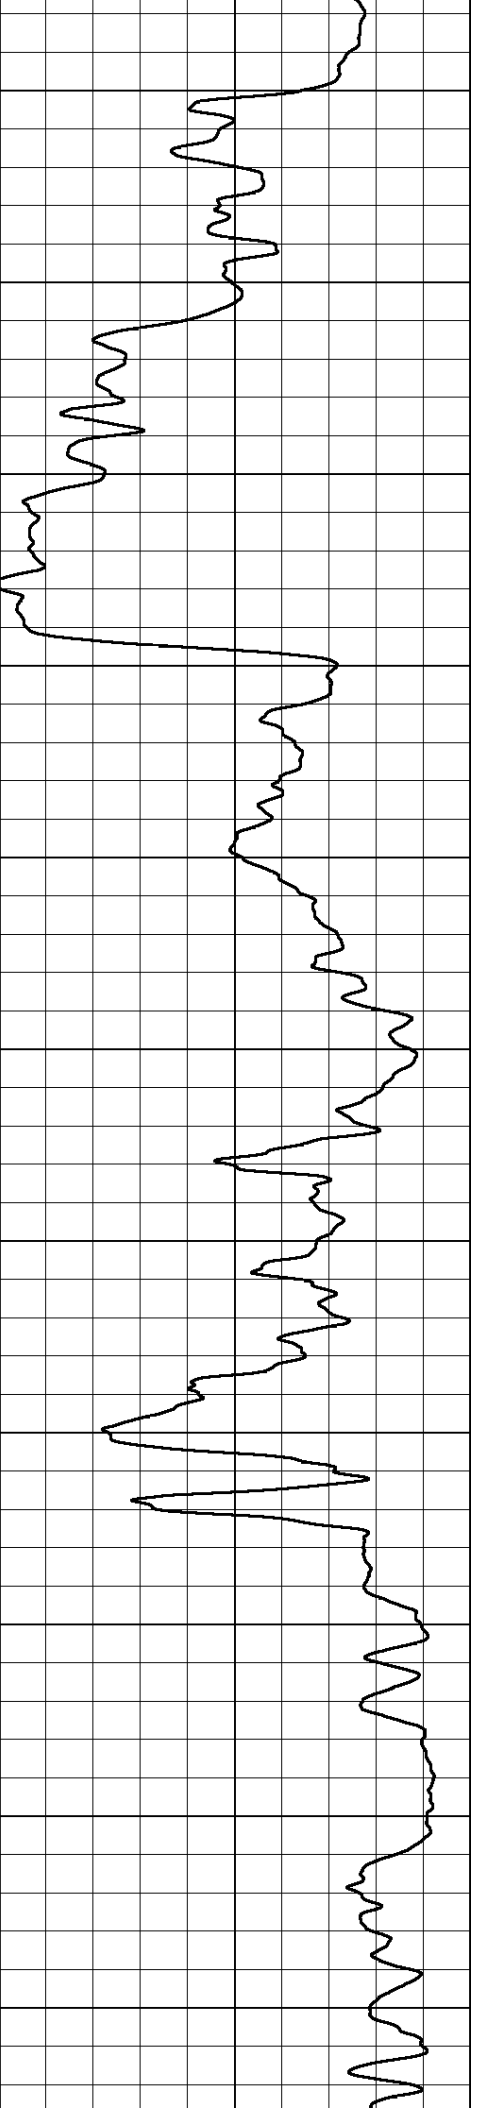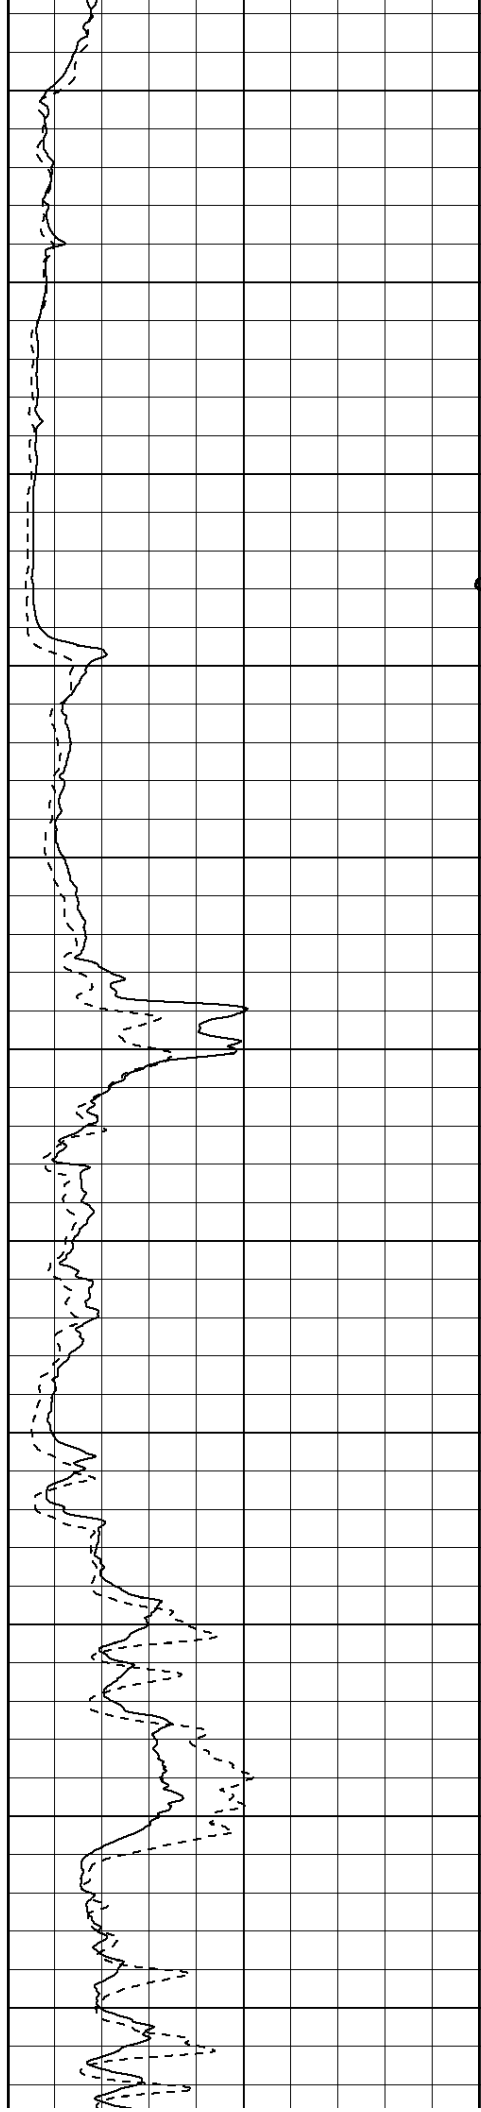

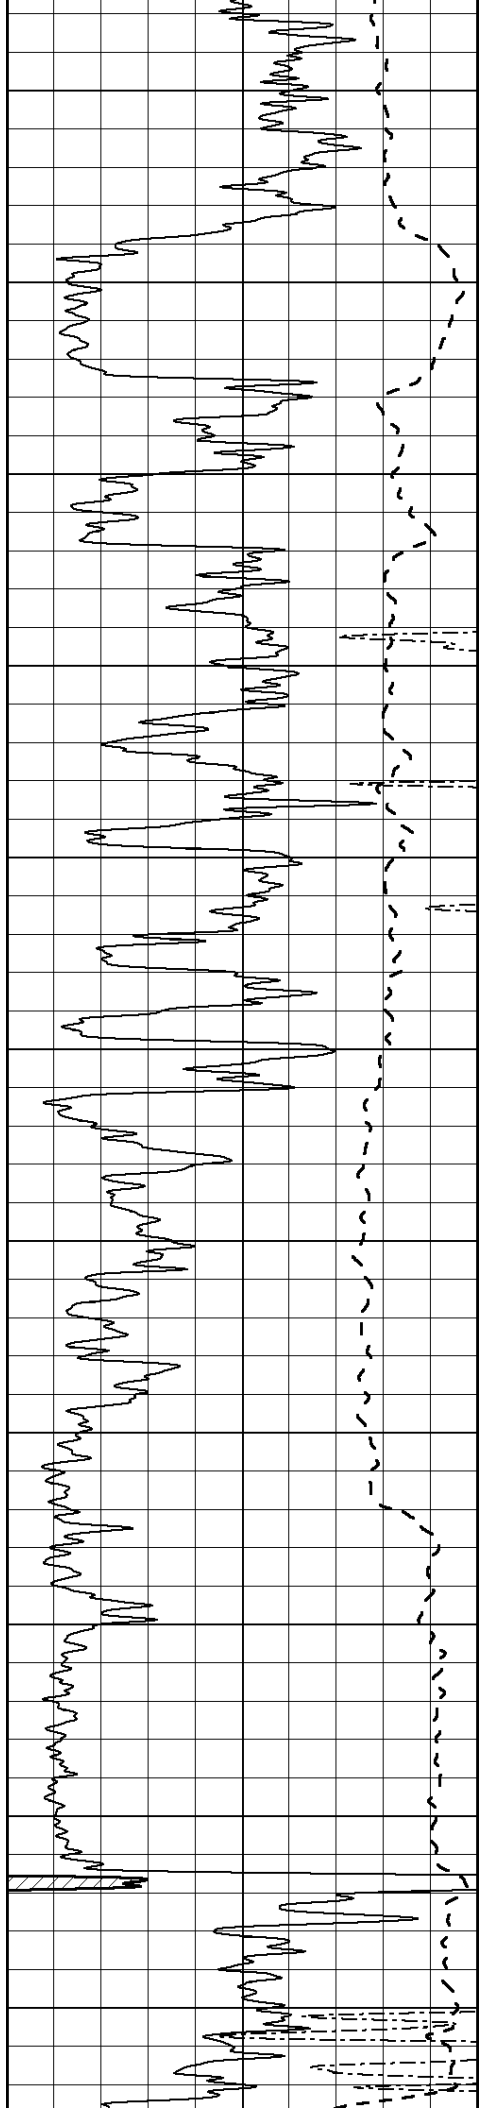

1550

1600

1650

1700

1750

1800



1850


1900

1950

2000

2050

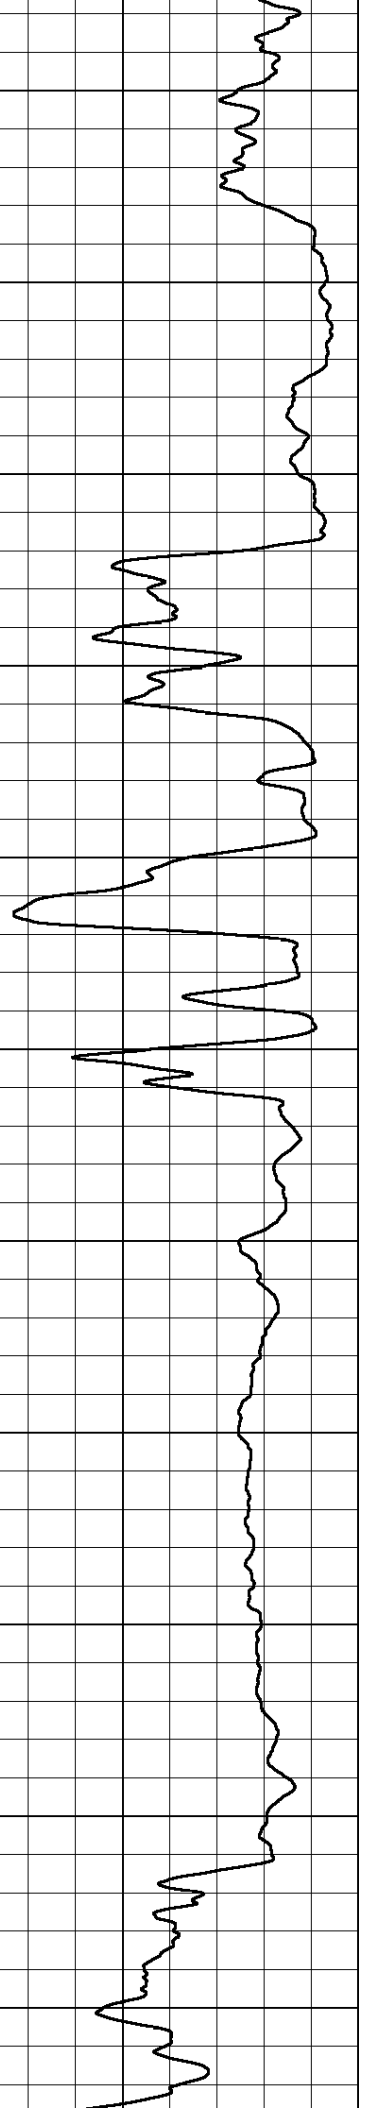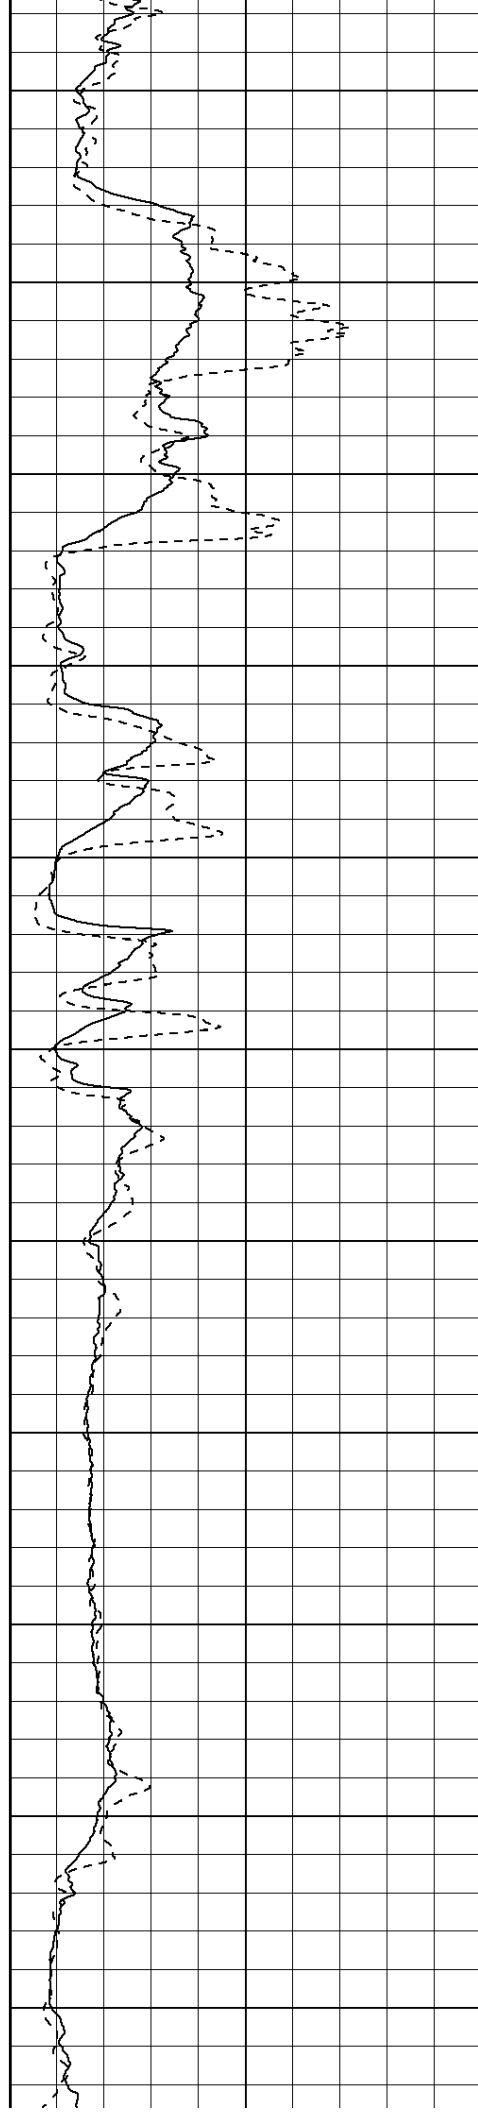

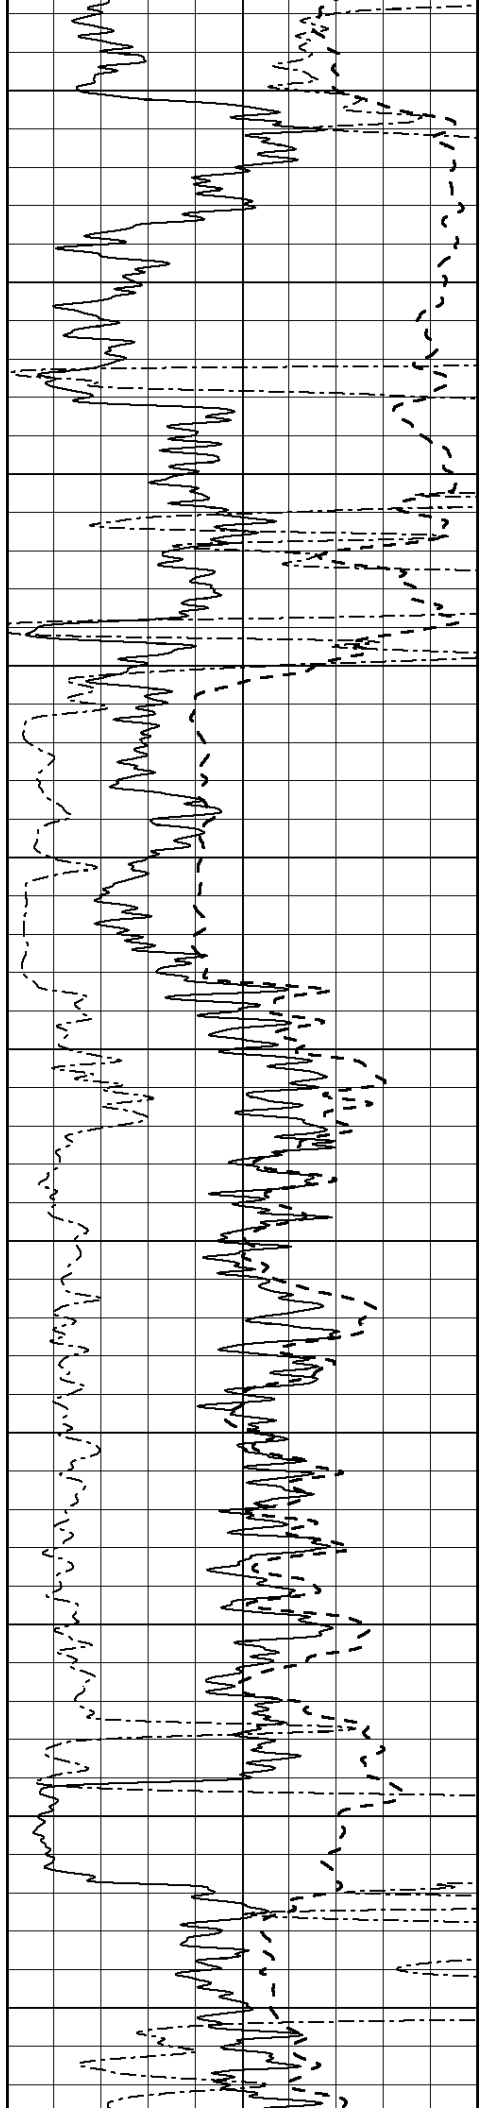

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

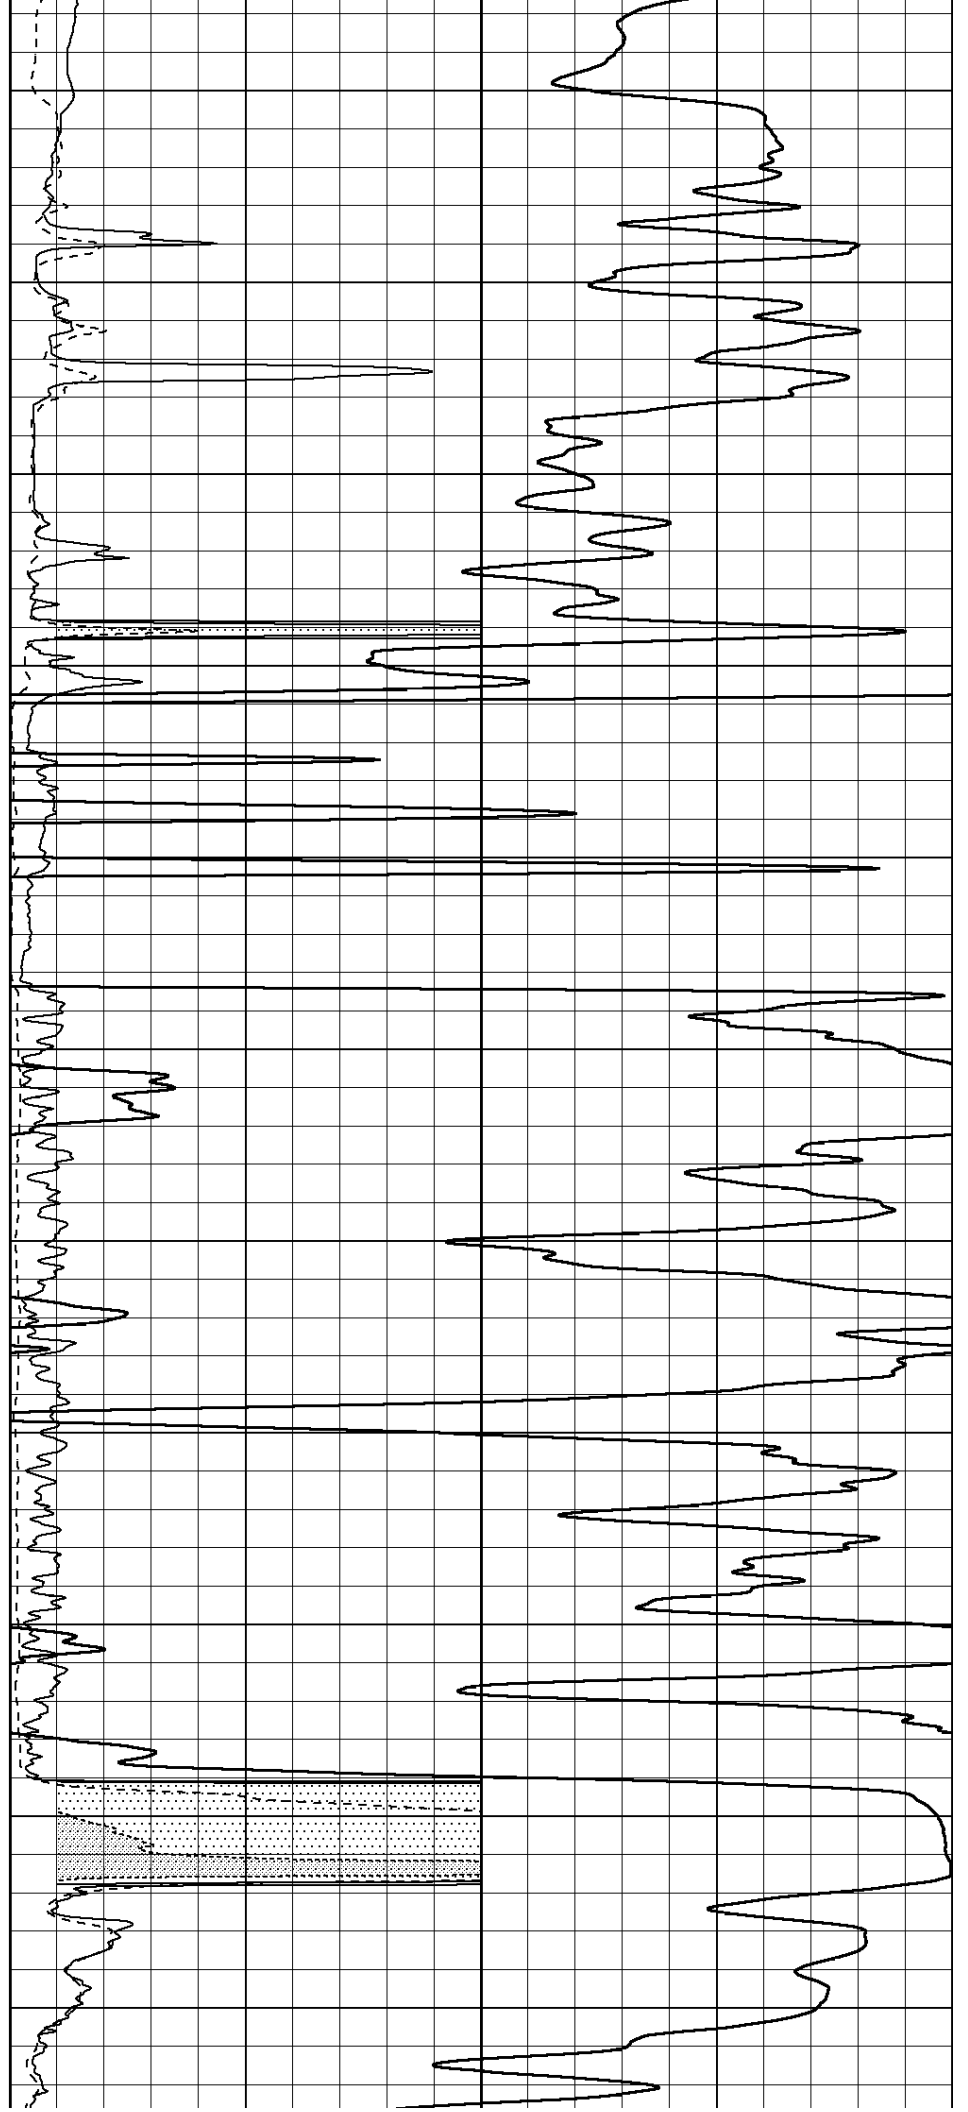

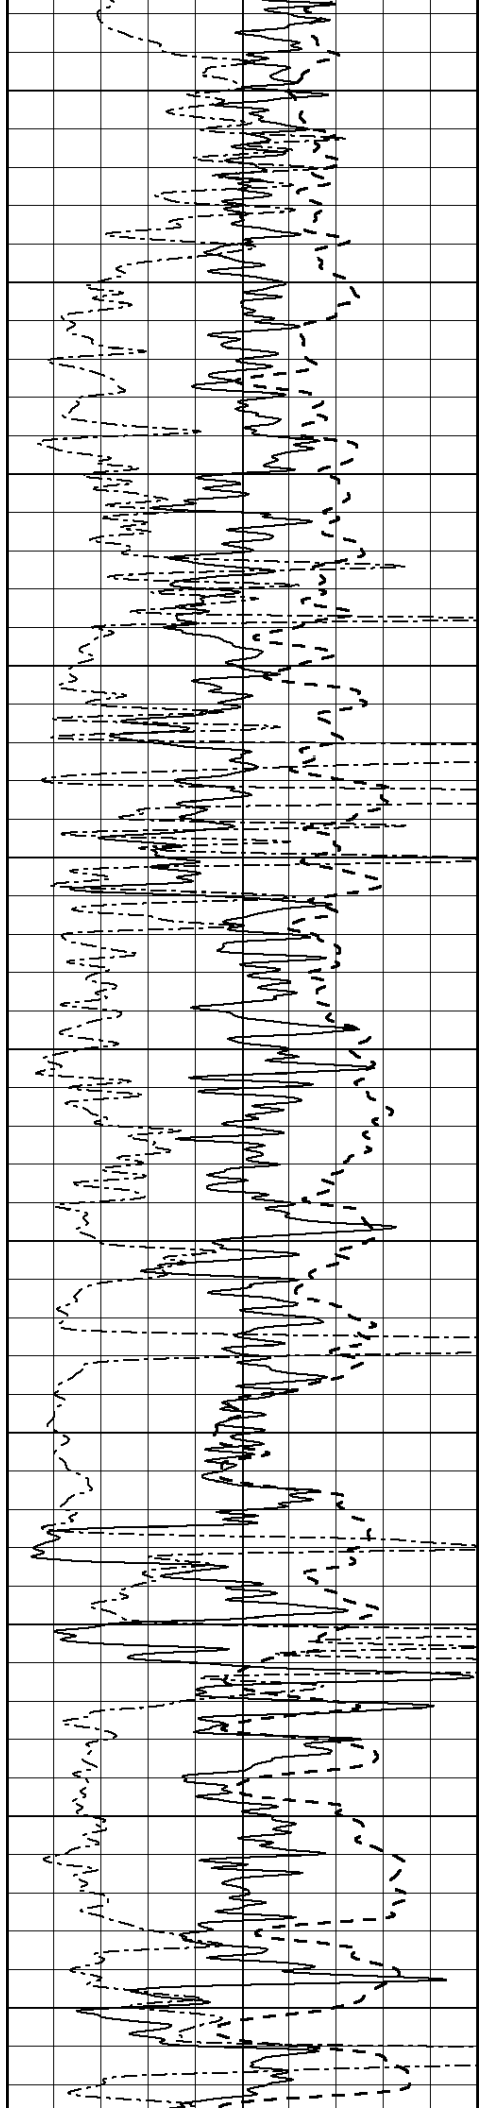

2650

2700

2750

2800

2850

2900


2950


3000

3050

3100

3150

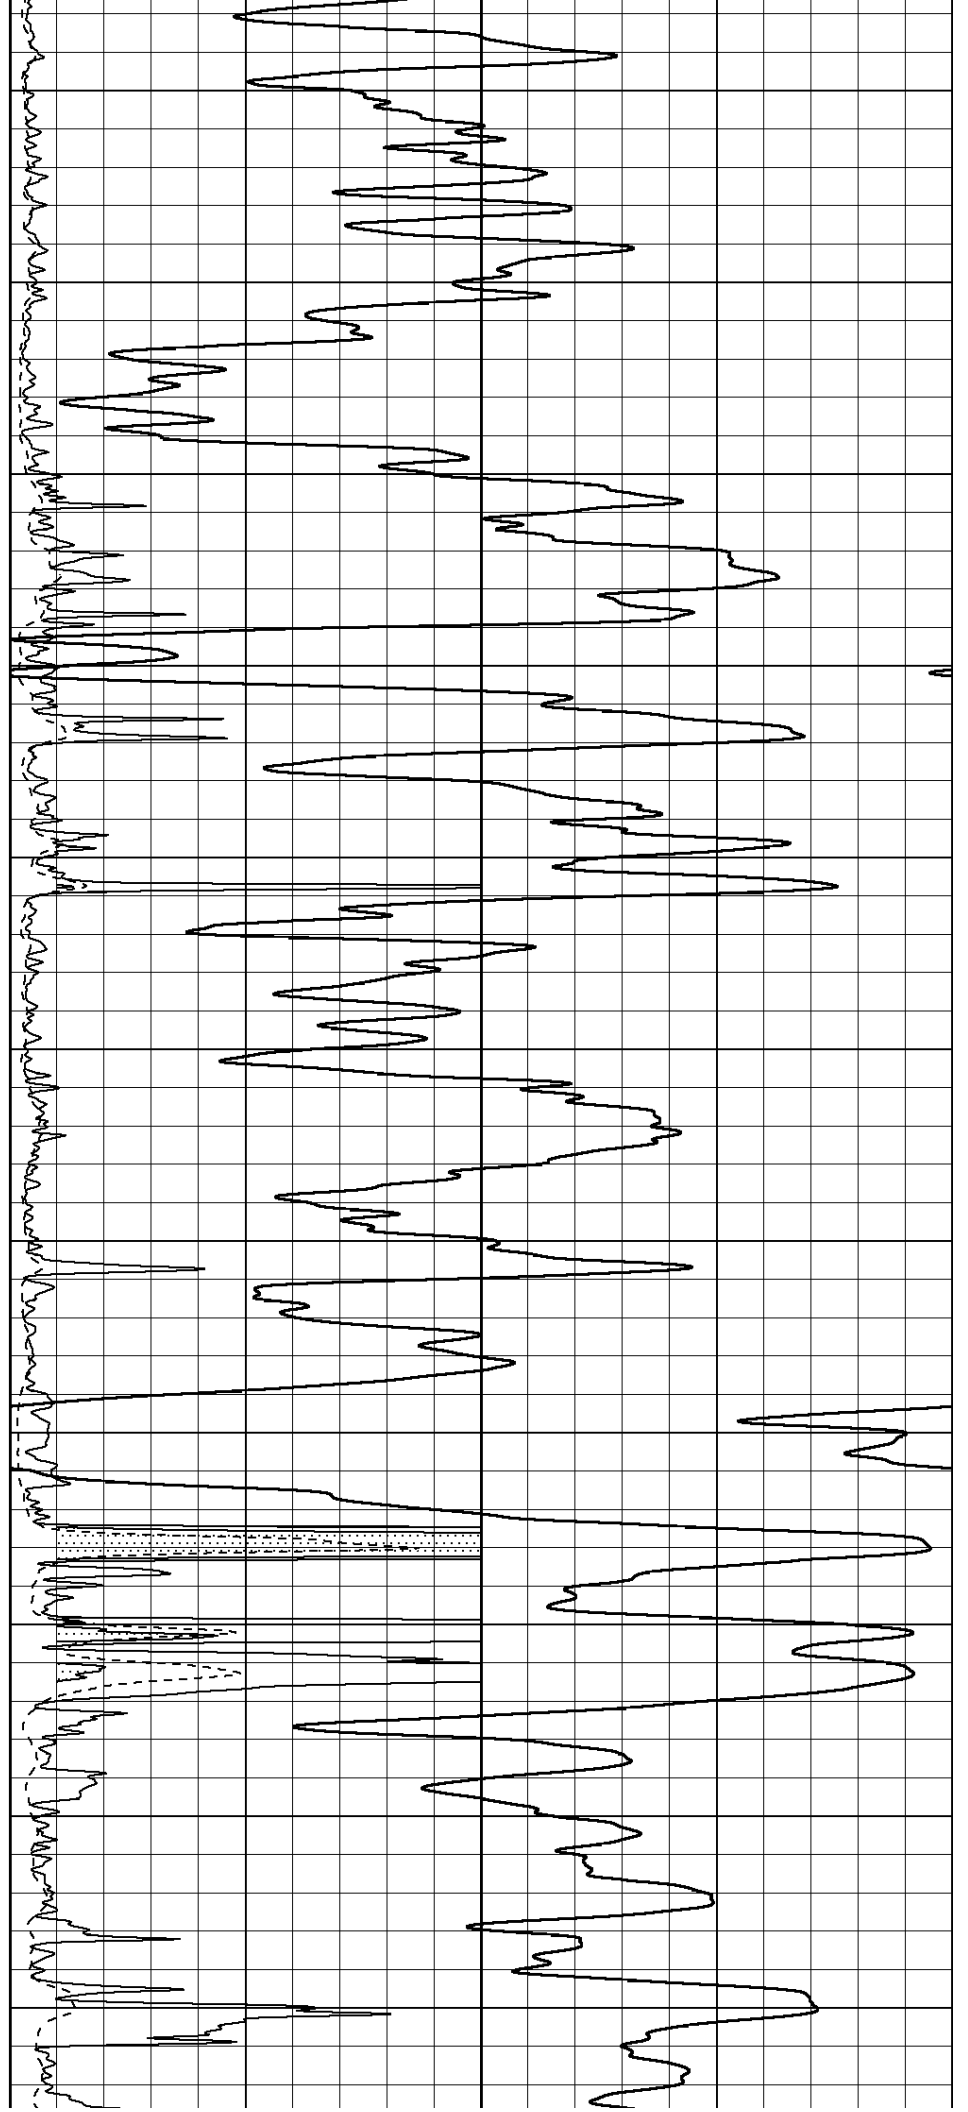

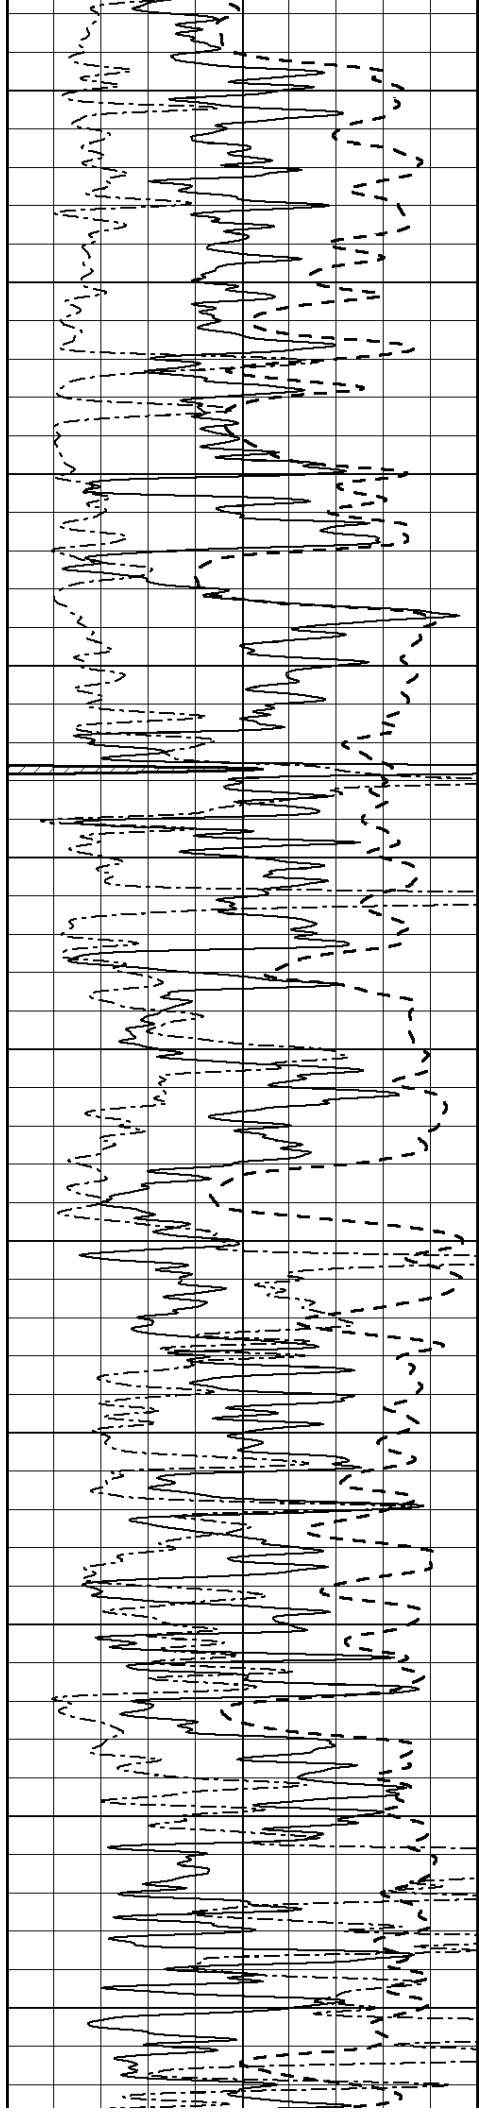

3200

3250

3300

3350

3400

3450


3500


3550

3600

3650

3700

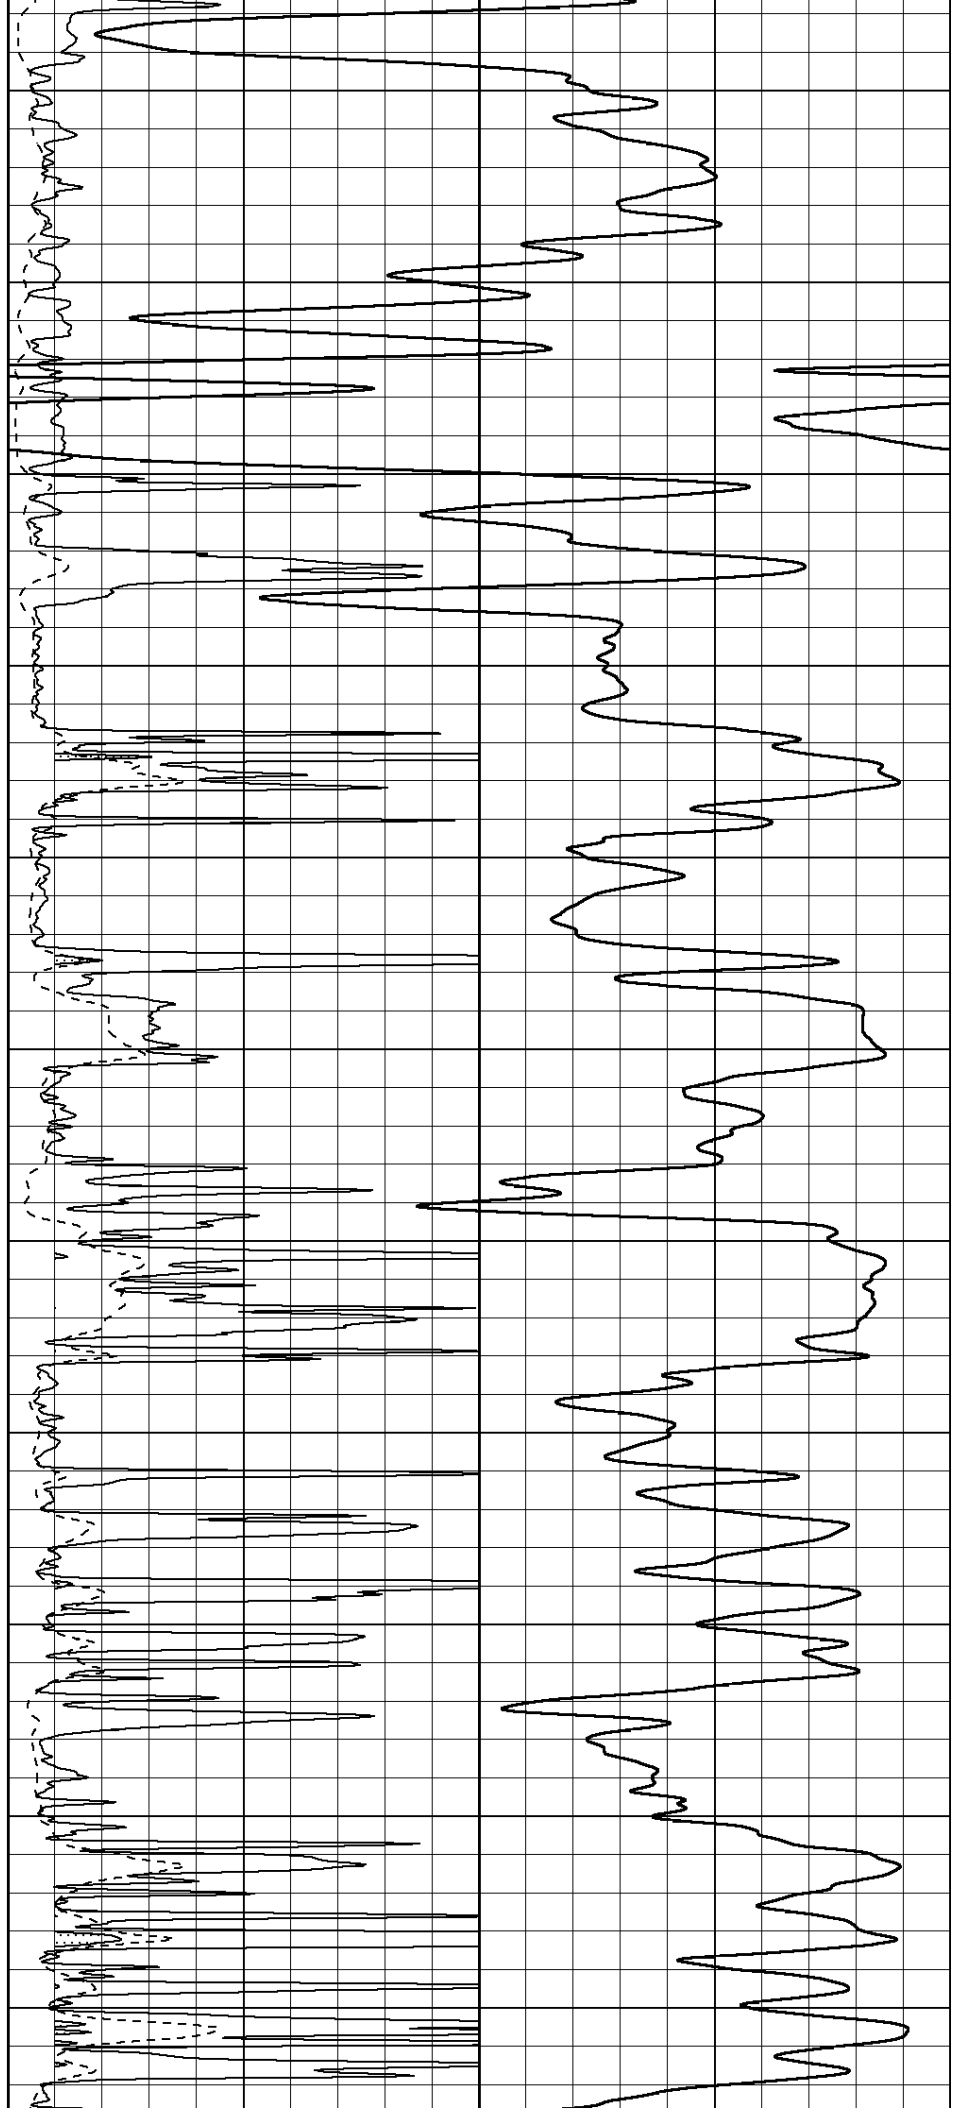

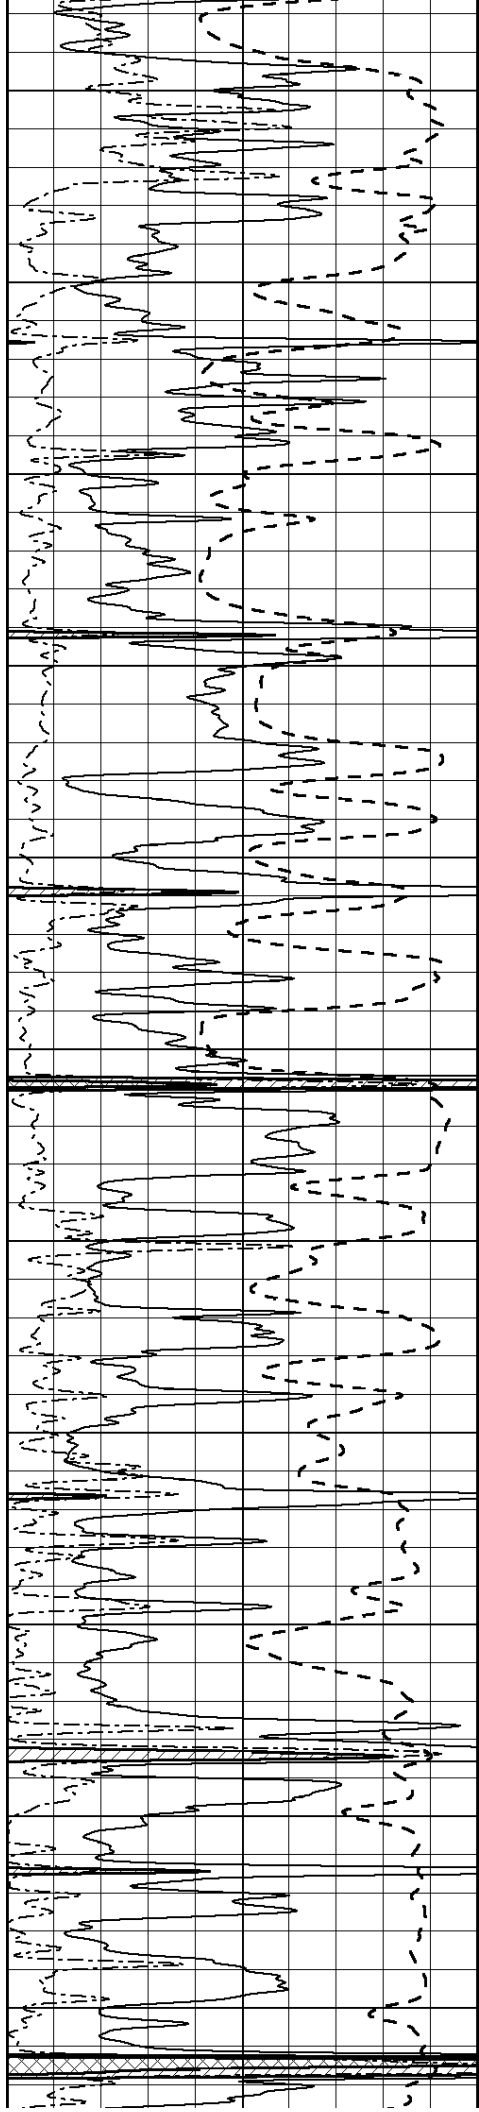

3750

3800

3850

3900

3950

4000



4050



4100

4150

4200

4250

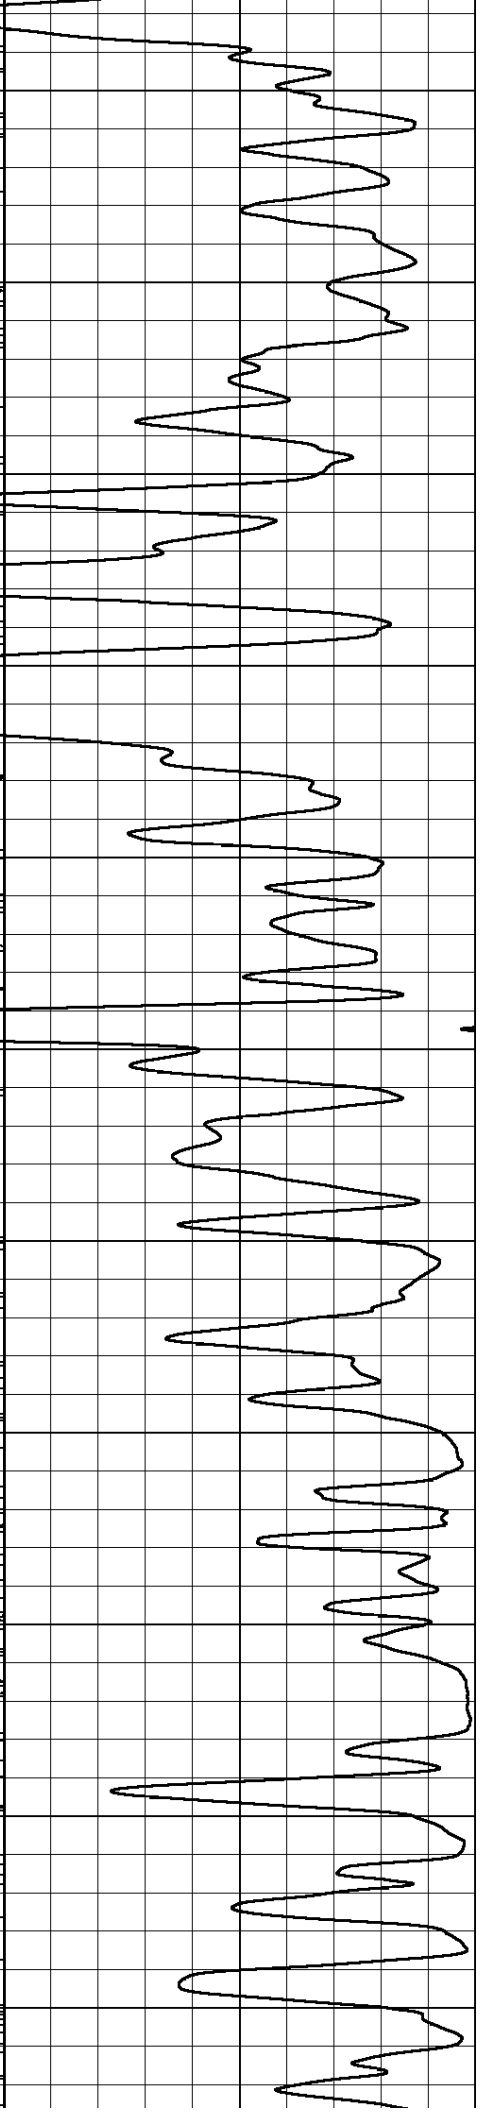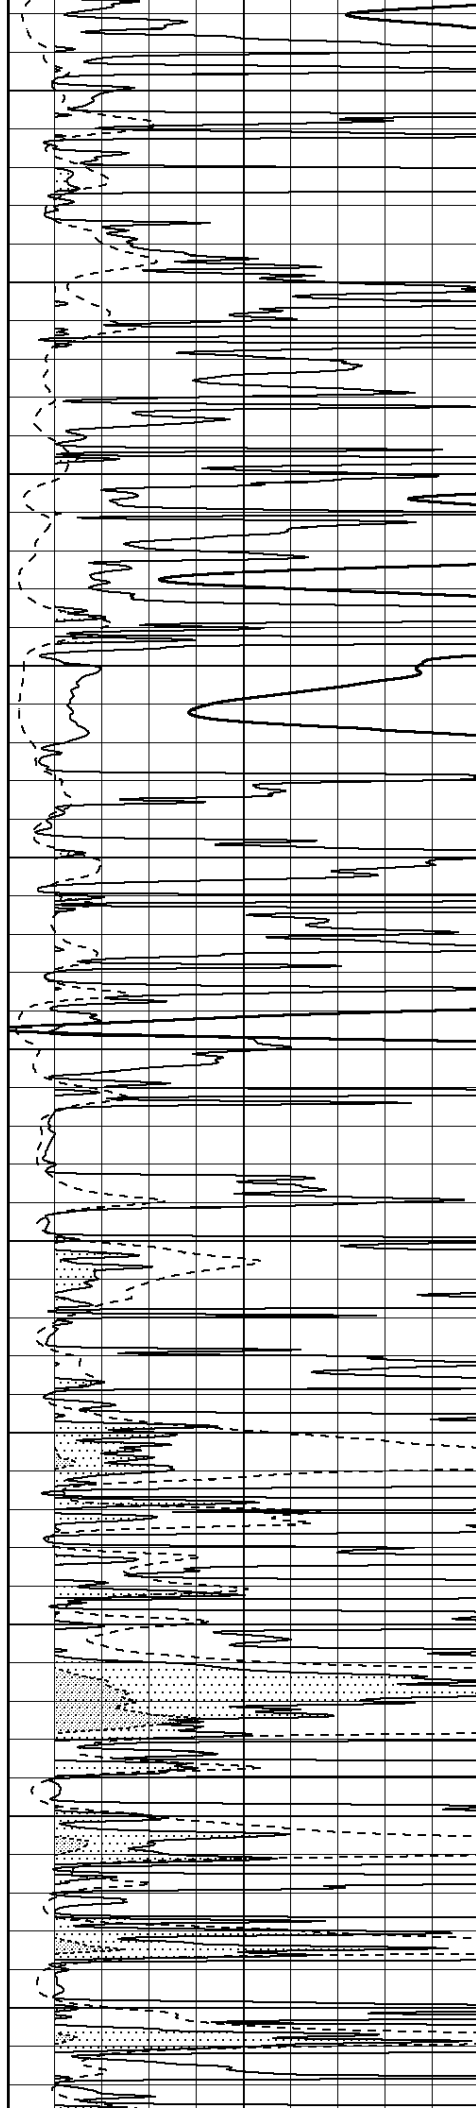

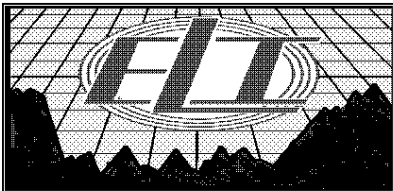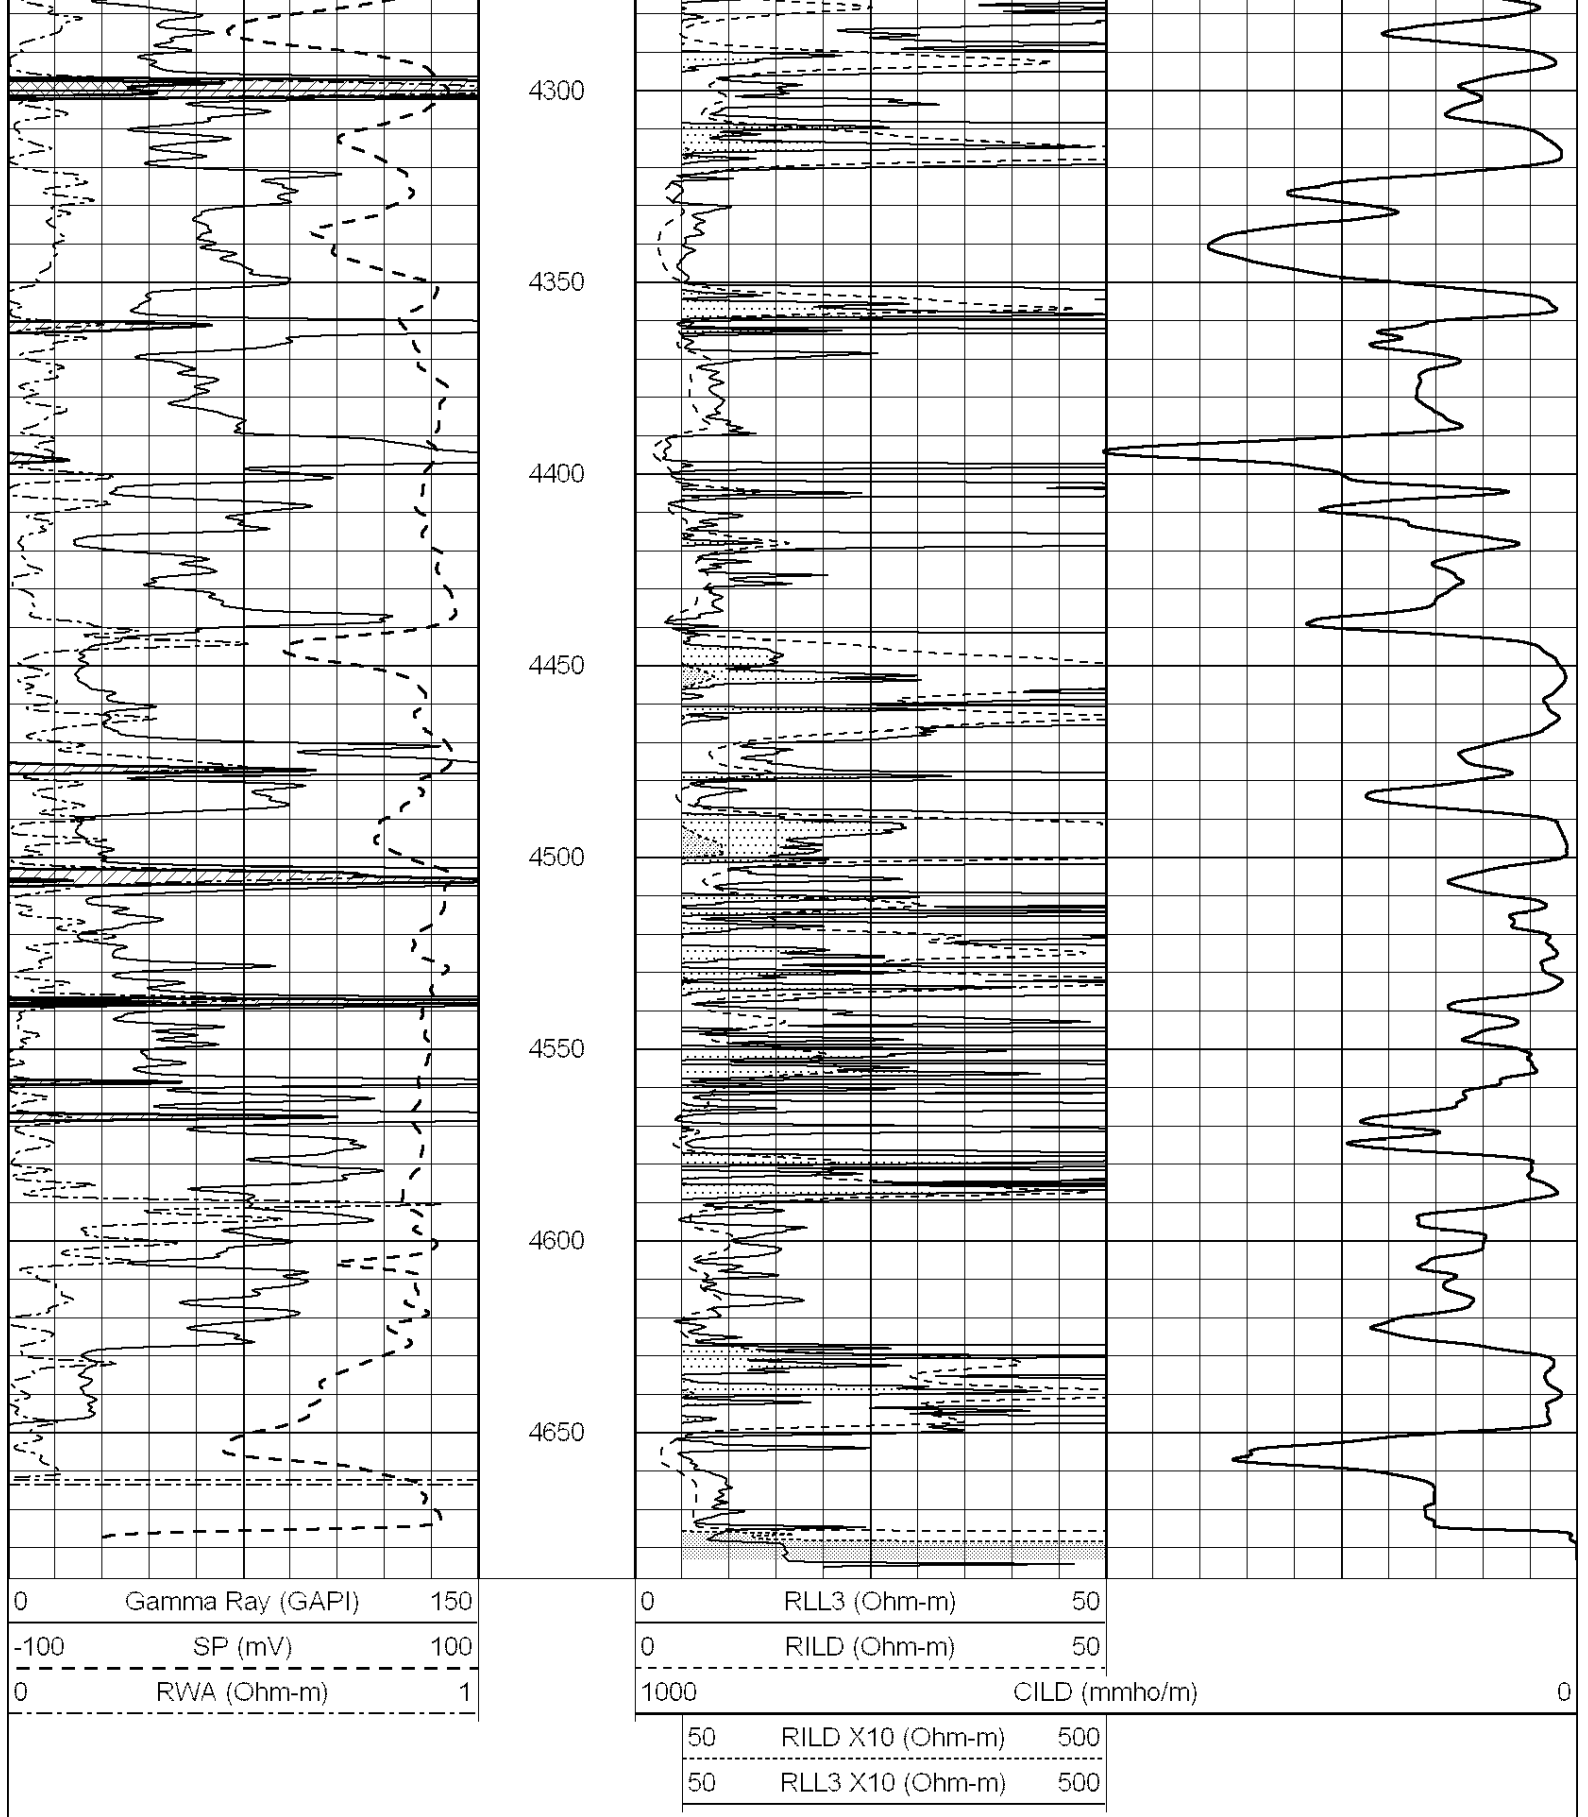


ANHYDRITE

Dataset Pathname: pass3.7
 Presentation Format: _dil
 Dataset Creation: Sat Jun 22 08:40:55 2019
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

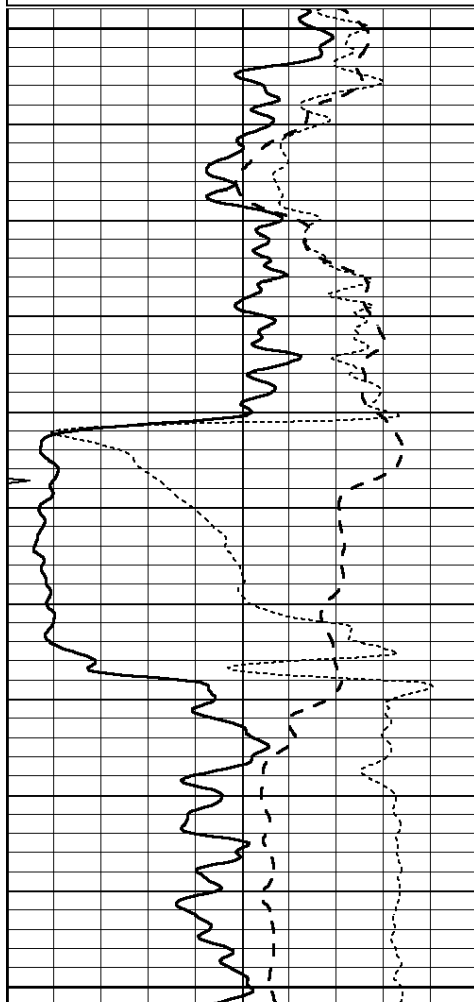

2500


2550

2600

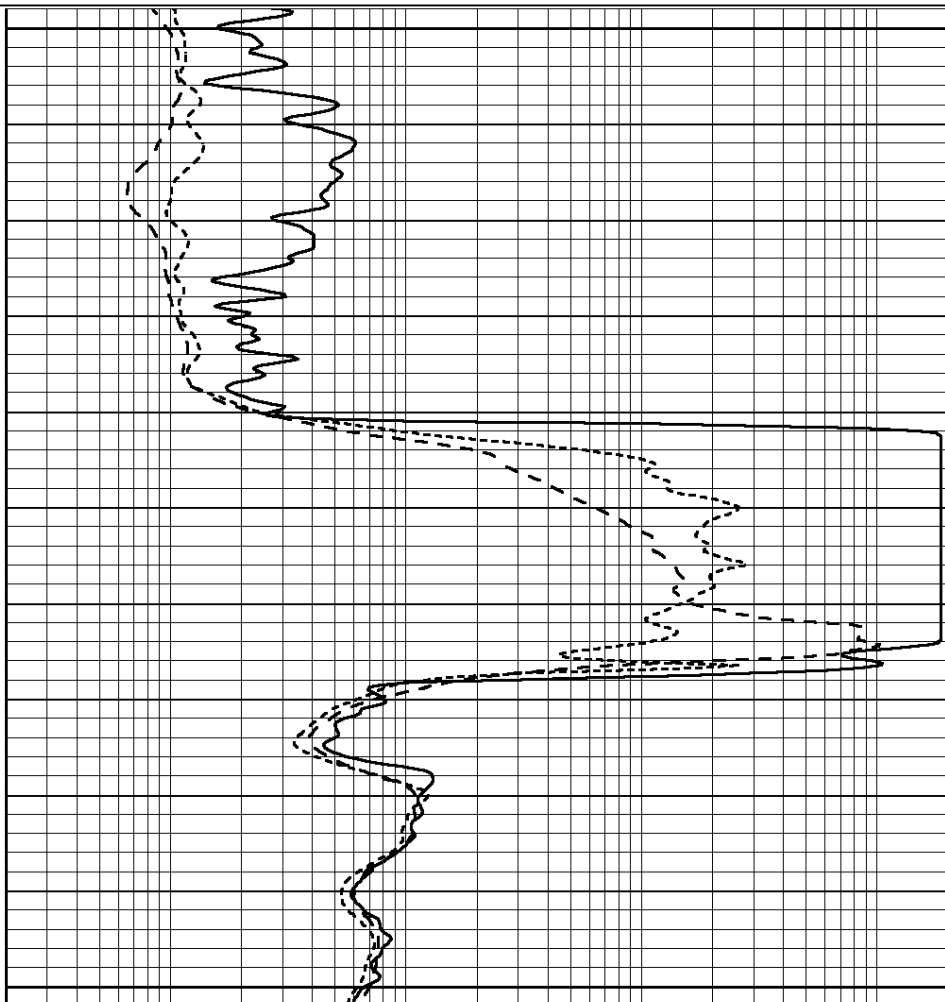

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

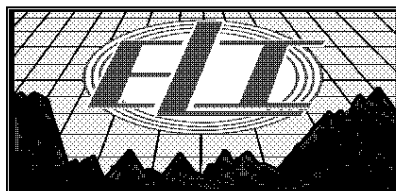

MAIN SECTION


Database File: 3733pe.db
 Dataset Pathname: pass3.6
 Presentation Format: _dil
 Dataset Creation: Sat Jun 22 08:40:38 2019
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
---	------------------	-----

0.2	SHALLOW GUARD (Ohm-m)	2000
-----	-----------------------	------

-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

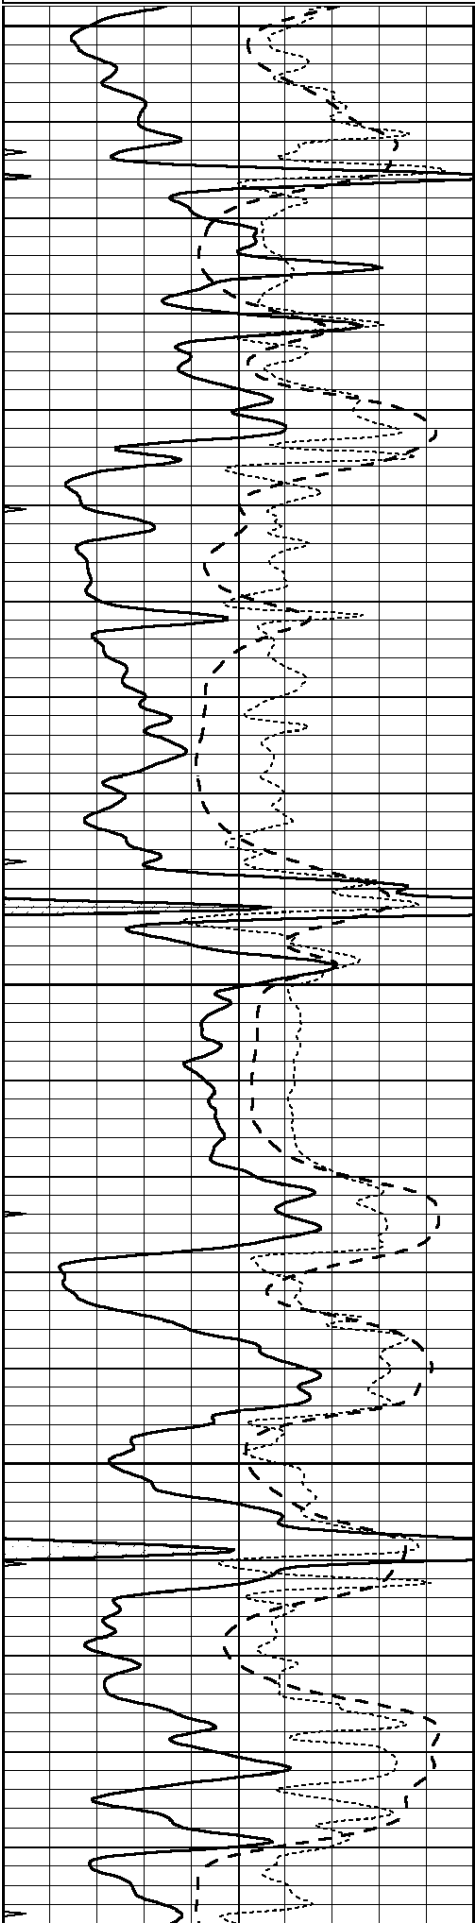



3800

3850

3900

3950

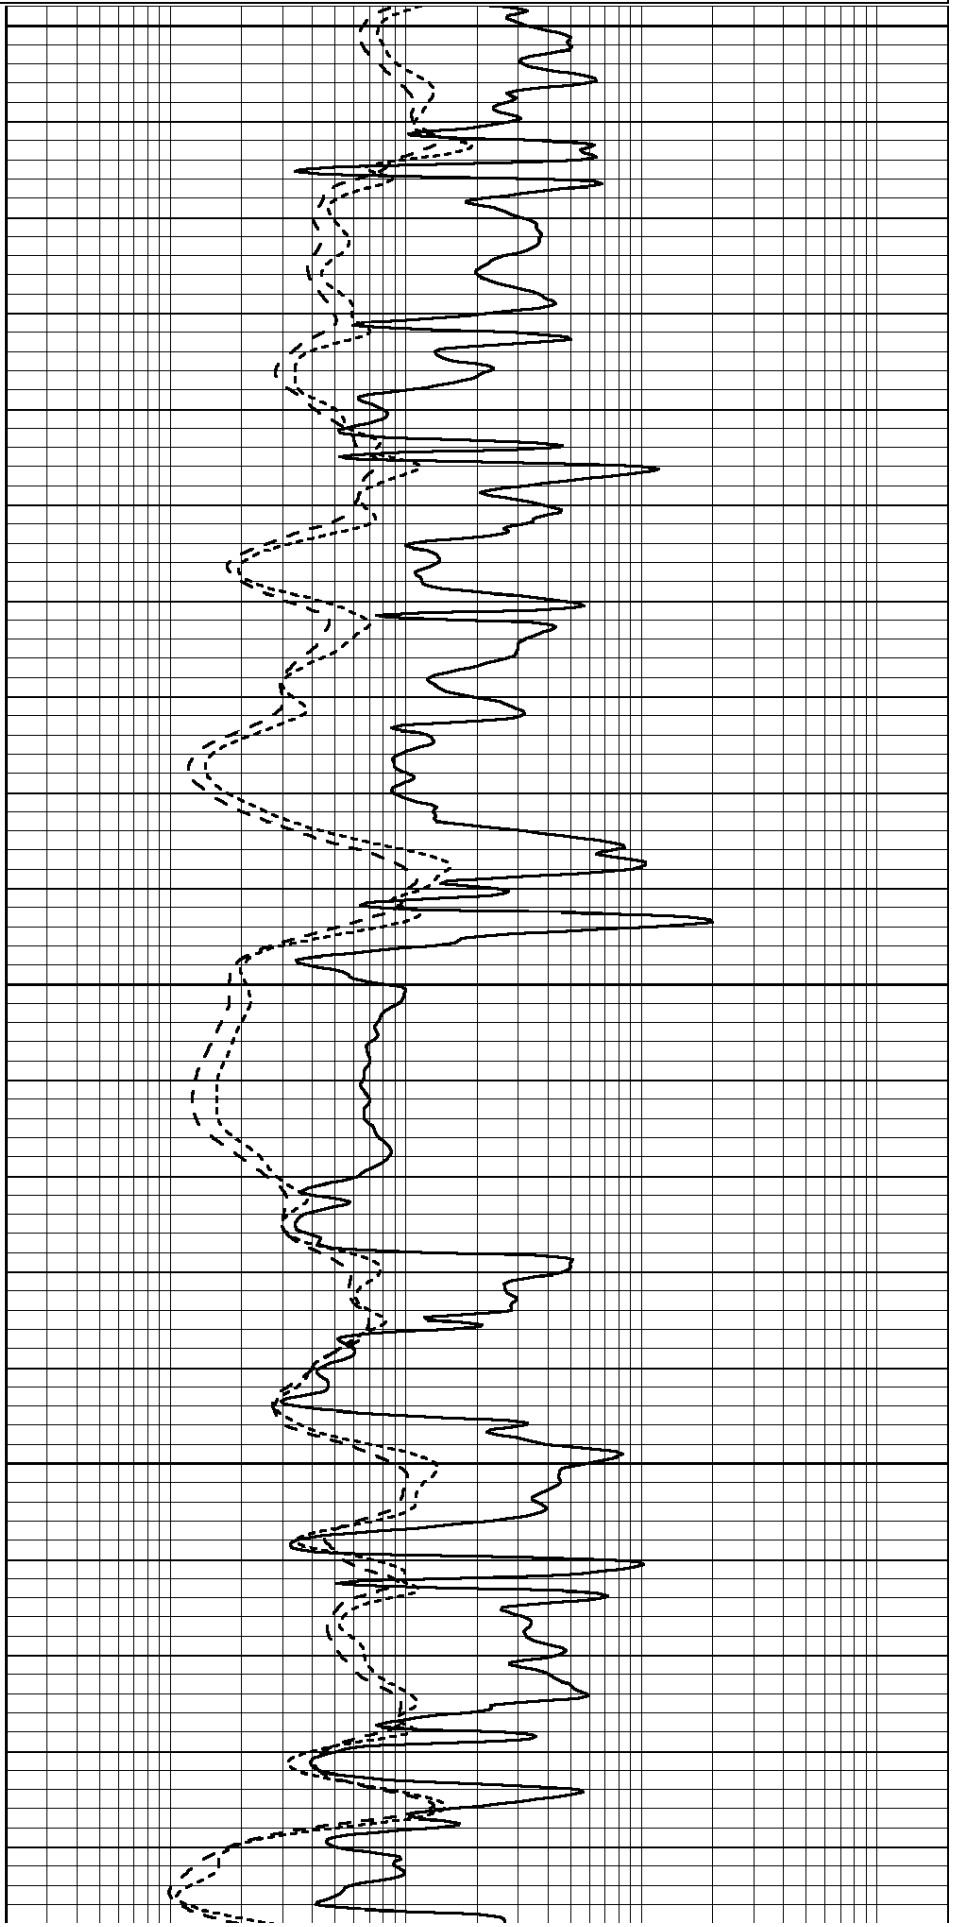

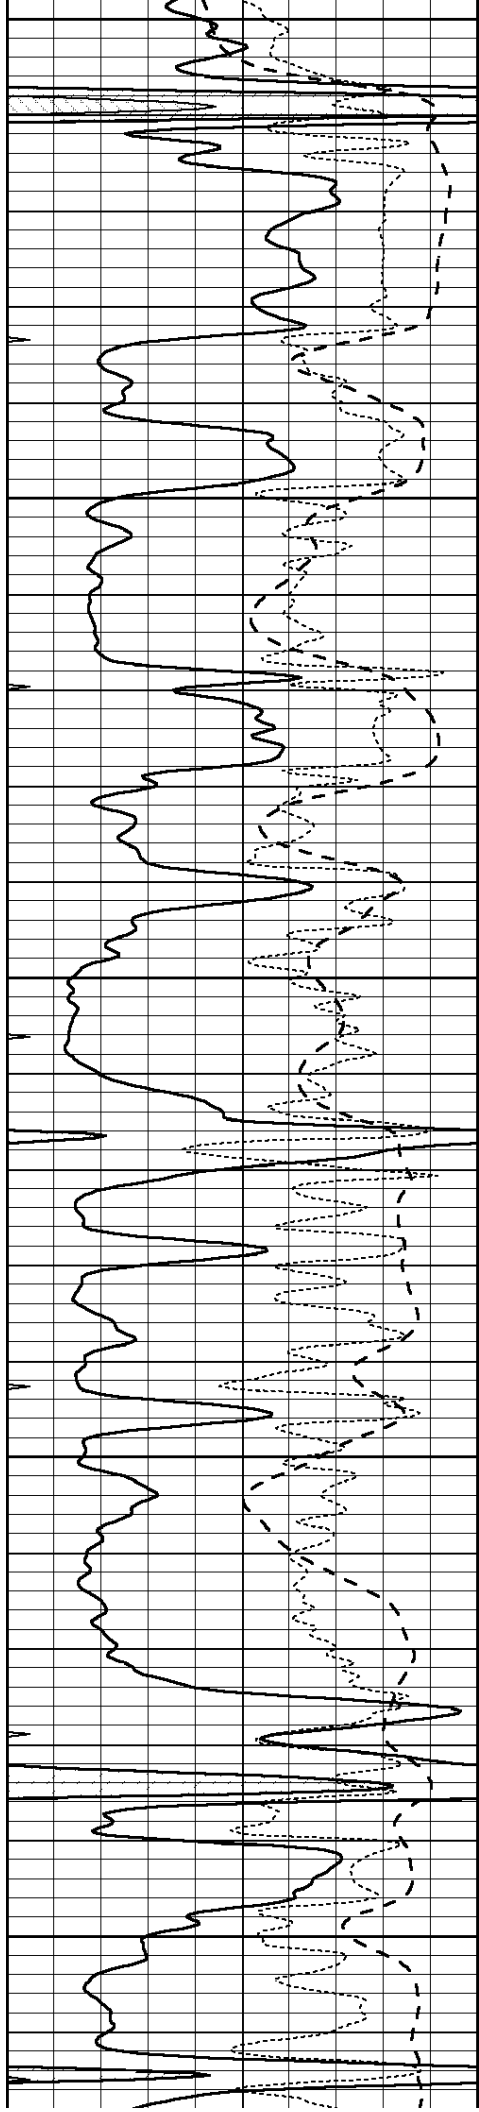


4000


4050

4100

4150

4200

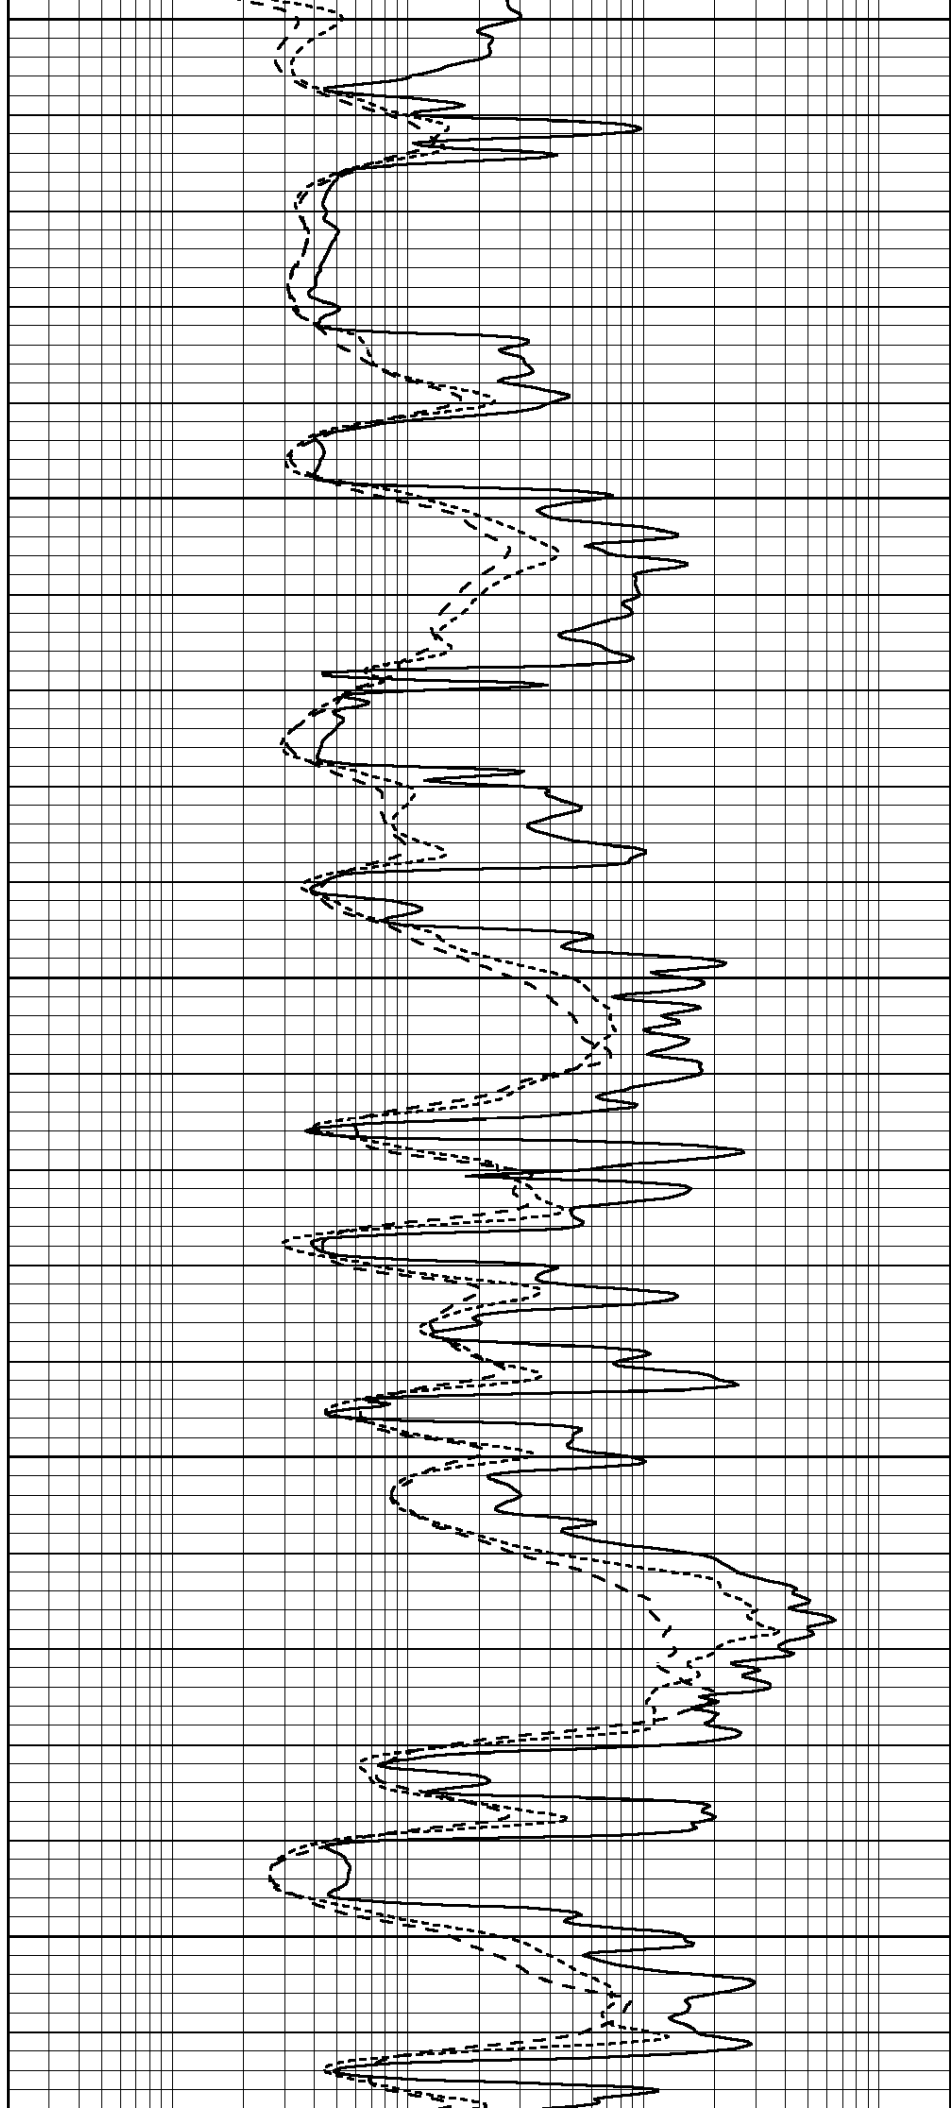

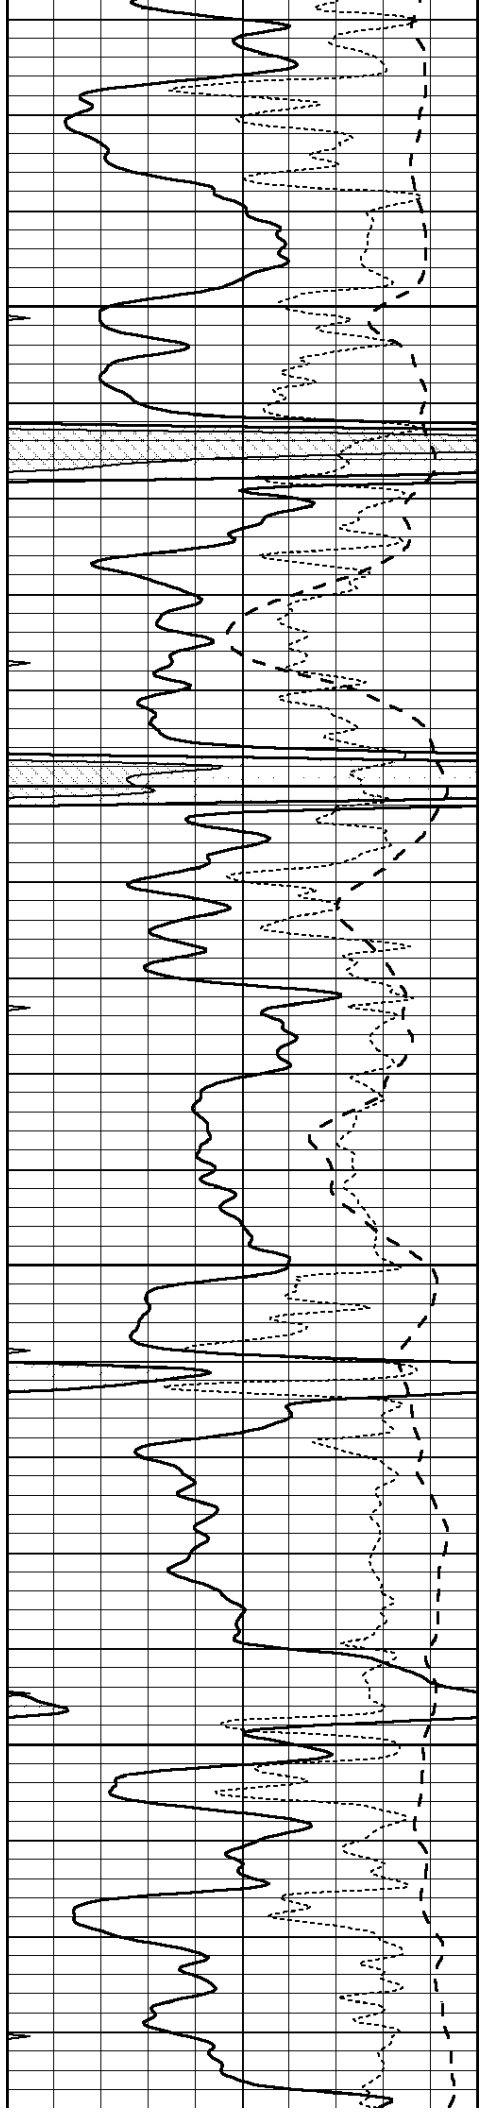



4250

4300

4350

4400

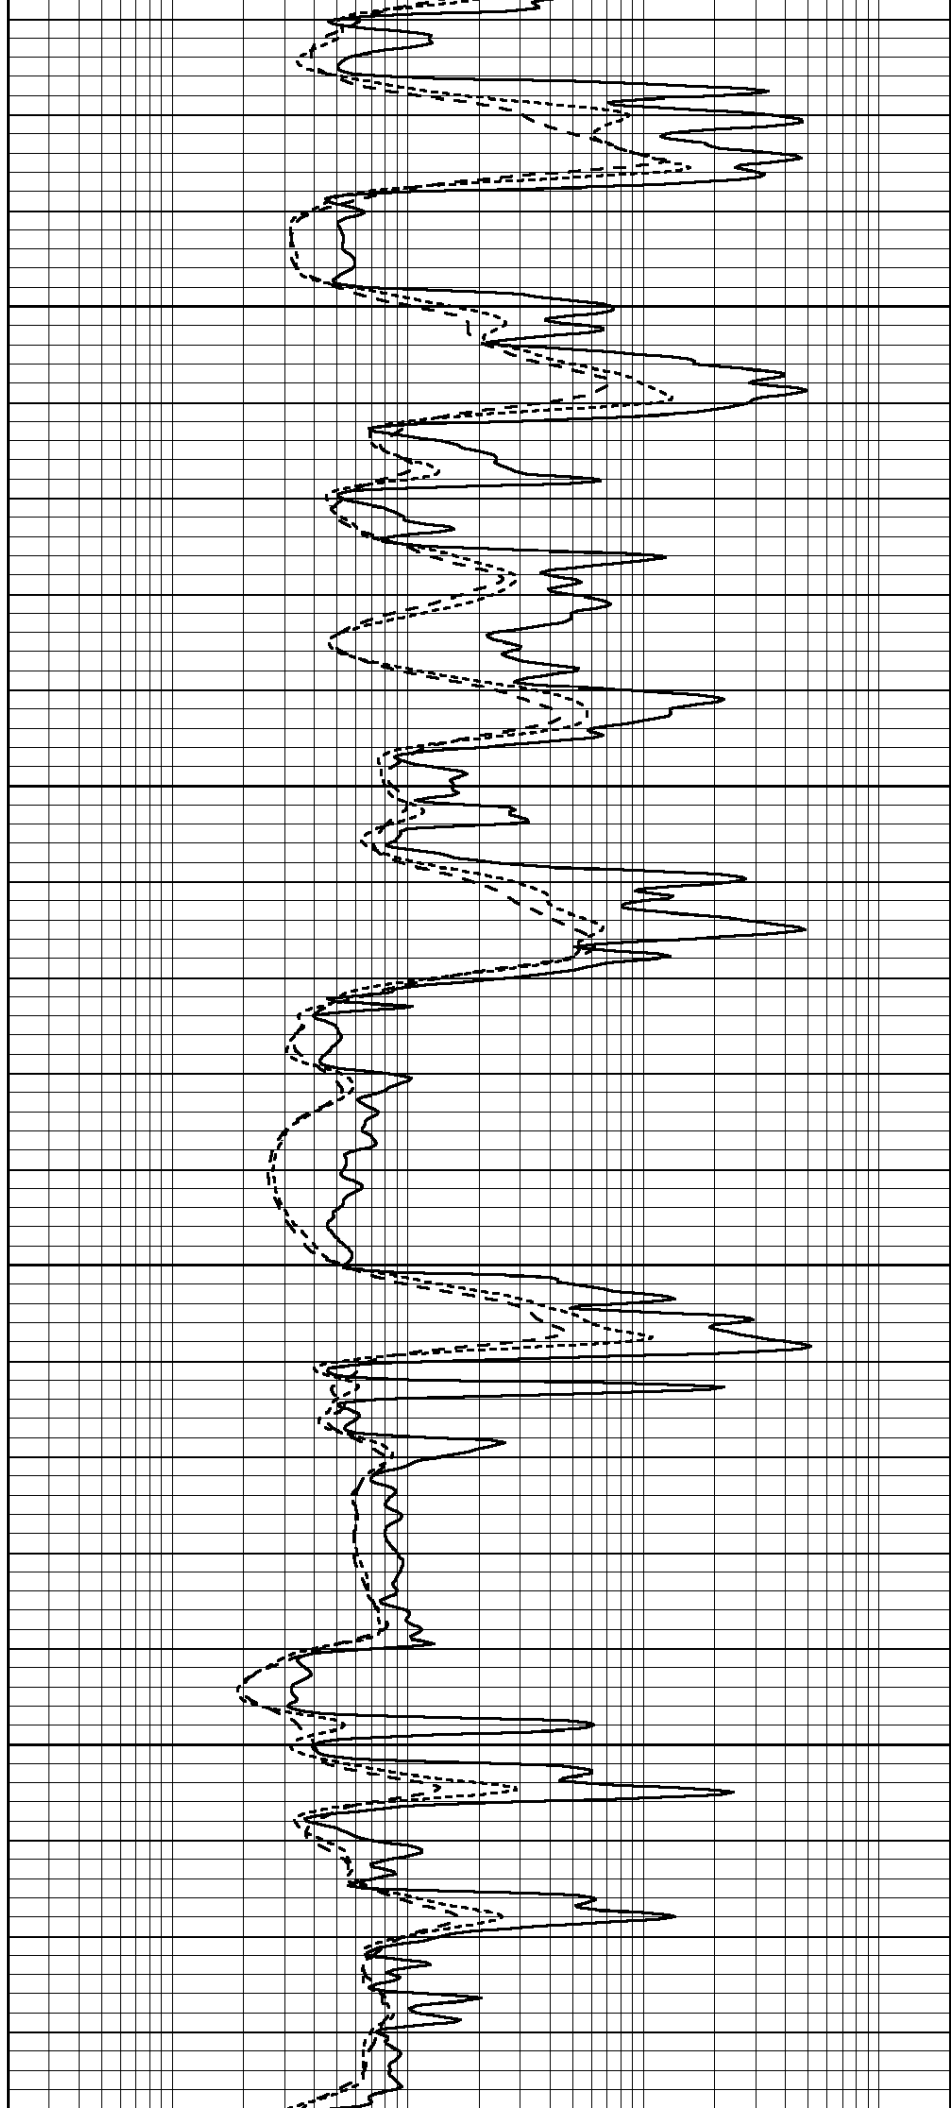

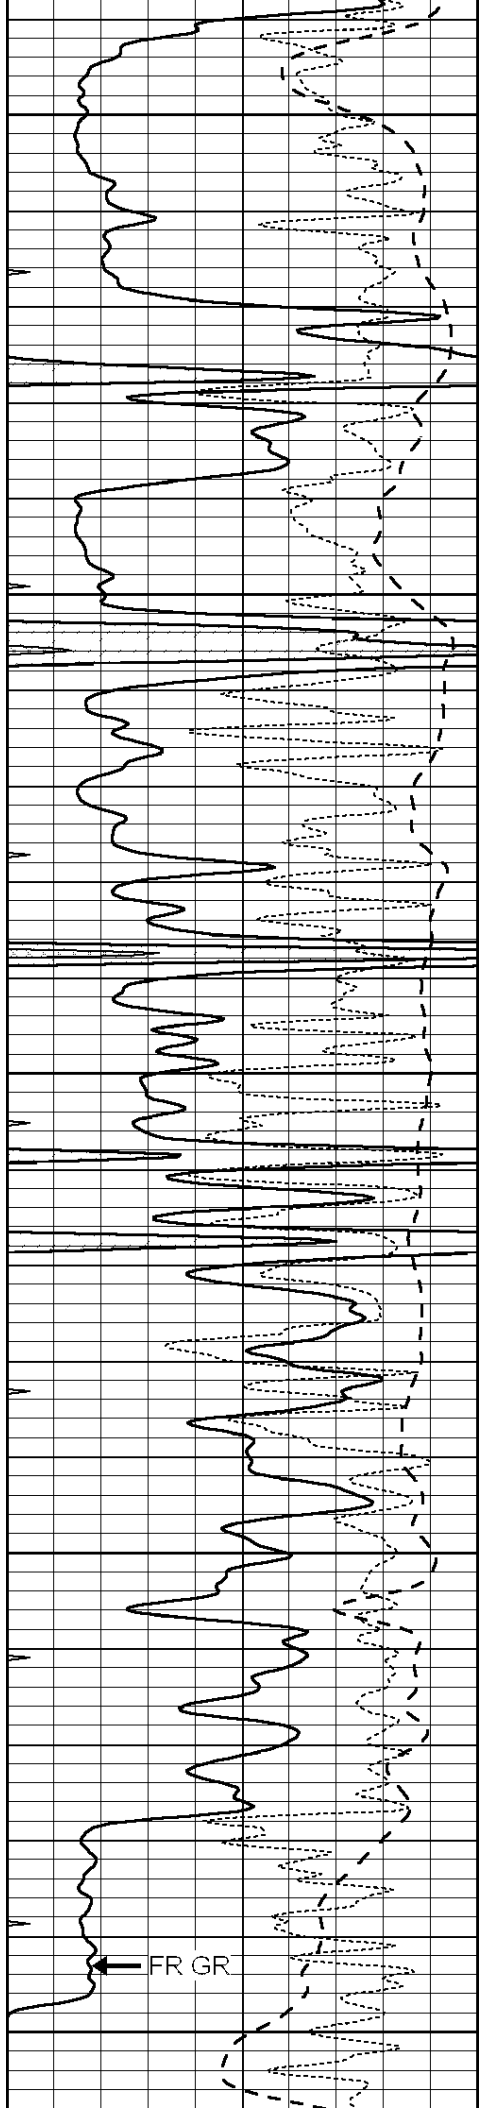


4450


4500

4550


4600

4650

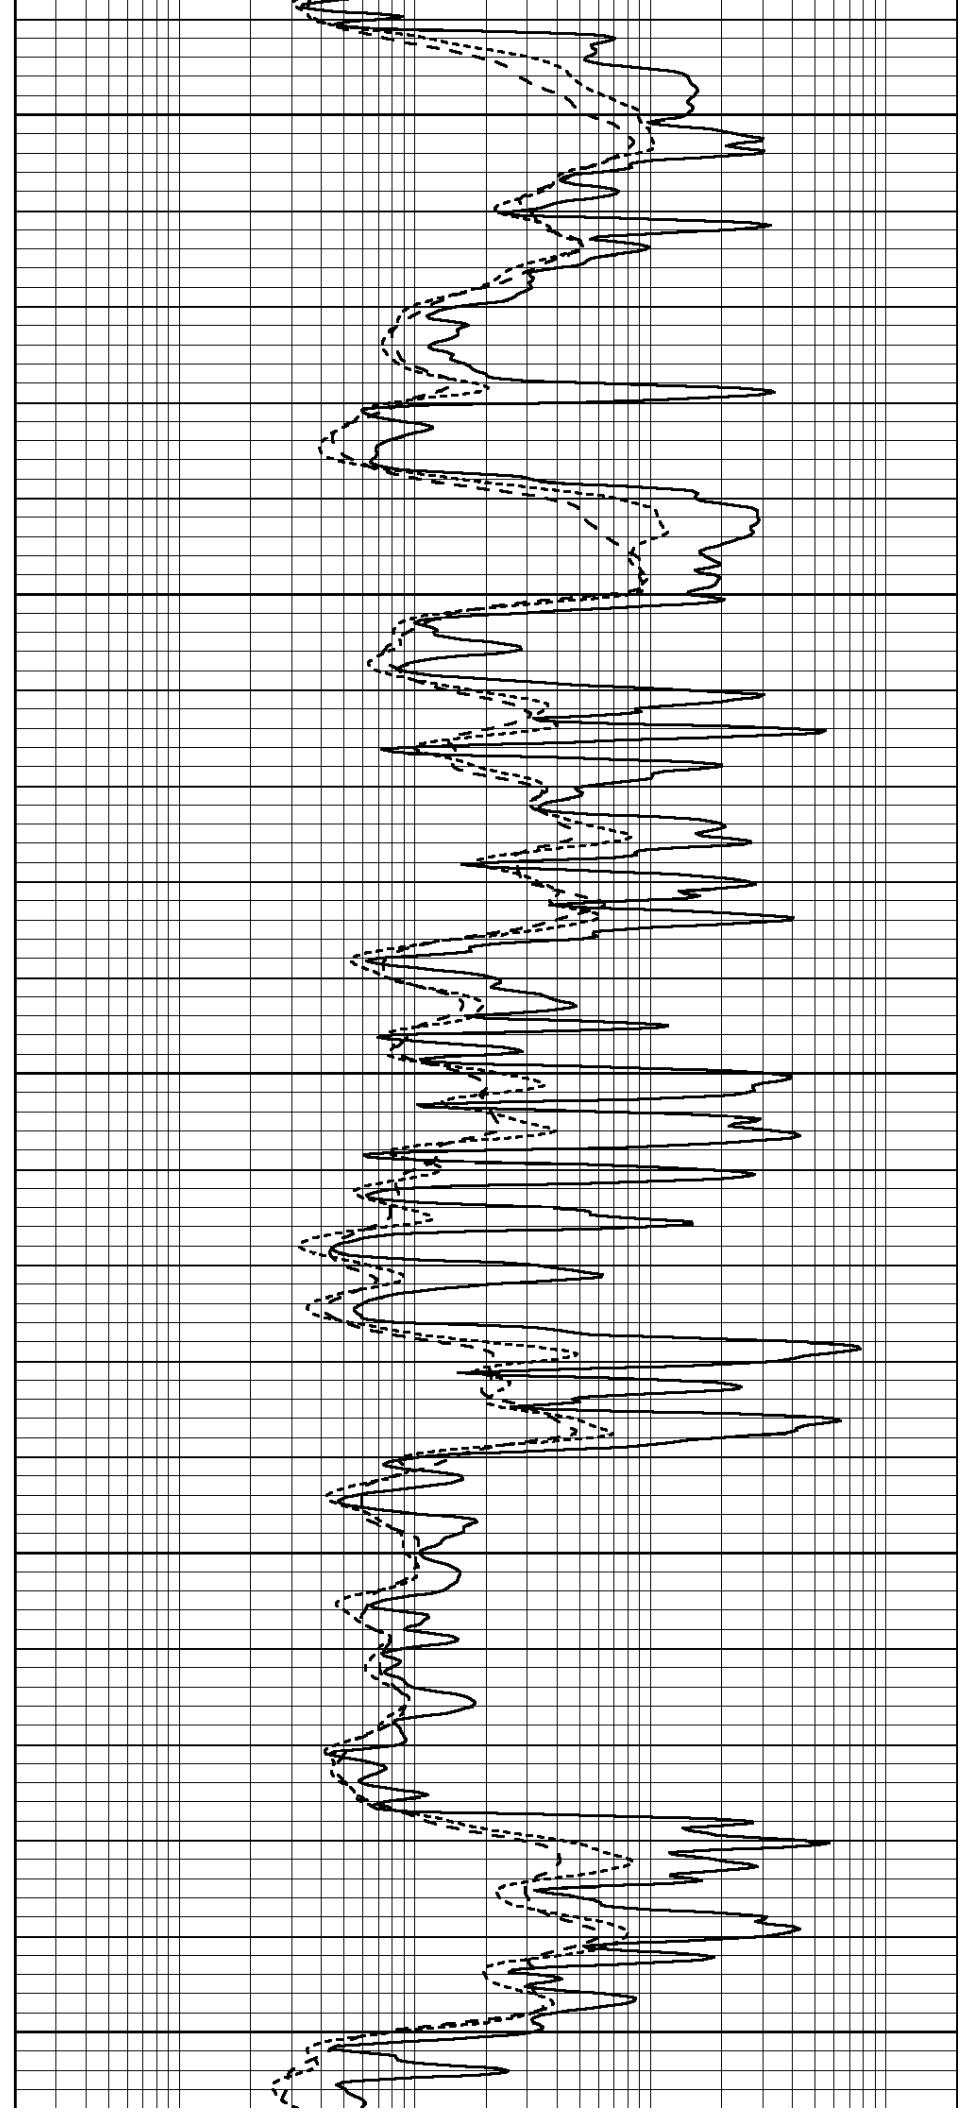

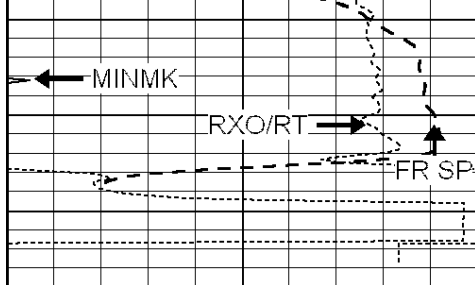


LTD 4681

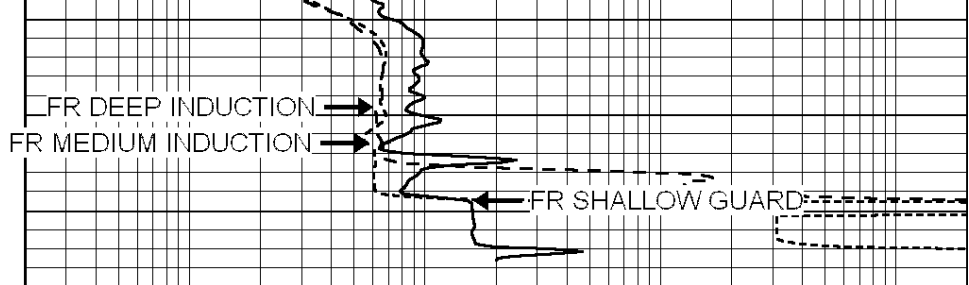

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

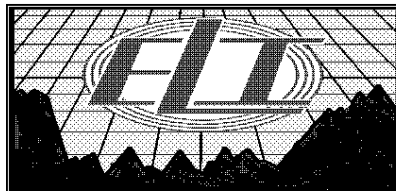


REPEAT SECTION

Database File: 3733pe.db
 Dataset Pathname: pass2.3
 Presentation Format: _dil
 Dataset Creation: Sat Jun 22 08:12:46 2019 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

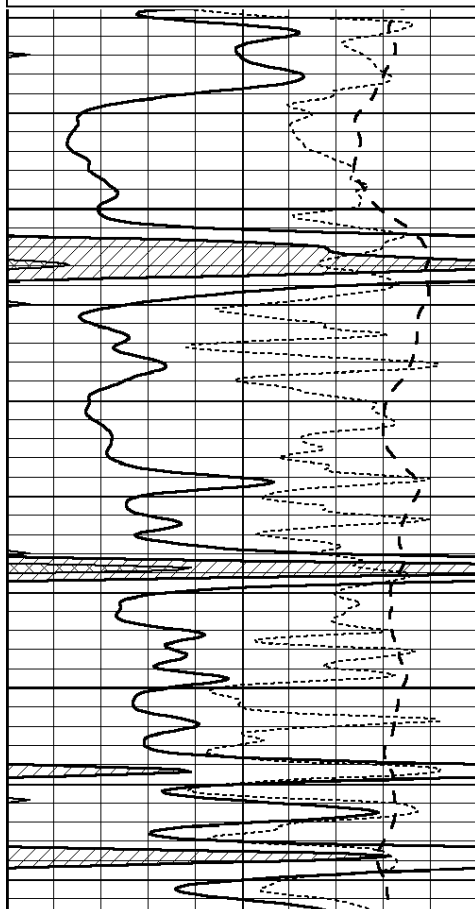

4500

4550

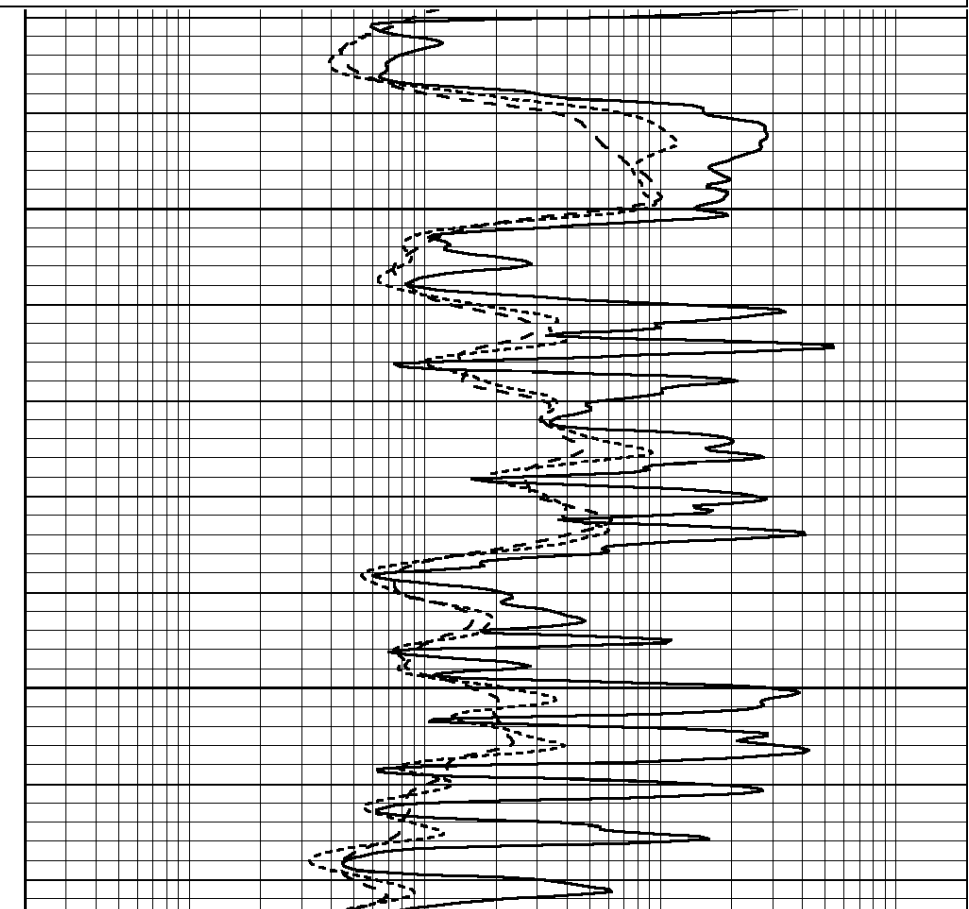

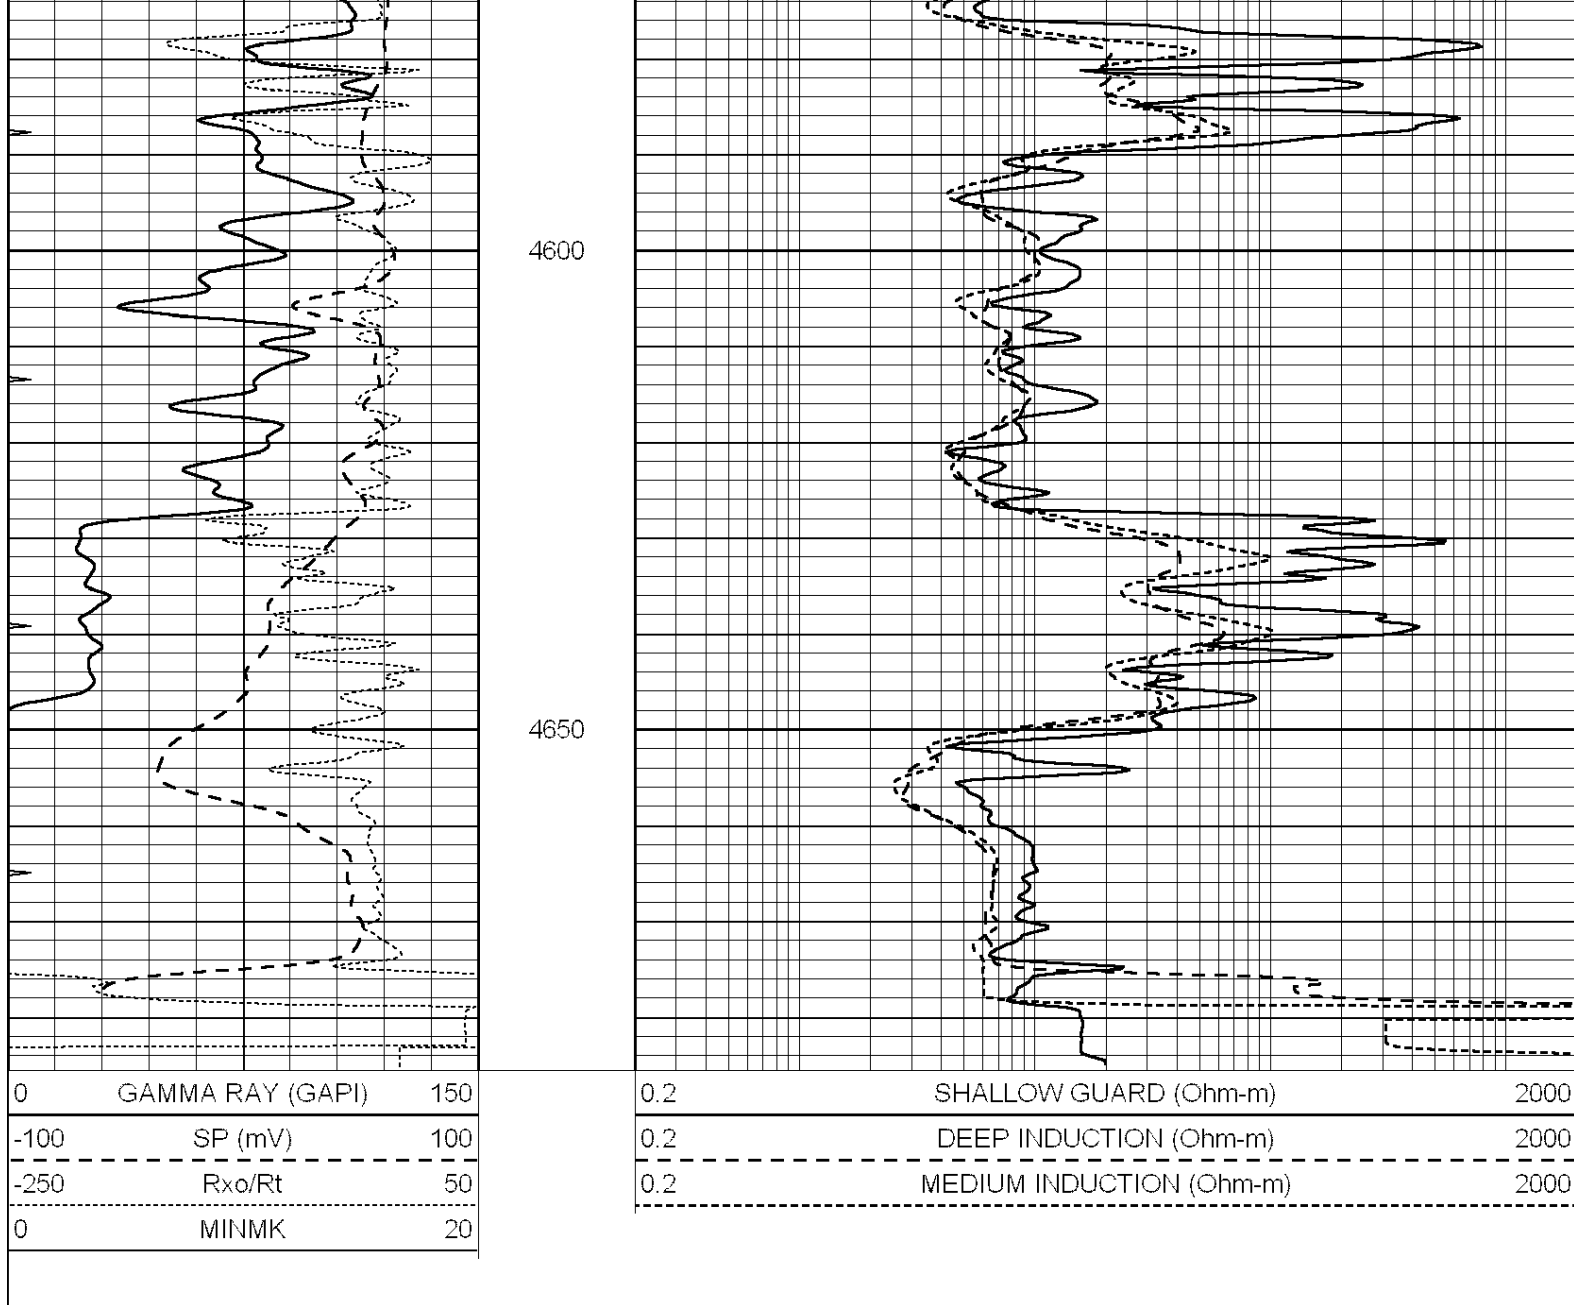

Calibration Report

Database File: 1598ddn.db
 Dataset Pathname: pass4
 Dataset Creation: Wed Aug 30 02:13:00 2017 by Log SOC 120430

Dual Induction Calibration Report

Serial-Model: PROBE7-DILG
 Surface Cal Performed: Wed Aug 30 00:06:33 2017
 Downhole Cal Performed: Mon Jul 28 12:02:56 2008
 After Survey Verification Performed: Mon Jul 28 12:02:56 2008

Surface Calibration

Loop:	Readings			References			Results	
	Air	Loop	V	Air	Loop	mmho/m	m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-44.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration								
	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification								
	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report
Serial: 002 Model: PRB

Master Calibration						Performed Mon Aug 21 11:27:42 2017		
	Background	Magnesium	Aluminum	Sandstone				
Window 1	837.1	10632.5	2945.1	12110.1				cps
Window 2	772.0	9117.4	2570.1	10197.3				cps
Window 3	631.7	4669.0	1481.9	5042.9				cps
Window 4	187.0	187.5	185.9	189.9				cps
Long Space	0.0	8345.4	1798.1	9425.3				cps
Short Space	1.1	1927.9	1285.9	2050.2				cps
Rho		1.7100	2.5960	1.3800				g/cc
Pe		0.0000	2.5700	1.5500				
Rib Angle	: 45.2	Rib Slope	: 1.008	Density/Spine Ratio				: 0.558
Spine Angle	: 75.2	Spine Slope	: 3.790	Spine Intercept				: -19.6

Before Survey Verification						Performed Wed Dec 31 18:00:00 1969		
Window 1	0.0	0.0	0.0	0.0				cps
Window 2	0.0	0.0	0.0	0.0				cps
Window 3	0.0	0.0	0.0	0.0				cps
Window 4	0.0	0.0	0.0	0.0				cps
Long Space	0.0	0.0	0.0	0.0				cps
Short Space	0.0	0.0	0.0	0.0				cps
Measured Rho		0.0000	0.0000	0.0000				g/cc
Measured Correction		0.0000	0.0000	0.0000				g/cc
Measured Pe			0.0000	0.0000				

After Survey Verification						Performed Wed Dec 31 18:00:00 1969		
Window 1	0.0	0.0	0.0	0.0				cps
Window 2	0.0	0.0	0.0	0.0				cps
Window 3	0.0	0.0	0.0	0.0				cps
Window 4	0.0	0.0	0.0	0.0				cps
Long Space	0.0	0.0	0.0	0.0				cps
Short Space	0.0	0.0	0.0	0.0				cps
Measured Rho		0.0000	0.0000	0.0000				g/cc
Measured Correction		0.0000	0.0000	0.0000				a/cc

Measured Pe

0.0000

0.0000

Compensated Neutron Calibration Report

Serial Number: 070808
Tool Model: Probe

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: 070558
Tool Model: OPEN_GR
Performed: Wed May 31 00:09:32 2017

Calibrator Value: 1.0 GAPI
Background Reading: 0.0 cps
Calibrator Reading: 1.0 cps
Sensitivity: 0.2800 GAPI/cps